# Sistemi Operativi

Corso di Laurea in Informatica a.a. 2020-2021

#### Gabriele Tolomei

Dipartimento di Informatica Sapienza Università di Roma tolomei@di.uniromal.it



## The Big Picture So Far

- We have presented a number of services the OS provides to
  - abstract from actual physical (HW) resources
  - ease the interaction between users and HW resources

## The Big Picture So Far

- We have presented a number of services the OS provides to
  - abstract from actual physical (HW) resources
  - ease the interaction between users and HW resources
- Different OS designs depending on how those services are implemented
  - monolithic, layered, microkernel, hybrid, etc.

• A process is the OS abstraction of a running program (unit of execution)

- A process is the OS abstraction of a running program (unit of execution)
- Process is dynamic, whilst a program is static (code and data only)

- A process is the OS abstraction of a running program (unit of execution)
- Process is dynamic, whilst a program is static (code and data only)
- Several processes may run the same program (e.g., multiple Google Chrome instances) but each has its own state

- A process is the OS abstraction of a running program (unit of execution)
- Process is dynamic, whilst a program is static (code and data only)
- Several processes may run the same program (e.g., multiple Google Chrome instances) but each has its own state
- A process executes one instruction at a time, sequentially


## OS Process Management

- How are processes represented in the OS?
- What are the possible states a process may be in and how the system moves from one state to another?
- How are processes created in the OS?
- How do processes communicate with each other?


#### **Process State**

- At least, process state consists of the following:
  - the code of the running program
  - the static data of the running program
  - the program counter (PC) indicating the next instruction to execute
  - CPU registers
  - the program's call chain (stack) along with frame and stack pointers
  - the space for dynamic memory allocation (heap) along with the heap pointer
  - the set of resources in use (e.g., open files)
  - the process execution state (ready, running, etc.)


• Text → contains executable instructions

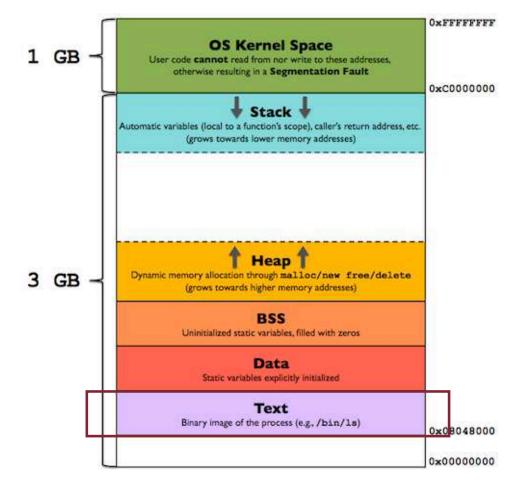


- Text -> contains executable instructions
- Data → global and static variable (initialized)

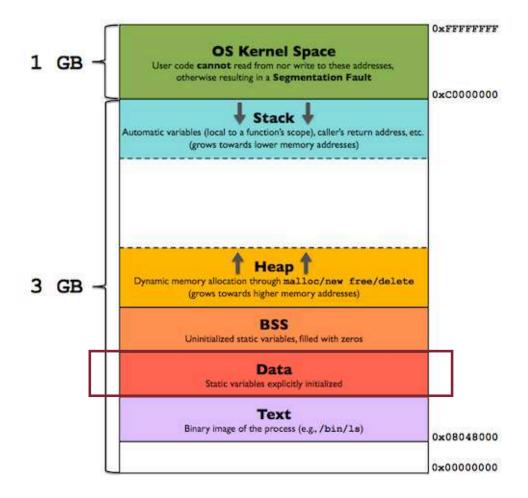


- Text -> contains executable instructions
- Data → global and static variable (initialized)
- BSS → global and static variable (uninitialized or initialized to 0)

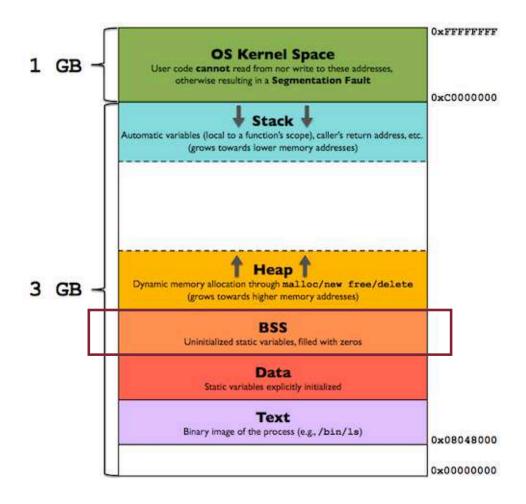

- Text -> contains executable instructions
- Data → global and static variable (initialized)
- BSS → global and static variable (uninitialized or initialized to 0)
- Stack → LIFO structure used to store all the data needed by a function call (stack frame)

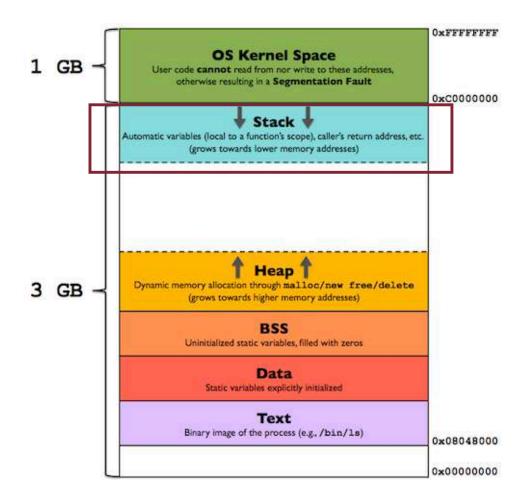

- Text -> contains executable instructions
- Data → global and static variable (initialized)
- BSS → global and static variable (uninitialized or initialized to 0)
- Stack → LIFO structure used to store all the data needed by a function call (stack frame)
- Heap → used for dynamic allocation

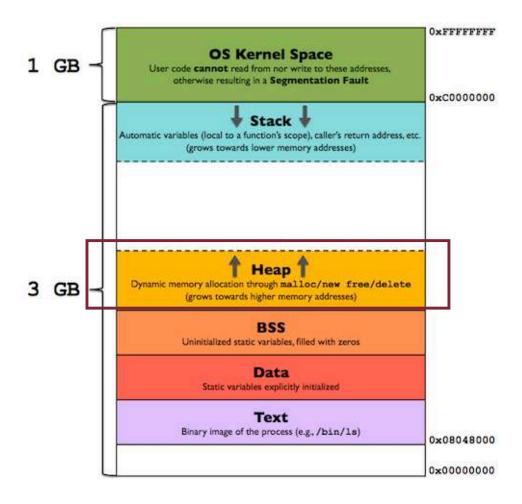


#### Program

```
int w = 42;
int x = 0;
float y;
void doSomething(int f) {
    int z = 37;
    z += f;
int main() {
    char* c = malloc(128);
    int k = 12;
    doSomething(k);
```


#### Program

```
int w = 42;
int x = 0;
float y;
void doSomething(int f) {
    int z = 37;
    z += f;
int main() {
    char* c = malloc(128);
    int k = 12;
    doSomething(k);
```

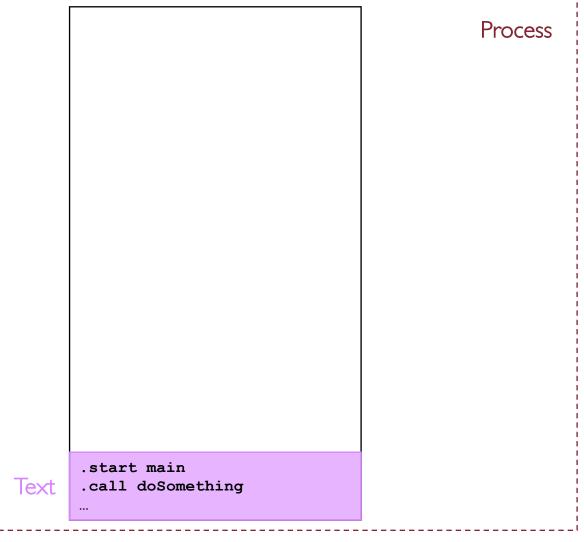


#### Program

```
int w = 42;
int x = 0;
float y;
void doSomething(int f) {
    int z = 37;
    z += f;
int main() {
    char* c = malloc(128);
    int k = 12;
    doSomething(k);
```

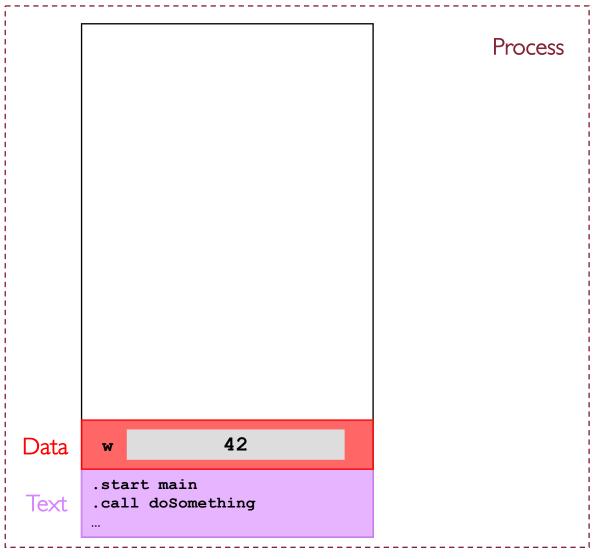


#### Program

```
int w = 42;
int x = 0;
float y;
void doSomething(int f) {
    int z = 37;
    z += f;
int main() {
    char* c = malloc(128);
    int k = 12;
    doSomething(k);
```

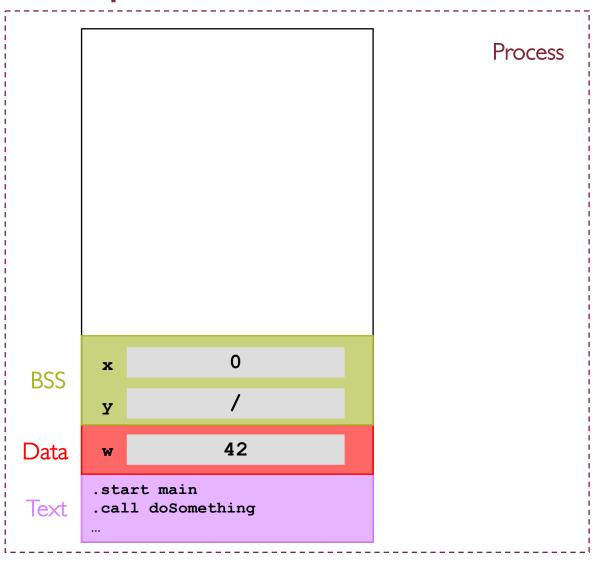


#### Program

```
int w = 42;
int x = 0;
float y;
void doSomething(int f) {
    int z = 37;
    z += f;
int main()
    char* c = malloc(128);
    int k = 12;
    doSomething(k);
```

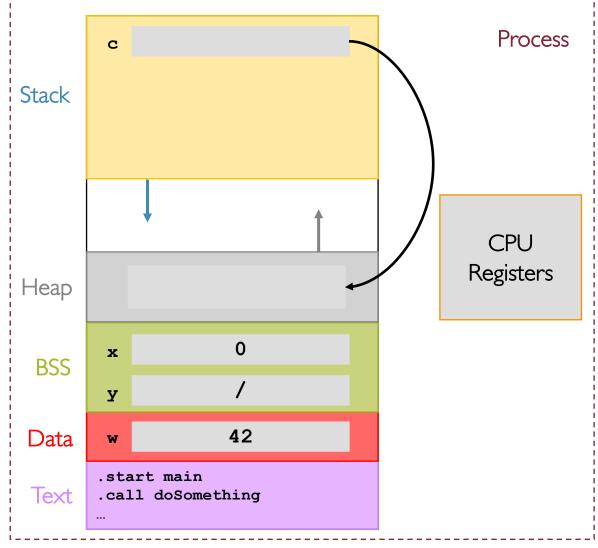


#### Program

```
int w = 42;
int x = 0;
float y;
void doSomething(int f) {
    int z = 37;
    z += f;
int main() {
    char* c = malloc(128);
    int k = 12;
    doSomething(k);
```

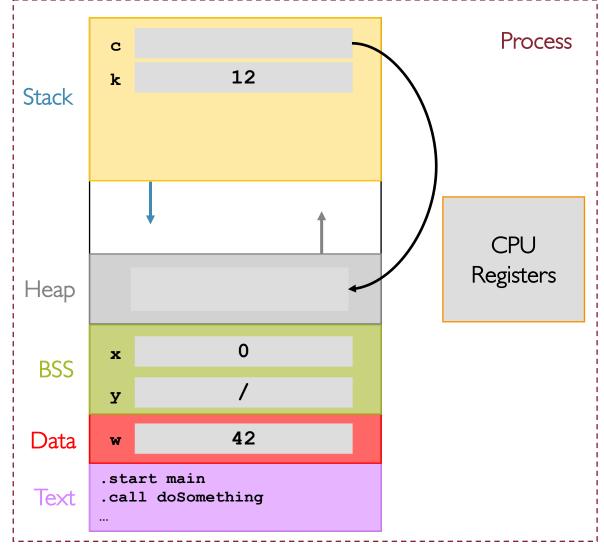


#### Program

```
int w = 42;
int x = 0;
float y;
void doSomething(int f) {
    int z = 37;
    z += f;
int main() {
    char* c = malloc(128);
   int k = 12;
    doSomething(k);
```

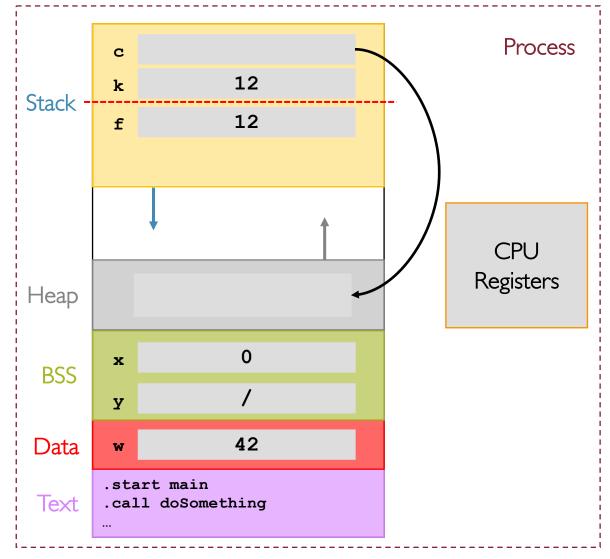


#### Program

```
int w = 42;
int x = 0;
float y;
void doSomething(int f) {
    int z = 37;
    z += f;
int main() {
    char* c = malloc(128);
    int k = 12;
    doSomething(k);
```

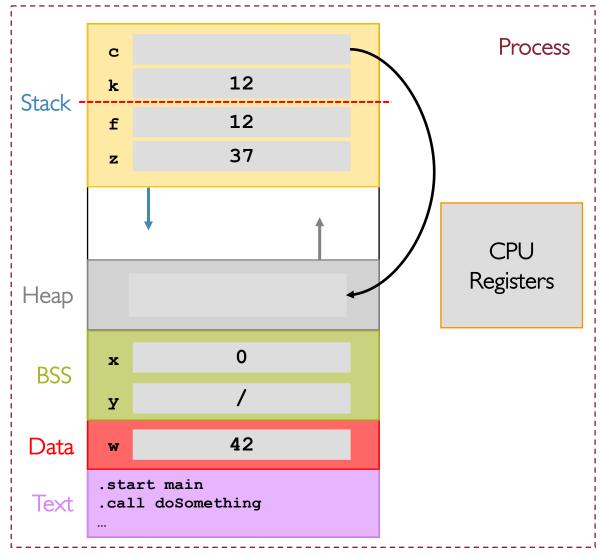

#### Program

```
int w = 42;
int x = 0;
float y;
void doSomething(int f) {
    int z = 37;
    z += f;
int main() {
    char* c = malloc(128);
    int k = 12;
    doSomething(k);
```

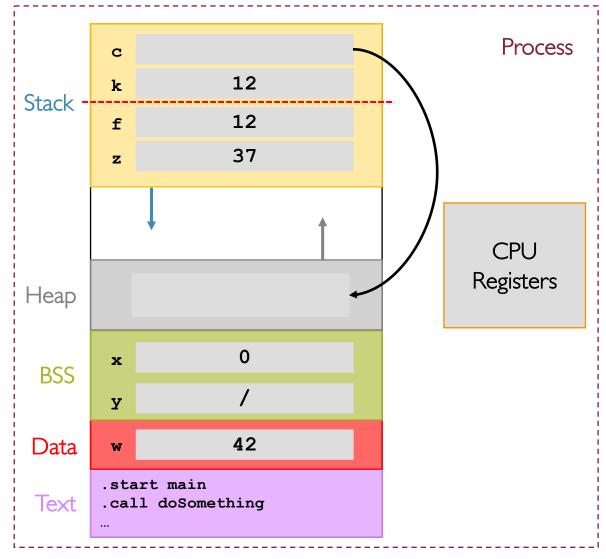

• At each time a process can be in one of the following 5 states:

- At each time a process can be in one of the following 5 states:
  - New → The OS has set up the process state

- At each time a process can be in one of the following 5 states:
  - New → The OS has set up the process state
  - Ready 

    The process is ready to be executed yet waiting to be scheduled on to the CPU

- At each time a process can be in one of the following 5 states:
  - New → The OS has set up the process state
  - Ready 

    The process is ready to be executed yet waiting to be scheduled on to the CPU
  - Running 

    The process is actually executing instructions on the CPU

- At each time a process can be in one of the following 5 states:
  - New → The OS has set up the process state
  - Ready 


    The process is ready to be executed yet waiting to be scheduled on to the CPU
  - Running -> The process is actually executing instructions on the CPU
  - Waiting 

    The process is suspended waiting for a resource to be available or an event to complete/occur (e.g., keyboard input, disk access, timer, etc.)


- At each time a process can be in one of the following 5 states:
  - New → The OS has set up the process state
  - Ready 


    The process is ready to be executed yet waiting to be scheduled on to the CPU
  - Running -> The process is actually executing instructions on the CPU
  - Waiting  $\rightarrow$  The process is suspended waiting for a resource to be available or an event to complete/occur (e.g., keyboard input, disk access, timer, etc.)
  - Terminated -> The process is finished and the OS can destroy it

### Process Execution State Diagram

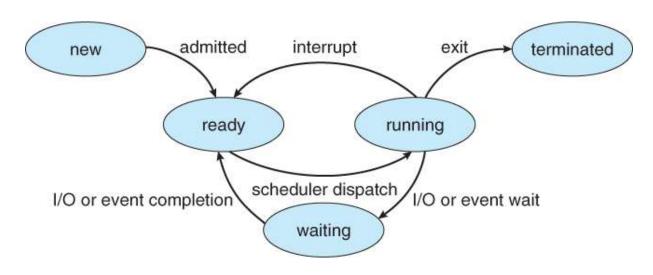


- As the process executes, it moves from state to state depending on:
  - program actions (e.g., system calls)
  - OS actions (e.g., scheduling)
  - external actions (e.g., interrupts)

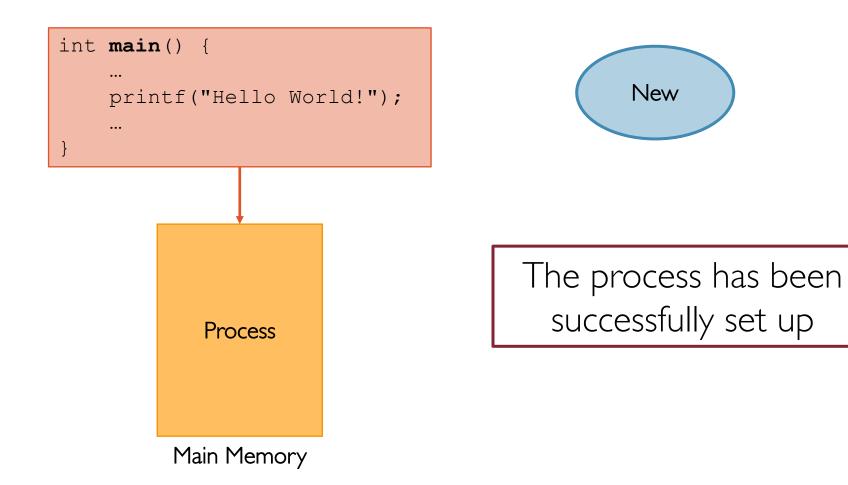


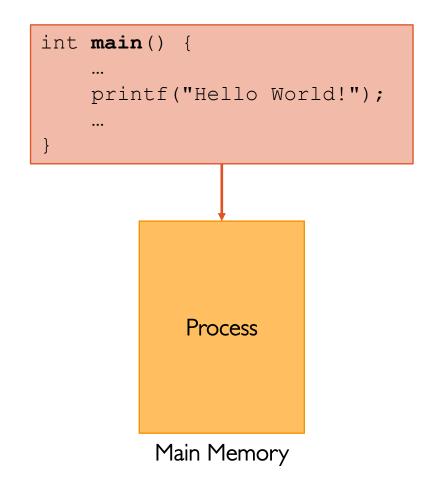



Ready

The process is ready to be executed on the CPU

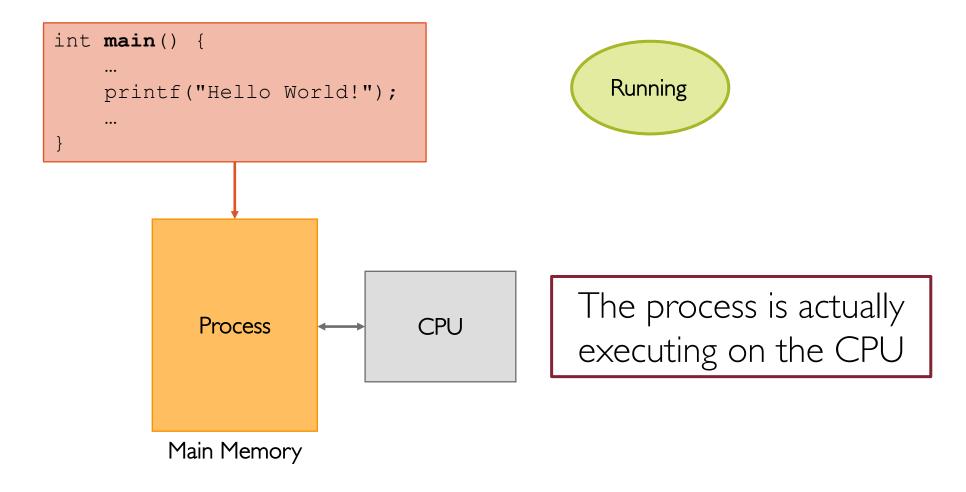

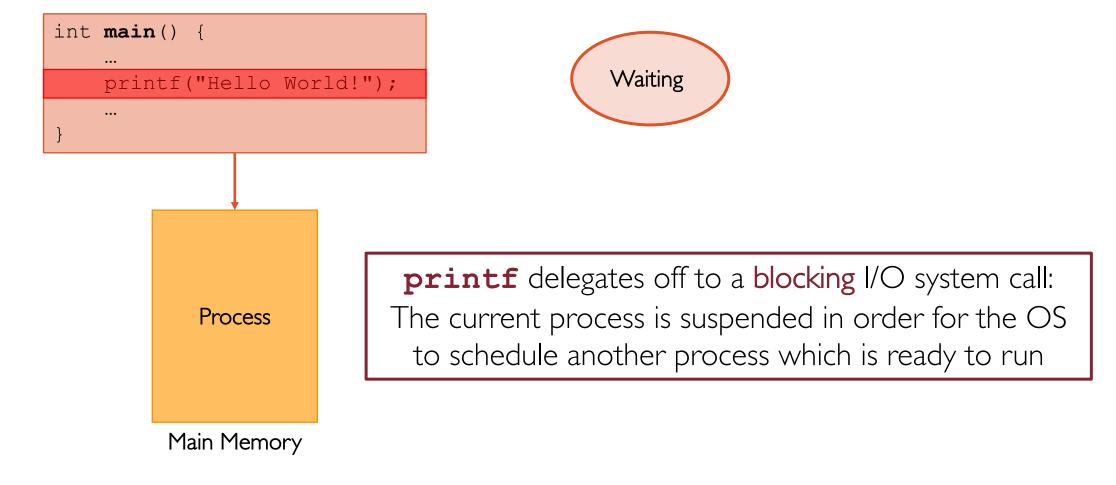

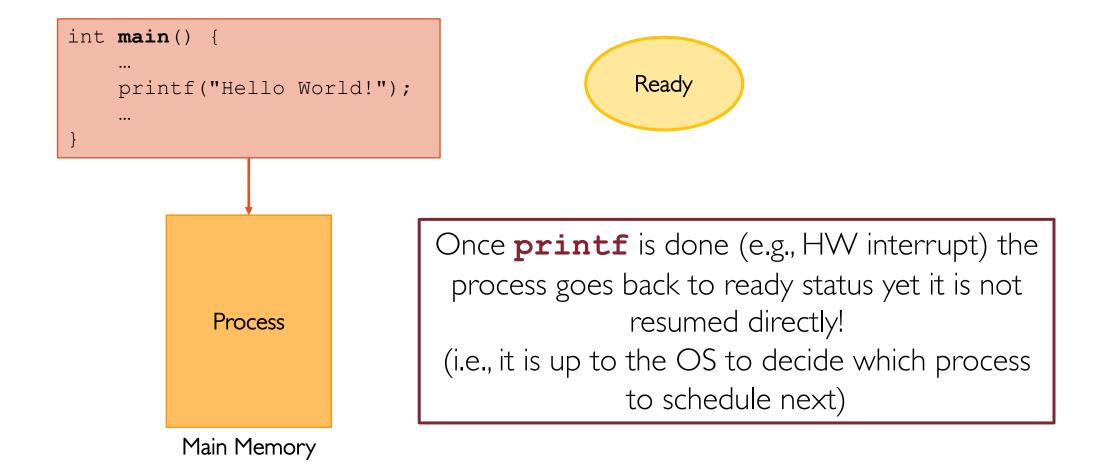

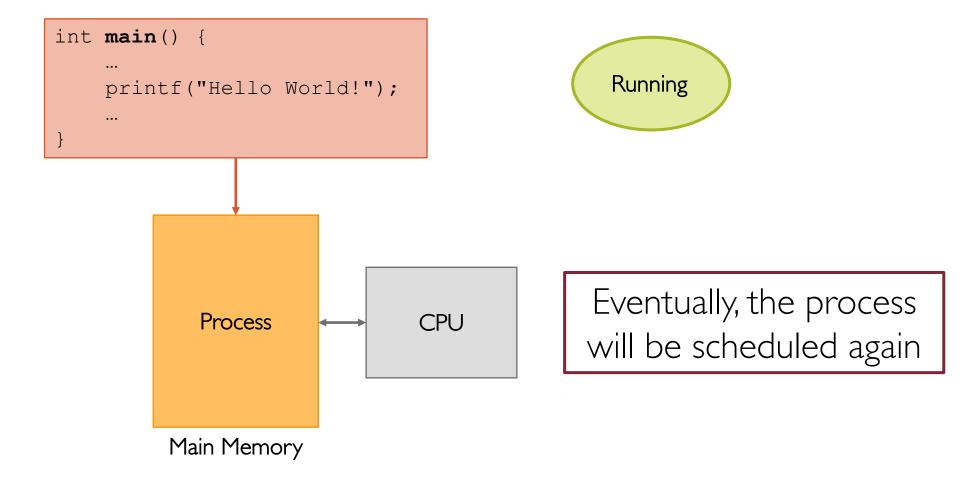

## Process Execution State: Example

```
int main() {
    ...
    printf("Hello World!");
    ...
}
```



Finally, the process terminates

Most system calls (e.g., I/O ones) are blocking

- Most system calls (e.g., I/O ones) are blocking
  - the caller process (user space) can't do anything until the system call returns

- Most system calls (e.g., I/O ones) are blocking
  - the caller process (user space) can't do anything until the system call returns
  - the OS (kernel space):
    - sets the current process to a waiting state (i.e., waiting for the system call to return)
    - schedules a different ready process to avoid the CPU being idle

- Most system calls (e.g., I/O ones) are blocking
  - the caller process (user space) can't do anything until the system call returns
  - the OS (kernel space):
    - sets the current process to a waiting state (i.e., waiting for the system call to return)
    - schedules a different ready process to avoid the CPU being idle
  - once the system call returns the previously blocked process is ready to be scheduled for execution again

- Most system calls (e.g., I/O ones) are blocking
  - the caller process (user space) can't do anything until the system call returns
  - the OS (kernel space):
    - sets the current process to a waiting state (i.e., waiting for the system call to return)
    - schedules a different ready process to avoid the CPU being idle
  - once the system call returns the previously blocked process is ready to be scheduled for execution again
- NOTE: the whole system is not blocked, only the process which has requested the blocked call is!

- The main data structure used by the OS to keep track of any process
- The PCB keeps track of the execution state and location of a process
- The OS allocates a new PCB upon the creation of a process and places it into a state queue
- The OS deallocates a PCB as soon as the associated process terminates

• At least, the PCB contains the following:

- At least, the PCB contains the following:
  - Process state  $\rightarrow$  ready, waiting, running, etc.

14/10/20 45

- At least, the PCB contains the following:
  - Process state  $\rightarrow$  ready, waiting, running, etc.
  - Process number (i.e., unique identifier)

- At least, the PCB contains the following:
  - Process state  $\rightarrow$  ready, waiting, running, etc.
  - Process number (i.e., unique identifier)
  - Program Counter (PC) + Stack Pointer (SP) + general purpose registers

- At least, the PCB contains the following:
  - Process state  $\rightarrow$  ready, waiting, running, etc.
  - Process number (i.e., unique identifier)
  - Program Counter (PC) + Stack Pointer (SP) + general purpose registers
  - CPU scheduling information  $\rightarrow$  priority and pointers to state queues

- At least, the PCB contains the following:
  - Process state  $\rightarrow$  ready, waiting, running, etc.
  - Process number (i.e., unique identifier)
  - Program Counter (PC) + Stack Pointer (SP) + general purpose registers
  - CPU scheduling information -> priority and pointers to state queues
  - Memory management information → page tables

- At least, the PCB contains the following:
  - Process state  $\rightarrow$  ready, waiting, running, etc.
  - Process number (i.e., unique identifier)
  - Program Counter (PC) + Stack Pointer (SP) + general purpose registers
  - CPU scheduling information  $\rightarrow$  priority and pointers to state queues
  - Memory management information → page tables
  - Accounting information 

     user and kernel CPU time consumed, owner

- At least, the PCB contains the following:
  - Process state 
     ready, waiting, running, etc.
  - Process number (i.e., unique identifier)
  - Program Counter (PC) + Stack Pointer (SP) + general purpose registers
  - CPU scheduling information  $\rightarrow$  priority and pointers to state queues
  - Memory management information → page tables
  - Accounting information 

     user and kernel CPU time consumed, owner
  - I/O status → list of open files

process state process number program counter registers memory limits list of open files

## **Process Scheduling**

- 2 main goals of the process scheduling system:
  - keep the CPU busy at all times
  - deliver "acceptable" response times for all programs, particularly for interactive ones

## Process Scheduling

- 2 main goals of the process scheduling system:
  - keep the CPU busy at all times
  - deliver "acceptable" response times for all programs, particularly for interactive ones
- The process scheduler must meet these objectives by implementing suitable policies for swapping processes in and out of the CPU


## Process Scheduling

- 2 main goals of the process scheduling system:
  - keep the CPU busy at all times
  - deliver "acceptable" response times for all programs, particularly for interactive ones
- The process scheduler must meet these objectives by implementing suitable policies for swapping processes in and out of the CPU
- Note that these objectives can be conflicting!
  - Every time the OS steps in to swap processes it takes up time on the CPU to do so, which is thereby "lost" from doing any useful productive work

### Process State Queues

- The OS mantains the PCBs of all the processes in state queues
- There is one queue for each of the 5 states a process can be in
- There is typically one queue for each I/O device (where processes wait for a device to become available or to deliver data)
- When the OS change the status of a process (e.g., from ready to running) the PCB is unlinked from the current queue and moved to the new one
- The OS may use different policies to manage each state queue

## Process State Queues: Example

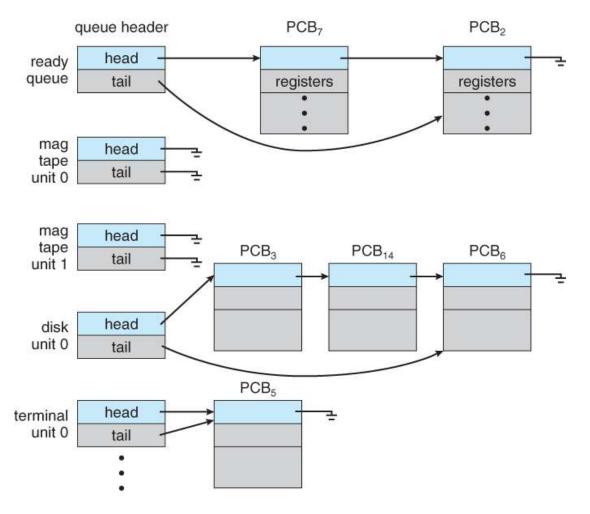

• How many PCBs can be in the Running Queue?

- How many PCBs can be in the Running Queue?
  - The Running Queue is bound by the number of cores available on the system
  - At each time, only one process can be executed on a CPU

- How many PCBs can be in the Running Queue?
  - The Running Queue is bound by the number of cores available on the system
  - At each time, only one process can be executed on a CPU
- What about the other queues?

- How many PCBs can be in the Running Queue?
  - The Running Queue is bound by the number of cores available on the system
  - At each time, only one process can be executed on a CPU
- What about the other queues?
  - They are basically unbounded as there is no theoretical limit on the number processes in new/ready/waiting/terminated states


• A long-term scheduler runs infrequently and is typical of a batch system or a very heavily loaded system

- A long-term scheduler runs infrequently and is typical of a batch system or a very heavily loaded system
- A short-term scheduler runs very frequently (about every 100 milliseconds) and must very quickly swap one process out of the CPU and swap in another one

- A long-term scheduler runs infrequently and is typical of a batch system or a very heavily loaded system
- A short-term scheduler runs very frequently (about every 100 milliseconds) and must very quickly swap one process out of the CPU and swap in another one
- Some systems also employ a medium-term scheduler: when system loads get high, this scheduler allows smaller faster jobs to finish up quickly and clear the system

- A long-term scheduler runs infrequently and is typical of a batch system or a very heavily loaded system
- A short-term scheduler runs very frequently (about every 100 milliseconds) and must very quickly swap one process out of the CPU and swap in another one
- Some systems also employ a medium-term scheduler: when system loads get high, this scheduler allows smaller faster jobs to finish up quickly and clear the system
- An efficient scheduling system will select a good mix of CPU-bound processes and I/O bound processes

## Schedulers: Queuing Diagram

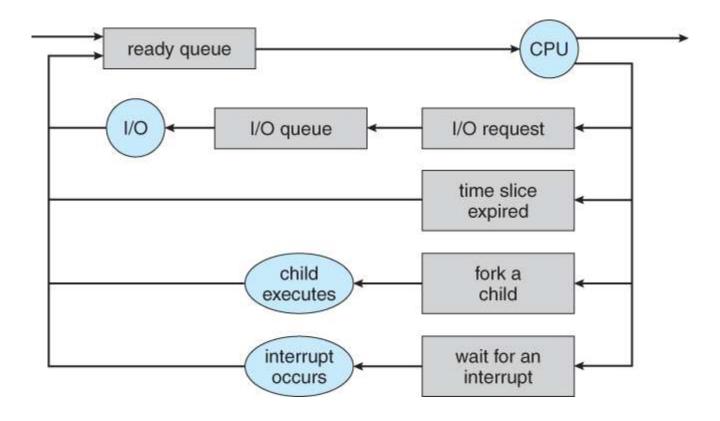

### Context Switch: What?

• It is the procedure used by the CPU to suspend the currently executing process in order to run a ready one

### Context Switch: What?

- It is the procedure used by the CPU to suspend the currently executing process in order to run a ready one
- It is a highly costly operation because:
  - stopping the current process involves saving all of its internal state (PC, SP, other registers, etc.) to its PCB

### Context Switch: What?

- It is the procedure used by the CPU to suspend the currently executing process in order to run a ready one
- It is a highly costly operation because:
  - stopping the current process involves saving all of its internal state (PC, SP, other registers, etc.) to its PCB
  - starting a ready process consists of loading all of its internal state (PC, SP, other registers, etc.) from its PCB

### Context Switch: When?

- A context switch occurs due to any incoming trap
  - system calls, exceptions, or HW interrupts

#### Context Switch: When?

- A context switch occurs due to any incoming trap
  - system calls, exceptions, or HW interrupts
- Whenever an trap arrives, the CPU must:
  - perform a state-save of the currently running process
  - switch into kernel mode to handle the interrupt
  - perform a state-restore of the interrupted process

#### Context Switch: Fairness

- I/O-bound processes eventually get switched due to I/O requests
- CPU-bound processes, instead, could theoretically never issue any I/O requests
- To avoid CPU-bound processes hog the CPU, context switch is also triggered via HW timer interrupts (time quantum or slice)

• The maximum amount of time between two context switches

14/10/20 73

- The maximum amount of time between two context switches
- To ensure that at least a context switch occurs every, say, 50 ms
  - in practice, it can happen more frequently than that (e.g., due to I/O requests)

- The maximum amount of time between two context switches
- To ensure that at least a context switch occurs every, say, 50 ms
  - in practice, it can happen more frequently than that (e.g., due to I/O requests)
- Can be easily implemented in HW through timer interrupt

14/10/20 75

- The maximum amount of time between two context switches
- To ensure that at least a context switch occurs every, say, 50 ms
  - in practice, it can happen more frequently than that (e.g., due to I/O requests)
- Can be easily implemented in HW through timer interrupt
- Mechanism used by modern time-sharing multi-tasking OSs to increase system responsiveness (pseudo-parallelism)

• The time taken to complete a context switch is just wasted CPU time

- The time taken to complete a context switch is just wasted CPU time
- A smaller time slice results in more frequent context switches
  - maximizing responsiveness

- The time taken to complete a context switch is just wasted CPU time
- A smaller time slice results in more frequent context switches
  - maximizing responsiveness
- A larger time slice results in less frequent context switches
  - minimizing wasted CPU time, therefore maximizing CPU utilization


- The time taken to complete a context switch is just wasted CPU time
- A smaller time slice results in more frequent context switches
  - maximizing responsiveness
- A larger time slice results in less frequent context switches
  - minimizing wasted CPU time, therefore maximizing CPU utilization

Trade-off

- The time taken to complete a context switch is just wasted CPU time
- A smaller time slice results in more frequent context switches
  - maximizing responsiveness
- A larger time slice results in less frequent context switches
  - minimizing wasted CPU time, therefore maximizing CPU utilization
- Typical values of time slice are between 10 and 100 ms, and context switch takes around 10  $\mu$ s, so the overhead is small relative to time slice

Trade-off

## Context Switch: Example

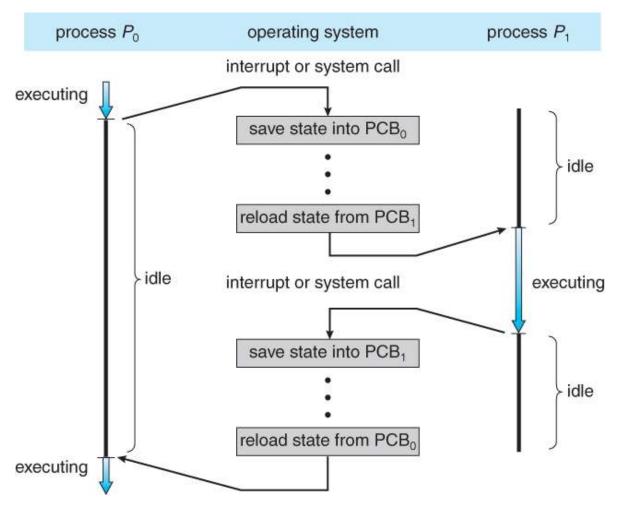

#### Process Creation

- Processes may create other processes through specific system calls
  - The creator process is called parent of the new process, which is called child
  - The parent shares resources and privileges to its children
  - A parent can either wait for a child to complete, or continue in parallel

#### Process Creation

- Processes may create other processes through specific system calls
  - The creator process is called parent of the new process, which is called child
  - The parent shares resources and privileges to its children
  - A parent can either wait for a child to complete, or continue in parallel
- Each process is given an integer identifier (a.k.a. process identifier or PID)


#### Process Creation

- Processes may create other processes through specific system calls
  - The creator process is called parent of the new process, which is called child
  - The parent shares resources and privileges to its children
  - A parent can either wait for a child to complete, or continue in parallel
- Each process is given an integer identifier (a.k.a. process identifier or PID)
- The parent PID (PPID) is also stored for each process

#### Process Creation: UNIX/Linux

- On typical UNIX systems the process scheduler is named sched, and is given PID 0
- The first thing it does at system startup time is to launch init, which gives that process PID I
- init then launches all system daemons and user logins, and becomes the ultimate parent of all other processes
- Processes are created through the fork() system call

### Process Creation: UNIX/Linux

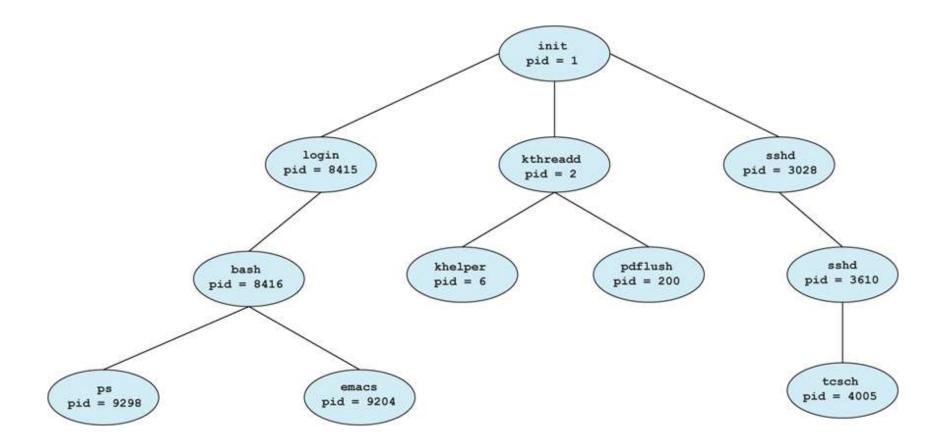

#### Process Creation: Parent vs. Child Resources

• 2 possibilities for the address space of the child relative to the parent:

#### Process Creation: Parent vs. Child Resources

- 2 possibilities for the address space of the child relative to the parent:
  - The child may be an exact duplicate of the parent, sharing the same program and data segments in memory
    - Each will have their own PCB, including program counter, registers, and PID
    - This is the behavior of the **fork** system call in UNIX

#### Process Creation: Parent vs. Child Resources

- 2 possibilities for the address space of the child relative to the parent:
  - The child may be an exact duplicate of the parent, sharing the same program and data segments in memory
    - Each will have their own PCB, including program counter, registers, and PID
    - This is the behavior of the **fork** system call in UNIX
  - The child process may have a **new program** loaded into its address space, with all new code and data segments
    - This is the behavior of the **spawn** system calls in Windows
    - UNIX systems implement this as a second step, using the **exec** system call

#### Process Creation: Parent vs. Child Execution

• 2 options for the parent process after creating the child:

#### Process Creation: Parent vs. Child Execution

- 2 options for the parent process after creating the child:
  - Wait for the child process to terminate before proceeding by issuing a wait system call, for either a specific child or for any child (usual behavior of UNIX shell)


#### Process Creation: Parent vs. Child Execution

- 2 options for the parent process after creating the child:
  - Wait for the child process to terminate before proceeding by issuing a wait system call, for either a specific child or for any child (usual behavior of UNIX shell)
  - Run concurrently with the child, continuing to process without being blocked (when a UNIX shell runs a process as a background task using "&")

### Process Creation: UNIX/Linux Code

```
#include <sys/types.h>
#include <stdio.h>
#include <unistd.h>
int main()
pid_t pid;
   /* fork a child process *,
   pid = fork();
   if (pid < 0) {/* error occurred */
    fprintf(stderr, "Fork Failed");
     exit(-1);
   else if (pid == 0) {/* child process *
     execlp("/bin/ls", "ls", NULL);
   else {/* parent process */
   /* parent will wait for the child to complete *
     wait(NULL);
     printf("Child Complete");
     exit(0);
```


Figure 3.10 C program forking a separate process.

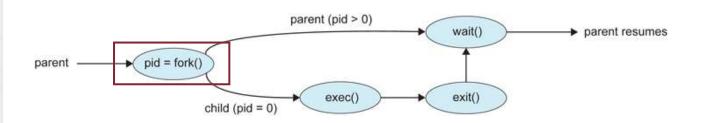

### Process Creation: UNIX/Linux Code

```
#include <sys/types.h>
#include <stdio.h>
#include <unistd.h>
int main()
pid_t pid;
   /* fork a child process */
   pid = fork();
   if (pid < 0) {/* error occurred */
   fprintf(stderr, "Fork Failed");
     exit(-1);
   else if (pid == 0) {/* child process *
     execlp("/bin/ls", "ls", NULL);
   else {/* parent process */
    /* parent will wait for the child to complete *
     wait(NULL);
     printf("Child Complete");
     exit(0);
```

Figure 3.10 C program forking a separate process

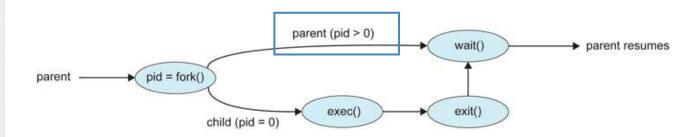


In the parent process, **fork()** returns the PID of the child

#### Process Creation: UNIX/Linux Code


```
#include <sys/types.h>
#include <stdio.h>
#include <unistd.h>
int main()
pid_t pid;
  /* fork a child process */
   pid = fork();
   if (pid < 0) {/* error occurred */
   fprintf(stderr, "Fork Failed");
     exit(-1);
   else if (pid == 0) {/* child process *
     execlp("/bin/ls", "ls", NULL);
   else {/* parent process */
   /* parent will wait for the child to complete *
     wait(NULL);
     printf("Child Complete");
     exit(0);
```

Figure 3.10 C program forking a separate process

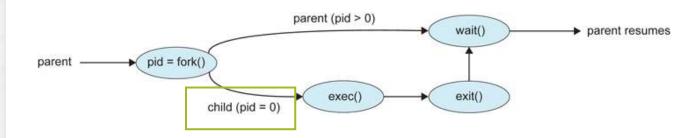


In the child process, it returns 0

# Process Creation: Activity Monitor

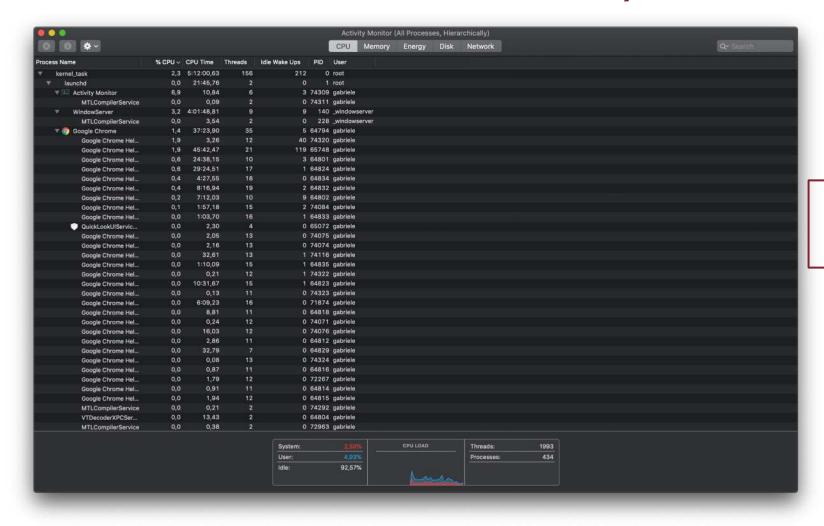


Hierarchy of Processes (i.e., process tree)


97

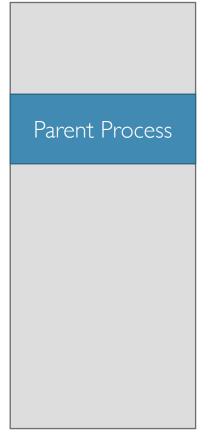

Main Memory

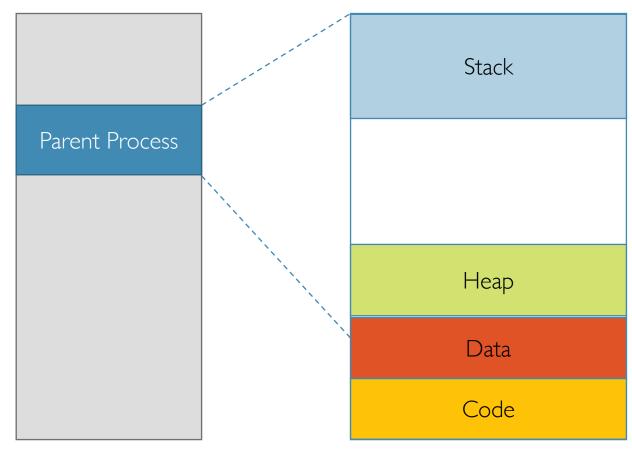



Main Memory

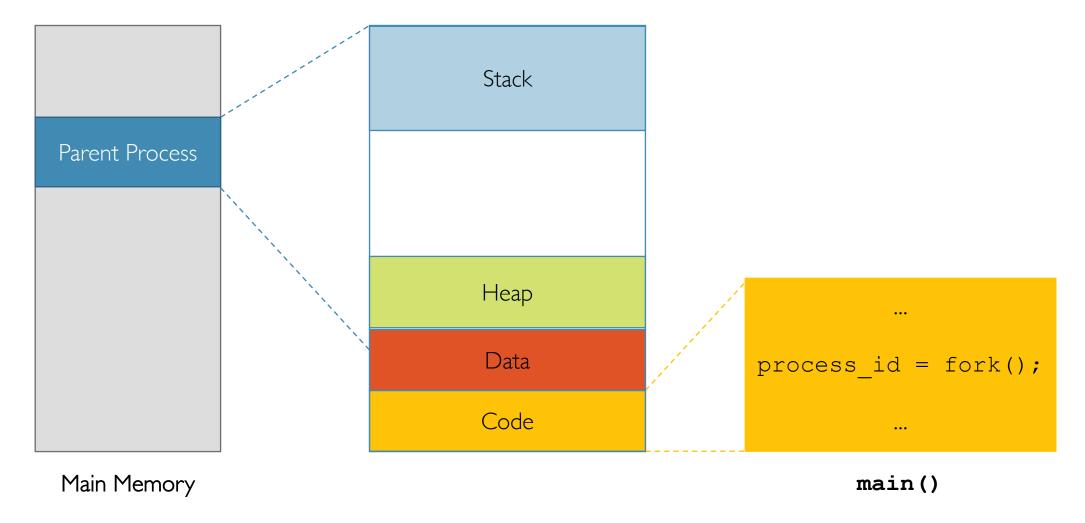

Parent Process Child Process

Main Memory

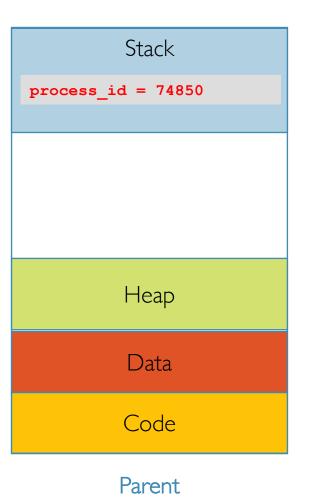

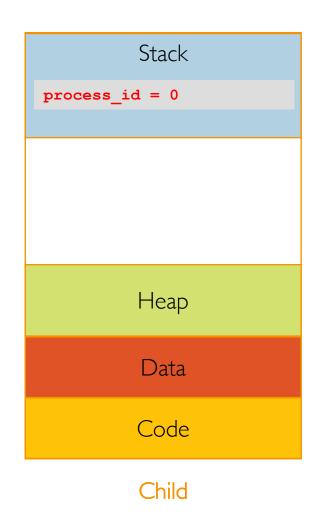


101

Parent Process Child Process

Main Memory

Stack process id = 74850Heap Data Code

Parent

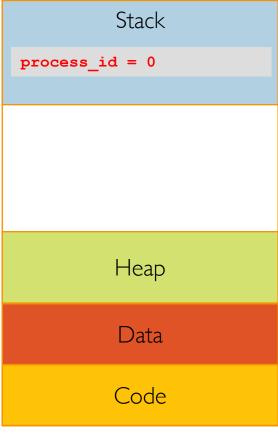


**Child** PID = 74850


Parent Process

Child Process

Main Memory

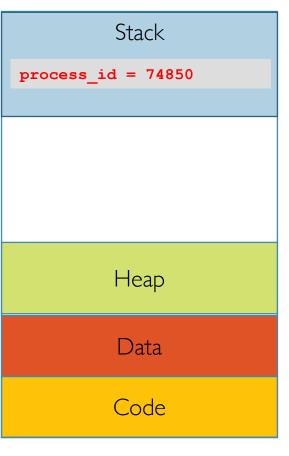

**Parent**PID = 74849

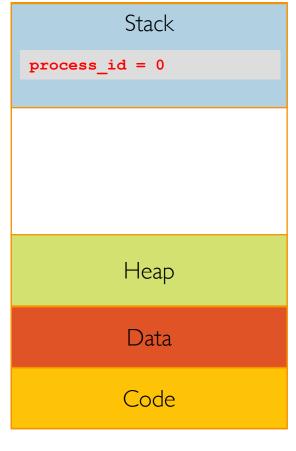


**Child**PID = 74850

parentID = 74849


Parent Process Child Process

Main Memory

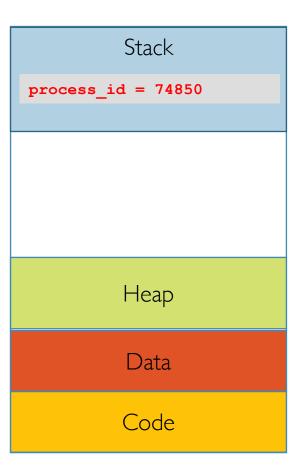

Parent
PID = 74849

parentID = 65784

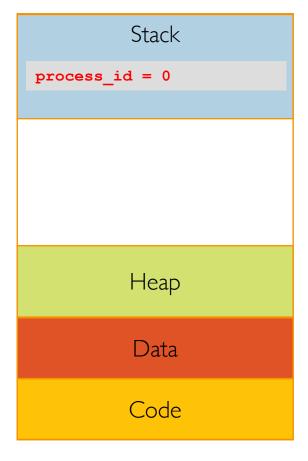

Child PID = 74850 parentID = 74849

### Process Creation: Code Example

```
#include <iostream>
#include <unistd.h>
using namespace std;
int main() {
    cout << "Current process ID is: " << getpid() << endl;</pre>
    cout << "\nCurrent parent's process ID is: " << getppid() << endl;</pre>
    int pid;
    pid = fork();
    // both the parent and the child processes will resume from this point onward
    if (pid == 0) { // child
        cout << "\nThis is the child process with process ID = "</pre>
             << getpid() << endl;
        cout << "\nThis is the child process with parent's process ID = "</pre>
             << getppid() << endl;
    else { // parent
        sleep(1); // to ensure the child process finishes before the parent
        cout << "\nThis is the parent process with process ID = "</pre>
             << getpid() << endl;
        cout << "\nThis is the parent process with parent's process ID = "</pre>
             << getppid() << endl;</pre>
    return 0;
```

### Process Creation: Code Example

```
#include <iostream>
#include <unistd.h>
using namespace std;
int main() {
    cout << "Current process ID is: " << getpid() << endl;</pre>
    cout << "\nCurrent parent's process ID is: " << getppid() << endl;</pre>
    int pid;
    pid = fork();
    // once the fork() system call returns,
    // both the parent and the child processes will resume from this point onward
    if (pid == 0) { // child
        cout << "\nThis is the child process with process ID = "</pre>
             << getpid() << endl;
        cout << "\nThis is the child process with parent's process ID = "</pre>
             << getppid() << endl;
    else { // parent
        sleep(1); // to ensure the child process finishes before the parent
        cout << "\nThis is the parent process with process ID = "</pre>
             << getpid() << endl;</pre>
        cout << "\nThis is the parent process with parent's process ID = "</pre>
             << getppid() << endl;
    return 0;
```

What happens if the child sleeps rather than the parent?

#### Process Creation: What's Next?

- So far, we have seen how **fork** system call is able to make a complete copy of an existing process
- However, this ability alone is not that useful, right?
- Our ultimate goal is to create new yet different processes, not just copies of a single one!

## Process Creation: The Example of UNIX Shell

• When we log in to a UNIX machine a shell process is usually started

## Process Creation: The Example of UNIX Shell

- When we log in to a UNIX machine a shell process is usually started
- Every command we type into the shell creates a new child process whose parent is the shell itself

## Process Creation: The Example of UNIX Shell

- When we log in to a UNIX machine a shell process is usually started
- Every command we type into the shell creates a new child process whose parent is the shell itself
- Implicitly, 2 system calls take place: fork and exec
  - the former creates a new process, whilst the latter execute the new process
  - e.g., try typing **emacs** on your shell

## Process Creation: The Example of UNIX Shell

- When we log in to a UNIX machine a shell process is usually started
- Every command we type into the shell creates a new child process whose parent is the shell itself
- Implicitly, 2 system calls take place: fork and exec
  - the former creates a new process, whilst the latter execute the new process
  - e.g., try typing **emacs** on your shell
- NOTE: adding "&" at the end of the command will run the child process in parallel with the parent shell (background)

```
#include <iostream>
#include <unistd.h>
#include <sys/wait.h>
#include <stdio.h>
#include <string.h>
using namespace std;
int main() {
    int current_pid = getpid();
    cout << "Current process ID is: " << current_pid << endl;</pre>
    string progStr;
    // read the name of the program we want to start
    getline(cin, progStr);
    const char *prog = progStr.c_str();
    int pid = fork();
    if (pid == 0) { // child
        execlp(prog, prog, 0); // load the program
        // if prog can actually be started, we will never get to the
        // following statement, as the child process will be replaced by prog!
        printf("Can't load the program %s\n", prog);
    else { // parent
        sleep(1); // give some time to the child process to starting up
        waitpid(pid, 0, 0); // wait for child process to terminate
        printf("Program %s finished!\n", prog);
    return 0;
```

**execlp** loads the program whose name is read from **stdin** 

```
int execlp(const char *file, const char *arg, ...);
```

```
#include <iostream>
#include <unistd.h>
#include <sys/wait.h>
#include <stdio.h>
#include <string.h>
using namespace std;
int main() {
    int current_pid = getpid();
    cout << "Current process ID is: " << current_pid << endl;</pre>
    string progStr;
    // read the name of the program we want to start
    getline(cin, progStr);
    const char *prog = progStr.c_str();
    int pid = fork();
    if (pid == 0) { // child
        execlp(prog, prog, 0); // load the program
        // if prog can actually be started, we will never get to the
        // following statement, as the child process will be replaced by prog!
        printf("Can't load the program %s\n", prog);
    else { // parent
        sleep(1); // give some time to the child process to starting up
        waitpid(pid, 0, 0); // wait for child process to terminate
        printf("Program %s finished!\n", prog);
    return 0;
```

**execlp** loads the program whose name is read from **stdin** 

```
int execlp(const char *file, const char *arg, ...);
```

path to executable

```
#include <iostream>
#include <unistd.h>
#include <sys/wait.h>
#include <stdio.h>
#include <string.h>
using namespace std;
int main() {
    int current_pid = getpid();
    cout << "Current process ID is: " << current_pid << endl;</pre>
    string progStr;
    // read the name of the program we want to start
    getline(cin, progStr);
    const char *prog = progStr.c_str();
    int pid = fork();
    if (pid == 0) { // child
        execlp(prog, prog, 0); // load the program
        // if prog can actually be started, we will never get to the
        // following statement, as the child process will be replaced by prog!
        printf("Can't load the program %s\n", prog);
    else { // parent
        sleep(1); // give some time to the child process to starting up
        waitpid(pid, 0, 0); // wait for child process to terminate
        printf("Program %s finished!\n", prog);
    return 0;
```

**execlp** loads the program whose name is read from **stdin** 

```
int execlp(const char *file, const char *arg, ...);
```

argv[0]

```
#include <iostream>
#include <unistd.h>
#include <sys/wait.h>
#include <stdio.h>
#include <string.h>
using namespace std;
int main() {
    int current pid = getpid();
    cout << "Current process ID is: " << current_pid << endl;</pre>
    string progStr;
    // read the name of the program we want to start
    getline(cin, progStr);
    const char *prog = progStr.c_str();
    int pid = fork();
    if (pid == 0) { // child
        execlp(prog, prog, 0); // load the program
        // if prog can actually be started, we will never get to the
        // following statement, as the child process will be replaced by prog!
        printf("Can't load the program %s\n", prog);
    else { // parent
        sleep(1); // give some time to the child process to starting up
        waitpid(pid, 0, 0); // wait for child process to terminate
        printf("Program %s finished!\n", prog);
    return 0;
```


waitpid allows the parent to wait for a child process to finish

```
pid_t waitpid(pid_t pid, int *status, int options);
```

How do we create the following process hierarchy using **fork** and possibly **exec**?



How do we create the following process hierarchy using fork and possibly exec?

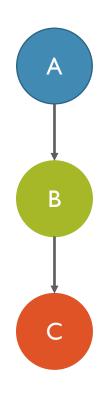


```
int pid = fork();
if (pid == 0) { // A's child (B)
   pid = fork();
    if(pid == 0) { // B's child (C)
        execlp(...);
    else { // B
else { // A
```

More generally, we will need *n-1* fork and if-else


if we want to create a sequence of *n* processes




How do we create the following process hierarchy using **fork** and possibly **exec**?

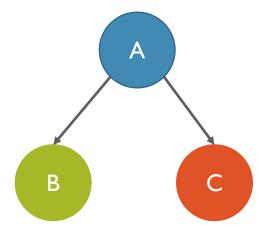

How do we create the following process hierarchy using fork and possibly exec?

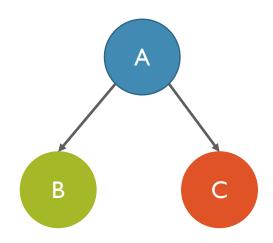

More generally, if we want to create n child processes all having the same parent

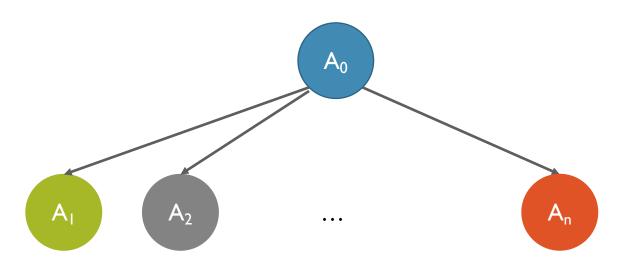

```
for(int i=0;i<n;i++) {
    if(fork() == 0) { // A0's child
        ...
        execlp(...);
    }
    // else we are in the parent: keep forking
}
// back in the parent A0

// wait for all children to terminate
for(int i=0;i<n;i++) {
    wait(NULL);
}</pre>
```

### Process Creation and Execution: Be Careful!

What will happen if we do the following?

```
while(1) {
    fork();
}
```

### Process Creation and Execution: Be Careful!

What will happen if we do the following?

```
while(1) {
    fork();
}
```

Infinite number of child processes growing with an exponential rate

• fork -> spawn a new child process as an exact copy of the parent

- fork -> spawn a new child process as an exact copy of the parent
- execlp → replaces the program of the current process with the input named program

- fork -> spawn a new child process as an exact copy of the parent
- execlp → replaces the program of the current process with the input named program
- **sleep**  $\rightarrow$  suspends the execution for a certain amount of seconds

- fork -> spawn a new child process as an exact copy of the parent
- execlp → replaces the program of the current process with the input named program
- **sleep**  $\rightarrow$  suspends the execution for a certain amount of seconds
- wait/waitpid -> wait for any/a specific process to finish execution

- Processes may request their own termination by making the exit system call, typically returning an int
- This int is passed along to the parent if it is doing a wait
- It is usually 0 on successful completion and some non-zero in the event of problems

- Processes may also be terminated by the system for a variety of reasons:
  - The inability of the system to deliver necessary system resources
  - In response to a kill command, or other un handled process interrupt

- Processes may also be terminated by the system for a variety of reasons:
  - The inability of the system to deliver necessary system resources
  - In response to a kill command, or other un handled process interrupt
- A parent may kill its children if the task assigned to them is no longer needed

- Processes may also be terminated by the system for a variety of reasons:
  - The inability of the system to deliver necessary system resources
  - In response to a kill command, or other un handled process interrupt
- A parent may kill its children if the task assigned to them is no longer needed
- If the parent exits, the system may or may not allow the child to continue without a parent
  - On UNIX systems, **orphaned** processes are generally inherited by **init**, which then proceeds to kill them

• When a process terminates, all of its system resources are freed up, open files flushed and closed, etc.

- When a process terminates, all of its system resources are freed up, open files flushed and closed, etc.
- The process termination status and execution times are returned to the parent if this is waiting for the child to terminate
  - Or eventually to **init** if the process becomes an **orphan**

- When a process terminates, all of its system resources are freed up, open files flushed and closed, etc.
- The process termination status and execution times are returned to the parent if this is waiting for the child to terminate
  - Or eventually to **init** if the process becomes an **orphan**
- Processes which are trying to terminate but cannot because their parent is not waiting for them are called zombies
  - Eventually inherited by init as orphans and killed

## Interprocess Communication

• Processes can be either independent or cooperating

## Interprocess Communication

- Processes can be either independent or cooperating
- Independent processes → operate concurrently on a system and can neither affect or be affected by other processes

## Interprocess Communication

- Processes can be either independent or cooperating
- Independent processes → operate concurrently on a system and can neither affect or be affected by other processes
- Cooperating processes  $\rightarrow$  can affect or be affected by other processes in order to achieve a common task

• Information sharing There may be several processes which need access to the same file (e.g., pipelines)

- Information sharing  $\rightarrow$  There may be several processes which need access to the same file (e.g., pipelines)
- Computation speedup → A problem can be solved faster if it can be broken down into sub-tasks to be solved simultaneously


- Information sharing  $\rightarrow$  There may be several processes which need access to the same file (e.g., pipelines)
- Computation speedup → A problem can be solved faster if it can be broken down into sub-tasks to be solved simultaneously
- Modularity 

  The most efficient architecture may be to break a system down into cooperating modules

- Information sharing There may be several processes which need access to the same file (e.g., pipelines)
- Computation speedup → A problem can be solved faster if it can be broken down into sub-tasks to be solved simultaneously
- Modularity → The most efficient architecture may be to break a system down into cooperating modules
- Convenience → Even a single user may be multi-tasking, such as editing, compiling, printing, and running the same code in different windows

## Cooperating Processes: Communication

• 2 possible ways for cooperating processes to communicate:

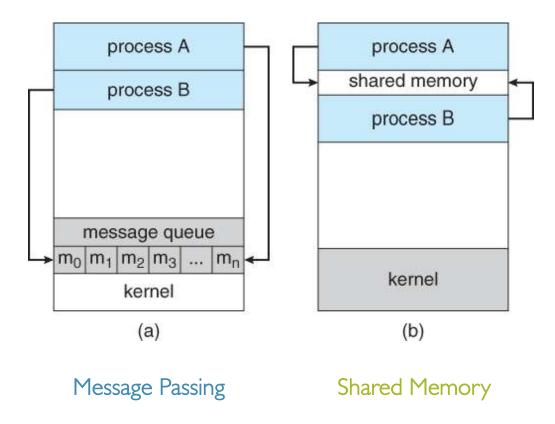

## Shared Memory vs. Message Passing

#### Shared Memory

- Faster once it is set up, as no system calls are needed
- More complicated to set up, and doesn't work as well across multiple computers
- Preferable when (large amount of) information must be shared on the same computer

## Shared Memory vs. Message Passing

#### Shared Memory

- Faster once it is set up, as no system calls are needed
- More complicated to set up, and doesn't work as well across multiple computers
- Preferable when (large amount of) information must be shared on the same computer

#### Message Passing

- Slower as it requires system calls for every message transfer
- Simpler to set up and works well across multiple computers
- Preferable when the amount and/or frequency of data transfers is small, or when multiple computers are involved

## Shared Memory Systems

- The memory to be shared is initially within the address space of a particular process
- This needs to make system calls in order to make that memory publicly available to other processes
- Other processes must make their own system calls to attach the shared memory onto their address space

## Message Passing Systems

- Must support at least system calls for sending and receiving messages
- A communication link must be established between the cooperating processes before messages can be sent
- 3 key issues to be solved:
  - direct or indirect communication (i.e., naming)
  - synchronous or asynchronous communication
  - automatic or explicit buffering

## Message Passing Systems: Naming

- Direct communication → the sender must know the name of the receiver to which it wishes to send a message
  - one-to-one link between every sender-receiver pair
  - for symmetric communication, the receiver must also know the name of the sender

## Message Passing Systems: Naming

- Direct communication → the sender must know the name of the receiver to which it wishes to send a message
  - one-to-one link between every sender-receiver pair
  - for symmetric communication, the receiver must also know the name of the sender
- Indirect communication  $\rightarrow$  uses shared mailboxes or ports
  - multiple processes can share the same mailbox or port
  - only one process can read any given message in a mailbox
  - the OS must provide system calls to create and delete mailboxes, and to send and receive messages to/from mailboxes

# Message Passing Systems: Buffering and Synchronization

Zero capacity 

Messages cannot be stored in the queue, so senders must block until receivers accept the messages

# Message Passing Systems: Buffering and Synchronization

- Zero capacity → Messages cannot be stored in the queue, so senders must block until receivers accept the messages
- Bounded capacity → There is a pre-determined finite capacity in the queue, so senders must block if the queue is full, otherwise may be either blocking or non-blocking

# Message Passing Systems: Buffering and Synchronization

- Zero capacity → Messages cannot be stored in the queue, so senders must block until receivers accept the messages
- Bounded capacity There is a pre-determined finite capacity in the queue, so senders must block if the queue is full, otherwise may be either blocking or non-blocking
- Unbounded capacity The queue has a theoretical infinite capacity, so senders are never forced to block

## Summary

- Process is the unit of execution (running on a single CPU)
- OS keeps track of process-related information using an ad hoc data structure called Process Control Block (PCB)
- Process can be in one of 5 possible states: new, ready, waiting, running, or terminated
- Context switch to intertwine the execution of multiple processes
- Process communication either via message passing or shared memory