



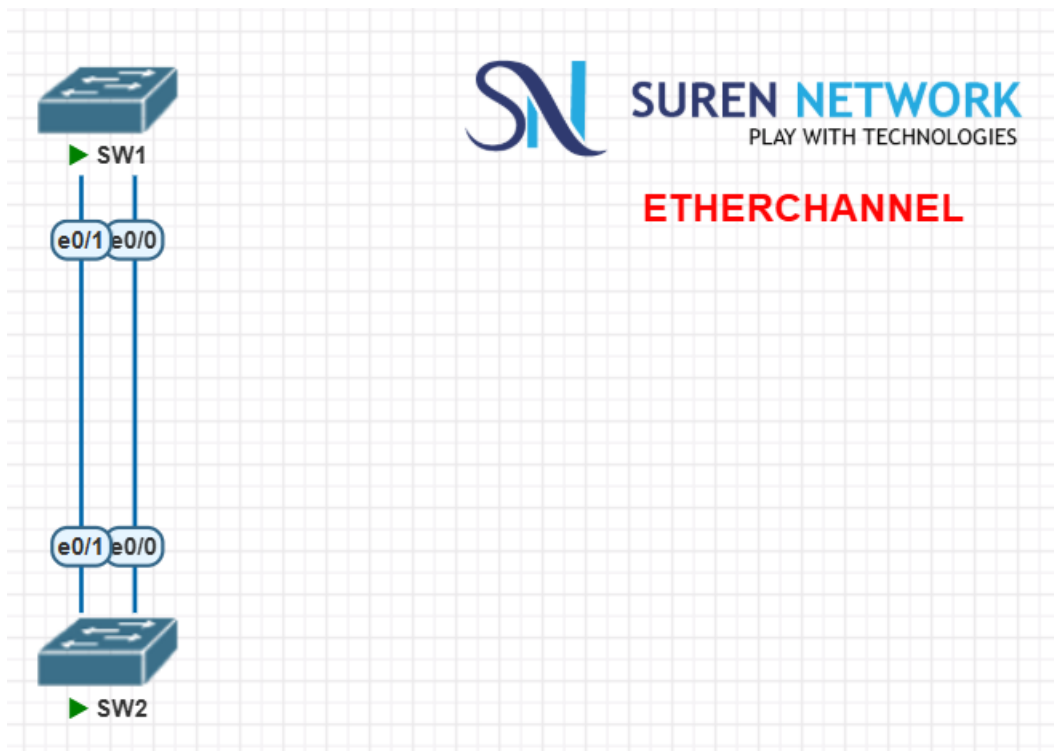

Before Configure Ether-channel

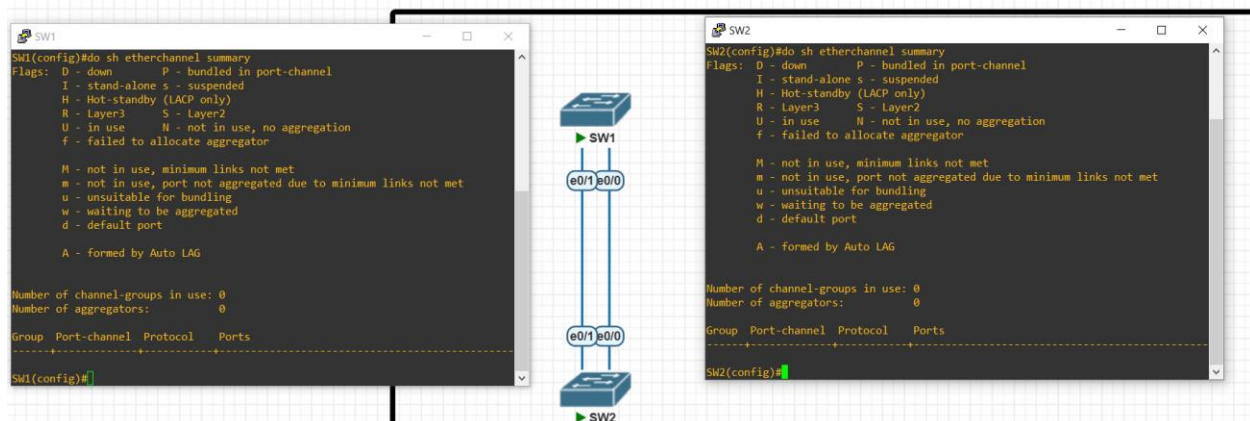

Create etherchannel on switch-1

```
SW1
SW1(config)#int range e0/0 - 1
SW1(config-if-range)#channel-group 1 mode active
Creating a port-channel interface Port-channel 1

SW1(config-if-range)#
*Sep 19 05:19:07.310: %LINEPROTO-5-UPDOWN: Line protocol on Interface Ethernet0/
0, changed state to down
*Sep 19 05:19:07.310: %LINEPROTO-5-UPDOWN: Line protocol on Interface Ethernet0/
1, changed state to down
SW1(config-if-range)#
*Sep 19 05:19:14.565: %EC-5-L3DONTBNL2: Et0/0 suspended: LACP currently not ena
bled on the remote port.
*Sep 19 05:19:14.860: %EC-5-L3DONTBNL2: Et0/1 suspended: LACP currently not ena
bled on the remote port.
SW1(config-if-range)#
SW1(config-if-range)#
```

Create etherchannel on switch-2

```
SW2
g Wizard)
SW2(config)#int range e0/0 , e0/1
SW2(config-if-range)#channel-group 1 mode passive
Creating a port-channel interface Port-channel 1

SW2(config-if-range)#
*Sep 19 05:23:00.916: %LINEPROTO-5-UPDOWN: Line protocol on Interface Ethernet0/
0, changed state to down
*Sep 19 05:23:00.916: %LINEPROTO-5-UPDOWN: Line protocol on Interface Ethernet0/
1, changed state to down
SW2(config-if-range)#
```

Check etherchannel status

```
SW1
SW1(config)#do sh etherchannel summary
Flags: D - down      P - bundled in port-channel
       I - stand-alone s - suspended
       H - Hot-standby (LACP only)
       R - Layer3    S - Layer2
       U - in use    N - not in use, no aggregation
       f - failed to allocate aggregator

       M - not in use, minimum links not met
       m - not in use, port not aggregated due to minimum links not met
       u - unsuitable for bundling
       w - waiting to be aggregated
       d - default port

       A - formed by Auto LAG

Number of channel-groups in use: 1
Number of aggregators:          1

Group  Port-channel  Protocol    Ports
-----
1      Po1(SU)          LACP        Et0/0(P)  Et0/1(P)

SW2
SW2(config)#do sh etherchannel summary
Flags: D - down      P - bundled in port-channel
       I - stand-alone s - suspended
       H - Hot-standby (LACP only)
       R - Layer3    S - Layer2
       U - in use    N - not in use, no aggregation
       f - failed to allocate aggregator

       M - not in use, minimum links not met
       m - not in use, port not aggregated due to minimum links not met
       u - unsuitable for bundling
       w - waiting to be aggregated
       d - default port

       A - formed by Auto LAG

Number of channel-groups in use: 1
Number of aggregators:          1

Group  Port-channel  Protocol    Ports
-----
1      Po1(SU)          LACP        Et0/0(P)  Et0/1(P)
```