I. INSTALLER PFSENSE

-
-
-
-

1.2 - Installer pfSense

Vous devez télécharger l'image ISO sur le site Internet suivant : https://www.pfsense.org/download/.

pfSense

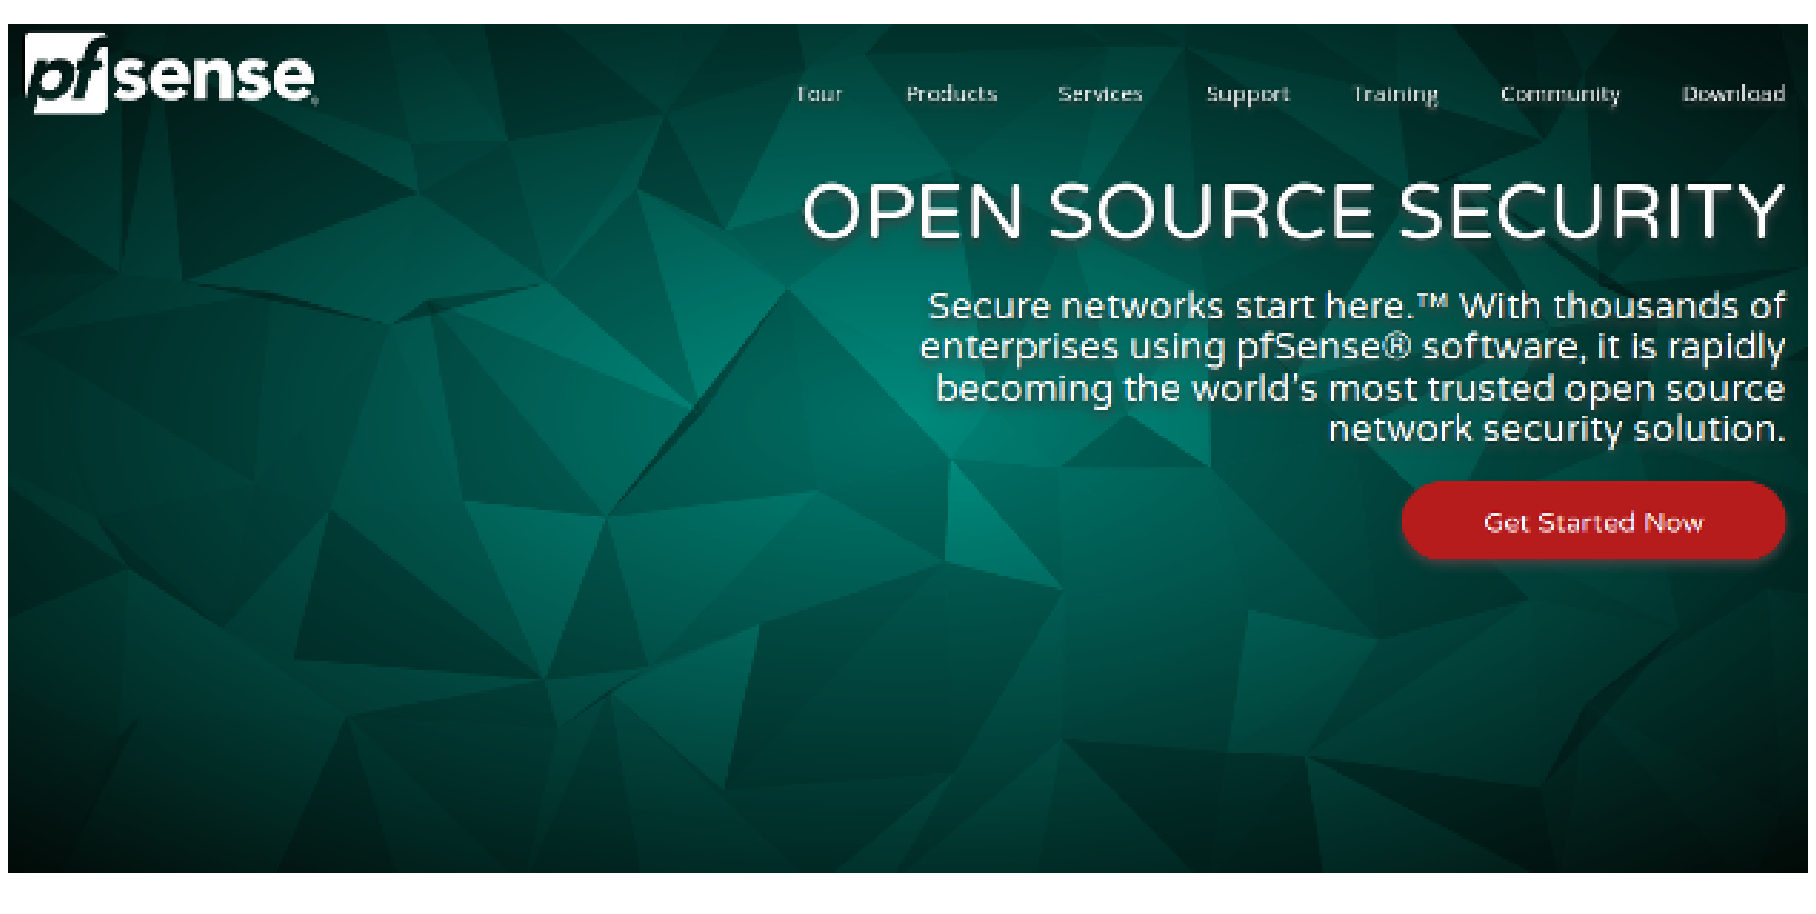
pfsense
Tour
Products
Services
Support
Training
Community
Download
OPEN SOURCE SECURITY
Secure networks start here.™ With thousands of enterprises using pfSense® software, it is rapidly becoming the world's most trusted open source network security solution.
Get Started Now

=> Insérez pfSense dans le lecteur de DVD ou, s'il s'agit d'une VM, sélectionnez l'image Iso

Figure 1 - pfSense Boot

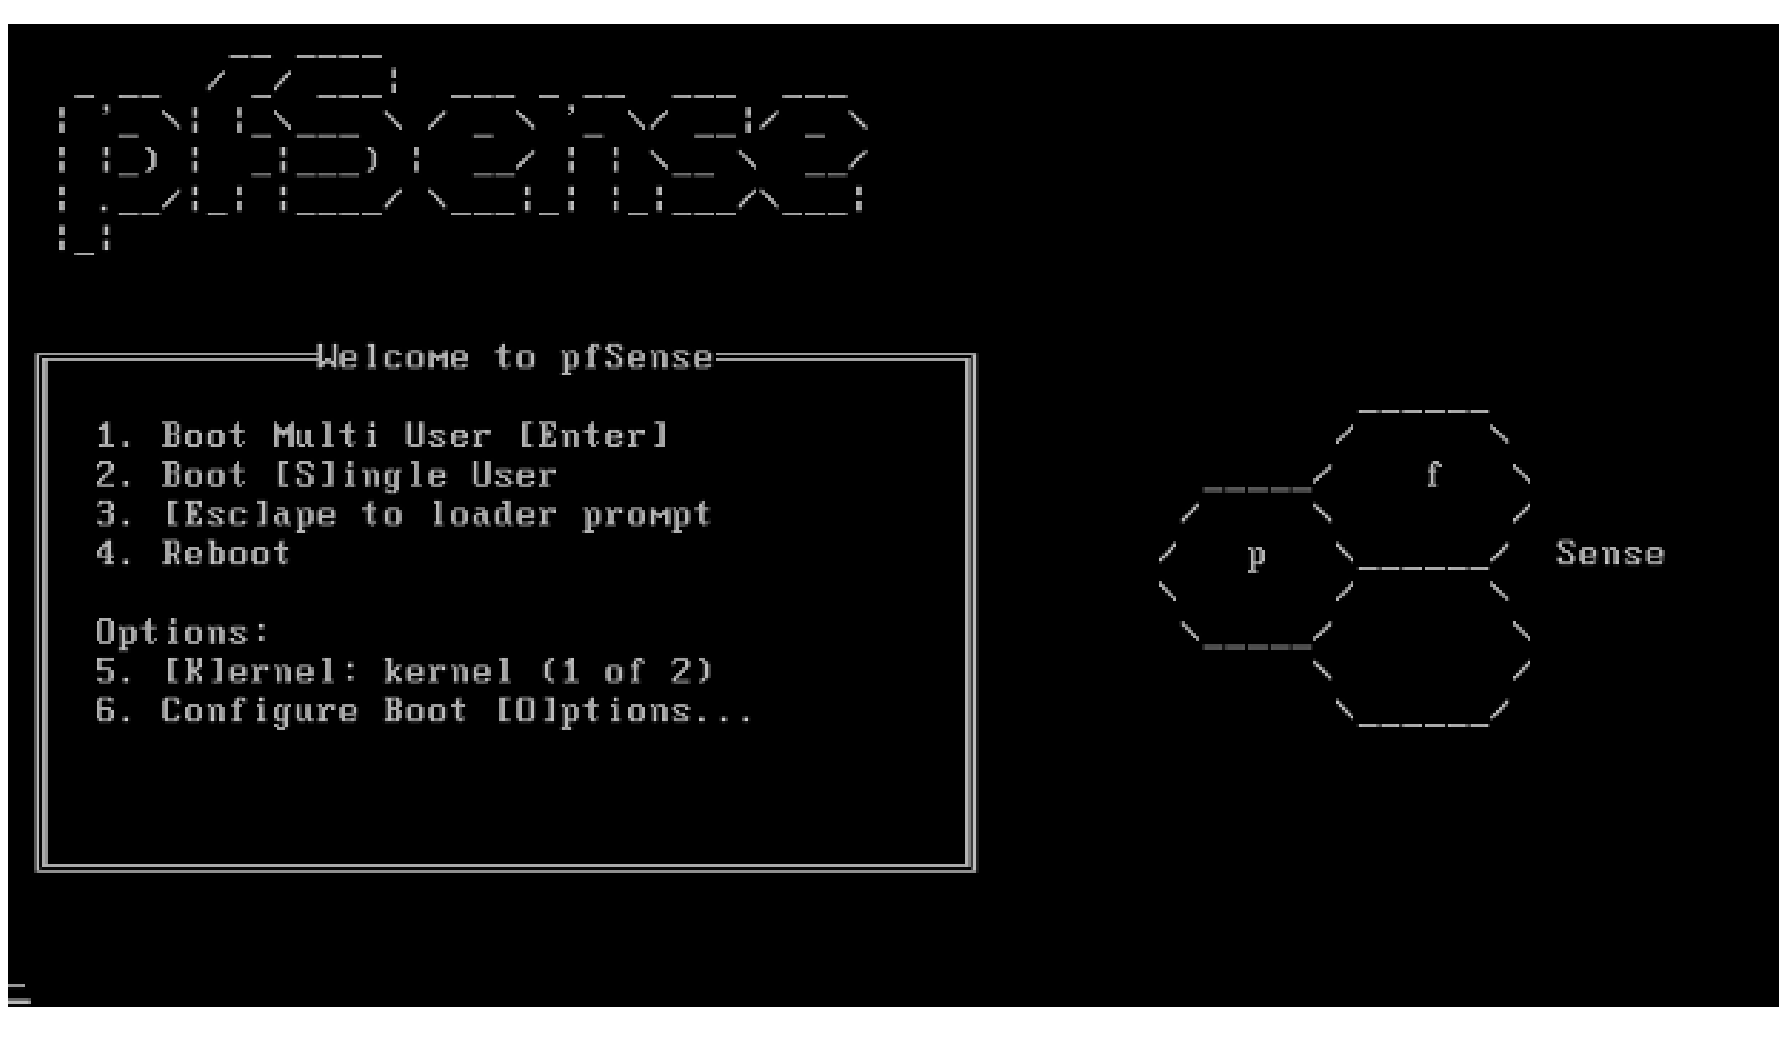

```
Welcome to pfSense
 1. Boot Multi User [Enter]
 2. Boot [S]ingle User
 3. [Esc]ape to loader prompt
 4. Reboot

 Options:
 5. [K]ernel: kernel (1 of 2)
 6. Configure Boot [O]ptions...
```

=> Appuyez sur la touche [Entrée] - 1. Boot Multi User

Figure 2 - pfSense Installer

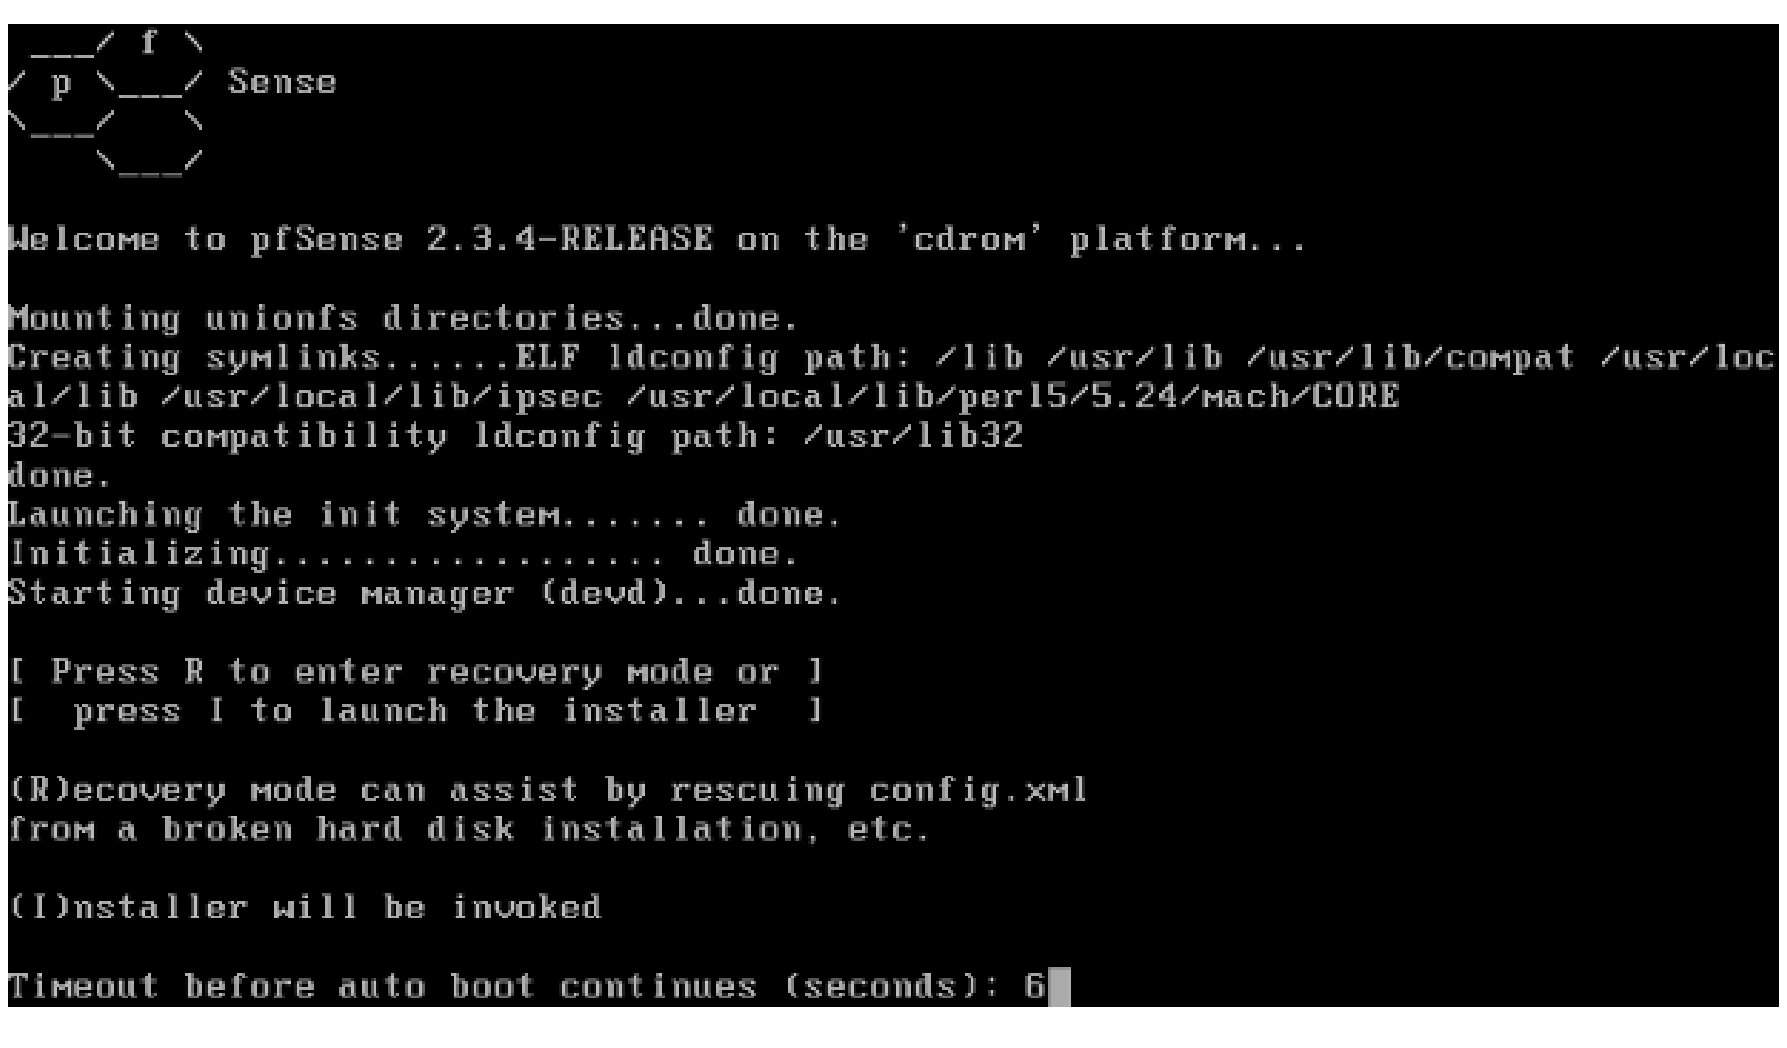

```
Welcome to pfSense 2.3.4-RELEASE on the 'cdrom' platform...

Mounting unionfs directories...done.
Creating symlinks......ELF ldconfig path: /lib /usr/lib /usr/lib/compat /usr/loc
al/lib /usr/local/lib/ipsec /usr/local/lib/perl5/5.24/mach/CORE
32-bit compatibility ldconfig path: /usr/lib32
done.
Launching the init system....... done.
Initializing.................. done.
Starting device manager (devd)...done.

[ Press R to enter recovery mode or ]
[  press I to launch the installer  ]

(R)ecovery mode can assist by rescuing config.xml
from a broken hard disk installation, etc.

(I)nstaller will be invoked

Timeout before auto boot continues (seconds): 6
```

=> Appuyez sur la touche [I] - Press I to launch the installer

Figure 3 - pfSense Configure console

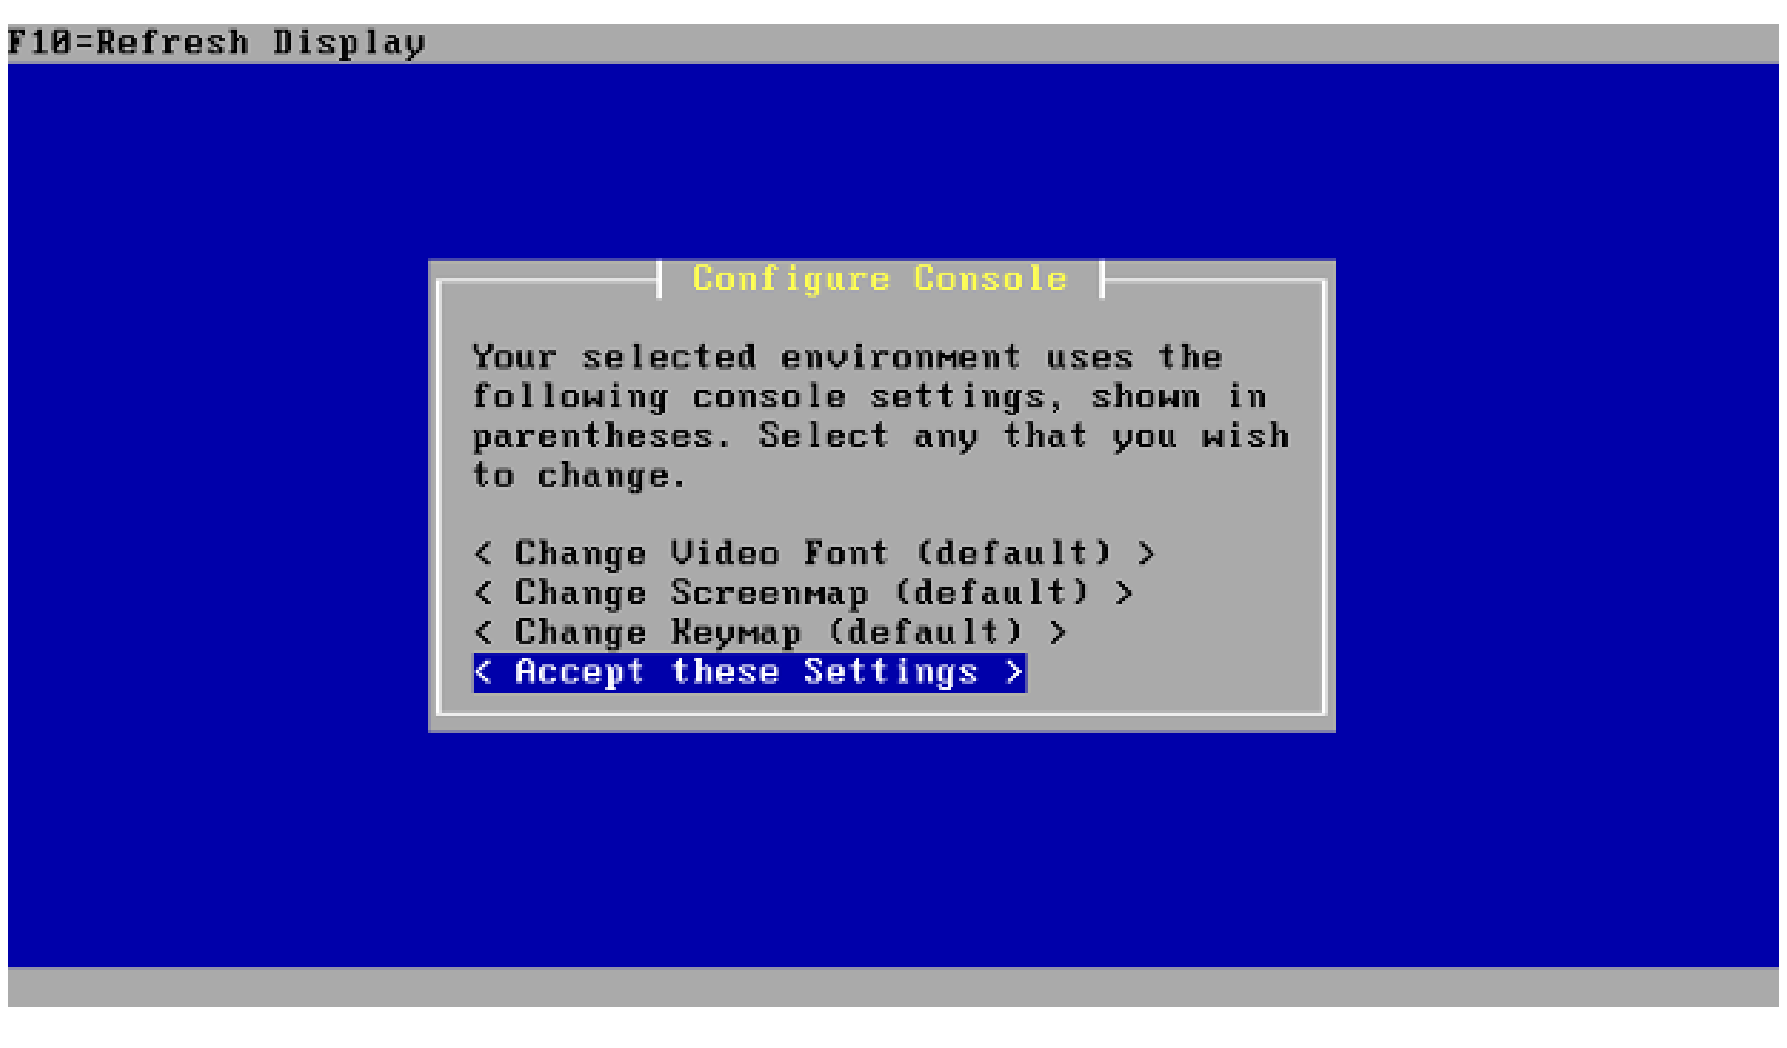

```
F10=Refresh Display

        Configure Console
 Your selected environment uses the
 following console settings, shown in
 parentheses. Select any that you wish
 to change.

 < Change Video Font (default) >
 < Change Screenmap (default) >
 < Change Keymap (default) >
 < Accept these Settings >
```

=> Sélectionnez < Accept these Settings >

Figure 4 - pfSense Select Task

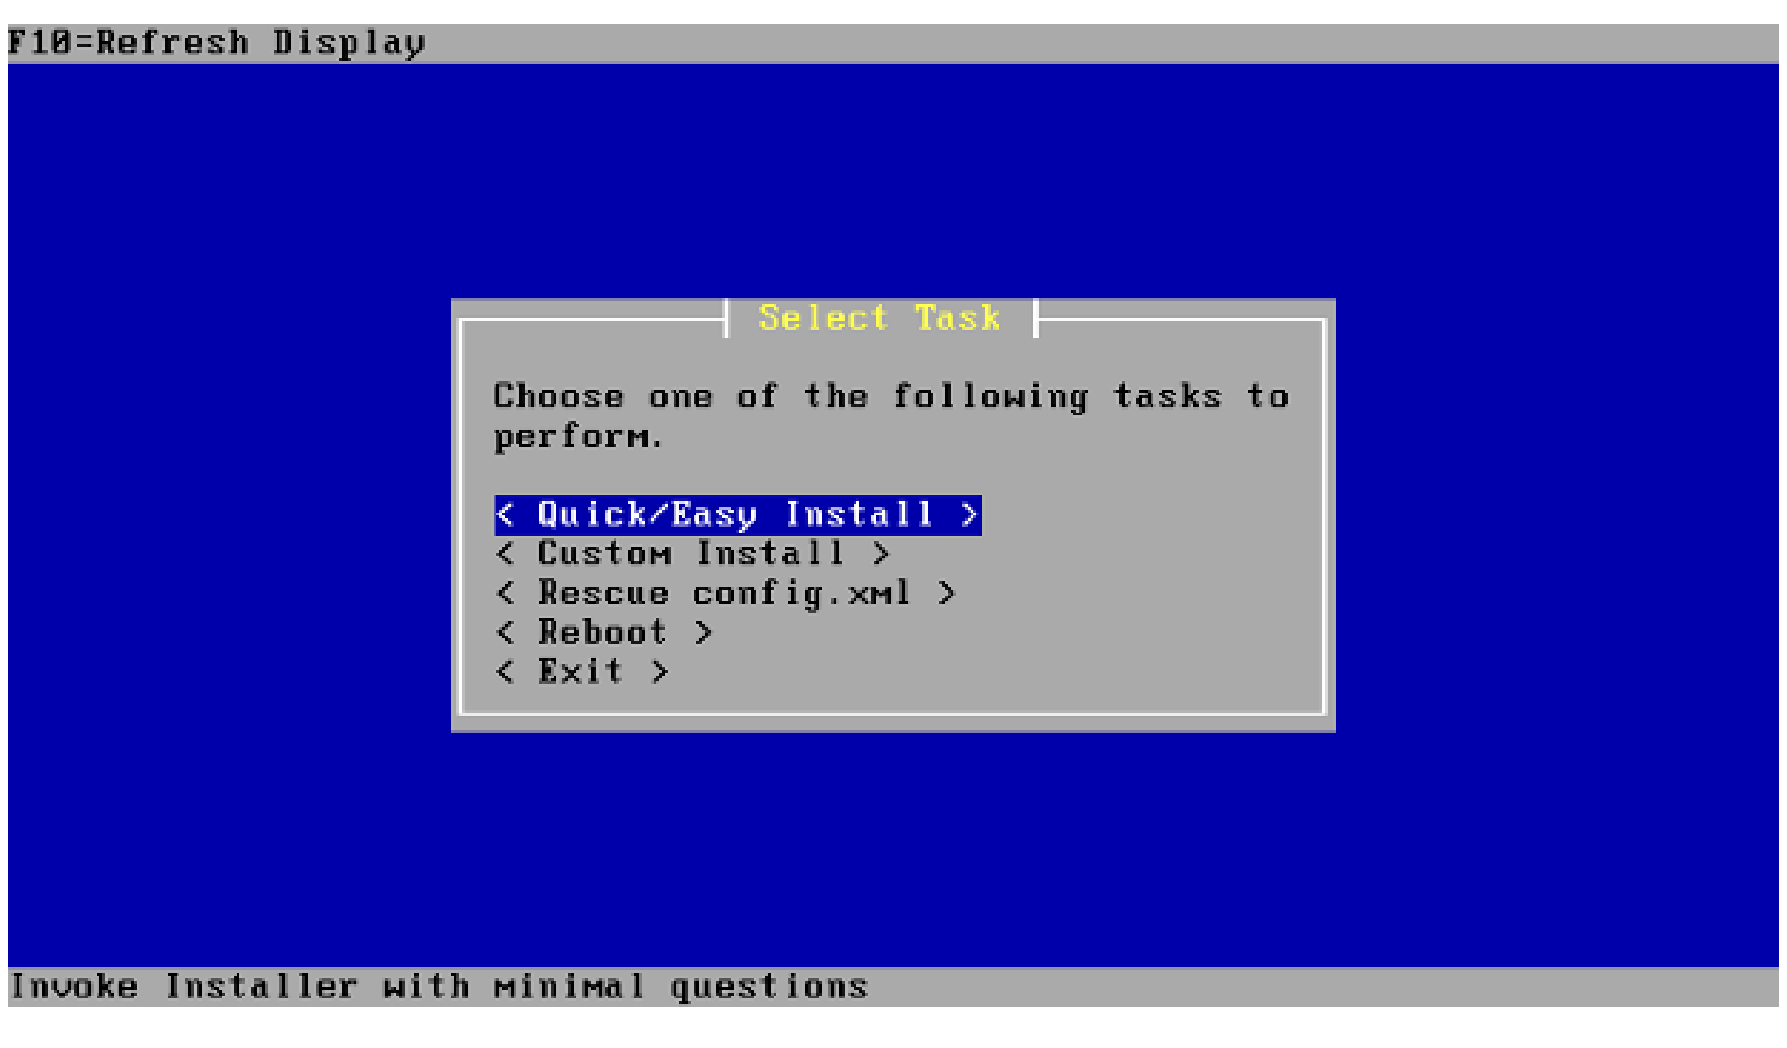

```
F10=Refresh Display

        Select Task
 Choose one of the following tasks to
 perform.

 < Quick/Easy Install >
 < Custom Install >
 < Rescue config.xml >
 < Reboot >
 < Exit >

Invoke Installer with minimal questions
```

=> Sélectionnez < Quick/Easy Install >

Figure 5 - pfSense Are You Sure ?

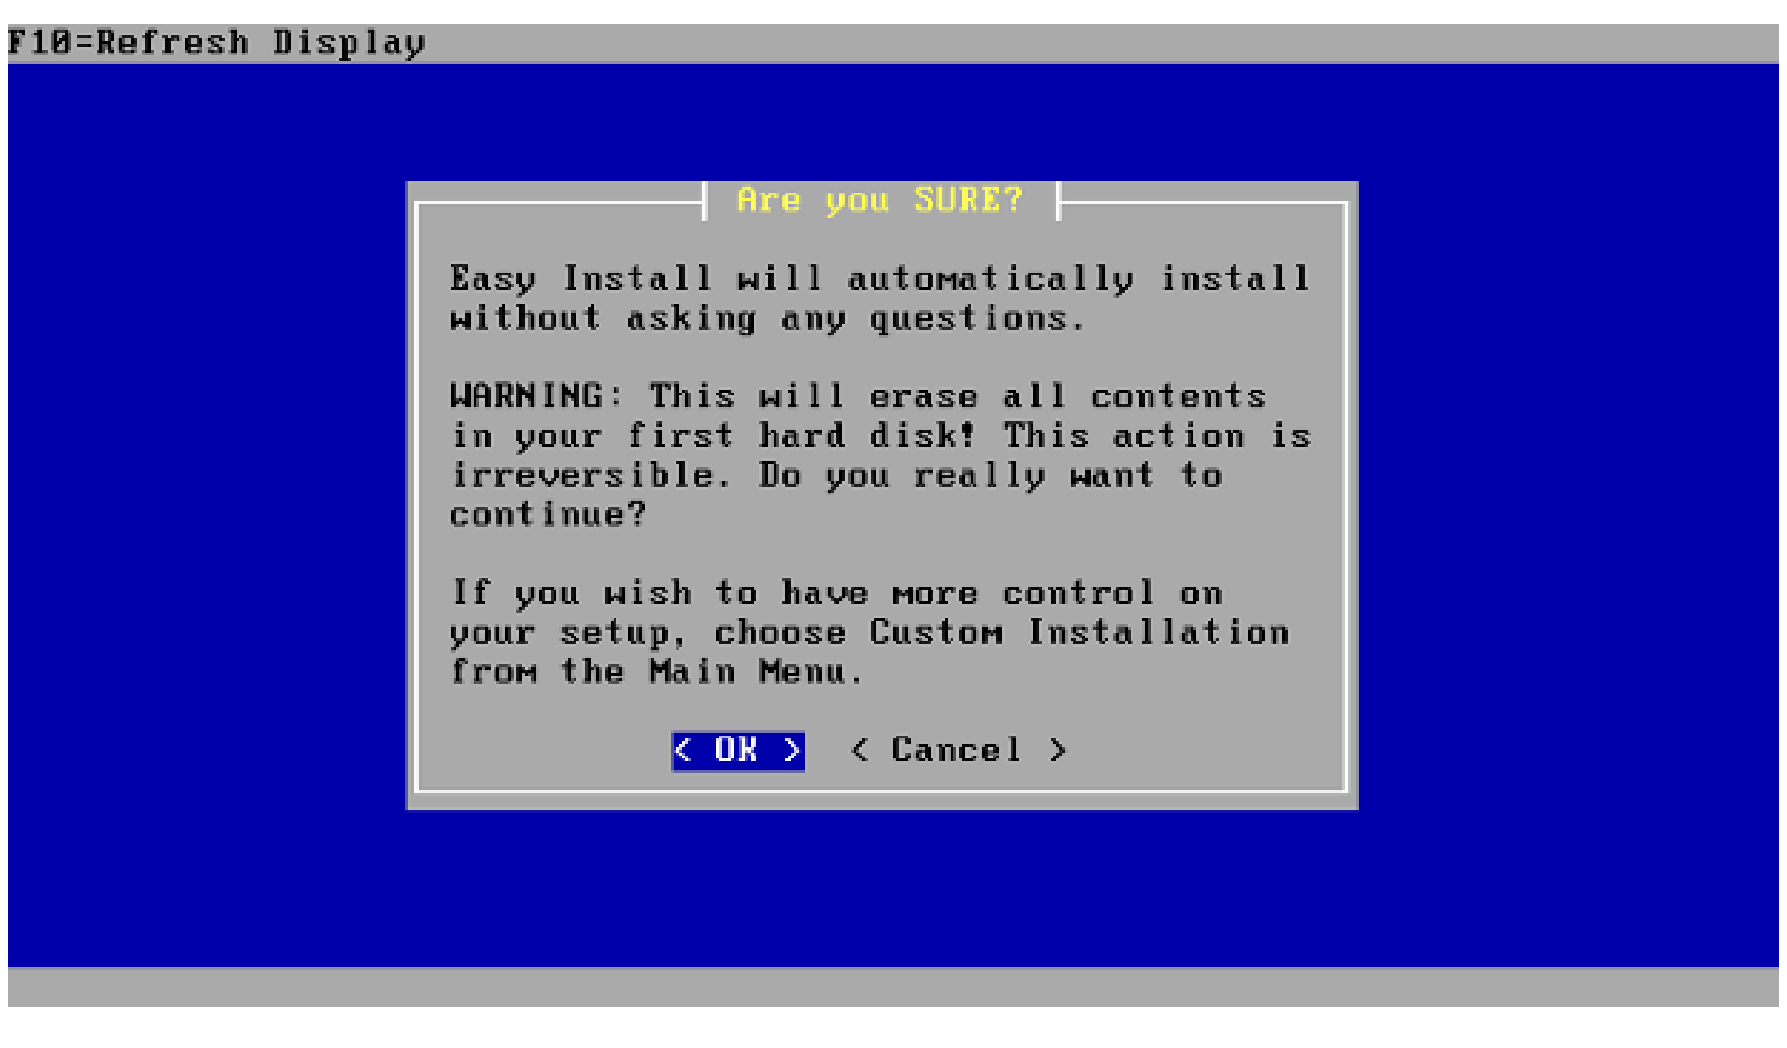

```
F10=Refresh Display

        Are you SURE?
 Easy Install will automatically install
 without asking any questions.

 WARNING: This will erase all contents
 in your first hard disk! This action is
 irreversible. Do you really want to
 continue?

 If you wish to have more control on
 your setup, choose Custom Installation
 from the Main Menu.

         < OK >  < Cancel >
```

=> Sélectionnez < OK >

Figure 7 - pfSense Install Kernel

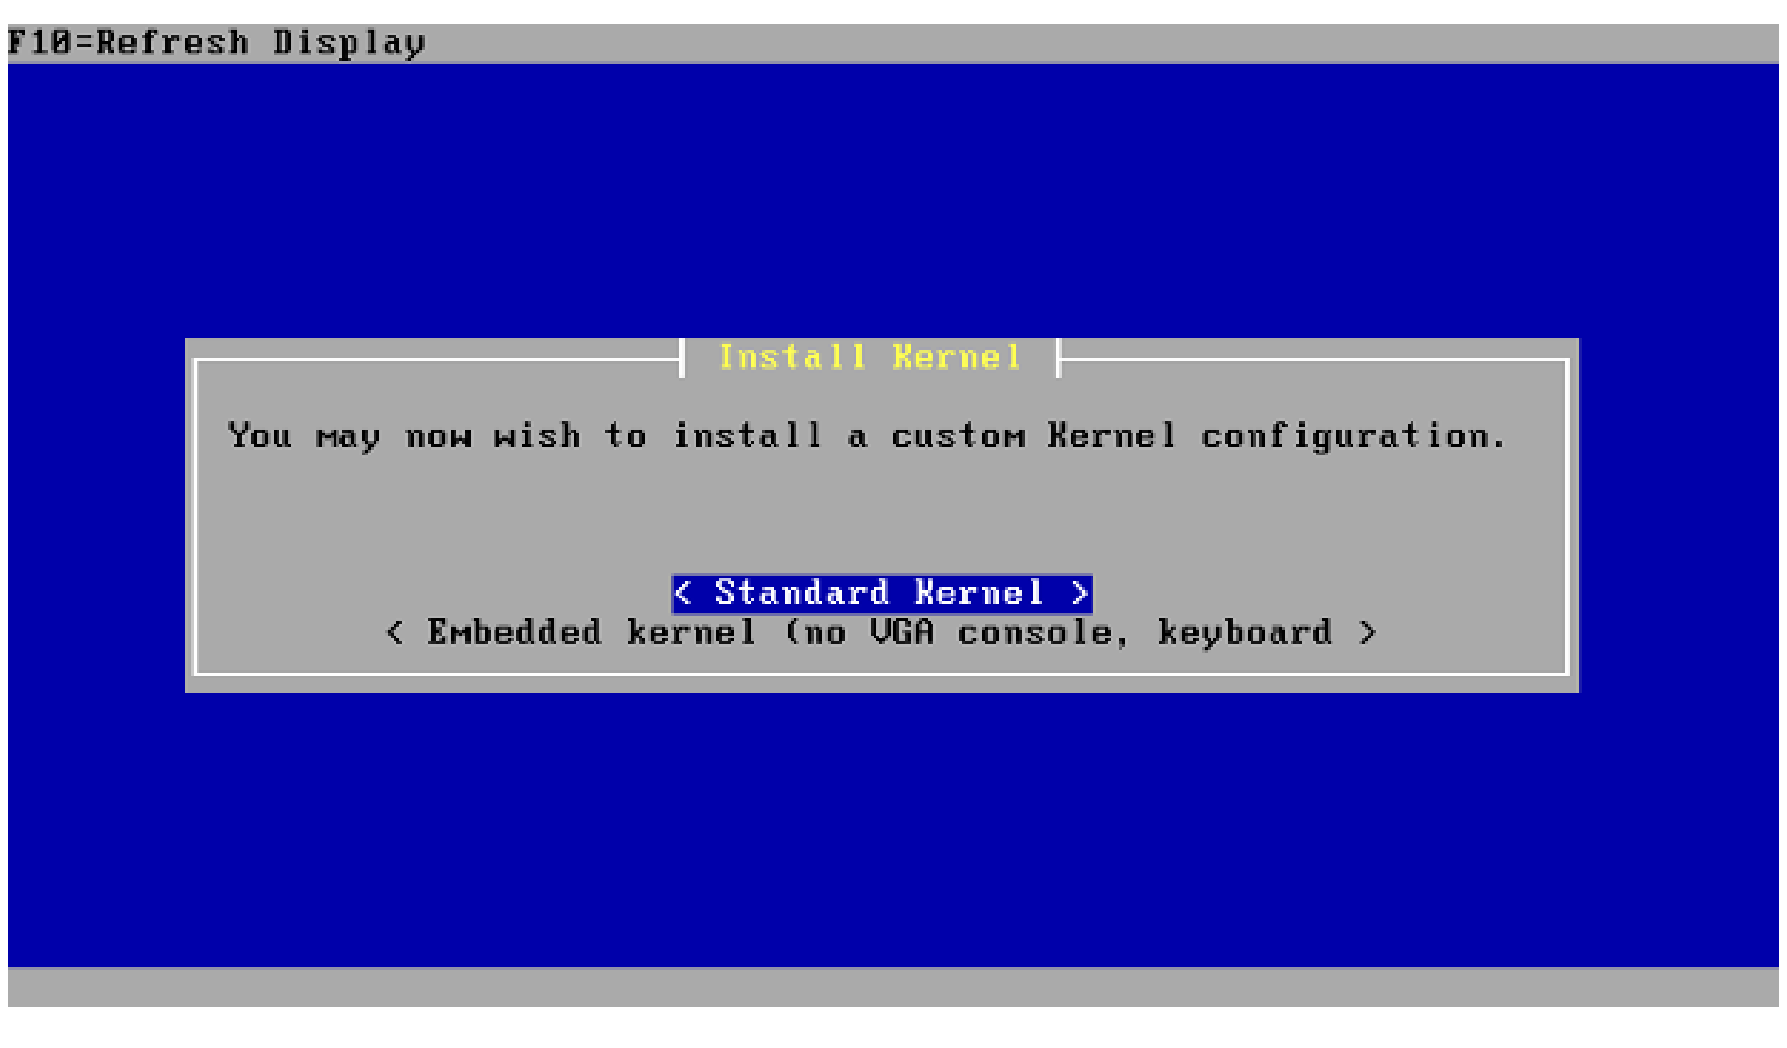

```
F10=Refresh Display

                 Install Kernel
 You may now wish to install a custom Kernel configuration.


               < Standard Kernel >
     < Embedded kernel (no VGA console, keyboard >
```

=> Sélectionnez < Standard Kernel >

L'installation initiale est terminée.

Figure 8 - pfSense Reboot

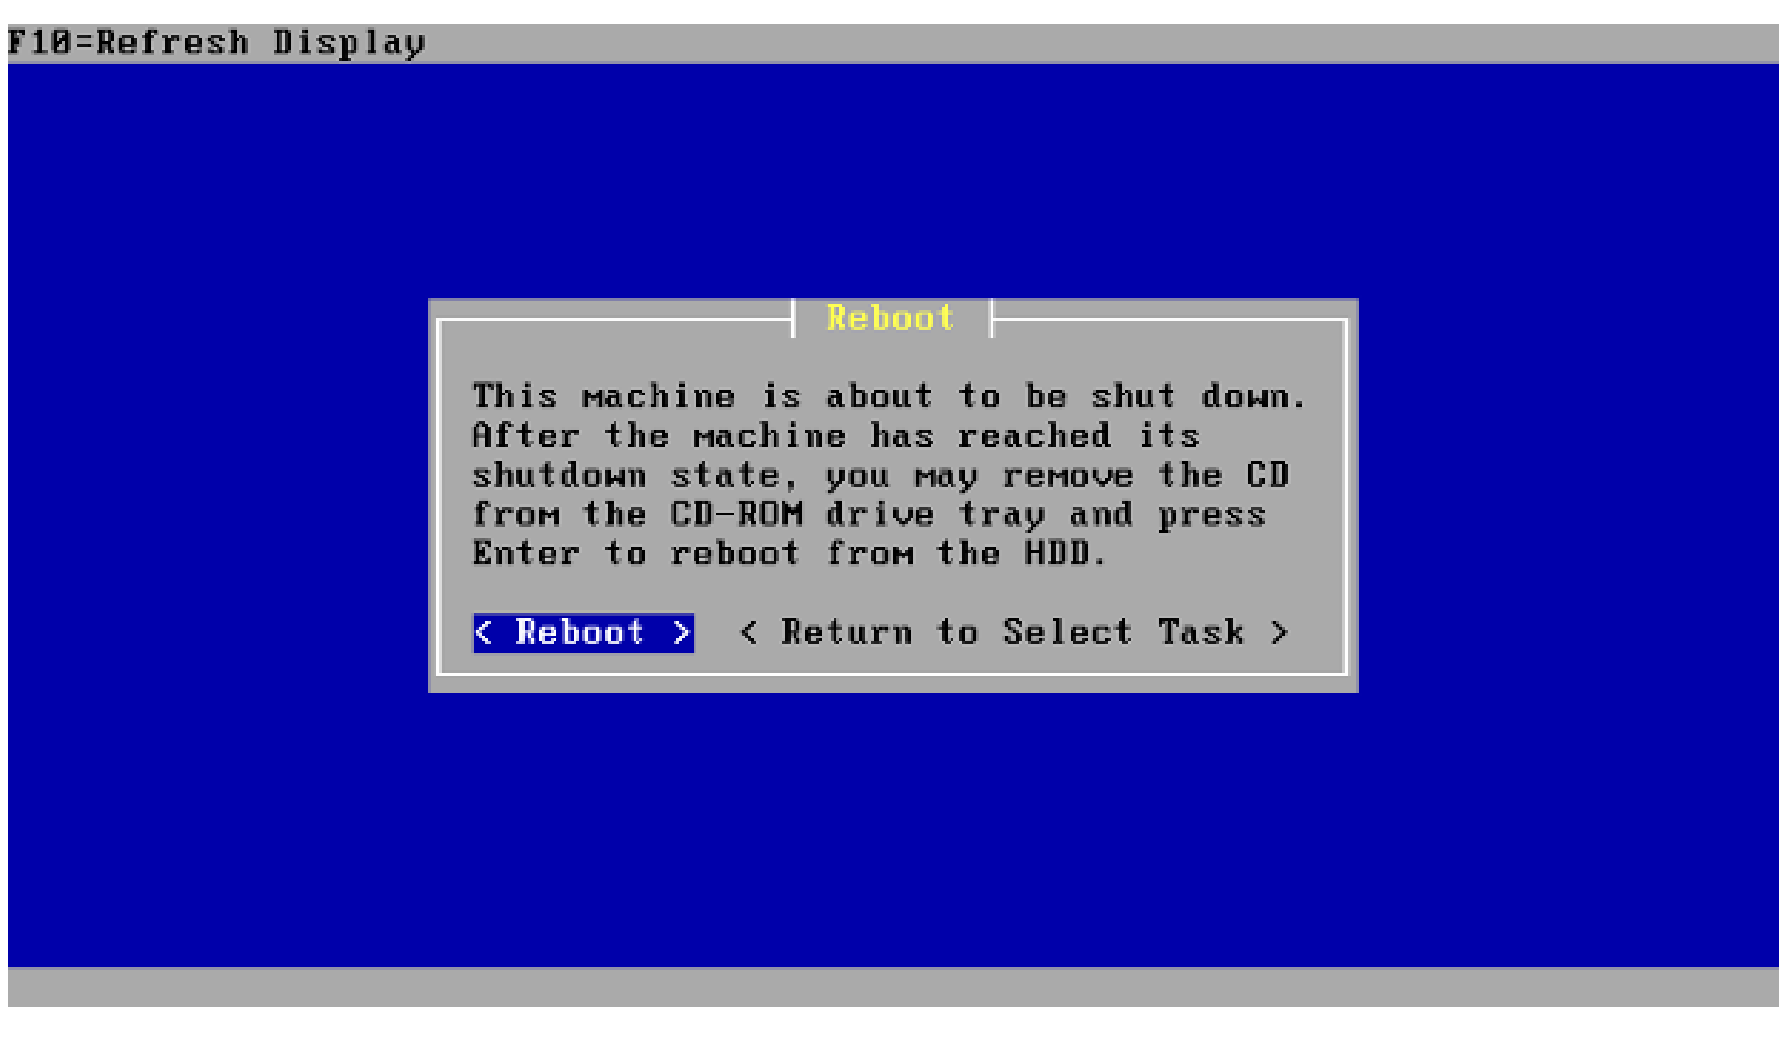

```
F10=Refresh Display

            Reboot
 This machine is about to be shut down.
 After the machine has reached its
 shutdown state, you may remove the CD
 from the CD-ROM drive tray and press
 Enter to reboot from the HDD.

 < Reboot >  < Return to Select Task >
```

=> Sélectionnez < Reboot >

Après ce premier redémarrage, le système nécessite un paramétrage de base pour y accéder via une interface Web. Répondez aux questions suivantes :

Figure 9 - pfSense VLANs ?

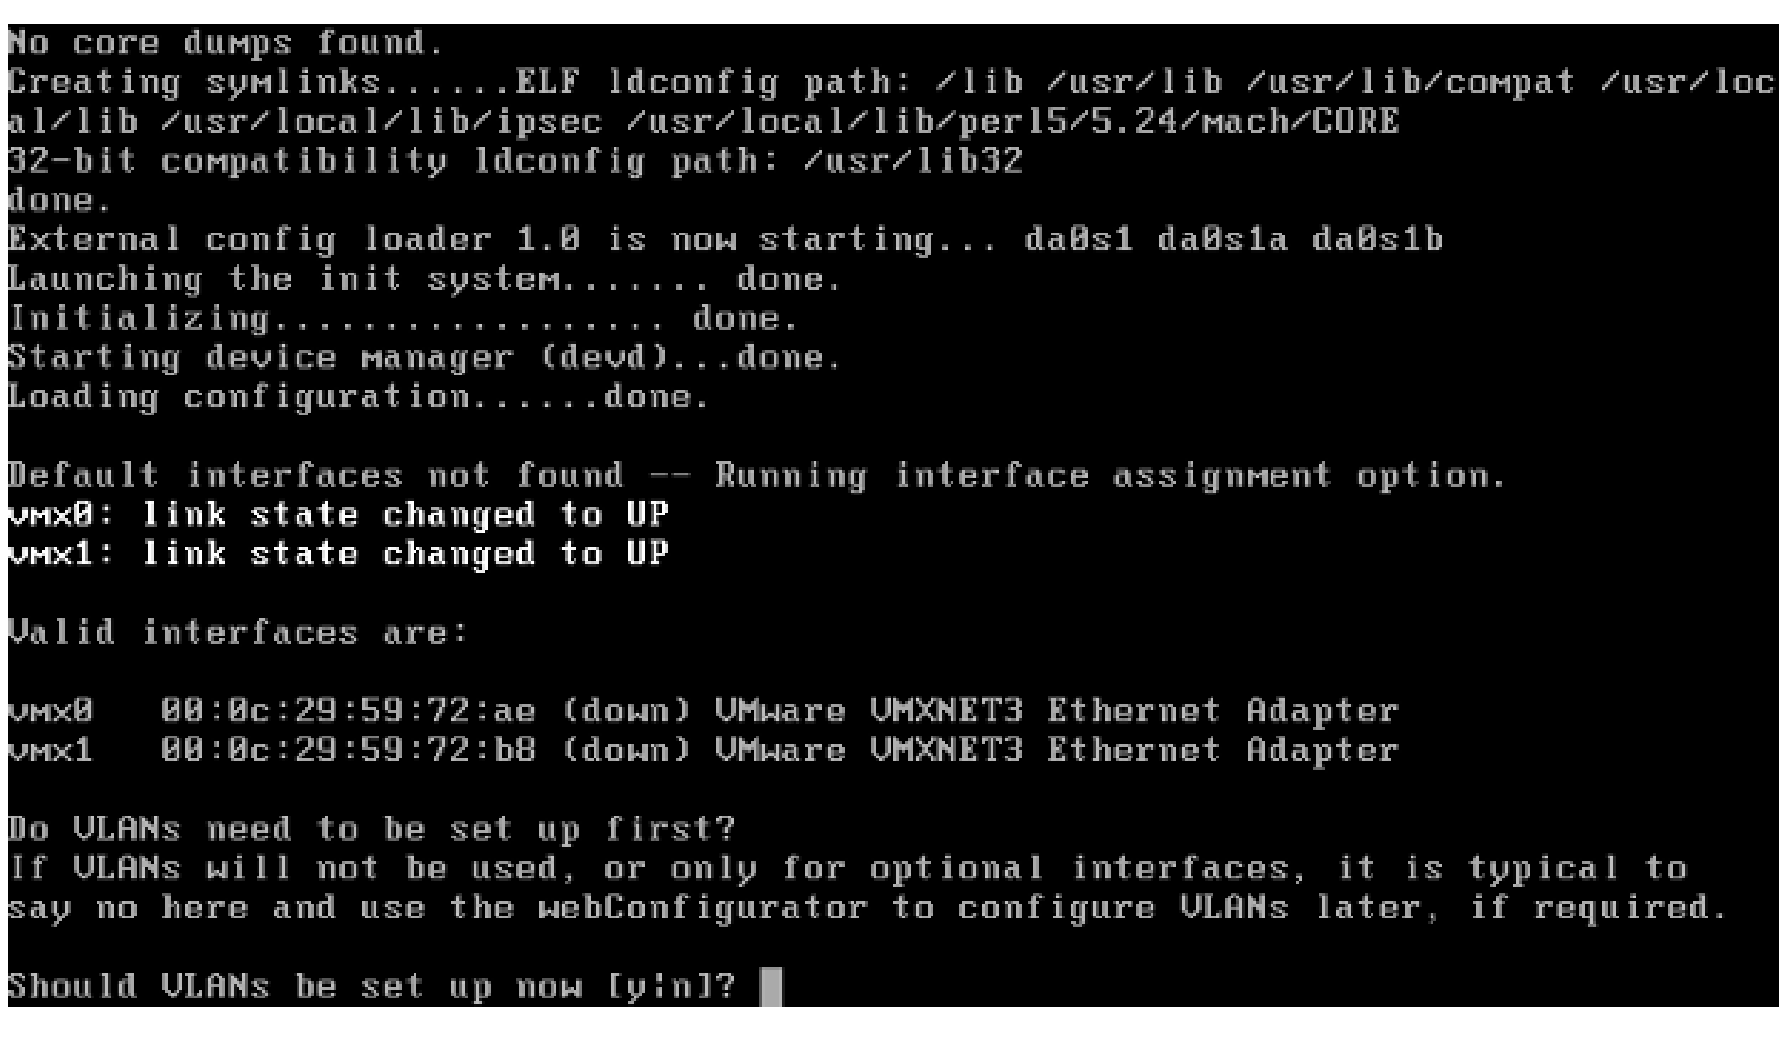

```
No core dumps found.
Creating symlinks......ELF ldconfig path: /lib /usr/lib /usr/lib/compat /usr/loc
al/lib /usr/local/lib/ipsec /usr/local/lib/perl5/5.24/mach/CORE
32-bit compatibility ldconfig path: /usr/lib32
done.
External config loader 1.0 is now starting... da0s1 da0s1a da0s1b
Launching the init system....... done.
Initializing.................. done.
Starting device manager (devd)...done.
Loading configuration......done.

Default interfaces not found -- Running interface assignment option.
vmx0: link state changed to UP
vmx1: link state changed to UP

Valid interfaces are:

vmx0   00:0c:29:59:72:ae (down) VMware VMXNET3 Ethernet Adapter
vmx1   00:0c:29:59:72:b8 (down) VMware VMXNET3 Ethernet Adapter

Do VLANs need to be set up first?
If VLANs will not be used, or only for optional interfaces, it is typical to
say no here and use the webConfigurator to configure VLANs later, if required.

Should VLANs be set up now [y|n]?
```

Nous n'avons pas de VLans.

=> Should VLANs be set up now [y|n] ? Tapez "n"

Figure 10 - pfSense WAN Interface ?

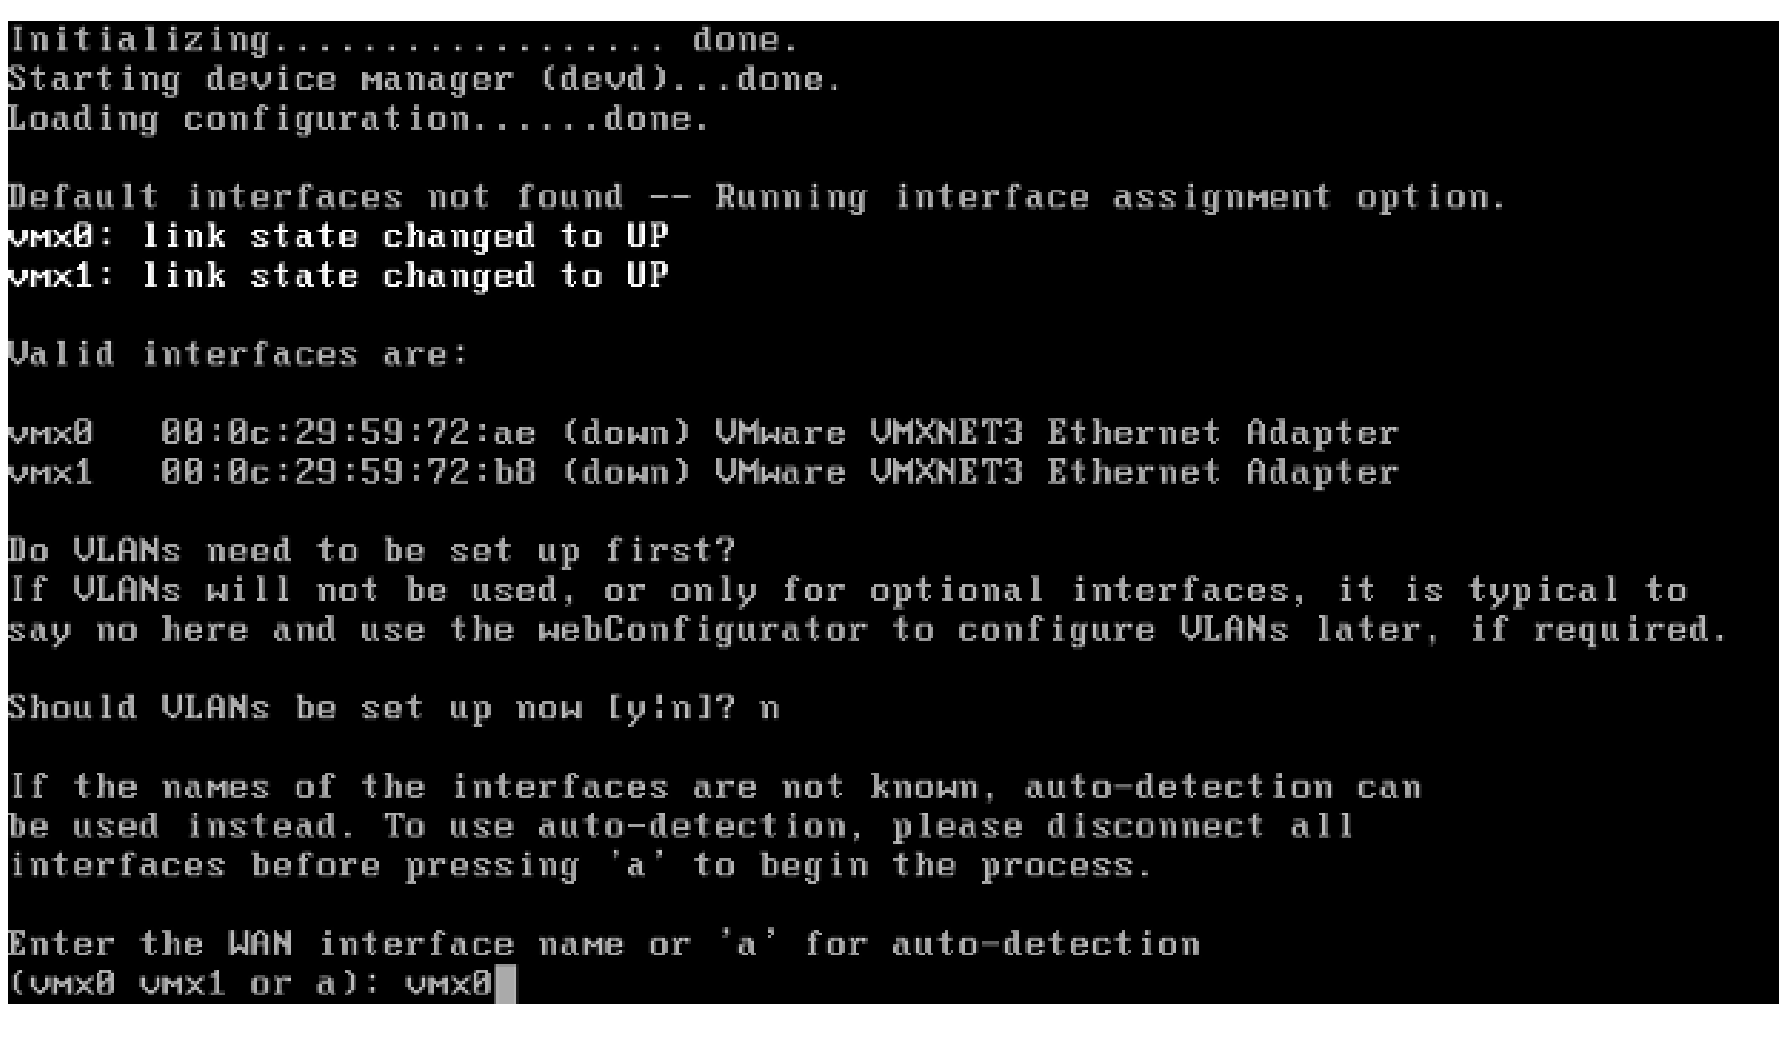

```
Initializing.................. done.
Starting device manager (devd)...done.
Loading configuration......done.

Default interfaces not found -- Running interface assignment option.
vmx0: link state changed to UP
vmx1: link state changed to UP

Valid interfaces are:

vmx0   00:0c:29:59:72:ae (down) VMware VMXNET3 Ethernet Adapter
vmx1   00:0c:29:59:72:b8 (down) VMware VMXNET3 Ethernet Adapter

Do VLANs need to be set up first?
If VLANs will not be used, or only for optional interfaces, it is typical to
say no here and use the webConfigurator to configure VLANs later, if required.

Should VLANs be set up now [y|n]? n

If the names of the interfaces are not known, auto-detection can
be used instead. To use auto-detection, please disconnect all
interfaces before pressing 'a' to begin the process.

Enter the WAN interface name or 'a' for auto-detection
(vmx0 vmx1 or a): vmx0
```

L'interface reliée à Internet est "**vmx0**".

=> Enter the WAN interface name or 'a' for auto-detection : Tapez "vmx0"

Figure 11 - pfSense LAN Interface ?

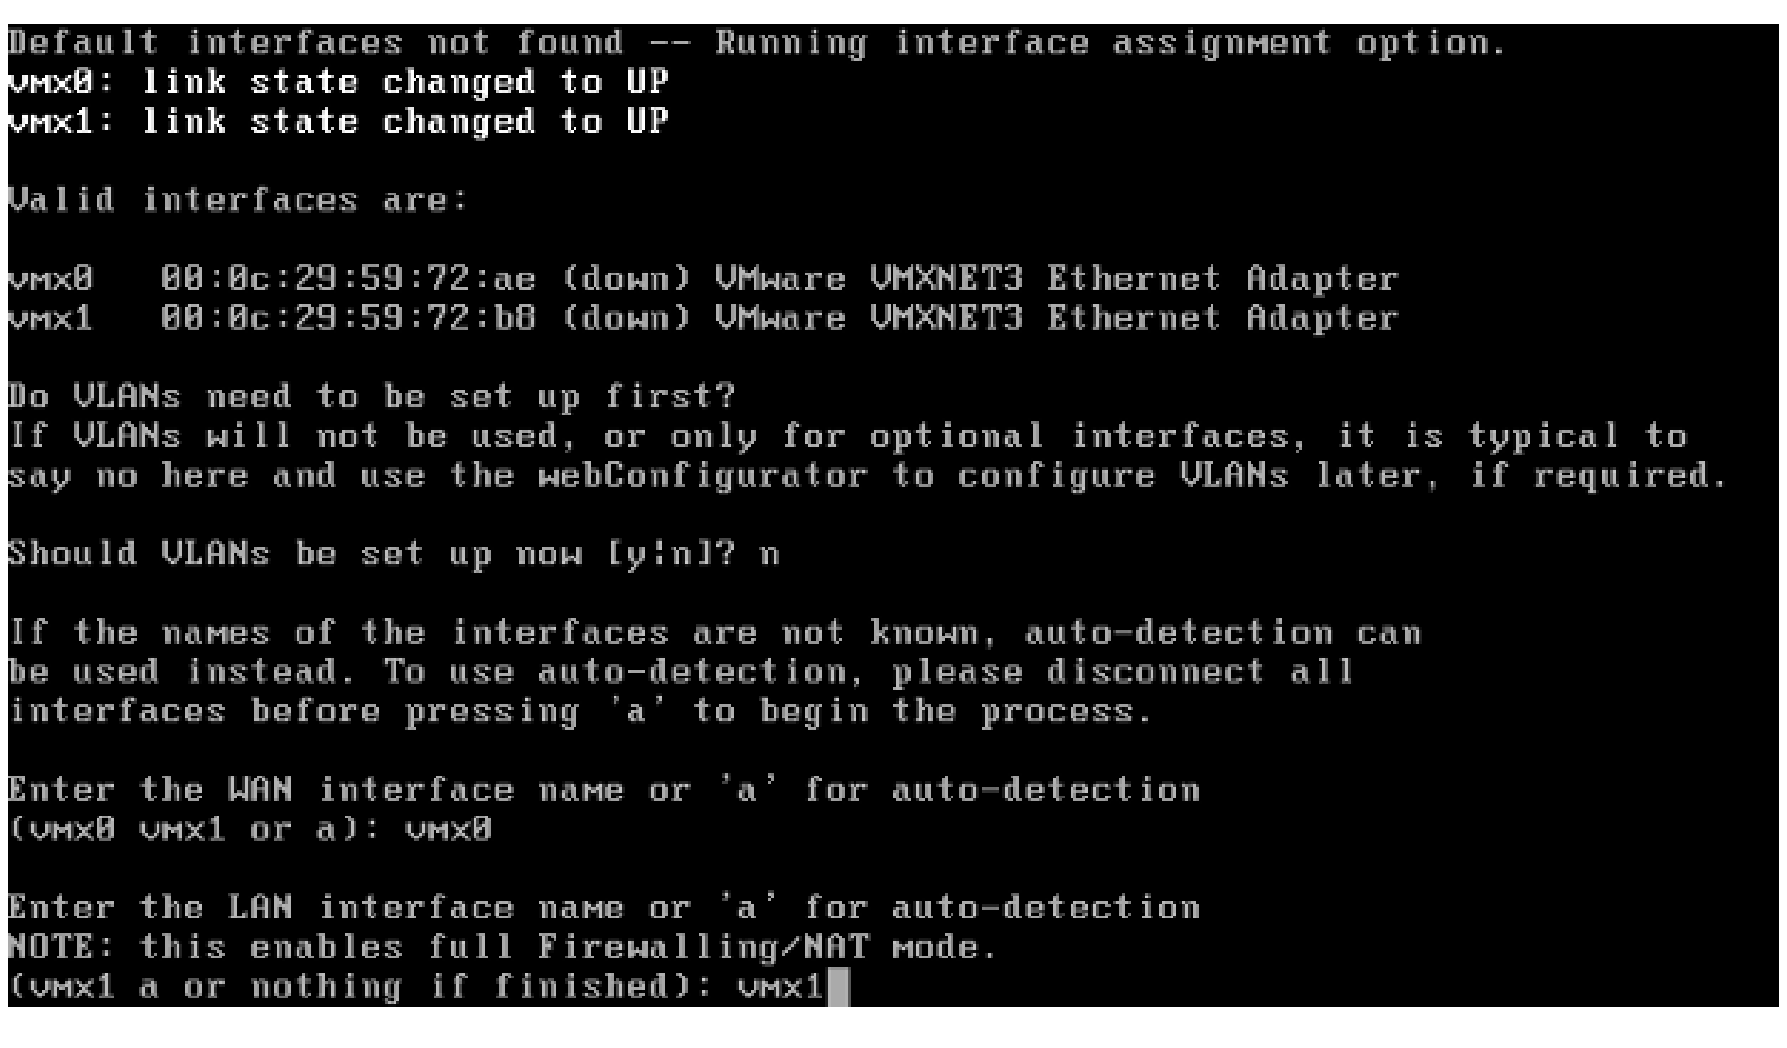

```
Default interfaces not found -- Running interface assignment option.
vmx0: link state changed to UP
vmx1: link state changed to UP

Valid interfaces are:

vmx0   00:0c:29:59:72:ae (down) VMware VMXNET3 Ethernet Adapter
vmx1   00:0c:29:59:72:b8 (down) VMware VMXNET3 Ethernet Adapter

Do VLANs need to be set up first?
If VLANs will not be used, or only for optional interfaces, it is typical to
say no here and use the webConfigurator to configure VLANs later, if required.

Should VLANs be set up now [y|n]? n

If the names of the interfaces are not known, auto-detection can
be used instead. To use auto-detection, please disconnect all
interfaces before pressing 'a' to begin the process.

Enter the WAN interface name or 'a' for auto-detection
(vmx0 vmx1 or a): vmx0

Enter the LAN interface name or 'a' for auto-detection
NOTE: this enables full Firewalling/NAT mode.
(vmx1 a or nothing if finished): vmx1
```

L'interface reliée au réseau local est "**vmx1**".

=> Enter the LAN interface name or 'a' for auto-detection : Tapez "vmx1"

Figure 12 - pfSense Optional Interface ?

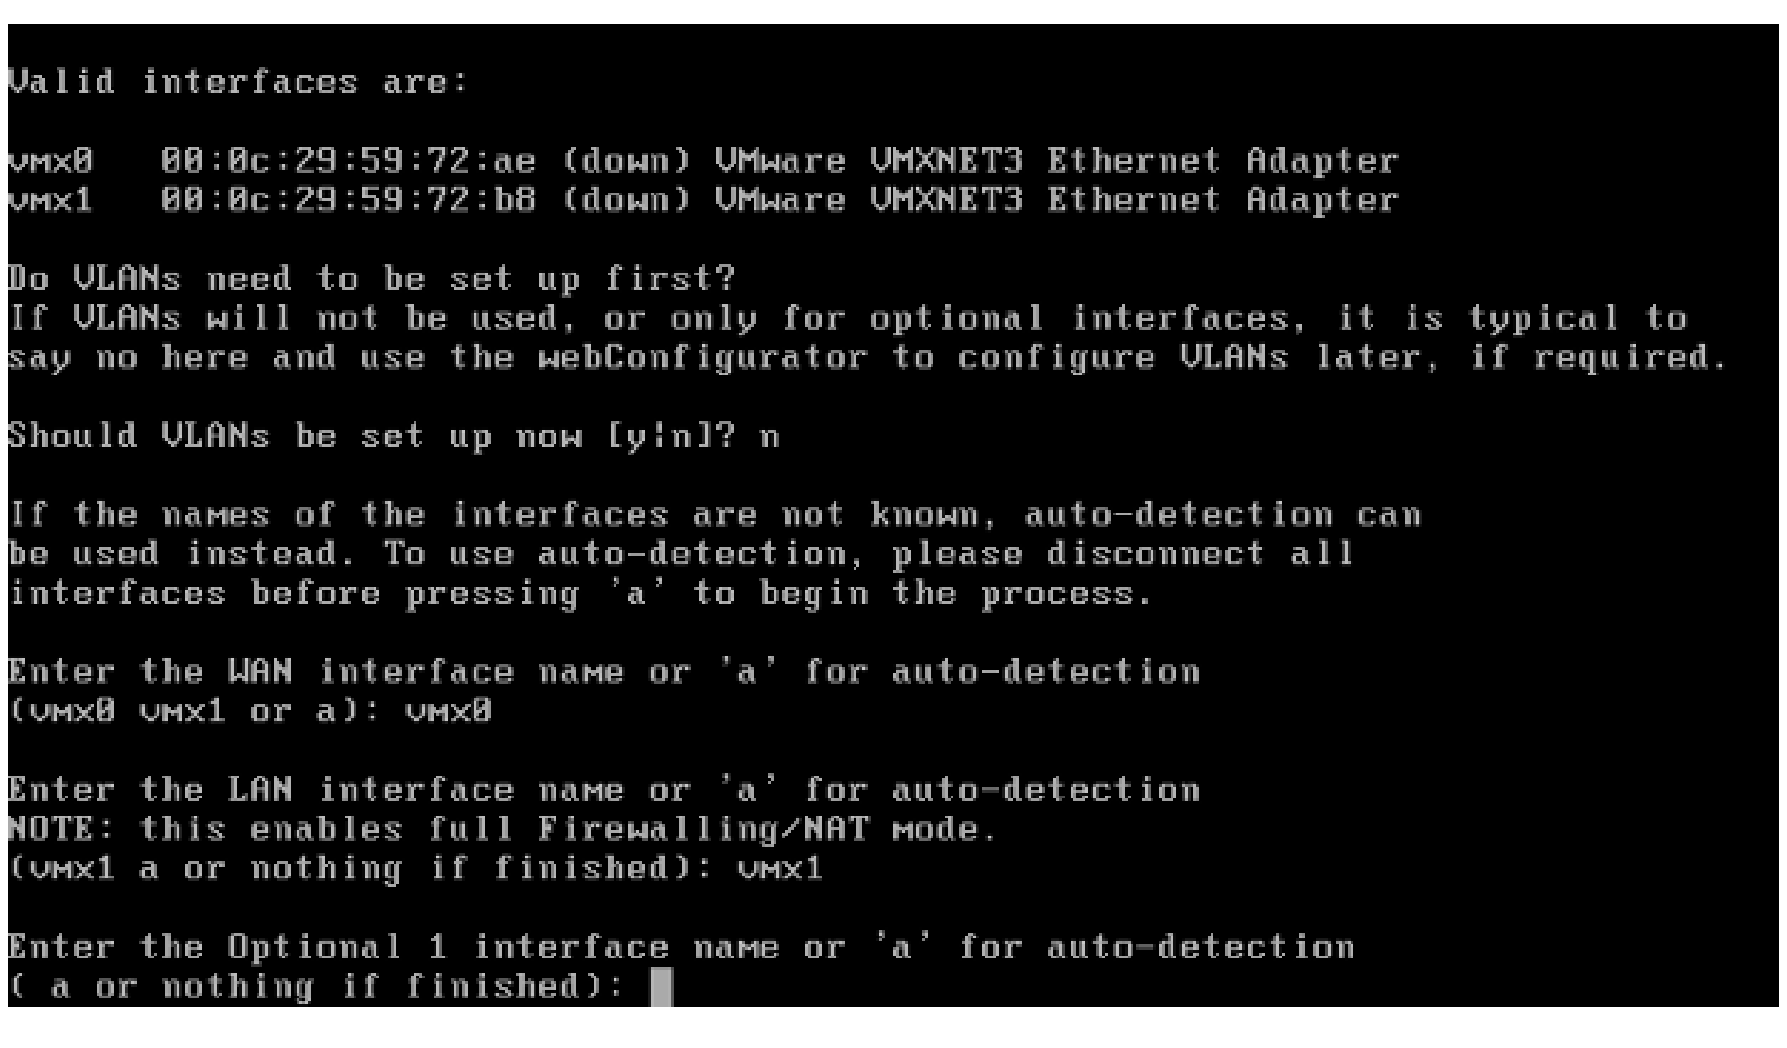

```

Valid interfaces are:

vmx0   00:0c:29:59:72:ae (down) VMware VMXNET3 Ethernet Adapter
vmx1   00:0c:29:59:72:b8 (down) VMware VMXNET3 Ethernet Adapter

Do VLANs need to be set up first?
If VLANs will not be used, or only for optional interfaces, it is typical to
say no here and use the webConfigurator to configure VLANs later, if required.

Should VLANs be set up now [y|n]? n

If the names of the interfaces are not known, auto-detection can
be used instead. To use auto-detection, please disconnect all
interfaces before pressing 'a' to begin the process.

Enter the WAN interface name or 'a' for auto-detection
(vmx0 vmx1 or a): vmx0

Enter the LAN interface name or 'a' for auto-detection
NOTE: this enables full Firewalling/NAT mode.
(vmx1 a or nothing if finished): vmx1

Enter the Optional 1 interface name or 'a' for auto-detection
( a or nothing if finished):
```

Nous n'avons pas d'autres interfaces.

=> Enter the optional 1 interface name or 'a' for auto-detection : Appuyez sur la touche [Entrée]

Figure 13 - pfSense Fin de configuration initiale

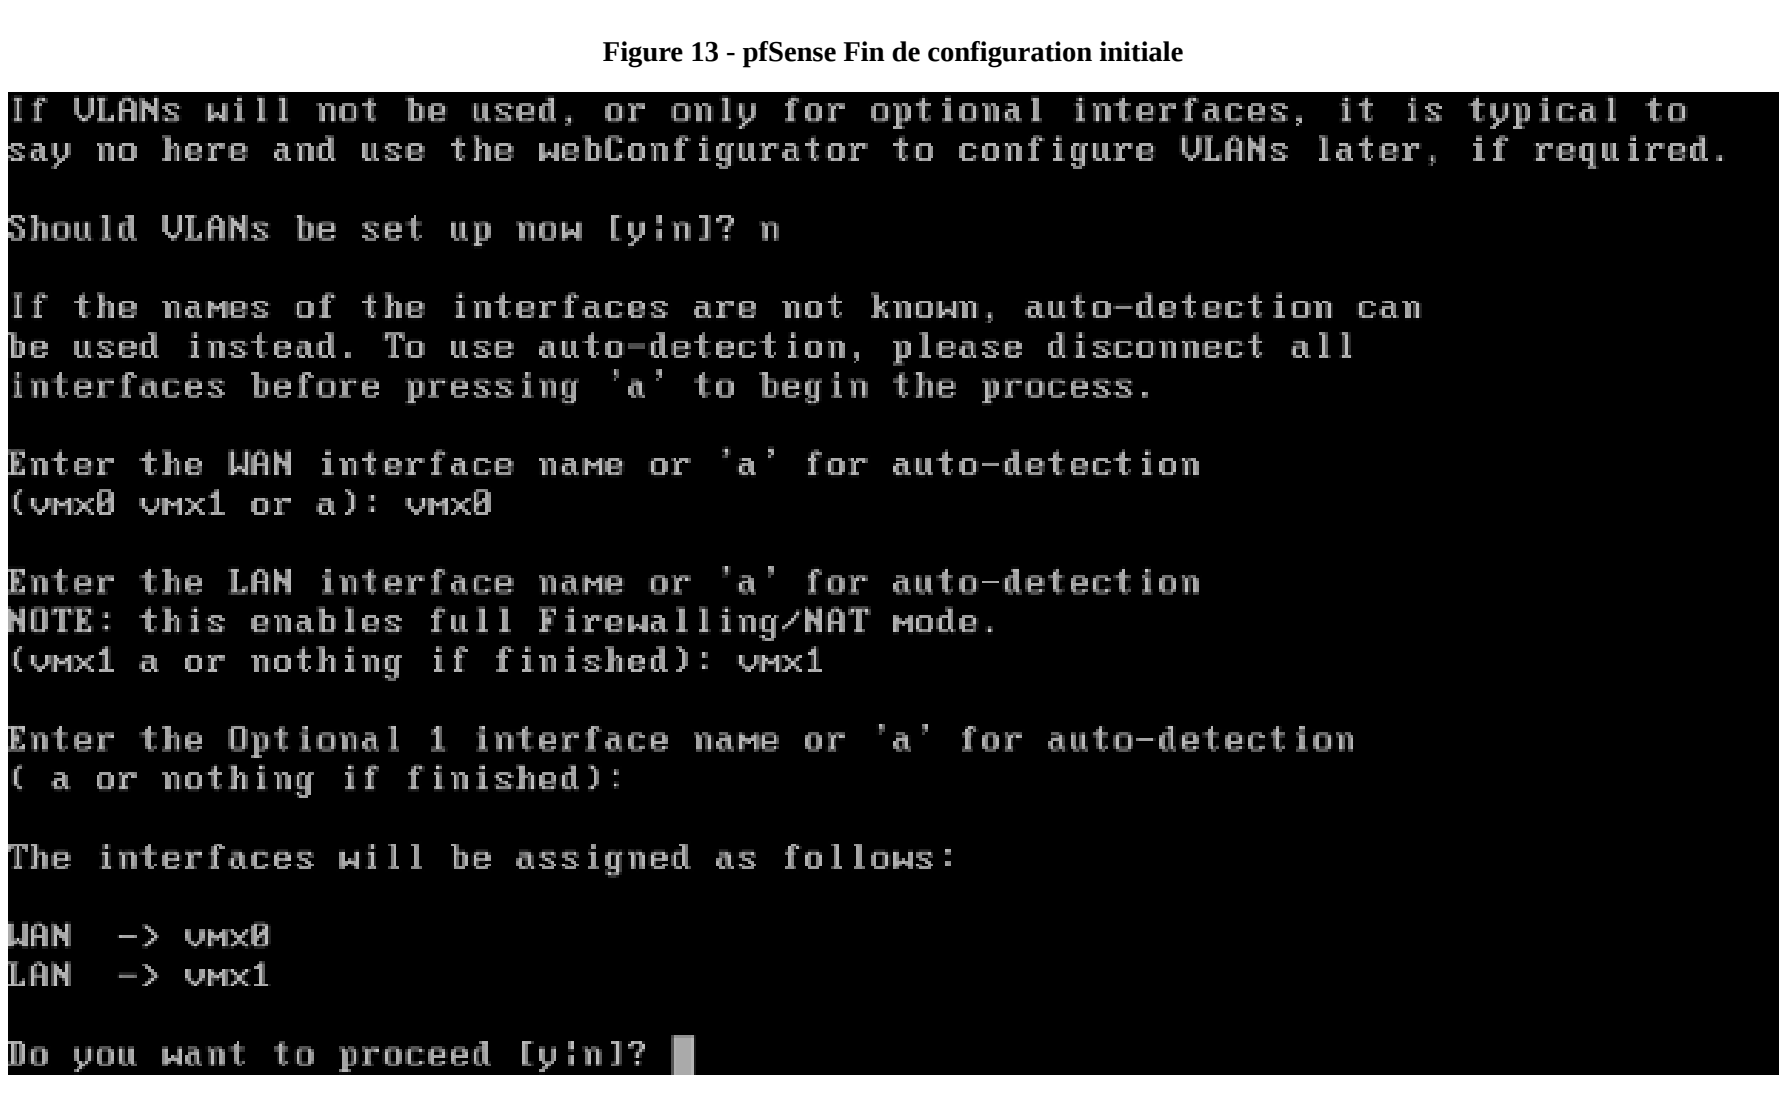

```
If VLANs will not be used, or only for optional interfaces, it is typical to
say no here and use the webConfigurator to configure VLANs later, if required.

Should VLANs be set up now [y|n]? n

If the names of the interfaces are not known, auto-detection can
be used instead. To use auto-detection, please disconnect all
interfaces before pressing 'a' to begin the process.

Enter the WAN interface name or 'a' for auto-detection
(vmx0 vmx1 or a): vmx0

Enter the LAN interface name or 'a' for auto-detection
NOTE: this enables full Firewalling/NAT mode.
(vmx1 a or nothing if finished): vmx1

Enter the Optional 1 interface name or 'a' for auto-detection
( a or nothing if finished):

The interfaces will be assigned as follows:

WAN  -> vmx0
LAN  -> vmx1

Do you want to proceed [y|n]?
```

Les interfaces réseaux ont toutes été affectées. Vous pouvez accepter la modification des fichiers de configuration.

=> Do you want to proceed [y|n] ? Tapez "y"

Figure 14a - pfSense Installation de base terminée

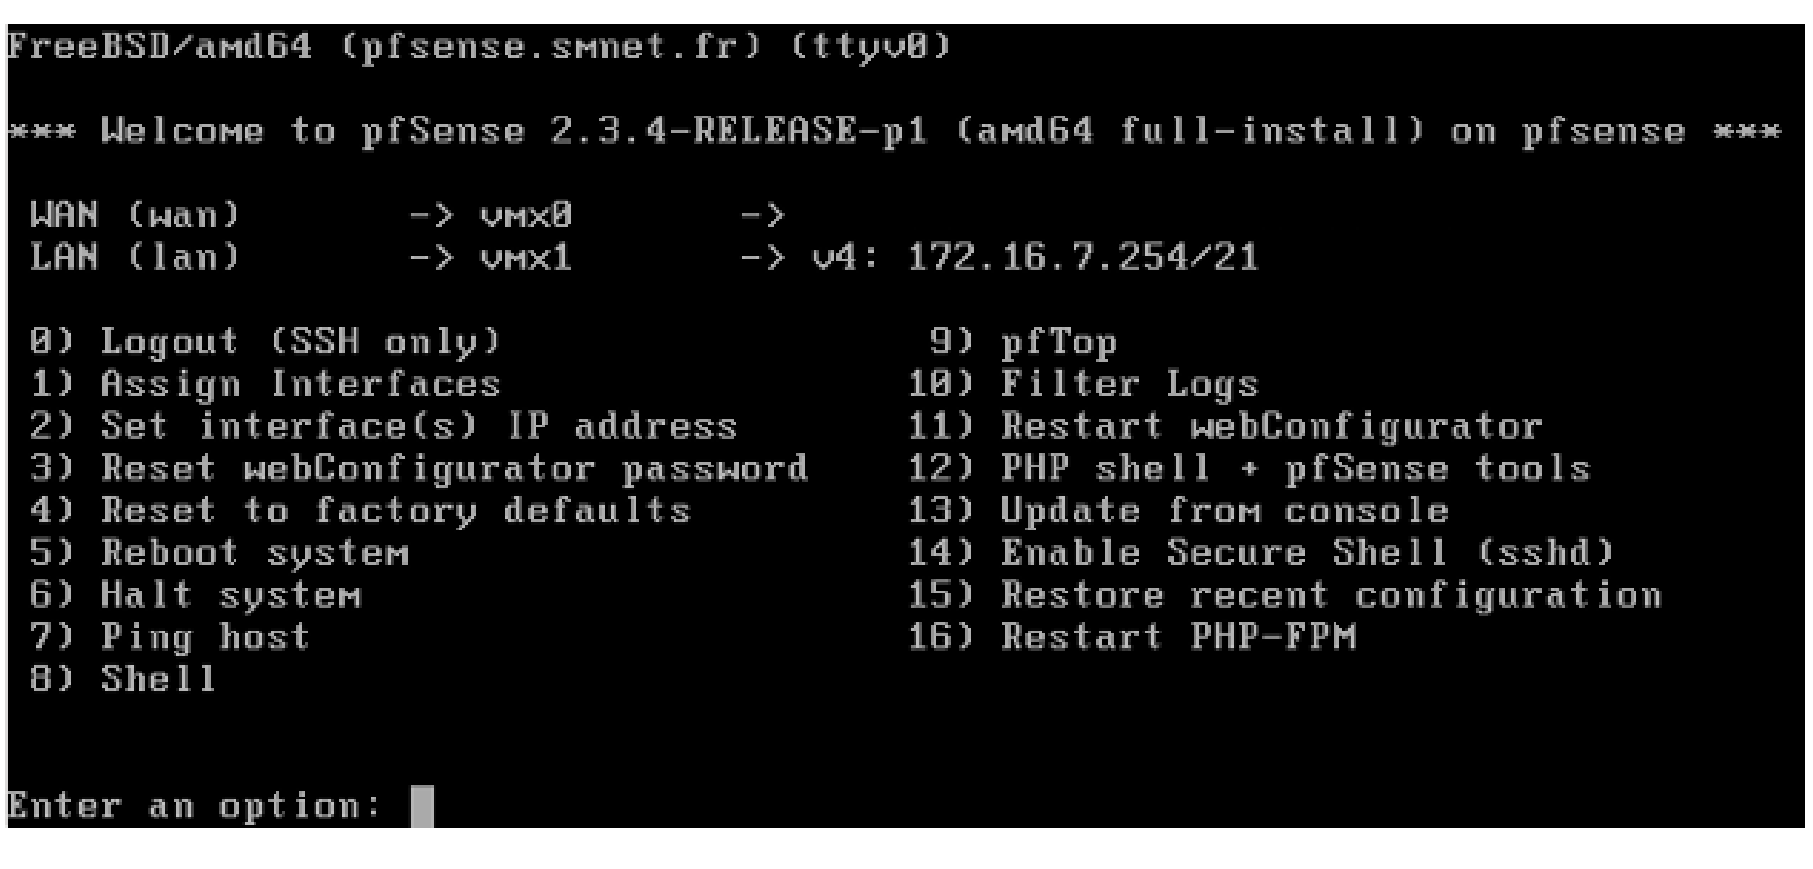

```
FreeBSD/amd64 (pfsense.smnet.fr) (ttyv0)

*** Welcome to pfSense 2.3.4-RELEASE-p1 (amd64 full-install) on pfsense ***

 WAN (wan)       -> vmx0       ->
 LAN (lan)       -> vmx1       -> v4: 172.16.7.254/21

 0) Logout (SSH only)                  9) pfTop
 1) Assign Interfaces                 10) Filter Logs
 2) Set interface(s) IP address       11) Restart webConfigurator
 3) Reset webConfigurator password    12) PHP shell + pfSense tools
 4) Reset to factory defaults         13) Update from console
 5) Reboot system                     14) Enable Secure Shell (sshd)
 6) Halt system                       15) Restore recent configuration
 7) Ping host                         16) Restart PHP-FPM
 8) Shell


Enter an option:
```

La console s'affiche. **pfSense** est désormais accessible via un navigateur Web.

Auteur : Stéphane Maas / 2013-2022

Précédent ACCUEIL Suivant