

Summary of findings:


- InsertionSort: empirical time scaling exponent (log-log) ~ 1.28
- SelectionSort: empirical time scaling exponent (log-log) ~ 1.23

Interpretation: exponent close to 2 indicates $O(n^2)$ behavior as expected for both algorithms.


Key notes about data:

- Data includes sizes: 100, 1000, 10000 (100000 excluded by runner).
- For 'sorted' distribution InsertionSort shows linear behavior (very low times).
- SelectionSort shows near-constant comparisons ~ n^2 regardless of distribution.


Real data: time vs n (random)

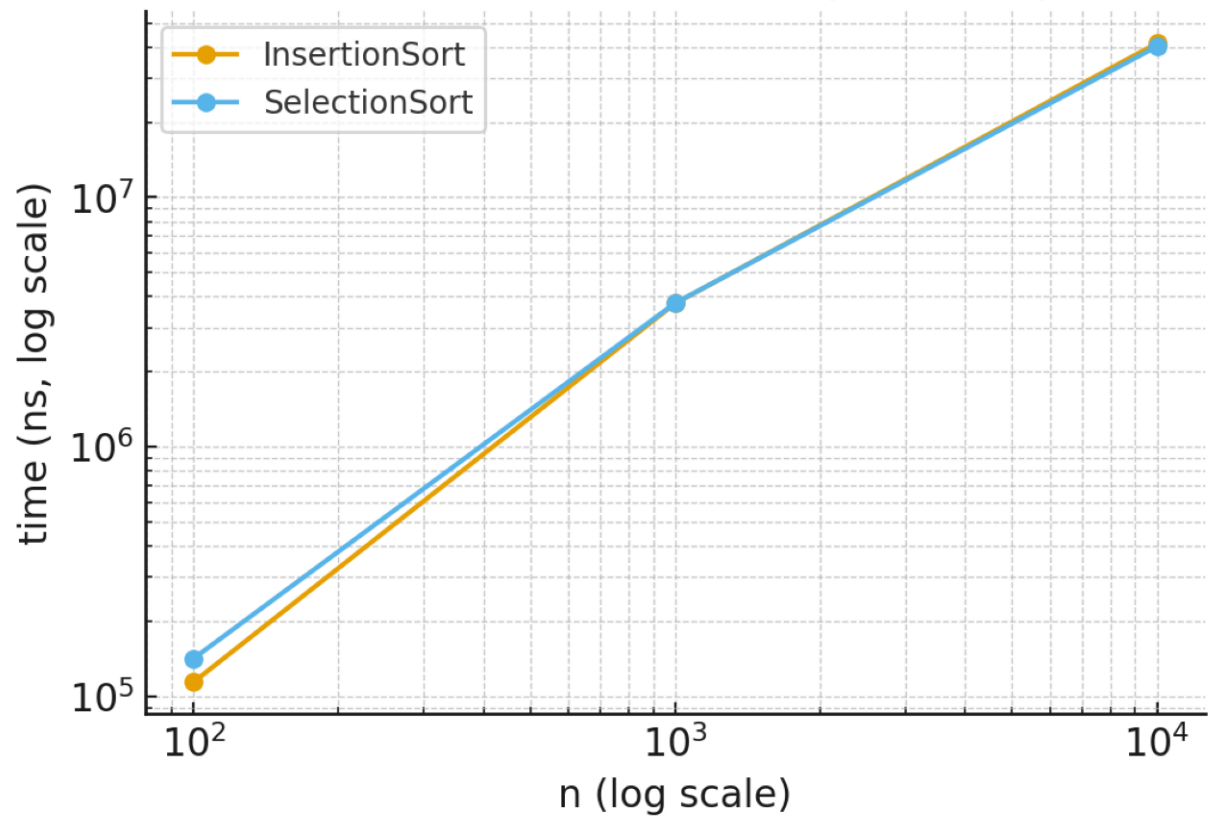


Real data: time vs n (sorted)

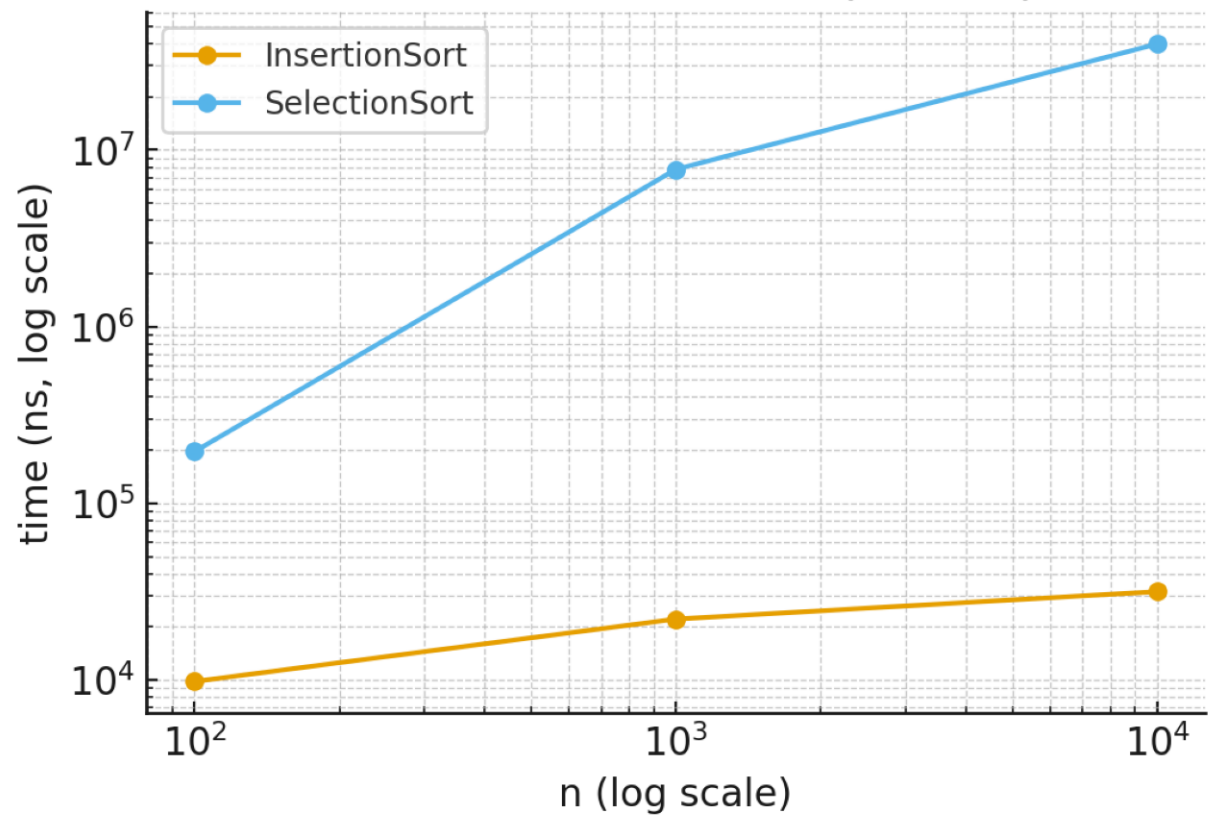

Real data: time vs n (reverse_sorted)

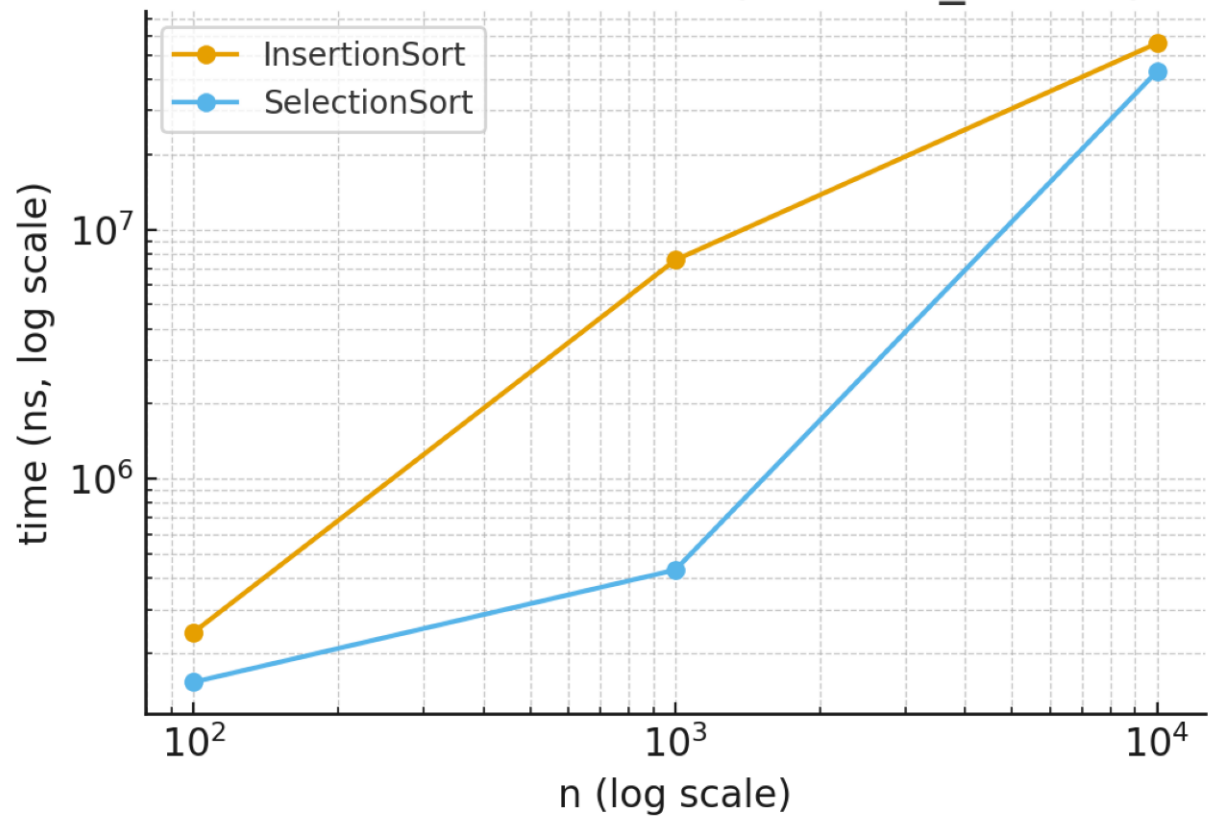

Real data: comparisons vs n (random)

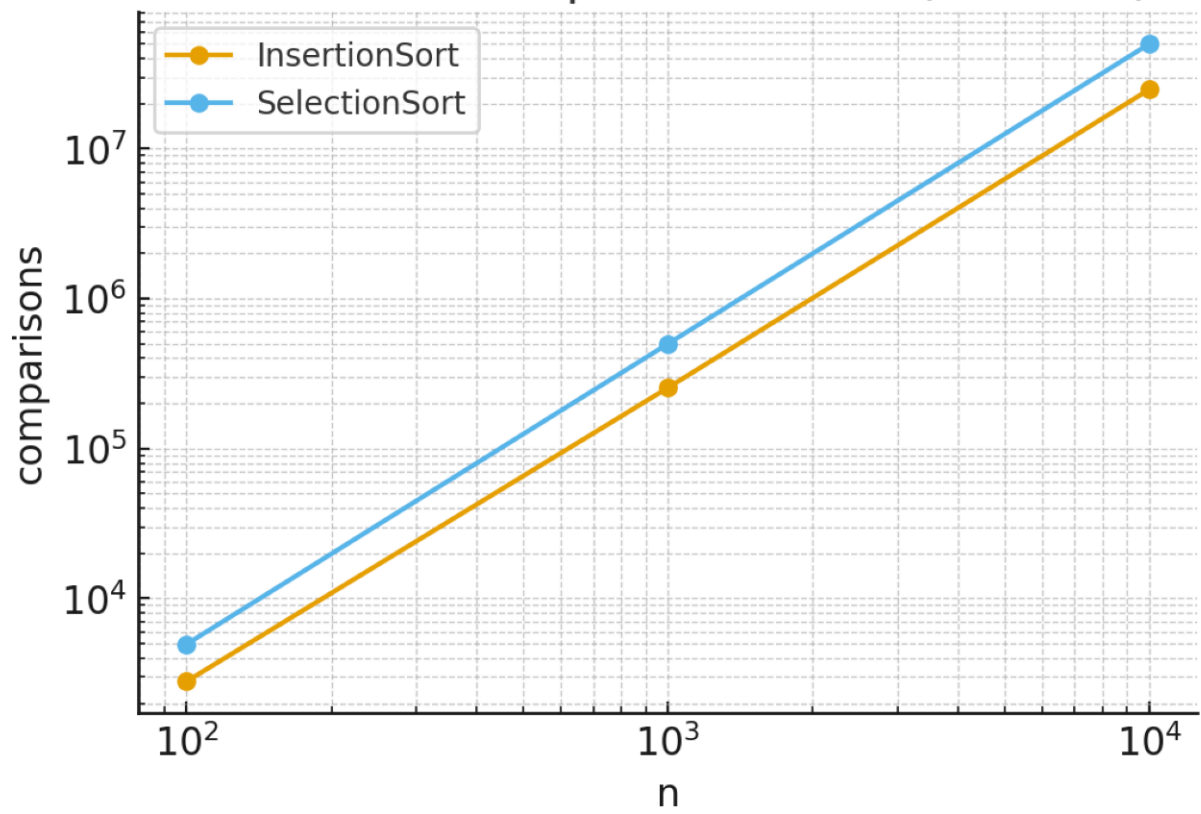

Real data: comparisons vs n (random)

