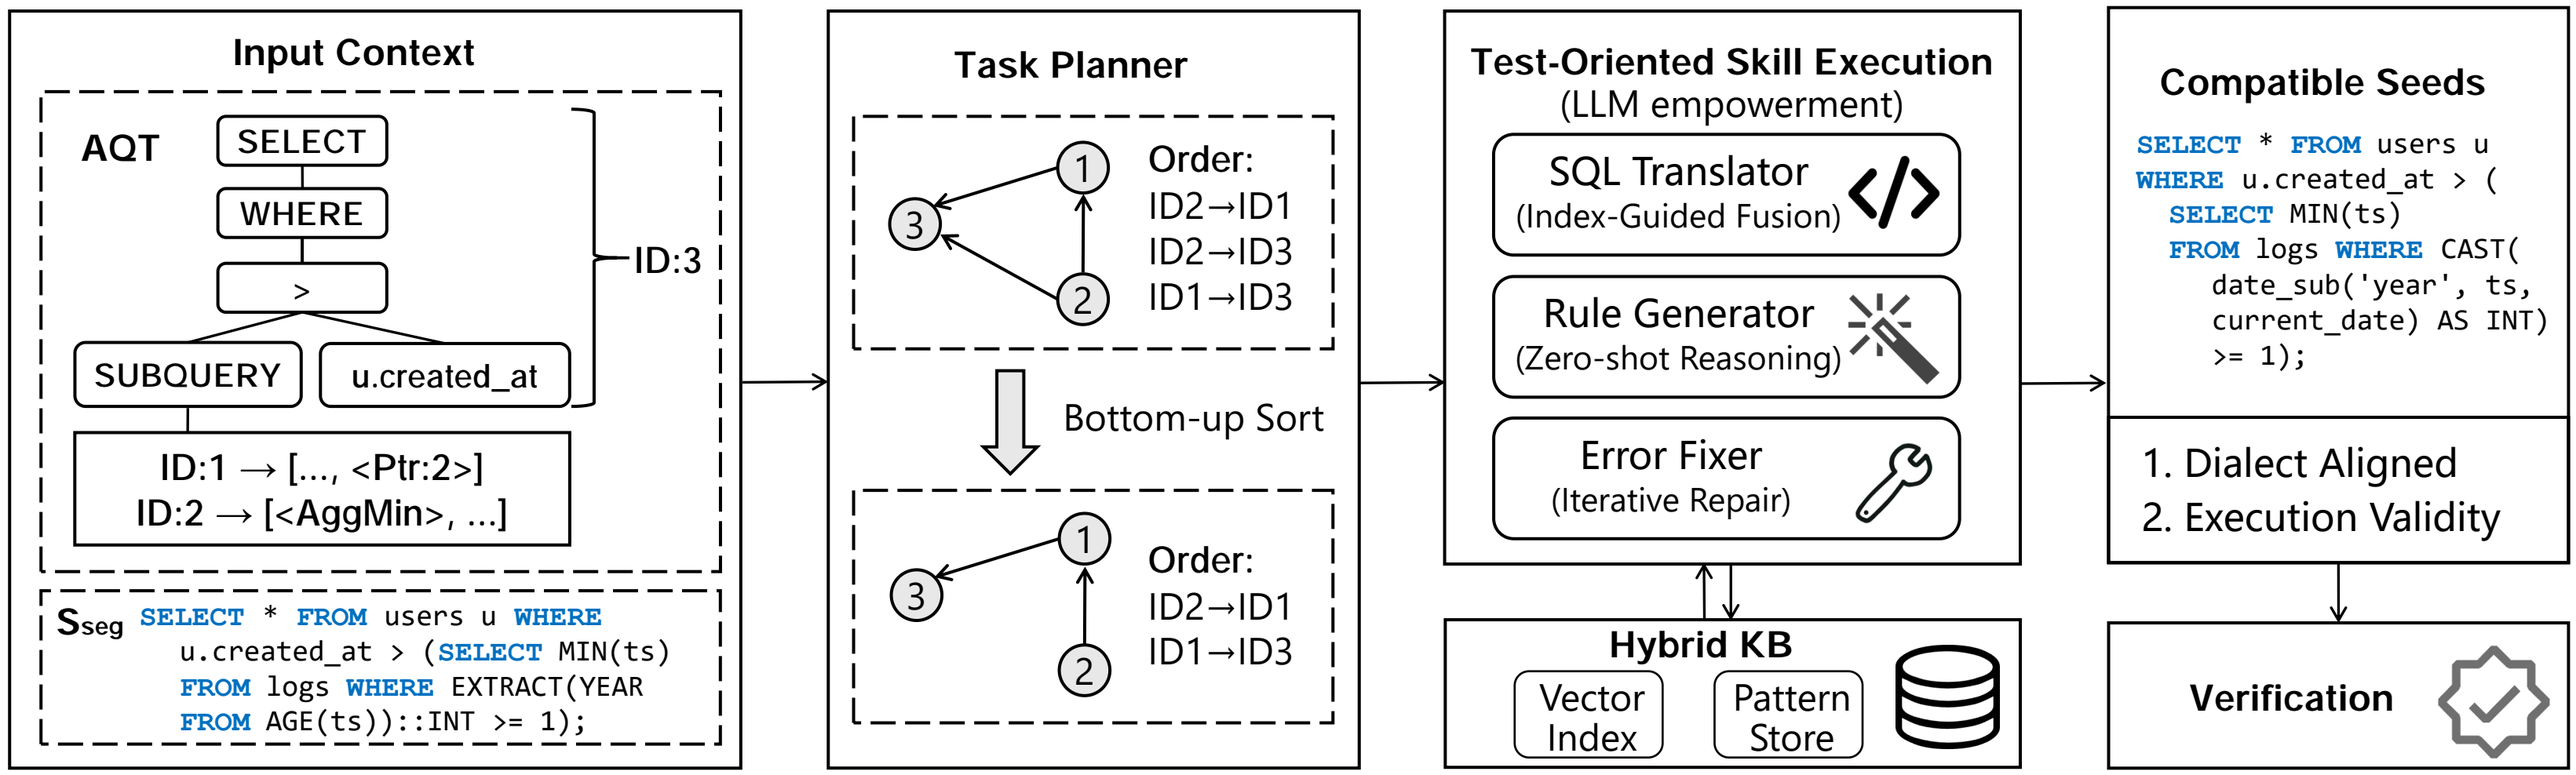

Input Context
AQT
SELECT
WHERE
>
SUBQUERY
u.created_at
ID:3
ID:1 → [..., <Ptr:2>]
ID:2 → [<AggMin>, ...]
Sseg SELECT * FROM users u WHERE u.created_at > (SELECT MIN(ts) FROM logs WHERE EXTRACT(YEAR FROM AGE(ts))::INT >= 1);
Task Planner
1
2
3
Order:
ID2→ID1
ID2→ID3
ID1→ID3
Bottom-up Sort
1
2
3
Order:
ID2→ID1
ID1→ID3
Test-Oriented Skill Execution
(LLM empowerment)
SQL Translator
(Index-Guided Fusion)
Rule Generator
(Zero-shot Reasoning)
Error Fixer
(Iterative Repair)
Hybrid KB
Vector Index
Pattern Store
Compatible Seeds
SELECT * FROM users u
WHERE u.created_at > (
SELECT MIN(ts)
FROM logs WHERE CAST(
date_sub('year', ts,
current_date) AS INT)
>= 1);
1. Dialect Aligned
2. Execution Validity
Verification