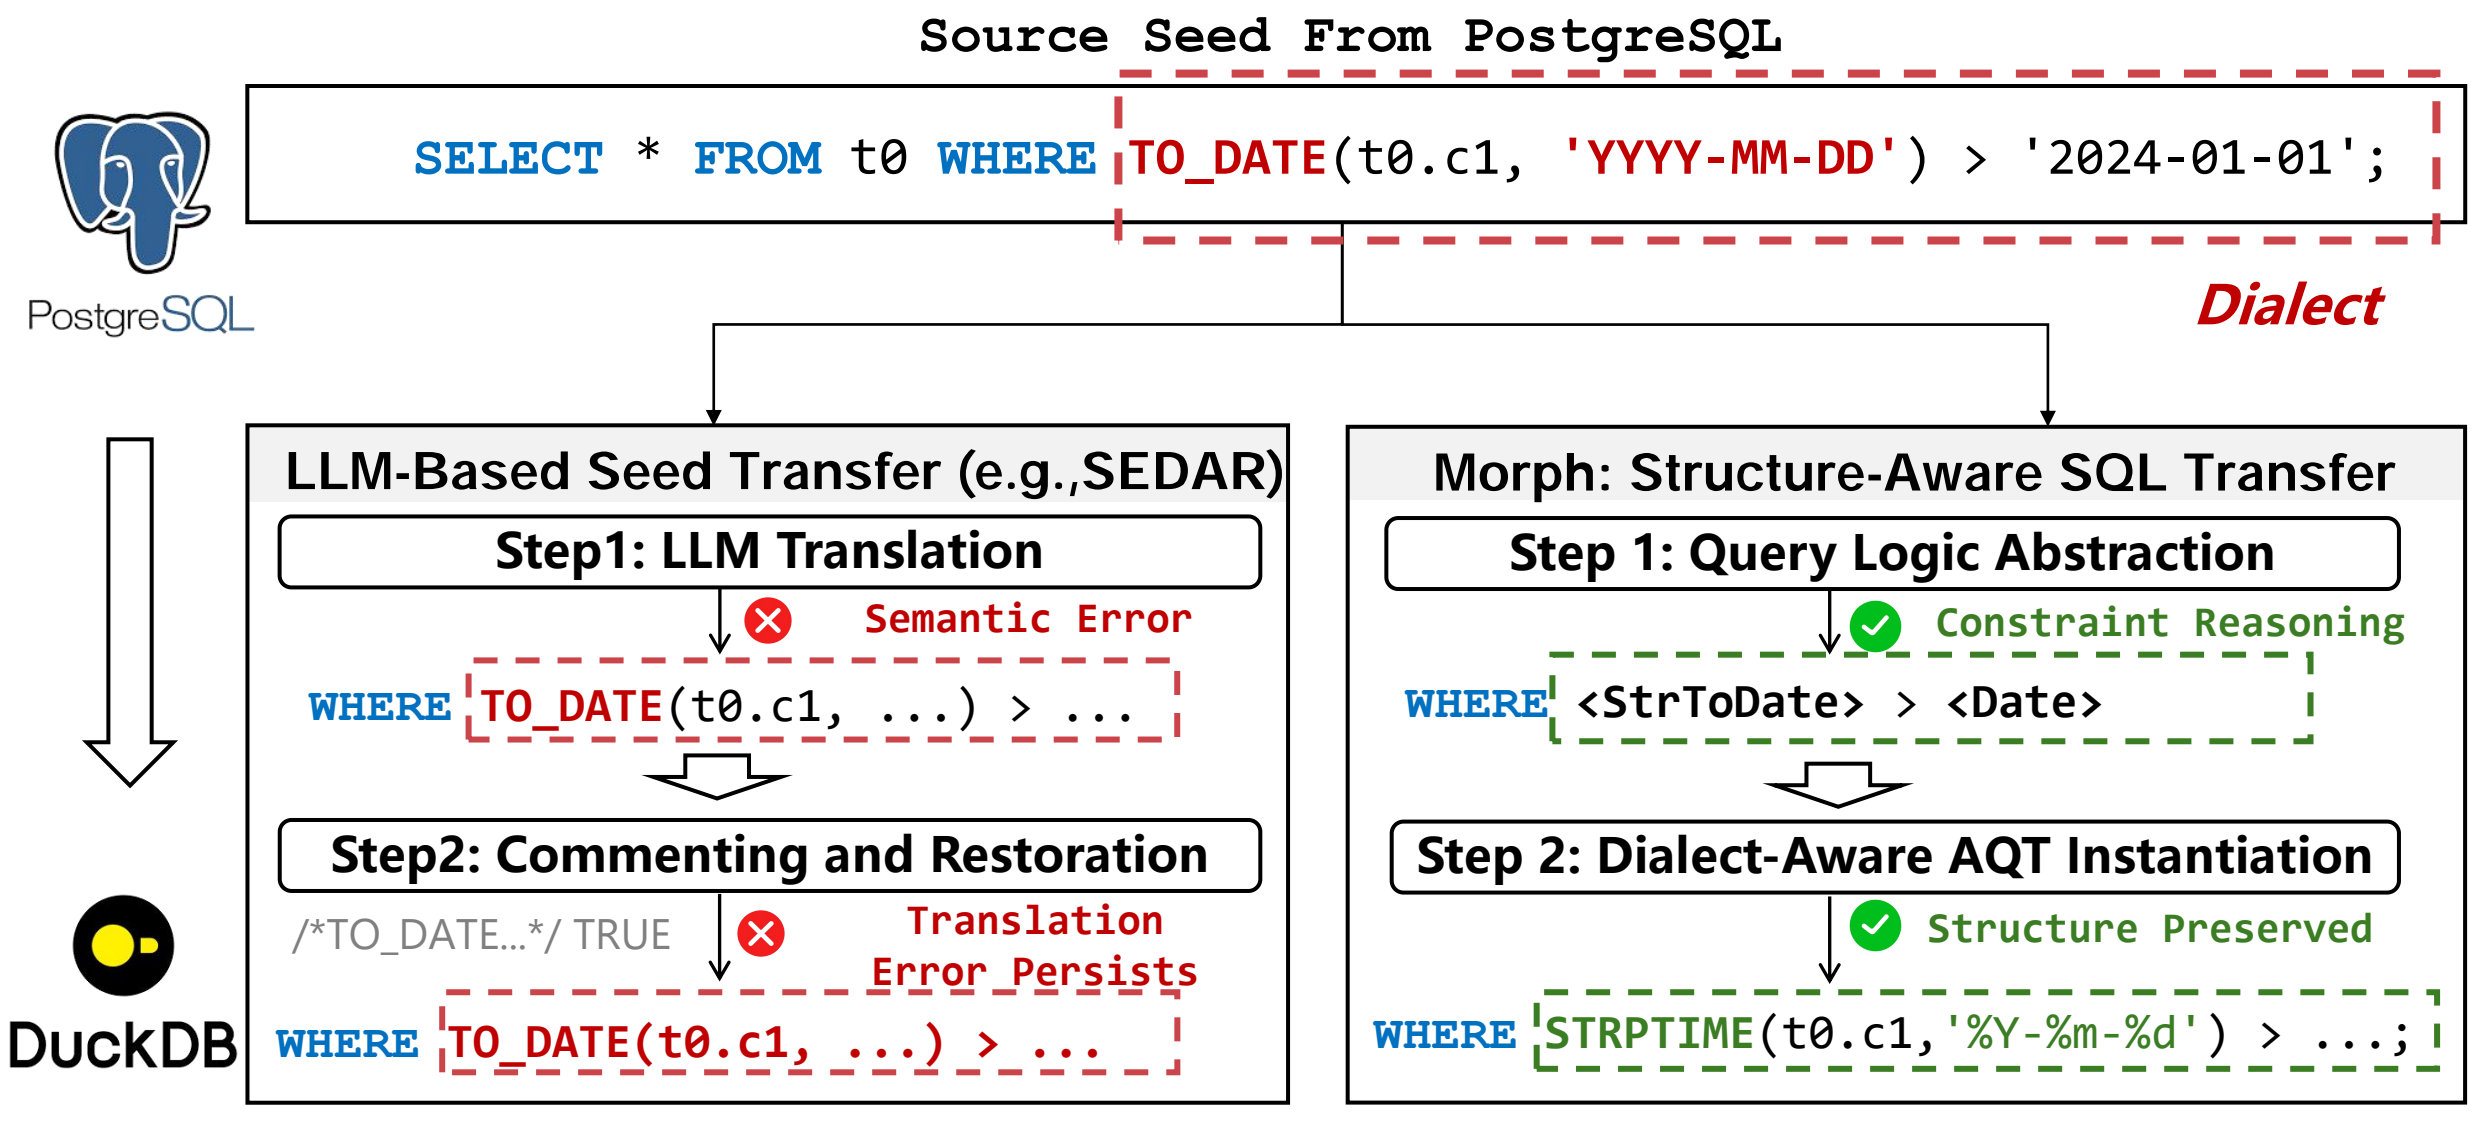

Source Seed From PostgreSQL
SELECT * FROM t0 WHERE TO_DATE(t0.c1, 'YYYY-MM-DD') > '2024-01-01';
PostgreSQL
Dialect
LLM-Based Seed Transfer (e.g.,SEDAR)
Step1: LLM Translation
Semantic Error
WHERE TO_DATE(t0.c1, ...) > ...
Step2: Commenting and Restoration
/*TO_DATE...*/ TRUE
Translation Error Persists
WHERE TO_DATE(t0.c1, ...) > ...
DuckDB
Morph: Structure-Aware SQL Transfer
Step 1: Query Logic Abstraction
Constraint Reasoning
WHERE <StrToDate> > <Date>
Step 2: Dialect-Aware AQT Instantiation
Structure Preserved
WHERE STRPTIME(t0.c1,'%Y-%m-%d') > ...;