Stellar Cyber 6.6.0s is now live! Discover all the updates in the release notes!

Configuring BlackBerry Cylance Connectors

The BlackBerry Cylance connector allows you to lock down a device that is associated with an event reported by another connector. In Stellar Cyber, this connector is used for lock down only, not event tracking.

The devices you want to lock down using this connector must be configured using BlackBerry's CylancePROTECT Console to have a policy that permits device control (or to be in a zone configured with a policy that has device control enabled).

In addition, you can use Cylance responders to configure Webhook actions that can be triggered manually or that can enhance Automated Threat Hunting (ATH) actions. 5.5.0

Cylance responders use Webhook templates that support actions. Each action is one responder, there are four actions, and hence there are four Cylance responders: Cylance Add to GlobalQuarantine, Cylance Add to GlobalSafe, Cylance Delete from GlobalQuarantine, and Cylance Delete from GlobalSafe.

This document describes how to configure a Cylance responder using the Universal Webhook Responder, how to add the respond function to a Cylance connector and how to manually trigger an action and perform ATH actions with a Cylance responder.

Connector Overview: Blackberry Cylance

Capabilities

- Collect: **No**
- Respond: **Webhook actions**
- Native Alerts Mapped: **Yes**
- Runs on: **DP**
- Interval: **N/A**

Collected Data

N/A

Domain

<Service Endpoint URL>

where <Service Endp[image_ref id="1" box="0.343,0.057,0.387,0.089"]RL> is a variable from the configuration of this connector

Response Actions

Action	Required Fields
Contain Host	`deviceand device.deviceID` or `cylance` and one of `cylance.device_id` or `srcmac` or `dstmac` or (`host` and `host.mac`)

Webhook action templates: 5.5.0

- Cylance Add to GlobalQuarantine
- Cylance Add to GlobalSafe
- Cylance Delete from GlobalQuarantine
- Cylance Delete from GlobalSafe

Third Party Native Alert Integration Details

For CylancePROTECT, three types of Cylance events are mapped to the XDR Kill Chain and Stellar Cyber's Alert index: Exploit Attempts, Script Control, and Threats. The other data (Audit Log, Device, Device Control, and Threat Classification) are ingested and mapped to the Syslog index (not Alerts index), and are not run through the ML/SA pipeline.

For CylanceOPTICS, Detection events are evaluated with Stellar Cyber time series analysis models to determine abnormality of the event before mapping.

For details, see Integration of Third Party Native Alerts.

Required Credentials and Configurations

- Service Endpoint URL, Tenant ID, App ID, and App Secret

Locating Records

Use the following to query for records:

- msg_origin.source: `cylance_protect` or `cylance_optics`
- msg_class: `cylance_protect_alert` or `cylance_optics_event`

To search the alerts in the Alerts index or to search the Original Records in the Syslog index, use the query: `msg_origin.source:cylance_protect AND event.type:(ExploitAttempt OR ScriptControl OR Threat)`

Adding a Blackberry Cylance Connector

To add a Blackberry Cylance connector:

1. Set up Stellar Cyber in CylancePROTECT and obtain IDs
2. Add the connector in Stellar Cyber
3. Add the connector in (Webhook Responder)
4. Test the connector
5. Use the connector to contain a host
6. Use actions

Use our example as a guideline, as you might be using a different software version.


Setting up the Stellar Cyber App Integration

Before you configure the connector in Stellar Cyber, you must obtain the following Cylance credentials:

- App ID and App Secret
- Tenant ID

To obtain the information:


1. Log in to the CylancePROTECT Console as an administrator.
2. Select **Settings > Integrations**.

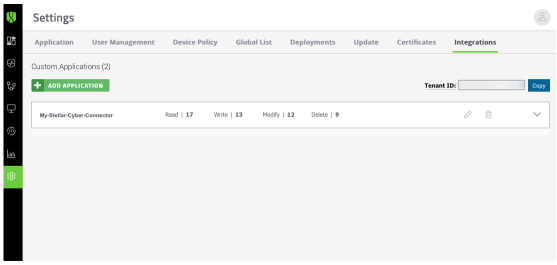

3. Click **Add Application**.



4. Type an **Application Name**. This must be unique within your organization.
5. Select the access privileges for a Console data type. Not selecting any checkboxes for a data type means the application does not have access to that data type.
6. Click **Save**.
7. The credentials to use for the application displays. Make note of both the **Application ID** and the **Application Secret**.

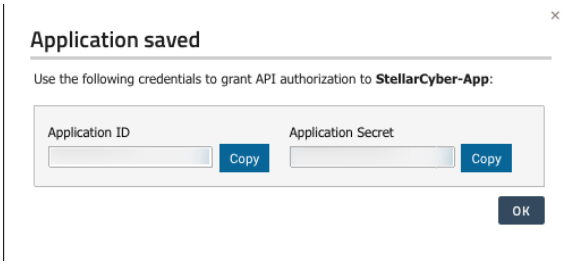

8. Click **OK** to return to the **Integrations** tab.
9. Note that your new application appears in the list. At this point, make note of the **Tenant ID** that is displayed on the Integrations tab.




The syntax of the Tenant ID must be exactly as it appears here.

You are now ready to set up your Stellar Cyber Cylance connector.


Adding the Connector in Stellar Cyber

After you have noted the configuration information, you can add the BlackBerry Cylance connector in Stellar Cyber:

1. Log in to Stellar Cyber.
2. Click **System | INTEGRATIONS | Connectors**. The **Connector Overview** appears.

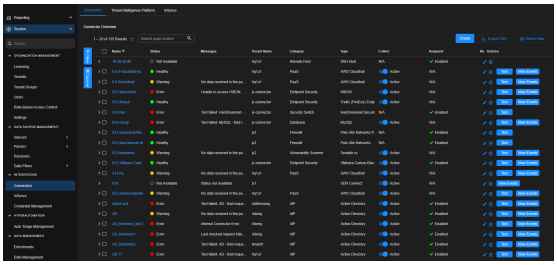


3. Click **Create** and select **Connector**.



   The **General** tab of the **Add Connector** screen appears. The information on this tab cannot be changed after you add the connector.

4. Choose **Endpoint Security** from the **Category** dropdown.
5. Choose **BlackBerry Cylance** from the **Type** dropdown.

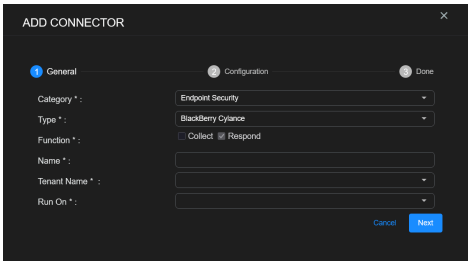


   The asterisk (*) indicates a required field.

6. For this connector, the supported **Function** is **Respond**, which is enabled already.
7. Enter a **Name**.

   Notes:
   - This field does not accept multibyte characters.
   - It is recommended that you follow a naming convention such as tenantname-connectortype.

8. Choose a **Tenant Name**. The Interflow records created by this connector include this tenant name.
9. Choose the device on which to run the connector.
10. Click **Next**. The **Configuration** tab appears.

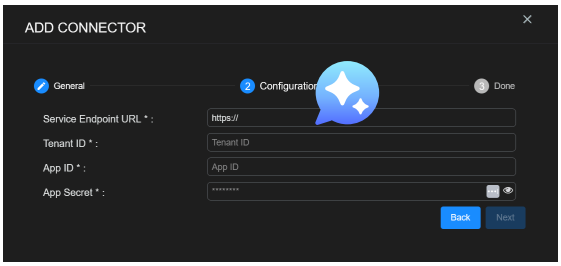

The asterisk (*) indicates a required field.

11. Enter the **Service Endpoint URL** (the URL of your regional BlackBerry Cylance portal). Do not append any details to this URL, just the value indicated below for your region:


Region	URL
Asia-Pacific - North	https://protectapi-apne1.cylance.com/
Asia-Pacific - Southeast	https://protectapi-au.cylance.com/
Europe - Central	https://protectapi-euc1.cylance.com/
North America	https://protectapi.cylance.com/
South America	https://protectapi-sae1.cylance.com/
US Government	https://protectapi.us.cylance.com/

   For release versions prior to v4.3.4, ensure the URL does not include a trailing "/" symbol.

12. Enter the **Tenant ID** you noted above in Setting up the Stellar Cyber App Integration.

    The syntax of the Tenant ID must be exactly as it appeared in the Integration tab of the Cylance Console.

13. Enter the **App ID** and **App Secret** you noted above.
14. Click **Next**. The final confirmation tab appears.

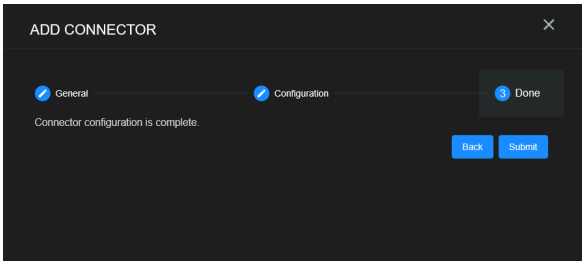


15. Click **Submit**.

The new connector is immediately active.


Adding the Connector in Stellar Cyber (Webhook Respond) 5.5.0

To add the Webhook respond function for a BlackBerry Cylance connector in Stellar Cyber:

1. Log in to Stellar Cyber
2. Click **System | INTEGRATIONS | Connectors**. The **Connector Overview** appears.

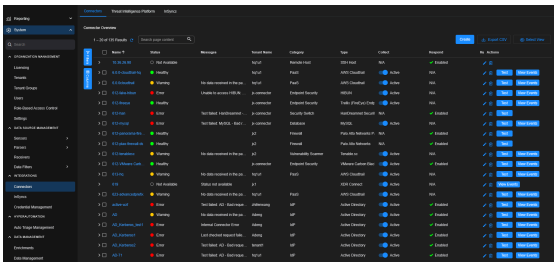


3. Click **Create** and select **Connector**.



   The **General** tab of the **Add Connector** screen appears. The information on this tab cannot be changed after you add the connector.

4. Choose **Webhook** from the **Category** dropdown.
5. Choose one of the predefined templates from the **Type** dropdown: **Cylance Add to GlobalQuarantine**, **Cylance Add to GlobalSafe**, **Cylance Delete from GlobalQuarantine**, or **Cylance Delete from GlobalSafe**.

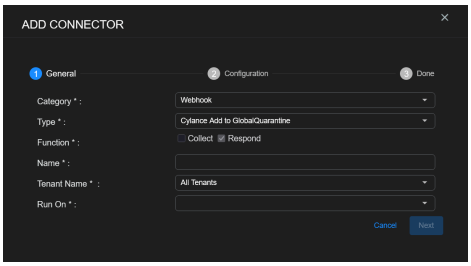

   The asterisk (*) indicates a required field.


6. For this connector, the supported **Function** is **Respond**, which is enabled already.
7. Enter a **Name**.

   Notes:
   - This field does not accept multibyte characters.
   - It is recommended that you follow a naming convention such as tenantname-connectortype.

8. Choose a **Tenant Name**. This identifies which tenant is allowed to use the connector. In addition to specific tenants, this connector supports **All Tenants**, which means that a Cylance responder can be used across tenants.
9. Choose the device on which to run the connector.

- Certain connectors can be run on either a Sensor or a Data Processor. The available devices are displayed in the **Run On** menu. If you want to associate your collector with a sensor, you must have configured that sensor prior to configuring the connector or you will not be able to select it during initial configuration.
- If the device you're connecting to is on premises, we recommend you run on the local sensor. If you're connecting to a cloud service, we recommend you run on the DP.

10. Click **Next**. The **Configuration** tab appears.

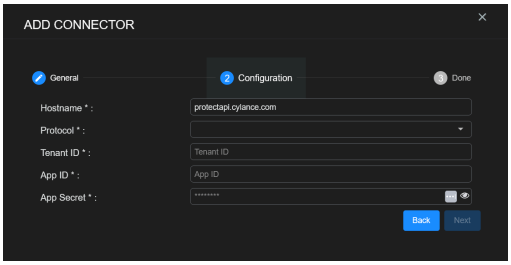


The asterisk (*) indicates a required field.

11. Enter the **Hostname** you noted above (the URL of your regional BlackBerry Cylance portal).
12. Select the **Protocol**, either **HTTP** or **HTTPS**. If you select **HTTPS**, another field is available: **Disable SSL Certificate Verification**.
13. (Optional) Click **Disable SSL Certificate Verification** if you want to disable SSL certificate verification. Only disable SSL certificates if you have a necessary reason to, otherwise, it is not a good security practice and may expose the connection to security risks.
14. Enter the **Tenant ID** you noted above.

    The syntax of the Tenant ID must be exactly as it appeared in the Integration tab of the Cylance Console.

15. Enter the **App ID** and **App Secret** you noted above.
16. Click **Next**. The final confirmation tab, **Done**, appears.

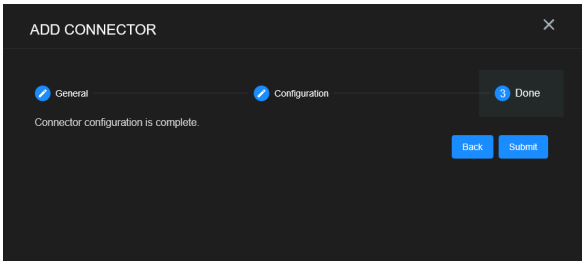


17. Click **Submit**.

Testing the Connector

When you add (or edit) a connector, we recommend that you run a test to validate the connectivity parameters you entered. The test validates authentication and connectivity.

For connectors running on a sensor, Stellar Cyber recommends that you allow 30-60 seconds for new or modified configuration details to be propagated to the sensor before performing a test.

1. Click **System | INTEGRATIONS | Connectors**. The **Connector Overview** appears.

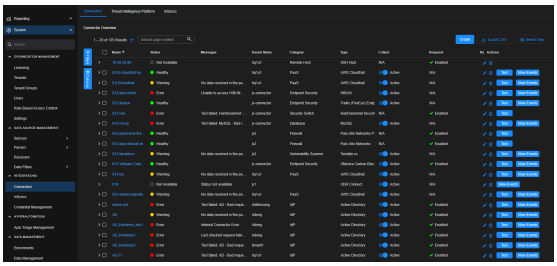

2. Locate the connector by name that you added, or modified, or that you want to test.
3. Click **Test** at the right side of that row. The test runs immediately.

   Note that you may run only one test at a time.

Stellar Cyber conducts a basic connectivity test for the connector and reports a success or failure result. A successful test indicates that you entered all of the connector information correctly.

To aid troubleshooting your connector, the dialog remains open until you explicitly close it by using the **X** button. If the test fails, you can select the button from the same row to review and correct issues.

The connector status is updated every five (5) minutes. A successful test clears the connector status, but if issues persist, the status reverts to failed after a minute.


Repeat the test as needed.

Display sample messages...


Success !



Failure with summary of issue:



Show More example detail:

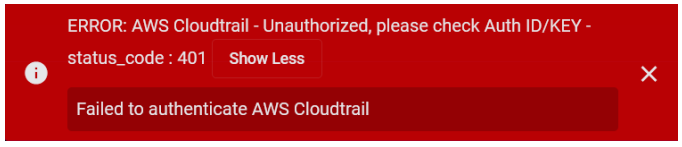

If the test fails, the common HTTP status error codes are as follows:

HTTP Error Code	HTTP Standard Error Name	Explanation	Recommendation
400	Bad Request	This error occurs when there is an error in the connector configuration.	Did you configure the connector correctly?
401	Unauthorized	This error occurs when an authentication credential is invalid or when a user does not have sufficient privileges to access a specific API.	Did you enter your credentials correctly? Are your credentials expired? Are your credentials entitled or licensed for that specific resource?
403	Forbidden	This error occurs when the permission or scope is not correct in a valid credential.	Did you enter your credentials correctly? Do you have the required role or permissions for that credential?
404	Not Found	This error occurs when a URL path does not resolve to an entity.	Did you enter your API URL correctly?
429	Too Many Requests	This error occurs when the API server receives too much traffic or if a user's license or entitlement quota is exceeded.	The server or user license/quota will eventually recover. The connector will periodically retry the query. If this occurs unexpectedly or too often, work with your API provider to investigate the server limits, user licensing, or quotas.

For a full list of codes, refer to HTTP response status codes.

Using the Connector to Contain a Host

When an event has occurred on a host known to the BlackBerry Cylance connector, you can use this to isolate the associated host. From the Event list in **Threat Hunting**, you can select the event of interest, then click **More Info**. From there, you can select Actions > External Actions > Contain Host. In the **Contain Host Configuration** dialog, select the relevant connector and in the **Target**, specify the Source IP, Destination IP, or host IP to lock down.

For more information on working with the events and the actions on them, refer to Understanding Event Details.

Using Actions 5.5.0

With a Cylance responder, you can:

- Manually trigger an action
- View action status
- Perform an ATH action

Manually Triggering an Action

To manually trigger an action with a Cylance responder:

1. Select **Threat Hunting**


   The **Interflow Search** tab appears.

2. Change the **Indices** for the record type, for example, **Syslog**.

3. Scroll down the page and click the icon for **More Info** in the **Actions** column.


4. Click the **Actions** tab.

   Webhook actions appear under **External Actions**.

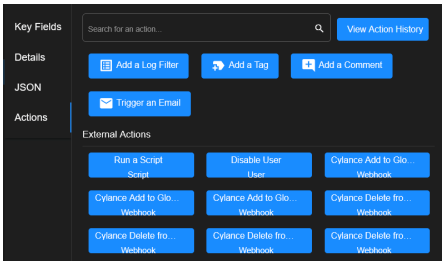

5. Click a Cylance Webhook action.

   The template populates the fields in the **Path and Query** and the **JSON Body**.

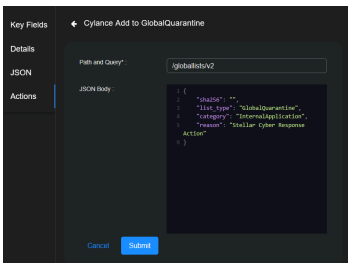

6. You can modify the **JSON Body** by entering string values or curly brace expressions.


7. To perform the action, click **Submit**.

Viewing Action Status

To view action status:

1. Click **Automation | Action History**.

2. Click **Webhook Actions**.

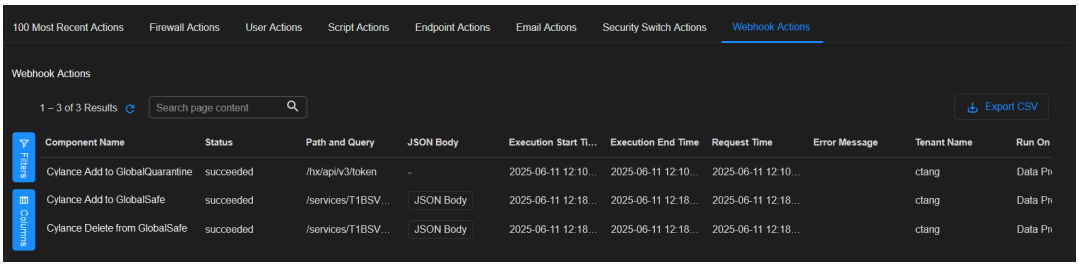

   You can view the action status or error message in the table.


Performing an ATH Action

To perform an ATH action with a Cylance responder:

1. Click **Automation | Automation**.

2. Click **Create**.

3. Scroll down to **Actions**.

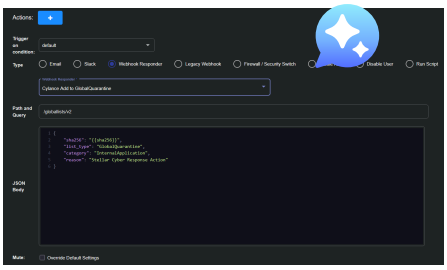

4. Click the ✚ button to add an action. Another action appears below the existing action.
5. Select the **Trigger on condition**.
6. Select **Webhook Responder** for the **Type**.
7. Select a previously configured Cylance responder from the dropdown menu for the **Webhook Responder**. The template populates the fields in the **Path and Query** and **JSON Body**.
8. You can modify the **JSON Body** by entering string values or curly brace expressions.
9. (Optional) Click **Override Default Settings** to override the playbook's mute settings and mute just this action.
10. Click **Submit**.

© 2026 Stellar Cyber . All rights reserved.