Stellar Cyber 6.6.0s is now live! Discover all the updates in the release notes!

# Configuring F5 BIG-IP Telemetry

You can send F5 BIG-IP telemetry data to a sensor using API calls:

1. Install an API client.
2. Install the AS3 and telemetry packages.
3. Create a telemetry entry.
4. Authorize the telemetry.
5. Configure the sensor to receive the telemetry.
6. Subscribe the Sensor to the Telemetry Service.

You can also configure an F5 BIG-IP connector.

## Install an API Client

You must use an API client to send the calls to the F5 BIG-IP firewall. We used Postman for this procedure, but other clients should also work.

## Install the AS3 and Telemetry Packages

To install the AS3 and telemetry packages in your BIG-IP firewall:

1. Download the AS3 script file from the F5 GitHub repository: https://github.com/F5Networks/f5-appsvcs-extension/releases/tag/v3.27.0.
2. Download the telemetry script file from the F5 GitHub repository: https://github.com/F5Networks/f5-telemetry-streaming/releases.
3. Log in to your BIG-IP firewall.
4. Select **iApps**.
5. Select **Package Management LX**.
6. Select **Import**.
7. Import the two scripts that you downloaded earlier.

## Creating a Telemetry Entry

To create a telemetry entry in your BIG-IP firewall:

1. Log in to Postman.
2. Make a **POST** to https  **P address of firewall>**: **<port>**/mgmt/shared/appsvcs/declare.
3. Enter this for the body:

```
{
   "class": "ADC",
   "schemaVersion": "3.10.0",
   "remark": "Example depicting creation of BIG-IP module log profiles",
   "Common": {
      "class": "Tenant",
      "Shared": {
         "class": "Application",
         "template": "shared",
         "telemetry_local_rule": {
            "remark": "Only required when TS is a local listener",
            "class": "iRule",
            "iRule": "when CLIENT_ACCEPTED {\n node 127.0.0.1 6514\n}"
         },
         "telemetry_local": {
            "remark": "Only required when TS is a local listener",
            "class": "Service_TCP",
            "virtualAddresses": [
               "255.255.255.254"
            ],
            "virtualPort": 6514,
            "iRules": [
               "telemetry_local_rule"
            ]
         },
         "telemetry": {
            "class": "Pool",
            "members": [
               {
                  "enable": true,
                  "serverAddresses": [
                     "255.255.255.254"
                  ],
                  "servicePort": 6514
               }
            ],
            "monitors": [
               {
                  "bigip": "/Common/tcp"
               }
            ]
         },
         "telemetry_hsl": {
            "class": "Log_Destination",
            "type": "remote-high-speed-log",
            "protocol": "tcp",
            "pool": {
               "use": "telemetry"
            }
         },
         "telemetry_formatted": {
            "class": "Log_Destination",
            "type": "splunk",
            "forwardTo": {
               "use": "telemetry_hsl"
            }
         },
         "telemetry_publisher": {
            "class": "Log_Publisher",
            "destinations": [
               {
                  "use": "telemetry_formatted"
               }
            ]
         },
         "telemetry_traffic_log_profile": {
            "class": "Traffic_Log_Profile",
            "requestSettings": {
               "requestEnabled": true,
               "requestProtocol": "mds-tcp",
               "requestPool": {
                  "use": "telemetry"
               },
               "requestTemplate":
"event_source=\"request_logging\",hostname=\"$BIGIP_HOSTNAME\",client_ip=\"$
```

4. Select **Send**.

## Authorize Telemetry

To authorize the BIG-IP firewall to send telemetry:

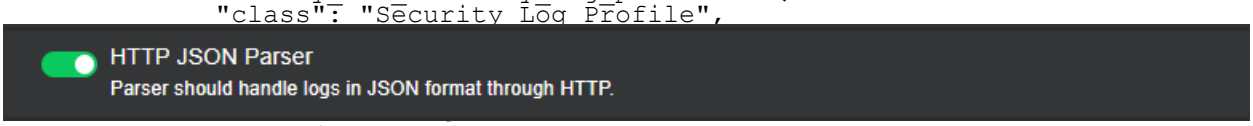
1. Log in to your BIG-IP firewall as the admin user.
2. Select **Collections**.
3. Select **Big IP** to expand the list of requests.
4. Select the request you just sent.
5. Select **Send**.

# Configure the Modular Sensor to Receive Telemetry

To configure the Modular Sensor to receive telemetry:

1. Log in to Stellar Cyber and then navigate to **System | DATA SOURCE MANAGEMENT | Sensors | Sensor Profiles**.
2. Select for the Modular Sensor that you want to receive telemetry.

   The **Edit Sensor Profile** screen appears.
3. Expand **Log Forwarder** to view the options.
4. Enable **HTTP JSON Parser**.

   
   
5. Select **Submit**.

# Subscribe the Sensor to the Telemetry Service

To subscribe the sensor IP address to the telemetry service:

1. Log in to Postman.
2. Make a **POST** to `https://<IP address of firewall>:<Port>/mgmt/shared/telemetry/declare`.
3. Enter this for the body (using the IP address of your sensor):

```
{
    "class": "Telemetry",
    "My_System": {
        "class": "Telemetry_System",
        "systemPoller": {
            "interval": 60
        }
    },
    "My_Listener": {
        "class": "Telemetry_Listener",
        "port": 6514
    },

    "My_Consumer": {
        "class": "Telemetry_Consumer",
        "type": "Generic_HTTP",
        "host": "<IP address of sensor>",
        "protocol": "http",
        "port": 5200,
        "path": "/httpjson",
        "method": "POST",
        "headers": [
            {
                "name": "content-type",
                "value": "application/json"
            }
        ]
```

```
    }
}
```

4. Make a **GET** to `https://<IP address of firewall>:<Port>/mgmt/shared/telemetry/declare` to confirm that the data is saved in the firewall.
5. You should see a result similar to the following:


```
"message": "success",
"declaration": {
   "class": "Telemetry",
   "My_System": {
      "class": "Telemetry_System",
      "systemPoller": {
         "interval": 60,
         "enable": true,
         "actions": [
            {
               "setTag": {
                  "tenant": "`T`",
                  "application": "`A`"
               },
               "enable": true
            }
         ]
      },
      "enable": true,
      "host": "localhost",
      "port": 8100,
      "protocol": "http",
      "allowSelfSignedCert": false
   },
      "My_Listener": {
         "class": "Telemetry_Listener",
         "port": 6514,
         "enable": true,
         "trace": false,
         "match": "",
         "actions": [
            {
               "setTag": {
                  "tenant": "`T`",
                  "application": "`A`"
               },
               "enable": true
            }
         ]
      },
      "My_Consumer": {
         "class": "Telemetry_Consumer",
         "type": "Generic_HTTP",
         "host": "192.168.200.10",
         "protocol": "http",
         "port": 5200,
         "path": "/httpjson",
         "method": "POST",
         "headers": [
            {
               "name": "content-type",
               "value": "application/json"
            }
         ],
         "enable": true,
         "trace": false,
         "allowSelfSignedCert": false
      },
      "My_Consumer2": {
         "class": "Telemetry_Consumer",
         "type": "Generic_HTTP",
         "host": "192.168.1.192",
         "protocol": "http",
         "port": 5200,
         "path": "/httpjson",
         "method": "POST",
         "headers": [
            {
               "name": "content-type",
               "value": "application/json"
            }
         ],
```


6. To delete telemetry, issue this **POST** to `https://<IP address of firewall>:<Port>/mgmt/shared/telemetry/declare`:

```
body
```

```
{          "enable": true,
           "trace": false,
           "allowSelfSignedCert": false
    "class": "Telemetry"
        },
        "schemaVersion": "1.17.0"
    }
}
 }
```




© 2026 Stellar Cyber . All rights reserved.