Stellar Cyber 6.6.0s is now live! Discover all the updates in the release notes!


Configuring SentinelOne Log Ingestion

To configure your SentinelOne endpoint protection system to send logs to Stellar Cyber:

Use our example as a guideline, as you might be using a different software version.

During installation, the timezone for sensors are automatically set to UTC+0. Since the logs for some security products might only include the local time without a timezone, Stellar Cyber recommends that you set the sensor timezone to the same timezone as your security product.

1. Log in to SentinelOne.
2. Select **INTEGRATIONS**.
3. Select **SYSLOG**.

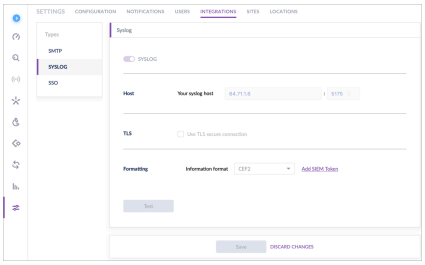

4. Enable **SYSLOG**.
5. For the **Host**, enter the IP address of the Modular Sensor.
6. For the port, enter **5175**.
7. Optionally enable TLS.

   If you do so, then under **Certificate**, select **Upload**. This sends the CA certificate for the Select to SentinelOne.
8. For **Formatting**, choose **CEF2**.
9. Select **Save**.



© 2026 Stellar Cyber . All rights reserved.