Stellar Cyber 6.6.0s is now live! Discover all the updates in the release notes!

Configuring Stormshield SNS Firewall Connectors 5.5.0

You can connect Stellar Cyber to Stormshield Network Security (SNS) firewalls so that you can block and unblock IP addresses quickly and easily from within Stellar Cyber while you're threat hunting. You can configure firewall actions or manually trigger a firewall action from the event display.

Stormshield firewalls use a dynamic blacklist mechanism to control network behavior in addition to deny policy rules. When an IP address is added to the blacklist, the firewall automatically blocks all traffic from that address, enforcing security policy without requiring manual rule modifications.

This integration uses the Stormshield CLI API so that Stellar Cyber can add IP addresses to its blacklist dynamically and remove them from it.

Connector Overview: Stormshield SNS Firewall

Capabilities

- Collect: **No**
- Respond: **Yes**
- Native Alerts Mapped: **No**
- Runs on: **DP**
- Interval: **N/A**

Collected Data

N/A

Domain

<Host>

where <Host> is a variable from the configuration of this connector

Response Actions

Action	Required Fields
Block IP/Unblock IP	srcip

Third Party Native Alert Integration Details

N/A

Required Credentials and Configurations

- Host or IP Address, Port, Username, and Password

Adding a Stormshield SNS Firewall Connector

To add a new Stormshield SNS Firewall connector:

1. Obtain Stormshield firewall credentials
2. Add the connector in Stellar Cyber
3. Test the connector

Stormshield firewalls come with predefined address lists, including a blacklist. It's not necessary to create or configure a blacklist manually. Instead, either you manually add IP addresses to the blacklist through the Stellar Cyber interface or Stellar Cyber automatically adds them when applying a firewall action in an Automated Threat Hunting (ATH) playbook in response to a security threat.

Obtaining Stormshield Firewall Credentials

Before you configure the connector in Stellar Cyber, you must obtain the following Stormshield Networks Security firewall user credentials:


- FQDN or IP address of the SNS firewall management interface
- Username and password for a Stormshield Networks Security (SNS) firewall user account with Modify privileges

Adding the Connector in Stellar Cyber


With the access information handy, you can add a Stormshield connector in Stellar Cyber.

To add the Stormshield Network Security (SNS) Firewall connector:

1. Log in to Stellar Cyber.
2. Click **System | INTEGRATIONS | Connectors**. The **Connector Overview** appears.

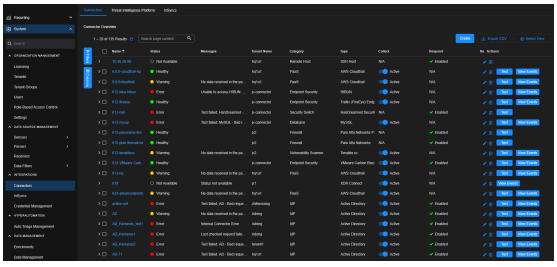


3. Click **Create** and select **Connector**.



The **General** tab of the **Add Connector** screen appears. The information on this tab cannot be changed after you add the connector.

4. Choose **Firewall** from the **Category** dropdown.
5. Choose **Stormshield Network Security (SNS) Firewall** from the **Type** dropdown.

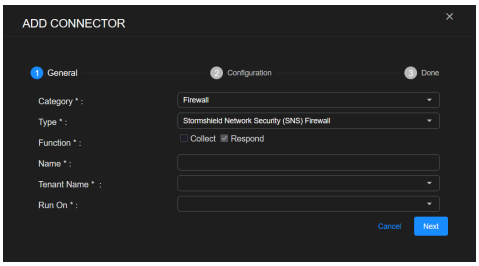


The asterisk (*) indicates a required field.

6. For this connector, the supported **Function** is **Respond**, which is enabled already.
7. Enter a **Name**.

Notes:

- This field does not accept multibyte characters.
- It is recommended that you follow a naming convention such as tenantname-connectortype.


8. Choose a **Tenant Name**. This identifies which tenant is allowed to use the connector.
9. Choose the device on which to run the connector.
10. Click **Next**. The **Configuration** tab appears.

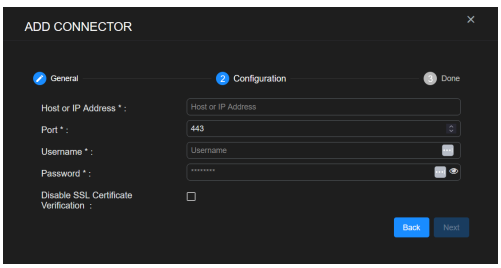

The asterisk (*) indicates a required field.

11. Enter the **Host or IP Address** using the FQDN or IP address of the SNS firewall management interface that you noted above in Obtaining Stormshield Firewall Credentials.
12. Enter the **Port** number. The default is 443.
13. Enter the **Username** and **Password** of the Stormshield user account that you noted above.

14. (Optional) Click **Disable SSL Certificate Verification** if you want to disable SSL certificate verification. Only disable SSL certificates if you have a necessary reason to, otherwise, it is not a good security practice and may expose the connection to security risks.
15. Click **Next**. The final confirmation tab appears.

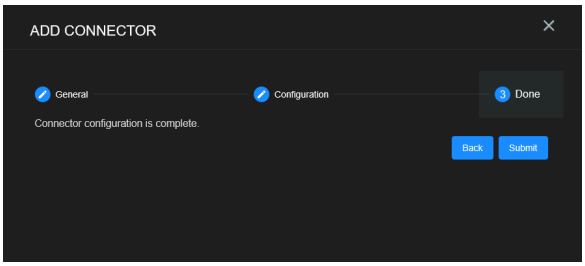

16. Click **Submit**.


    The new connector is immediately active.

Testing the Connector

When you add (or edit) a connector, we recommend that you run a test to validate the connectivity parameters you entered. The test validates authentication and connectivity.

For connectors running on a sensor, Stellar Cyber recommends that you allow 30-60 seconds for new or modified configuration details to be propagated to the sensor before performing a test.

1. Click **System | INTEGRATIONS | Connectors**. The **Connector Overview** appears.

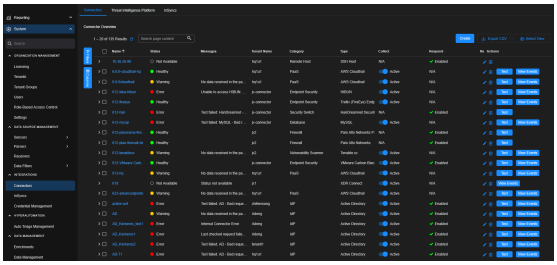

2. Locate the connector by name that you added, or modified, or that you want to test.
3. Click **Test** at the right side of that row. The test runs immediately.

   Note that you may run only one test at a time.

Stellar Cyber conducts a basic connectivity test for the connector and reports a success or failure result. A successful test indicates that you entered all of the connector information correctly.

To aid troubleshooting your connector, the dialog remains open until you explicitly close it by using the **X** button. If the test fails, you can select the button from the same row to review and correct issues.

The connector status is updated every five (5) minutes. A successful test clears the connector status, but if issues persist, the status reverts to failed after a minute.


Repeat the test as needed.

Display sample messages...


Success !



Failure with summary of issue:



Show More example detail:

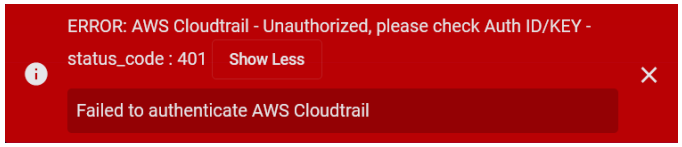

If the test fails, the common HTTP status error codes are as follows:

HTTP Error Code	HTTP Standard Error Name	Explanation	Recommendation
400	Bad Request	This error occurs when there is an error in the connector configuration.	Did you configure the connector correctly?
401	Unauthorized	This error occurs when an authentication credential is invalid or when a user does not have sufficient privileges to access a specific API.	Did you enter your credentials correctly? Are your credentials expired? Are your credentials entitled or licensed for that specific resource?
403	Forbidden	This error occurs when the permission or scope is not correct in a valid credential.	Did you enter your credentials correctly? Do you have the required role or permissions for that credential?
404	Not Found	This error occurs when a URL path does not resolve to an entity.	Did you enter your API URL correctly?
429	Too Many Requests	This error occurs when the API server receives too much traffic or if a user's license or entitlement quota is exceeded.	The server or user license/quota will eventually recover. The connector will periodically retry the query. If this occurs unexpectedly or too often, work with your API provider to investigate the server limits, user licensing, or quotas.

For a full list of codes, refer to HTTP response status codes.

© 2026 Stellar Cyber . All rights reserved.