Stellar Cyber 6.6.0s is now live! Discover all the updates in the release notes!

Configuring Trellix (FireEye) Endpoint Security HX Connectors

This connector allows Stellar Cyber to ingest logs from FireEye (Trellix) HX and add the records to the data lake.

Stellar Cyber connectors with the Collect function (collectors) may skip collecting some data when the ingestion volume is large, which potentially can lead to data loss. This can happen when the processing capacity of the collector is exceeded.

Connector Overview: Trellix (FireEye) Endpoint Security HX

Capabilities

- Collect: **Yes**
- Respond: **No**
- Native Alerts Mapped: **Yes**
- Runs on: **DP**
- Interval: **Configurable**

Collected Data

Content Type	Index	Locating Records
Alerts Hosts Host Sets	• All content type goes to **Syslog** index. • Hosts content also goes to **Assets** index. • Alerts content is mapped from Syslog to the **Alerts** index as noted below.	msg_class: fireeye_alerts

Content Type	Index	Locating Records
		`fireeye_hosts`
		`fireeye_host_sets`
		msg_origin.source: `fireeye_hx`
		msg_origin.vendor `fireeye`
		msg_origin.category: `endpoint`

Domain

https://<Hostname>

where <Hostname> is variable from the configuration of this connector

Response Actions

N/A

Third Party Native Alert Integration Details

Stellar Cyber identifies the FireEye data logged into the **Syslog** index. Select the Alerts content type.

Records of the type Alerts are then normalized, enriched, and mapped to the **Alerts** index. The following fields are included as part of the Stellar Cyber alert description: `indicator.name` and `agent.url`. Each relevant Syslog record is compared against existing records in the Alert index and not added to that index if the values in the following fields match those of an existing record logged in the previous 24 hours: `org_id, tenantid, user.name, host.ip, event.name, file.path, process.path`.

The following four alert types are supported: IOC, MAL, AMSI, and PROCGUARD. Tactic and Technique are based on alert type.

For details, see Integration of Third Party Native Alerts.

Required Credentials and Configurations

- Hostname: This is your Trellix (FireEye) Endpoint Security HX host.
- ID: This is the username with at least api_analyst role.
- Password: This is the password for the above user.

Locating Records

To search the alerts in the Alerts index or to search the Original Records in the Syslog index, use the queries:

- `msg_class: fireeye_alerts AND fireeye.source: AMSI`
- `msg_class: fireeye_alerts AND fireeye.source: IOC`
- `msg_class: fireeye_alerts AND fireeye.source: MAL`
- `msg_class: fireeye_alerts AND fireeye.source: PROCGUARD`

Adding a Trellix (FireEye) Endpoint Security HX Connector

To add a Trellix (FireEye) Endpoint Security HX connector:

1. Obtain credentials
2. Add the connector in Stellar Cyber
3. Test the connector
4. Verify ingestion

Obtaining your Trellix (FireEye) Endpoint Security HX Credentials

Configuring your Stellar Cyber connector requires the following details from your HX deployment:

- Hostname: This is your HX host. Example: hexbyd438-hx-webui-1.hex01.helix.apps.fireeye.com.


- ID: This is the username at least api_analyst role. (Refer to: https://fireeye.dev/docs/endpoint/authentication/) for guidance creating this user and password).
- Password: This is the password for the above user.

The password should not include non-ASCII special characters.


Adding the Connector in Stellar Cyber

With the access information handy, you can add the Trellix (FireEye) Endpoint Security HX connector in Stellar Cyber:

1. Log in to Stellar Cyber.
2. Click **System | INTEGRATIONS | Connectors**. The **Connector Overview** appears.

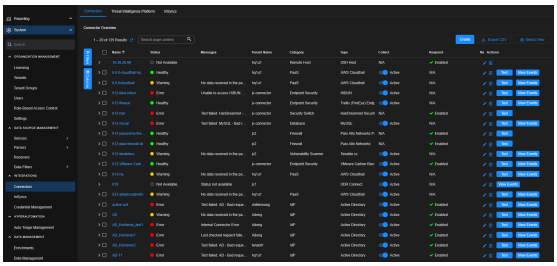


3. Click **Create** and select **Connector**.



The **General** tab of the **Add Connector** screen appears. The information on this tab cannot be changed after you add the connector.

4. Choose **Endpoint Security** from the **Category** dropdown.
5. Choose **Trellix (FireEye) Endpoint Security HX** from the **Type** dropdown.

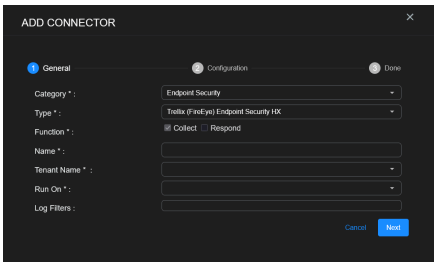

The asterisk (*) indicates a required field.


6. For this connector, the supported **Function** is **Collect**, which is enabled already.
7. Enter a **Name**.

Notes:

- This field does not accept multibyte characters.

- It is recommended that you follow a naming convention such as tenantname-connectortype.

8. Choose a **Tenant Name**. This identifies which tenant is allowed to use the connector.
9. Choose the device on which to run the connector.
10. (Optional) When the **Function** is **Collect**, you can apply **Log Filters**. For information, see Managing Log Filters.
11. Click **Next**. The **Configuration** tab appears.

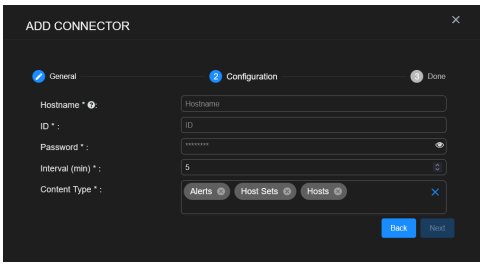

The asterisk (*) indicates a required field.


12. Enter the **Hostname** using the information you noted above in Obtaining your Trellix (FireEye) Endpoint Security HX Credentials.

Do not include https in the Hostname.

13. Enter the **ID** you noted above.
14. Enter the **Password** for this ID.
15. Choose the **Interval (min)**. This is how often the logs are collected.

The interval setting applies to the **Alerts** content type. The logs for **Hosts** and **Host Sets** are queried every 24 hours.

16. Choose the **Content Type**. The logs for **Alerts**, **Host Sets**, and **Hosts** are supported.
17. Click **Next**. The final confirmation tab appears.

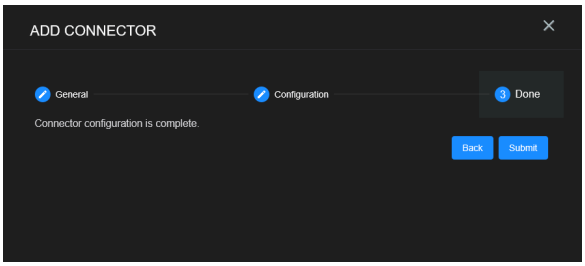

18. Click **Submit**.


The new connector is immediately active.

Testing the Connector

When you add (or edit) a connector, we recommend that you run a test to validate the connectivity parameters you entered. The test validates authentication and connectivity.

For connectors running on a sensor, Stellar Cyber recommends that you allow 30-60 seconds for new or modified configuration details to be propagated to the sensor before performing a test.

1. Click **System | INTEGRATIONS | Connectors**. The **Connector Overview** appears.

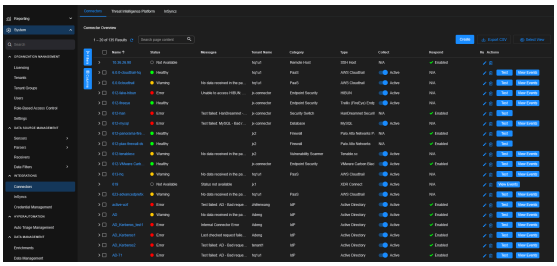

2. Locate the connector by name that you added, or modified, or that you want to test.
3. Click **Test** at the right side of that row. The test runs immediately.

Note that you may run only one test at a time.

Stellar Cyber conducts a basic connectivity test for the connector and reports a success or failure result. A successful test indicates that you entered all of the connector information correctly.

To aid troubleshooting your connector, the dialog remains open until you explicitly close it by using the **X** button. If the test fails, you can select the button from the same row to review and correct issues.

The connector status is updated every five (5) minutes. A successful test clears the connector status, but if issues persist, the status reverts to failed after a minute.


Repeat the test as needed.

Display sample messages...


Success !



Failure with summary of issue:



Show More example detail:

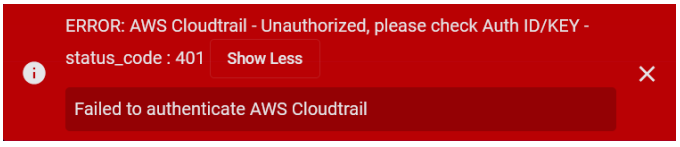

If the test fails, the common HTTP status error codes are as follows:

HTTP Error Code	HTTP Standard Error Name	Explanation	Recommendation
400	Bad Request	This error occurs when there is an error in the connector configuration.	Did you configure the connector correctly?

HTTP Error Code	HTTP Standard Error Name	Explanation	Recommendation
401	Unauthorized	This error occurs when an authentication credential is invalid or when a user does not have sufficient privileges to access a specific API.	Did you enter your credentials correctly? Are your credentials expired? Are your credentials entitled or licensed for that specific resource?
403	Forbidden	This error occurs when the permission or scope is not correct in a valid credential.	Did you enter your credentials correctly? Do you have the required role or permissions for that credential?
404	Not Found	This error occurs when a URL path does not resolve to an entity.	Did you enter your API URL correctly?
429	Too Many Requests	This error occurs when the API server receives too much traffic or if a user's license or entitlement quota is exceeded.	The server or user license/quota will eventually recover. The connector will periodically retry the query. If this occurs unexpectedly or too often, work with your API provider to investigate the server limits, user licensing, or quotas.

For a full list of codes, refer to HTTP response status codes.

Verifying Ingestion

To verify ingestion:

1. Select **Threat Hunting**.

   The **Interflow Search** tab appears.

2. Change the **Indices** for the type of content you collected:
   - For **Alerts**, **Host Sets**, and **Hosts**, change the **Indices** to **Syslog**.
   - For **Hosts** only, change the **Indices** to **Assets**.

   The table immediately updates to show ingested Interflow records.

© 2026 Stellar Cyber . All rights reserved.