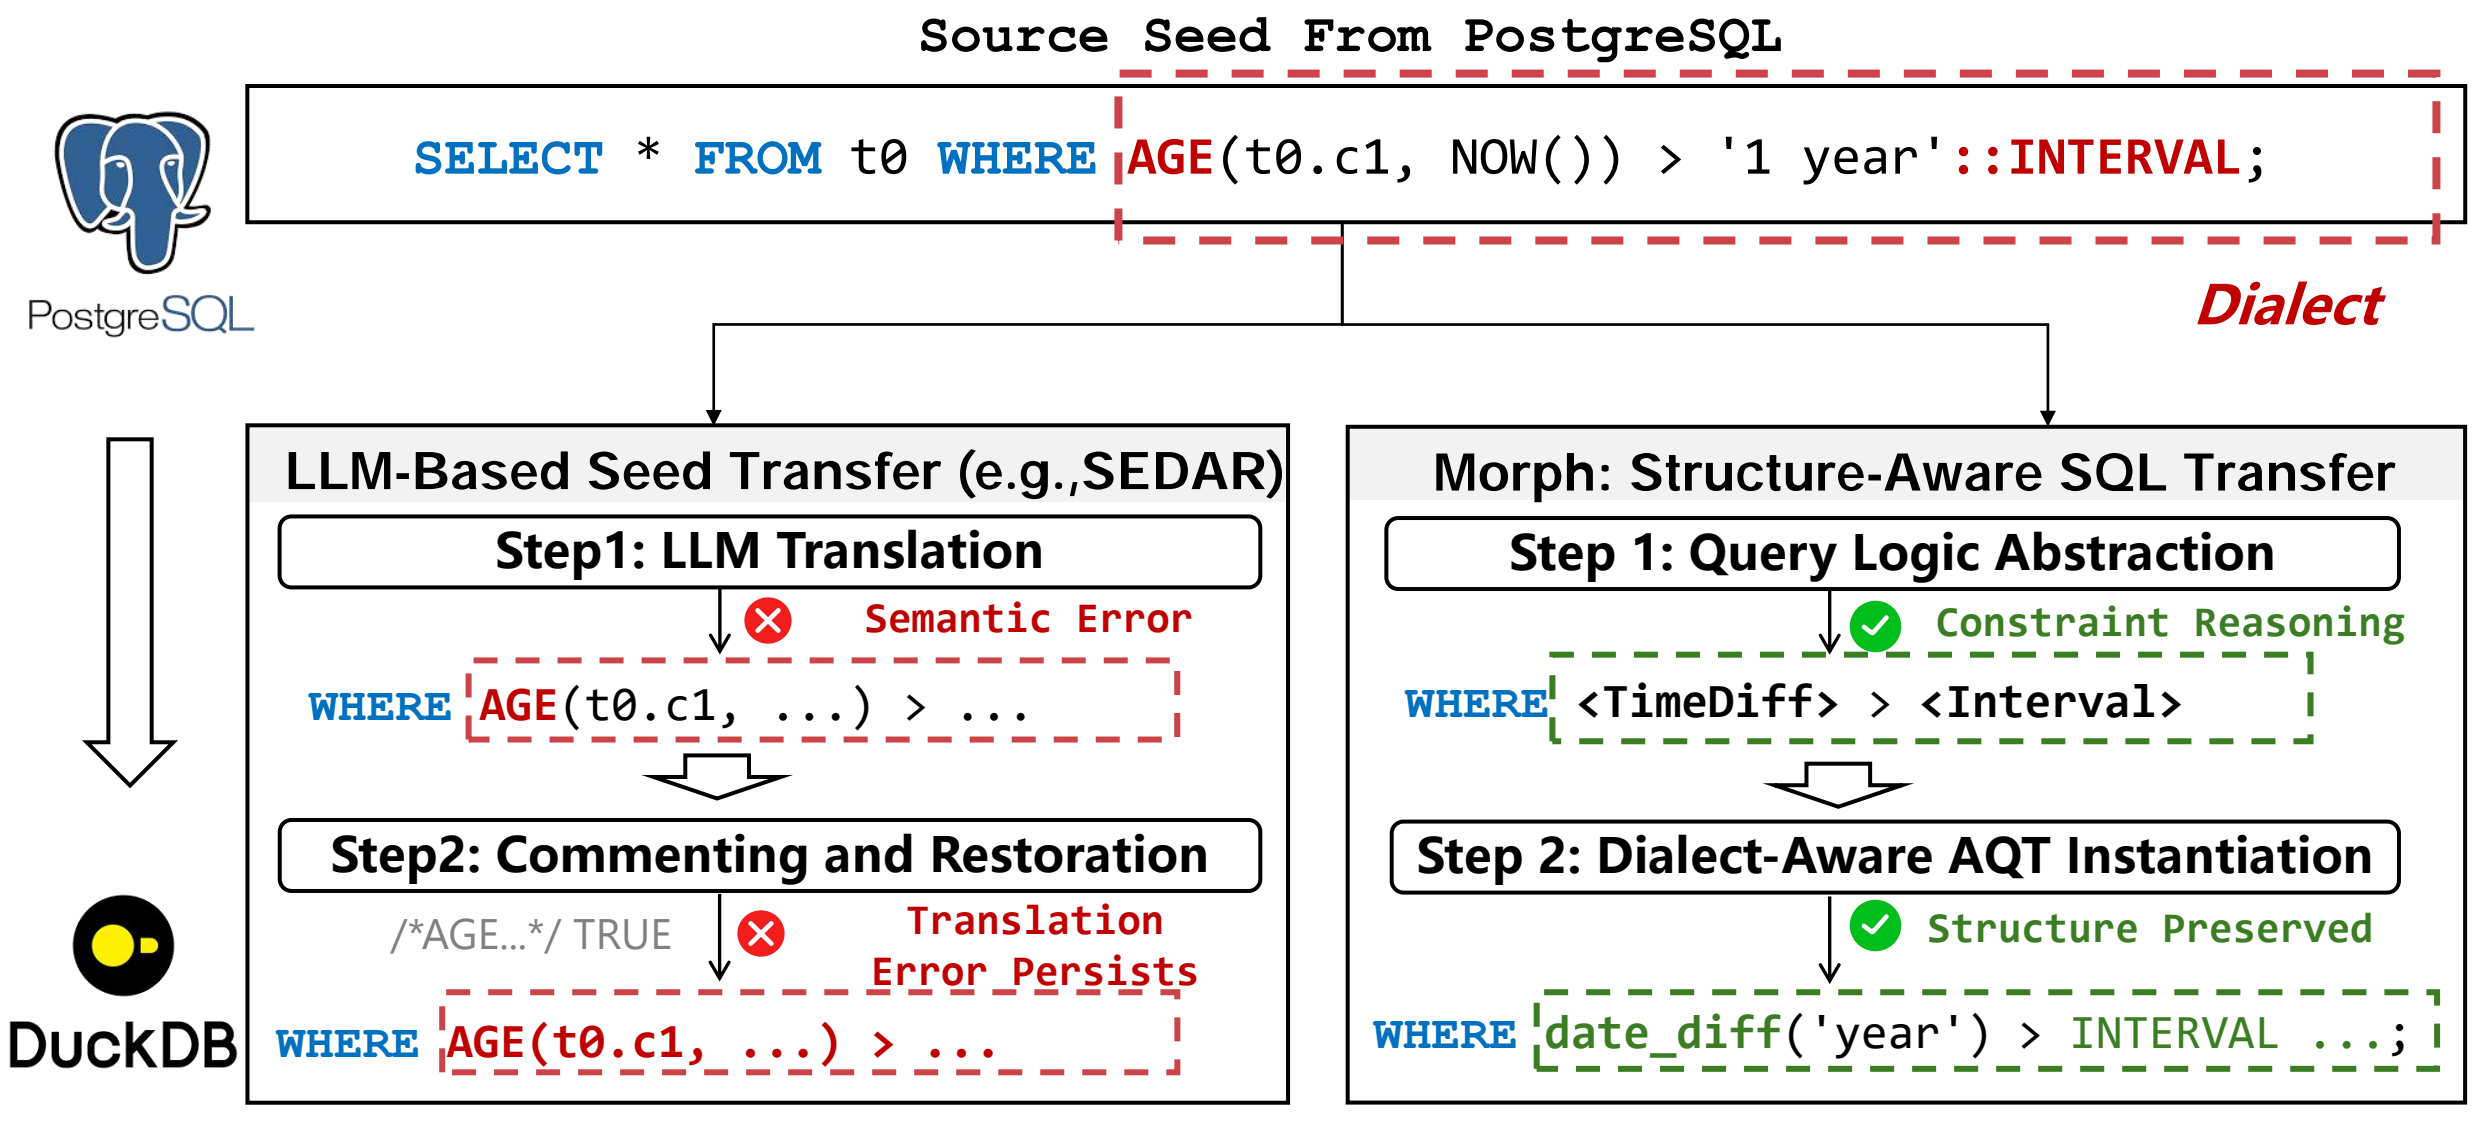

Source Seed From PostgreSQL
SELECT * FROM t0 WHERE AGE(t0.c1, NOW()) > '1 year'::INTERVAL;
PostgreSQL
Dialect
LLM-Based Seed Transfer (e.g.,SEDAR)
Step1: LLM Translation
Semantic Error
WHERE AGE(t0.c1, ...) > ...
Step2: Commenting and Restoration
/*AGE...*/ TRUE
Translation Error Persists
WHERE AGE(t0.c1, ...) > ...
DuckDB
Morph: Structure-Aware SQL Transfer
Step 1: Query Logic Abstraction
Constraint Reasoning
WHERE <TimeDiff> > <Interval>
Step 2: Dialect-Aware AQT Instantiation
Structure Preserved
WHERE date_diff('year') > INTERVAL ...;