

1.-

```
MINGW64:/c/Users/Usuario/Documents/examenEndes/gitAxelSchmitz
$ cat > PrimerFichero.txt
Axel Schmitz

Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes/gitAxelSchmitz
$ dir
PrimerFichero.txt

Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes/gitAxelSchmitz
$ git --global user.name Axel Schmitz
unknown option: --global
usage: git [-v | --version] [-h | --help] [-C <path>] [-c <name>=<value>]
          [--exec-path[=<path>]] [--html-path] [--man-path] [--info-path]
          [-p | --paginate | -P | --no-pager] [--no-replace-objects] [--bare]
          [--git-dir=<path>] [--work-tree=<path>] [--namespace=<name>]
          [--config-env=<name>=<envvar>] <command> [<args>]

Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes/gitAxelSchmitz
$ git config --global user.name "Axel Schmitz"

Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes/gitAxelSchmitz
$ git config --global user.mail "axelschmitz1@proton.me"

Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes/gitAxelSchmitz
$
```

3-4.-

```
MINGW64:/c/Users/Usuario/Documents/examenEndes
Examen_Git PrimerFichero.txt TercerFichero.txt ficheroRamaDos.txt

Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes/gitAxelSchmitz (master)
$ cd ..

Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes
$ dir
Arduino entrega gitAxelSchmitz

Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes
$ git clone https://github.com/charlyschmitz/Examen_Git.git
Cloning into 'Examen_Git'...
remote: Enumerating objects: 3, done.
remote: Counting objects: 100% (3/3), done.
remote: Compressing objects: 100% (2/2), done.
remote: Total 3 (delta 0), reused 0 (delta 0), pack-reused 0
Receiving objects: 100% (3/3), done.

Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes
$ dir
Arduino Examen_Git entrega gitAxelSchmitz

Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes
$
```

4.-

```
MINGW64:/c/Users/Usuario/Documents/examenEndes/gitAxelSchmitz
No commits yet

Changes to be committed:
  (use "git rm --cached <file>..." to unstage)
    new file:   PrimerFichero.txt

Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes/gitAxelSchmitz (master)
$ cat > SegundoFichero.txt
test

Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes/gitAxelSchmitz (master)
$ git status
On branch master

No commits yet

Changes to be committed:
  (use "git rm --cached <file>..." to unstage)
    new file:   PrimerFichero.txt

Untracked files:
  (use "git add <file>..." to include in what will be committed)
    SegundoFichero.txt

Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes/gitAxelSchmitz (master)
$ |
```

5.-

```
MINGW64:/c/Users/Usuario/Documents/examenEndes/gitAxelSchmitz
$ cat > SegundoFichero.txt
test

Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes/gitAxelSchmitz (master)
$ git status
On branch master

No commits yet


Changes to be committed:
  (use "git rm --cached <file>..." to unstage)
    new file:   PrimerFichero.txt

Untracked files:
  (use "git add <file>..." to include in what will be committed)
    SegundoFichero.txt

Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes/gitAxelSchmitz (master)
$ git commit PrimerFichero.txt -m 'versión 1'
warning: in the working copy of 'PrimerFichero.txt', LF will be replaced by CRLF the n
ext time Git touches it
[master (root-commit) edd5038] versión 1
 1 file changed, 2 insertions(+)
 create mode 100644 PrimerFichero.txt

Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes/gitAxelSchmitz (master)
$ |
```

5b.-

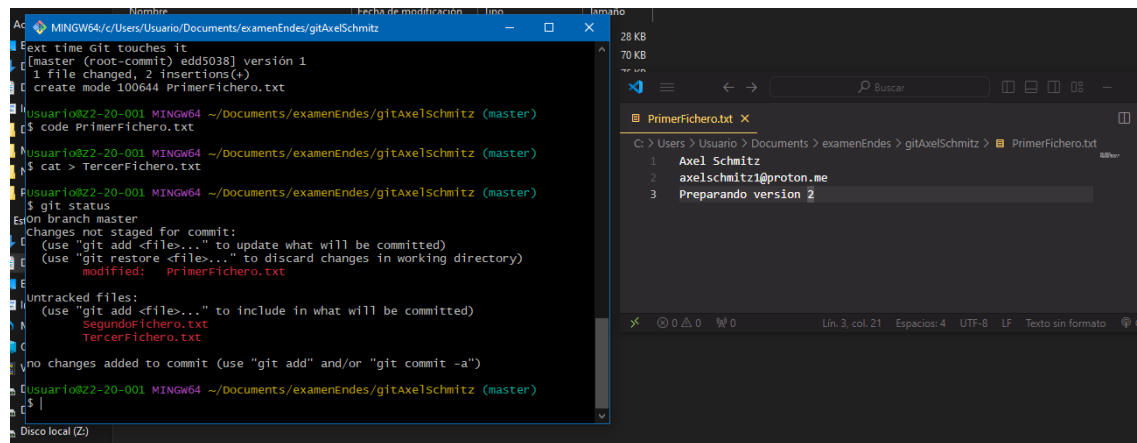

The screenshot shows a terminal window on the left and a file editor on the right. The terminal window is titled 'MINGW64/c/Users/Usuario/Documents/examenEndes/gitAxelSchmitz' and shows the following commands and output:

```
text time Git touches it
[master (root-commit) add5038] versión 1
1 file changed, 2 insertions(+)
create mode 100644 PrimerFichero.txt

Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes/gitAxelSchmitz (master)
c$ code PrimerFichero.txt

Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes/gitAxelSchmitz (master)
$ cat > TercerFichero.txt

Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes/gitAxelSchmitz (master)
$ git status
On branch master
changes not staged for commit:
  (use "git add <file>..." to update what will be committed)
  (use "git restore <file>..." to discard changes in working directory)
        modified:   PrimerFichero.txt


Untracked files:
  (use "git add <file>..." to include in what will be committed)
        SegundoFichero.txt
        TercerFichero.txt

no changes added to commit (use "git add" and/or "git commit -a")
Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes/gitAxelSchmitz (master)
$ |
```

The file editor on the right shows the file 'PrimerFichero.txt' with the following content:

```
1 Axel Schmitz
2 axelschmitz1@proton.me
3 Preparando version 2
```

6.-

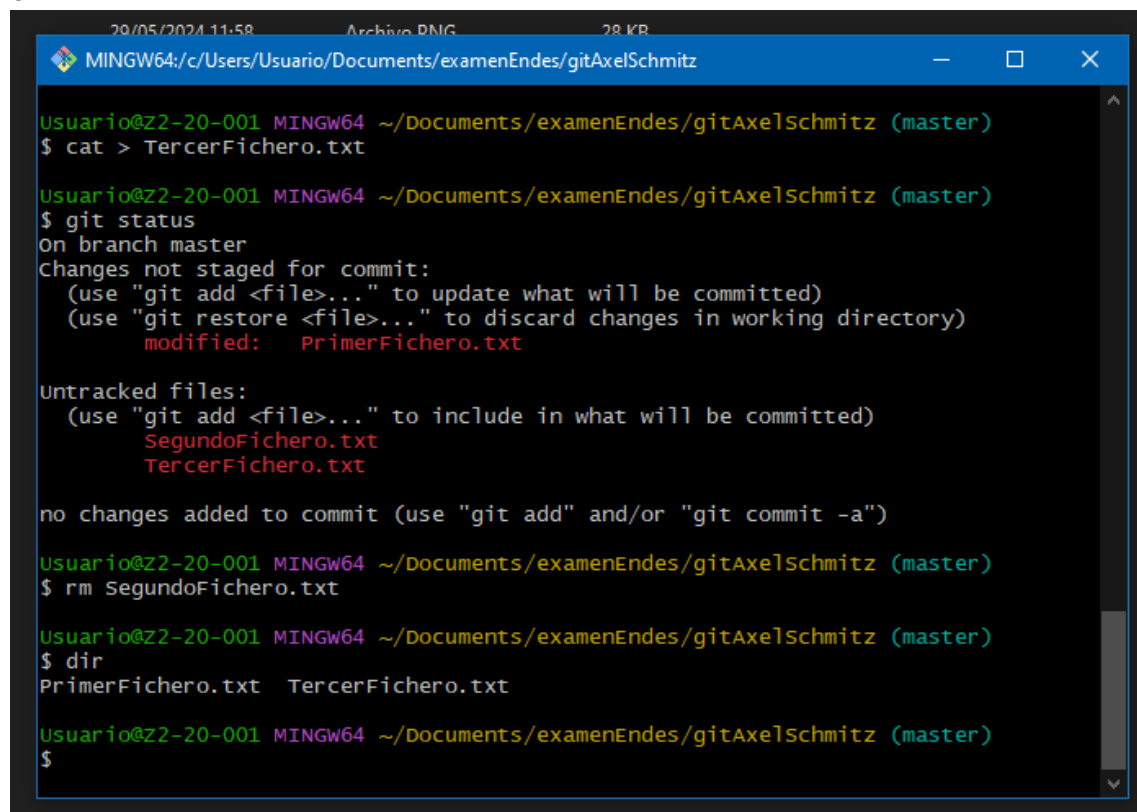

The screenshot shows a terminal window titled 'MINGW64/c/Users/Usuario/Documents/examenEndes/gitAxelSchmitz' with the following commands and output:

```
Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes/gitAxelSchmitz (master)
$ cat > TercerFichero.txt

Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes/gitAxelSchmitz (master)
$ git status
On branch master
changes not staged for commit:
  (use "git add <file>..." to update what will be committed)
  (use "git restore <file>..." to discard changes in working directory)
        modified:   PrimerFichero.txt

Untracked files:
  (use "git add <file>..." to include in what will be committed)
        SegundoFichero.txt
        TercerFichero.txt

no changes added to commit (use "git add" and/or "git commit -a")

Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes/gitAxelSchmitz (master)
$ rm SegundoFichero.txt

Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes/gitAxelSchmitz (master)
$ dir
PrimerFichero.txt  TercerFichero.txt

Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes/gitAxelSchmitz (master)
$
```

7.-

```

MINGW64:/c/Users/Usuario/Documents/examenEndes/gitAxelSchmitz
no changes added to commit (use "git add" and/or "git commit -a")
Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes/gitAxelSchmitz (master)
$ git commit -m 'version2'
On branch master
changes not staged for commit:
  (use "git add <file>..." to update what will be committed)
  (use "git restore <file>..." to discard changes in working directory)
        modified:   PrimerFichero.txt

Untracked files:
  (use "git add <file>..." to include in what will be committed)
        TercerFichero.txt

no changes added to commit (use "git add" and/or "git commit -a")
Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes/gitAxelSchmitz (master)
$ git commit --help
Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes/gitAxelSchmitz (master)
$ git commit -a -m 'version2'
warning: in the working copy of 'PrimerFichero.txt', LF will be replaced by CRLF
the next time Git touches it
[master 8348ba8] version2
 1 file changed, 2 insertions(+), 1 deletion(-)
Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes/gitAxelSchmitz (master)
$

```

8.-

```

20/05/2024 11:58 Archivo PNG 78 KB
MINGW64:/c/Users/Usuario/Documents/examenEndes/gitAxelSchmitz
Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes/gitAxelSchmitz (master)
$ git commit -a -m 'version2'
warning: in the working copy of 'PrimerFichero.txt', LF will be replaced by CRLF
the next time Git touches it
[master 8348ba8] version2
 1 file changed, 2 insertions(+), 1 deletion(-)

Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes/gitAxelSchmitz (master)
$ git history
git: 'history' is not a git command. see 'git --help'.

Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes/gitAxelSchmitz (master)
$ git log
commit 8348ba858e8c5cce64e0242988d4c89df0664f6c (HEAD -> master)
Author: Axel Schmitz <axelschmitz1@proton.me>
Date:   Wed May 29 12:14:08 2024 +0200

    version2

commit edd5038ed9fee542739b38e02c67f0b3021d71fd
Author: Axel Schmitz <axelschmitz1@proton.me>
Date:   Wed May 29 12:05:32 2024 +0200

    versión 1

Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes/gitAxelSchmitz (master)
$

```

10.-

```
MINGW64:/c/Users/Usuario/Documents/examenEndes/gitAxelSchmitz
$ git add TercerFichero.txt

Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes/gitAxelSchmitz (master)
$ git status
On branch master
changes to be committed:
  (use "git restore --staged <file>..." to unstage)
    new file:   TercerFichero.txt

Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes/gitAxelSchmitz (master)
$ git restore --staged TercerFichero.txt

Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes/gitAxelSchmitz (master)
$ dir
PrimerFichero.txt  TercerFichero.txt

Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes/gitAxelSchmitz (master)
$ git status
On branch master
Untracked files:
  (use "git add <file>..." to include in what will be committed)
    TercerFichero.txt

nothing added to commit but untracked files present (use "git add" to track)

Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes/gitAxelSchmitz (master)
$ |
```

11.-

```
MINGW64:/c/Users/Usuario/Documents/examenEndes/gitAxelSchmitz
commit edd5038ed9fee542739b38e02c67f0b3021d71fd
Author: Axel Schmitz <axelschmitz1@proton.me>
Date:   Wed May 29 12:05:32 2024 +0200

    versión 1

Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes/gitAxelSchmitz (master)
$ git log --stat
commit 8348ba858e8c5cce64e0242988d4c89df0664f6c (HEAD -> master)
Author: Axel Schmitz <axelschmitz1@proton.me>
Date:   Wed May 29 12:14:08 2024 +0200

    version2

PrimerFichero.txt | 3 ++-
1 file changed, 2 insertions(+), 1 deletion(-)


commit edd5038ed9fee542739b38e02c67f0b3021d71fd
Author: Axel Schmitz <axelschmitz1@proton.me>
Date:   Wed May 29 12:05:32 2024 +0200

    versión 1

PrimerFichero.txt | 2 ++
1 file changed, 2 insertions(+)

Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes/gitAxelSchmitz (master)
$
```

12.-

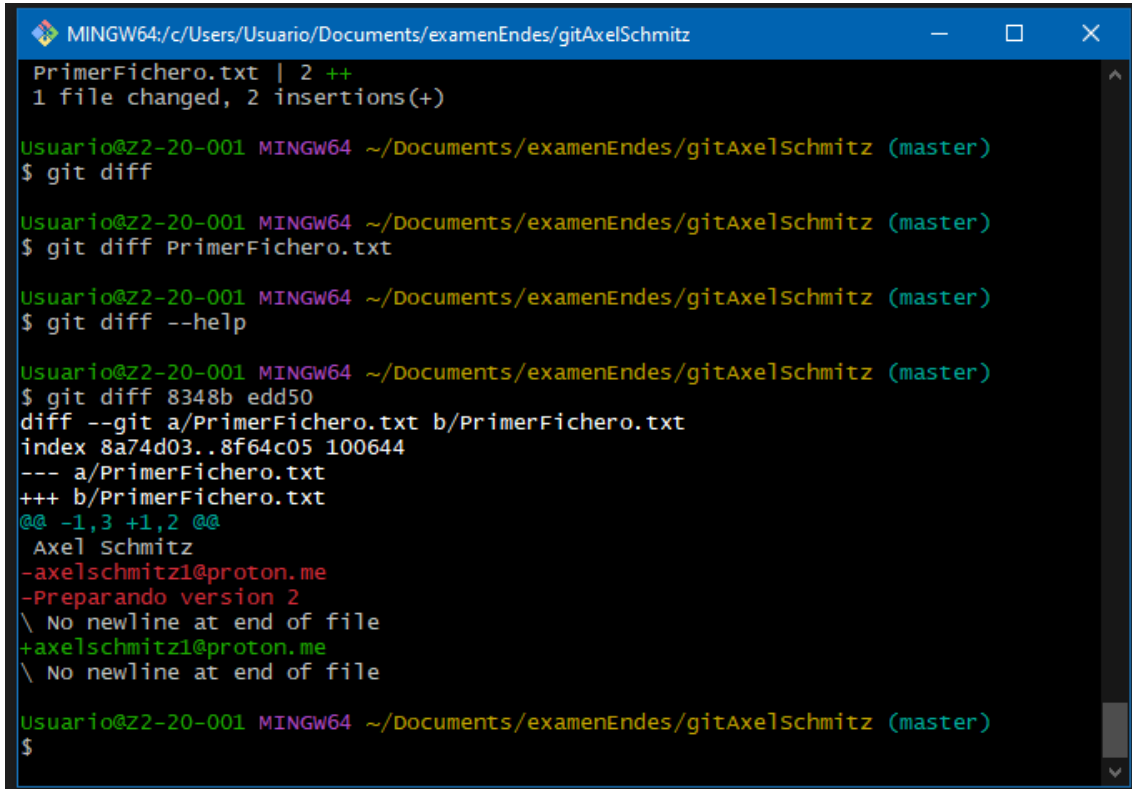

```
MINGW64:/c/Users/Usuario/Documents/examenEndes/gitAxelSchmitz
PrimerFichero.txt | 2 ++
1 file changed, 2 insertions(+)

Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes/gitAxelSchmitz (master)
$ git diff

Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes/gitAxelSchmitz (master)
$ git diff PrimerFichero.txt

Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes/gitAxelSchmitz (master)
$ git diff --help

Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes/gitAxelSchmitz (master)
$ git diff 8348b edd50
diff --git a/PrimerFichero.txt b/PrimerFichero.txt
index 8a74d03..8f64c05 100644
--- a/PrimerFichero.txt
+++ b/PrimerFichero.txt
@@ -1,3 +1,2 @@
 Axel Schmitz
-axelschmitz1@proton.me
-Preparando version 2
 \ No newline at end of file
+axelschmitz1@proton.me
 \ No newline at end of file

Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes/gitAxelSchmitz (master)
$
```

14.-

```
MINGW64; c:/Users/Usuario/Documents/examenEndes/gitAxelSchmitz
Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes/gitAxelSchmitz (master)
$ git log
commit 76a51a3693d0fda565516ace3956d97bbbd6392a (HEAD -> master)
Author: Axel Schmitz <axelschmitz1@proton.me>
Date: Wed May 29 12:37:11 2024 +0200

    version3

commit 8348ba858e8c5cce64e0242988d4c89df0664f6c
Author: Axel Schmitz <axelschmitz1@proton.me>
Date: Wed May 29 12:14:08 2024 +0200

    version2

commit edd5038ed9fee542739b38e02c67f0b3021d71fd
Author: Axel Schmitz <axelschmitz1@proton.me>
Date: Wed May 29 12:05:32 2024 +0200

    versión 1

Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes/gitAxelSchmitz (master)
$ git diff 76a51 8348b
diff --git a/PrimerFichero.txt b/PrimerFichero.txt
index 40f3791..8a74d03 100644
--- a/PrimerFichero.txt
+++ b/PrimerFichero.txt
@@ -1,4 +1,3 @@
 Axel Schmitz
 axelschmitz1@proton.me
 -Preparando version 2
 -Preparando version 3
 \ No newline at end of file
+Preparando version 2
 \ No newline at end of file

Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes/gitAxelSchmitz (master)
$ git diff 76a51a edd50
diff --git a/PrimerFichero.txt b/PrimerFichero.txt
index 40f3791..8f64c05 100644
--- a/PrimerFichero.txt
+++ b/PrimerFichero.txt
@@ -1,4 +1,2 @@
 Axel Schmitz
 -axelschmitz1@proton.me
 -Preparando version 2
 -Preparando version 3
 \ No newline at end of file
+axelschmitz1@proton.me
 \ No newline at end of file

Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes/gitAxelSchmitz (master)
$
```

```
MINGW64: c:/Users/Usuario/Documents/examenEndes/gitAxelSchmitz
no changes added to commit (use "git add" and/or "git commit -a")
Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes/gitAxelSchmitz (master)
$ git commit -m 'version2'
on branch master
changes not staged for commit:
  (use "git add <file>..." to update what will be committed)
  (use "git restore <file>..." to discard changes in working directory)
        modified:   PrimerFichero.txt

Untracked files:
  (use "git add <file>..." to include in what will be committed)
        TercerFichero.txt

no changes added to commit (use "git add" and/or "git commit -a")
Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes/gitAxelSchmitz (master)
$ git commit --help
Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes/gitAxelSchmitz (master)
$ git commit -a -m 'version2'
warning: in the working copy of 'PrimerFichero.txt', LF will be replaced by CRLF
the next time Git touches it
[master 8348ba8] version2
1 file changed, 2 insertions(+), 1 deletion(-)

Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes/gitAxelSchmitz (master)
$
```

2.-

```
MINGW64: c:/Users/Usuario/Documents/examenEndes/gitAxelSchmitz
[-p | --paginate | -P | --no-pager] [--no-replace-objects] [--bare]
[--git-dir=<path>] [--work-tree=<path>] [--namespaces=<name>]
[--config-env=<name>=<envvar>] <command> [<args>]

Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes/gitAxelSchmitz
$ git config --global user.name "Axel Schmitz"
Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes/gitAxelSchmitz
$ git config --global user.email "axelschmitz1@proton.me"
Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes/gitAxelSchmitz
$ dir
PrimerFichero.txt

Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes/gitAxelSchmitz
$ git init
Initialized empty Git repository in C:/Users/Usuario/Documents/examenEndes/gitAxelSchmitz/.git/
$ code PrimerFichero.txt
Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes/gitAxelSchmitz (master)
$
```

```
PrimerFichero.txt
C: > Users > Usuario > Documents > examenEndes > gitAxelSchmitz > PrimerFichero.txt
1 Axel Schmitz
2 axelschmitz1@proton.me
```


2a.-

```
MINGW64:/c/Users/Usuario/Documents/examenEndes/gitAxelSchmitz
--- a/PrimerFichero.txt
+++ b/PrimerFichero.txt
@@ -1,4 +1,2 @@
 Axel Schmitz
-axelschmitz1@proton.me
-Preparando version 2
-Preparando version 3
\ No newline at end of file
+axelschmitz1@proton.me
\ No newline at end of file

Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes/gitAxelSchmitz (master)
$ git reset --hard version1
fatal: ambiguous argument 'version1': unknown revision or path not in the working tree.
Use '--' to separate paths from revisions, like this:
'git <command> [<revision>...] -- [<file>...]'

Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes/gitAxelSchmitz (master)
$ git branch RamaDos

Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes/gitAxelSchmitz (master)
$ git checkout RamaDos
Switched to branch 'RamaDos'

Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes/gitAxelSchmitz (RamaDos)
$ |
```


2b.-

```
MINGW64:/c/Users/Usuario/Documents/examenEndes/gitAxelSchmitz
--[no-]create-reflog  create the branch's reflog
--[no-]edit-description
                        edit the description for the branch
-f, --[no-]force      force creation, move/rename, deletion
--merged <commit>    print only branches that are merged
--no-merged <commit> print only branches that are not merged
--[no-]column[=<style>]
                        list branches in columns
--[no-]sort <key>     field name to sort on
--[no-]points-at <object>
                        print only branches of the object
-i, --[no-]ignore-case
                        sorting and filtering are case insensitive
--[no-]recurse-submodules
                        recurse through submodules
--[no-]format <format>
                        format to use for the output

Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes/gitAxelSchmitz (RamaDos)
$ git branch -l
* RamaDos
  master

Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes/gitAxelSchmitz (RamaDos)
$ |
```

2c.-

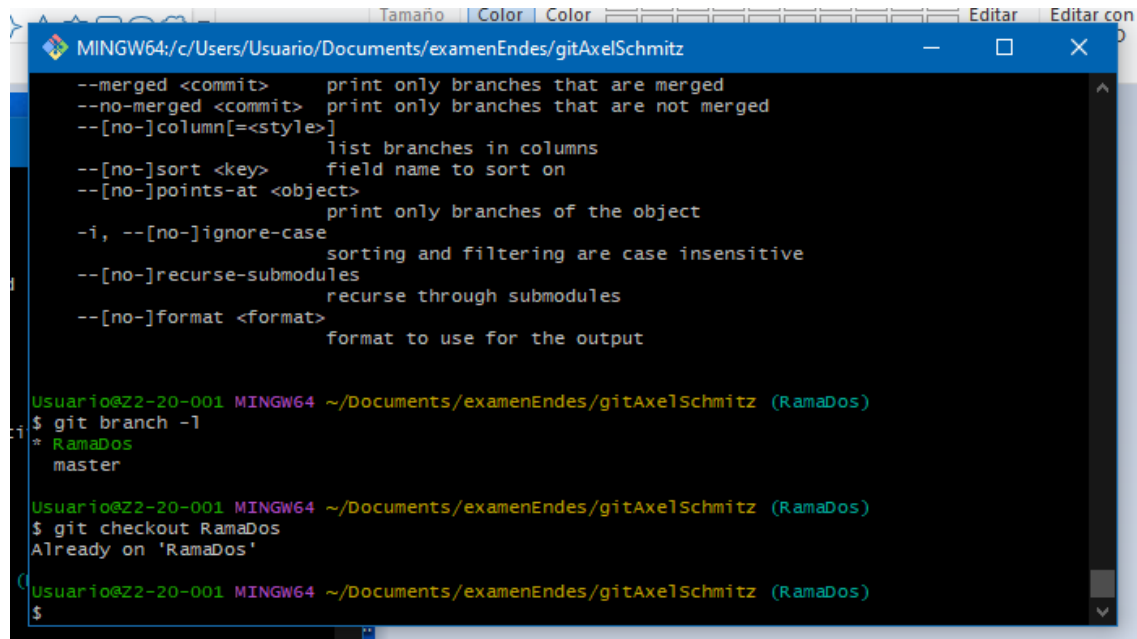


```
MINGW64/c/Users/Usuario/Documents/examenEndes/gitAxelSchmitz
--merged <commit>      print only branches that are merged
--no-merged <commit>   print only branches that are not merged
--[no-]column[=<style>]
                        list branches in columns
--[no-]sort <key>      field name to sort on
--[no-]points-at <object>
                        print only branches of the object
-i, --[no-]ignore-case
                        sorting and filtering are case insensitive
--[no-]recurse-submodules
                        recurse through submodules
--[no-]format <format>
                        format to use for the output

Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes/gitAxelSchmitz (RamaDos)
$ git branch -l
* RamaDos
  master

Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes/gitAxelSchmitz (RamaDos)
$ git checkout RamaDos
Already on 'RamaDos'

Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes/gitAxelSchmitz (RamaDos)
$
```

2d.-

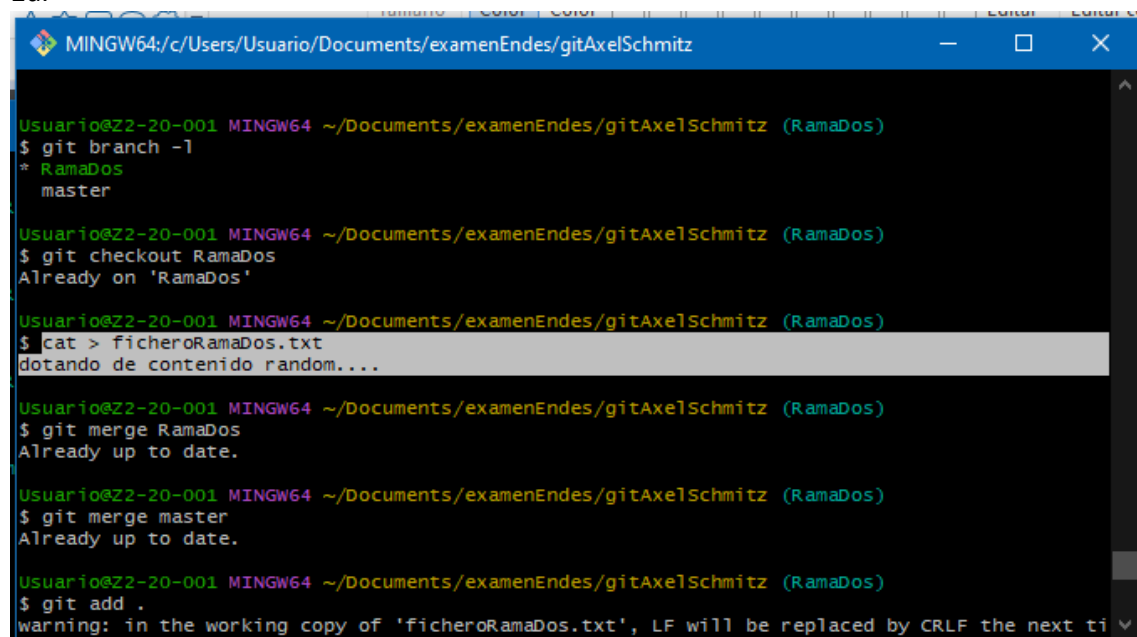

```
MINGW64/c/Users/Usuario/Documents/examenEndes/gitAxelSchmitz

Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes/gitAxelSchmitz (RamaDos)
$ git branch -l
* RamaDos
  master

Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes/gitAxelSchmitz (RamaDos)
$ git checkout RamaDos
Already on 'RamaDos'

Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes/gitAxelSchmitz (RamaDos)
$ cat > ficheroRamaDos.txt
dotando de contenido random...

Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes/gitAxelSchmitz (RamaDos)
$ git merge RamaDos
Already up to date.

Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes/gitAxelSchmitz (RamaDos)
$ git merge master
Already up to date.

Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes/gitAxelSchmitz (RamaDos)
$ git add .
warning: in the working copy of 'ficheroRamaDos.txt', LF will be replaced by CRLF the next ti
```

2e.-

```
MINGW64:/c/Users/Usuario/Documents/examenEndes/gitAxelSchmitz
create mode 100644 ficheroRamaDos.txt

Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes/gitAxelSchmitz (RamaDos)
$ git merge master
Already up to date.

Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes/gitAxelSchmitz (RamaDos)
$ git merge RamaDos/master
merge: RamaDos/master - not something we can merge

Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes/gitAxelSchmitz (RamaDos)
$ git checkout master
Switched to branch 'master'

Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes/gitAxelSchmitz (master)
$ git merge RamaDos
Updating 76a51a3..8d94c62
Fast-forward
 TercerFichero.txt | 3 +++
 ficheroRamaDos.txt | 1 +
 2 files changed, 4 insertions(+)
 create mode 100644 TercerFichero.txt
 create mode 100644 ficheroRamaDos.txt

Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes/gitAxelSchmitz (master)
$
```

3.4.-

```
MINGW64:/c/Users/Usuario/Documents/examenEndes
Examen_Git PrimerFichero.txt TercerFichero.txt ficheroRamaDos.txt

Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes/gitAxelSchmitz (master)
$ cd ..


Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes
$ dir
Arduino entrega gitAxelSchmitz

Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes
$ git clone https://github.com/charlyschmitz/Examen_Git.git
Cloning into 'Examen_Git'...
remote: Enumerating objects: 3, done.
remote: Counting objects: 100% (3/3), done.
remote: Compressing objects: 100% (2/2), done.
remote: Total 3 (delta 0), reused 0 (delta 0), pack-reused 0
Receiving objects: 100% (3/3), done.

Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes
$ dir
Arduino Examen_Git entrega gitAxelSchmitz

Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes
$
```

3.5.-

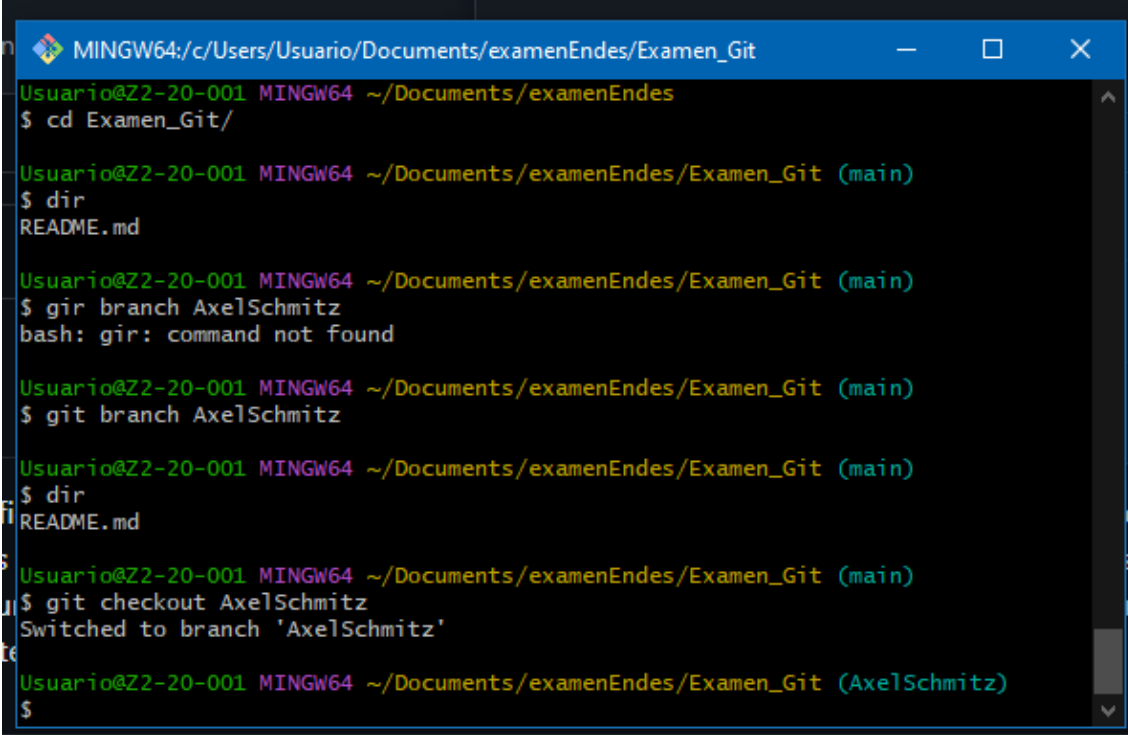

```
MINGW64:/c/Users/Usuario/Documents/examenEndes/Examen_Git
Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes
$ cd Examen_Git/

Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes/Examen_Git (main)
$ dir
README.md

Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes/Examen_Git (main)
$ gir branch AxelSchmitz
bash: gir: command not found

Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes/Examen_Git (main)
$ git branch AxelSchmitz

Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes/Examen_Git (main)
$ dir
README.md

Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes/Examen_Git (main)
$ git checkout AxelSchmitz
Switched to branch 'AxelSchmitz'

Usuario@Z2-20-001 MINGW64 ~/Documents/examenEndes/Examen_Git (AxelSchmitz)
$
```