A Surrogate Model for Reducing the Computational Cost of Neuron Simulations

○ Haruki Munechika, Taira Kobayashi
Grad Sch of Sci and Tech for Innov, Yamaguchi University (f032vbw@yamaguchi-u.ac.jp)

3P-479

Introduction

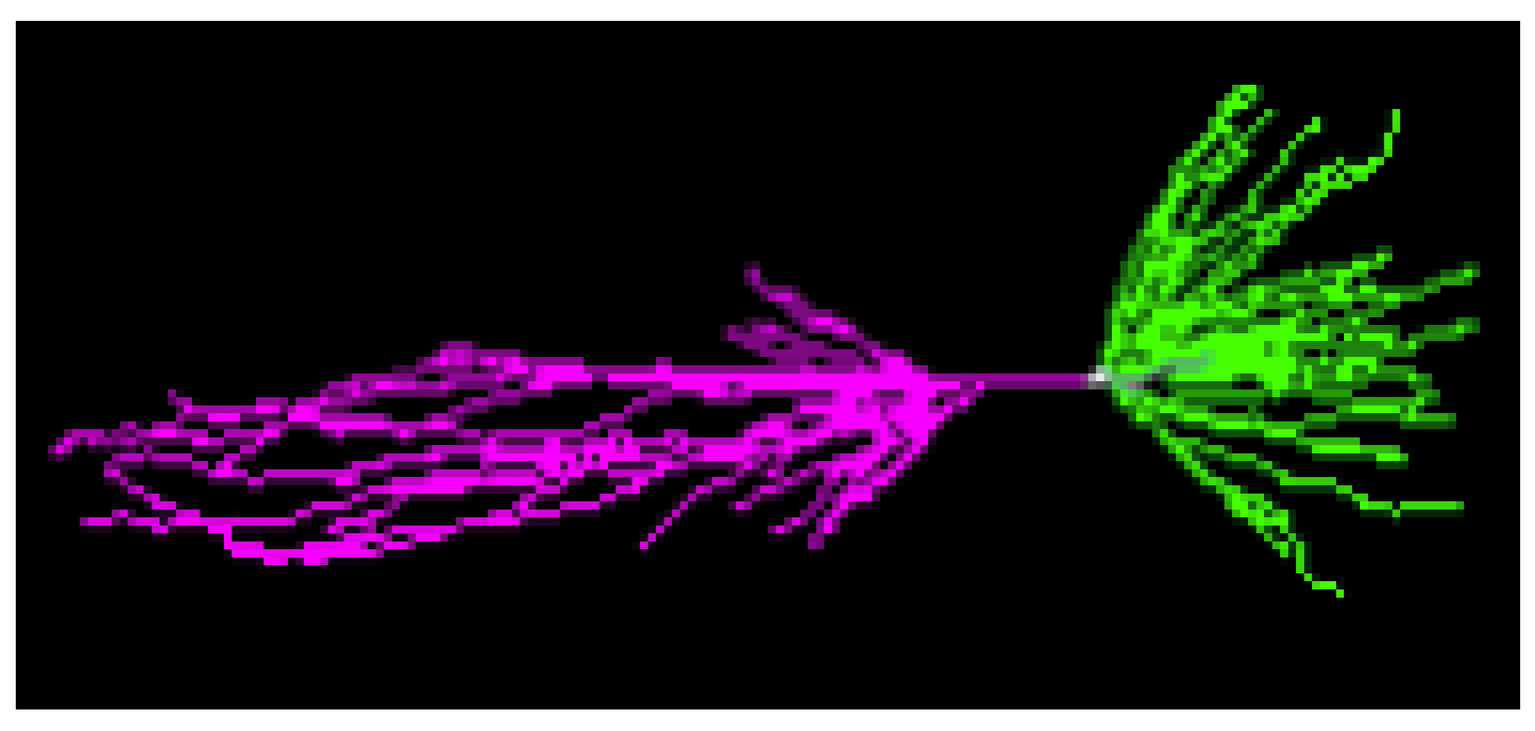

guinea pig CA3 pyramidal neuron[1]

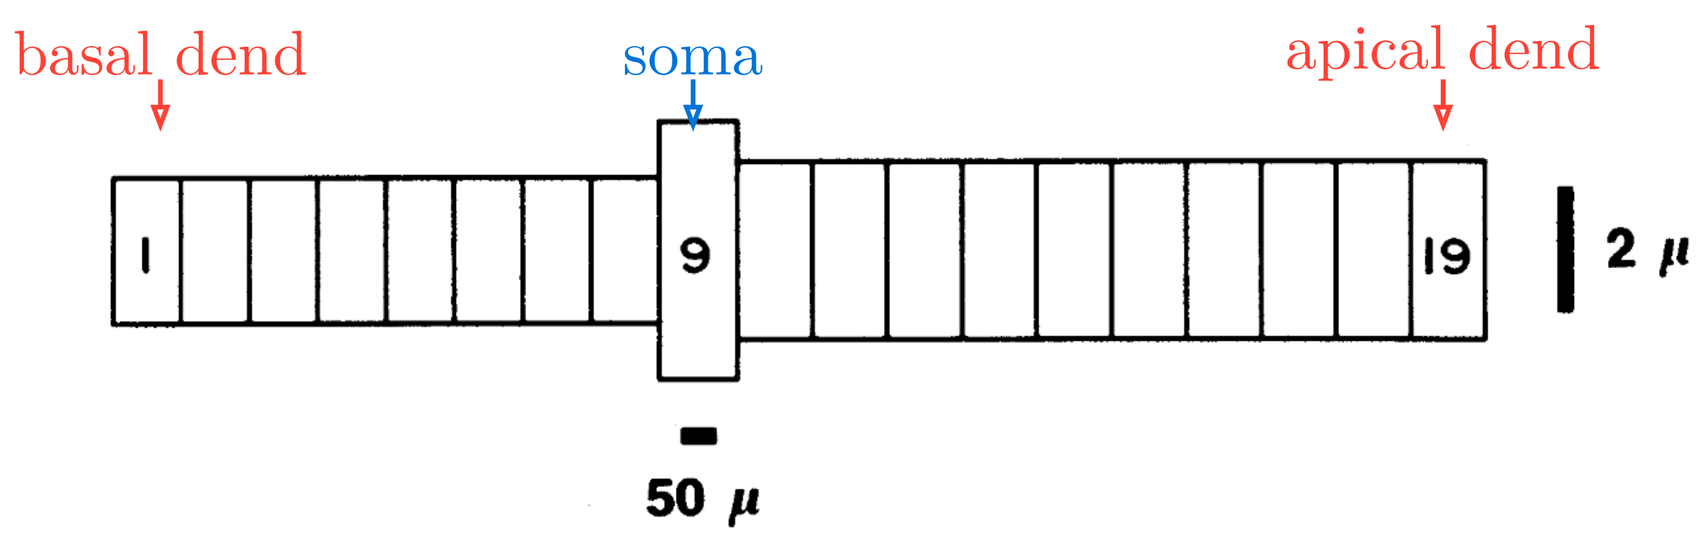

Modelled as **19 comps** [2]

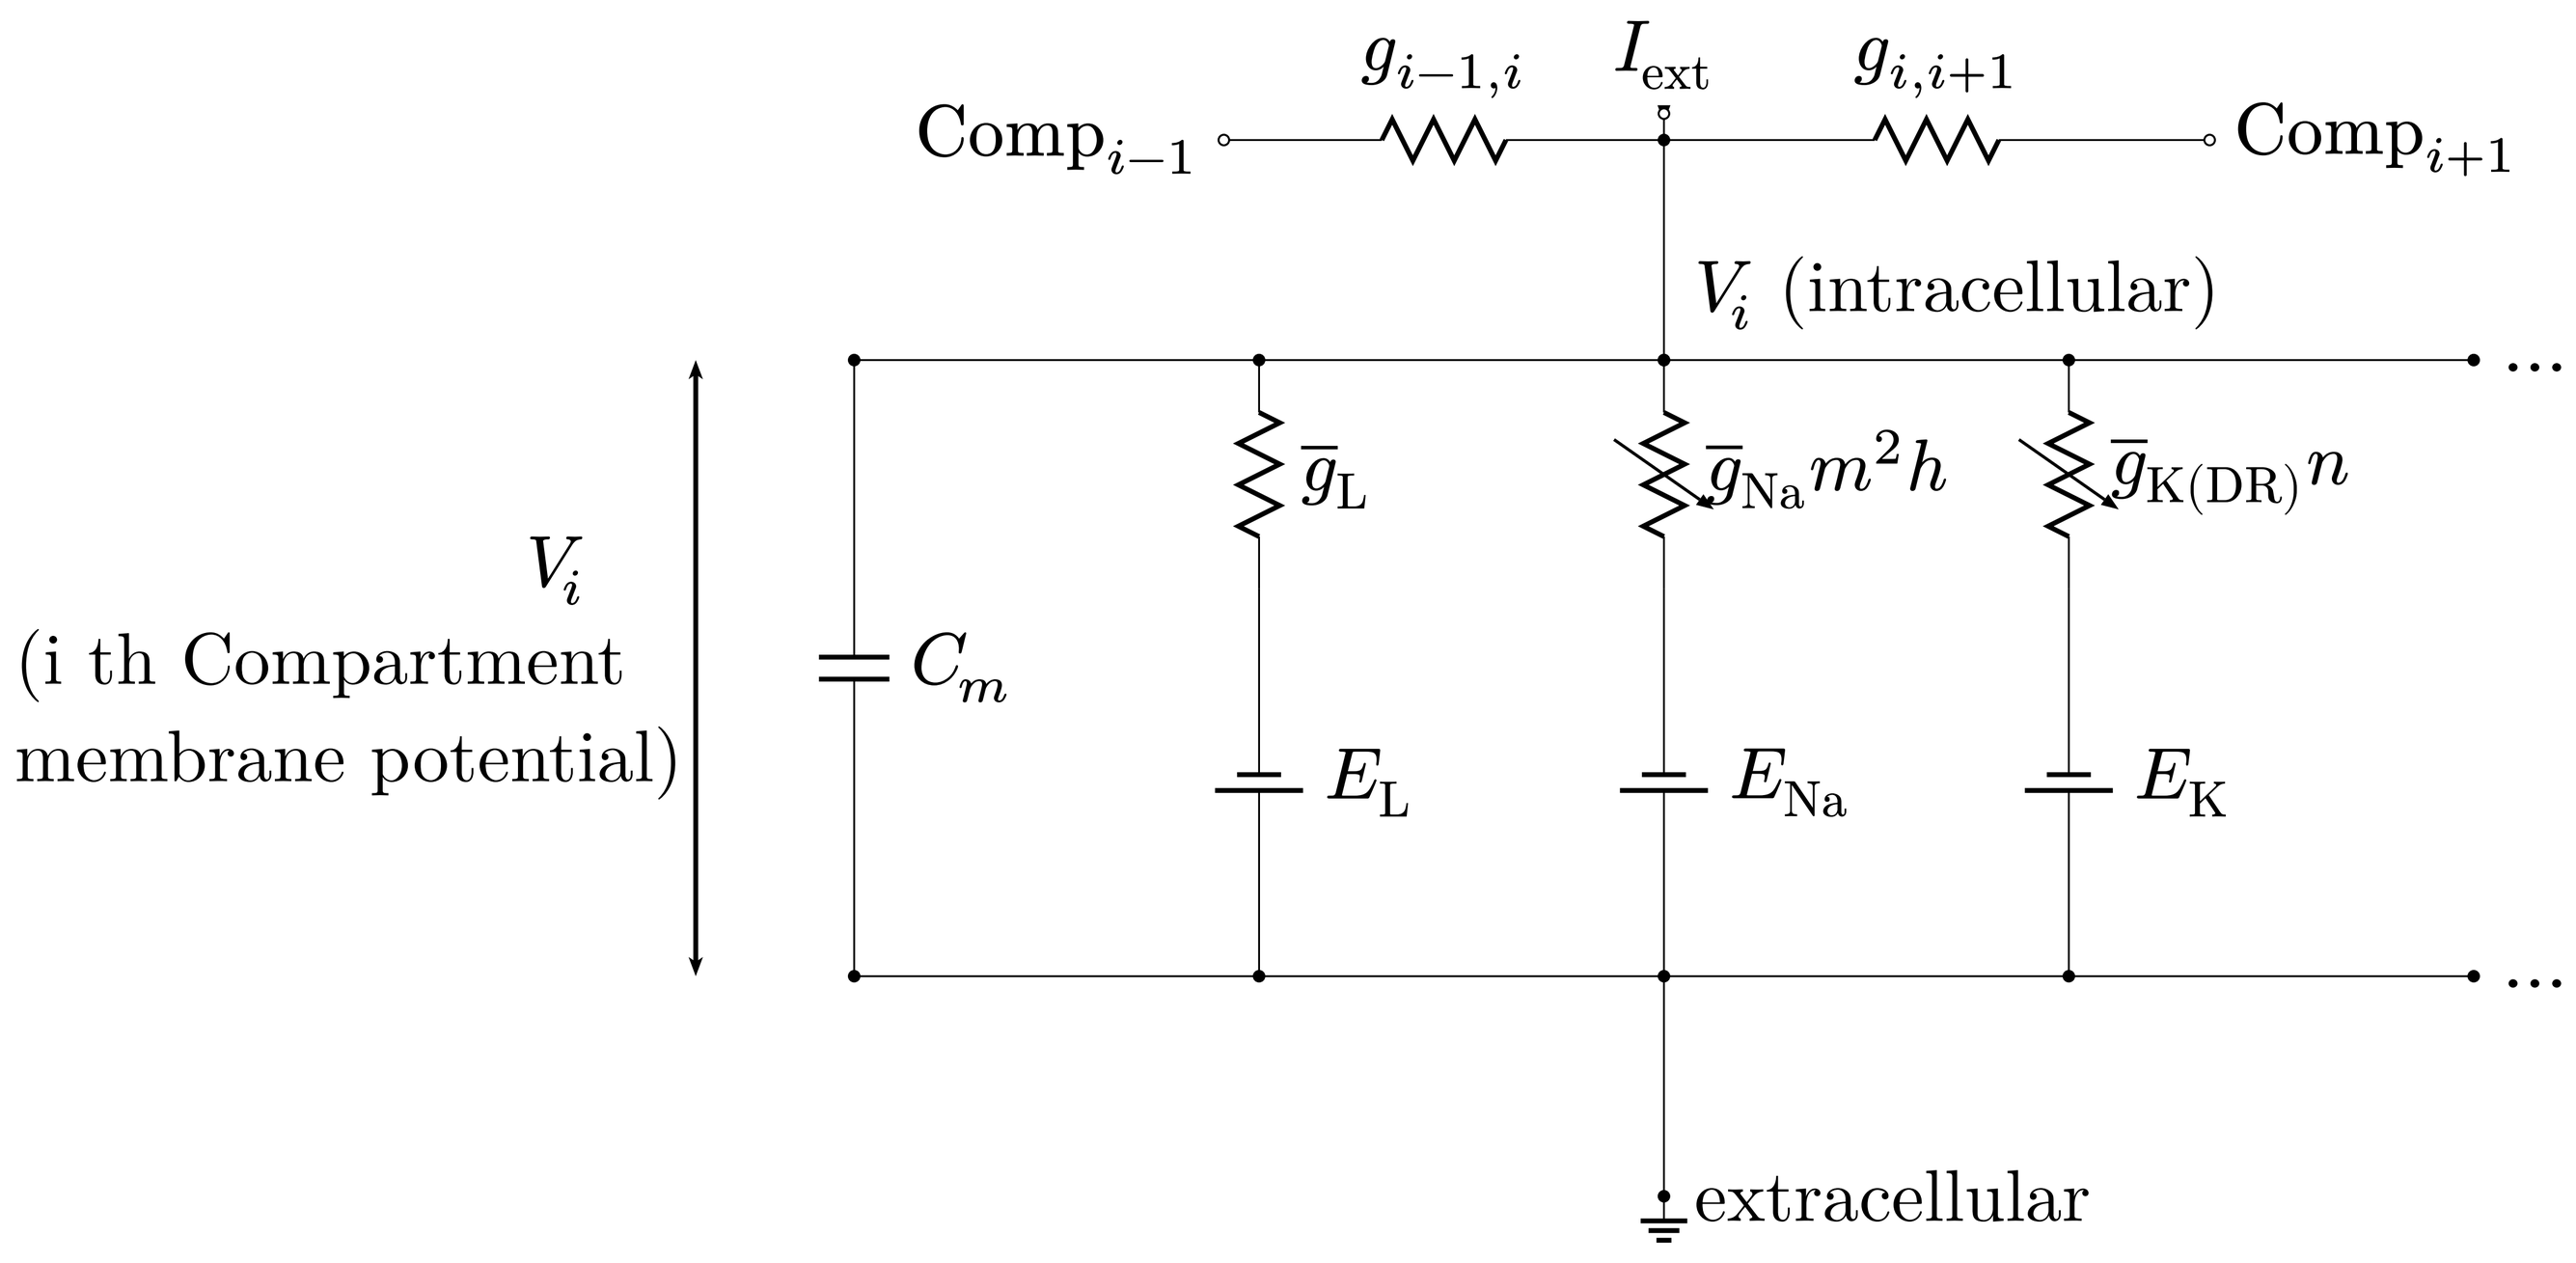

Conductances have **gate variables**, ODEs with rate functions α, β:

$$I_{\text{Na}} = \bar{g}_{\text{Na}}\, m^2 h\, (V - E_{\text{Na}})$$
$$\frac{dm}{dt} = \alpha_m(V)(1-m) - \beta_m(V)m$$
$$\alpha_m(V) = 0.32(13.1-u)/(\exp((13.1-u)/4)-1)$$
$$\beta_m(V) = 0.28(u-40.1)/(\exp((u-40.1)/5)-1)$$

→ **11 states per compartment**
→ **209** for 19 comps;
At large scale network simulation, the gates become a **memory bottleneck**.

Goal

Development of a multi-compartment neuron's surrogate model capable of reproducing the membrane potential response with few gate variables.

Methods

① Sample the training data

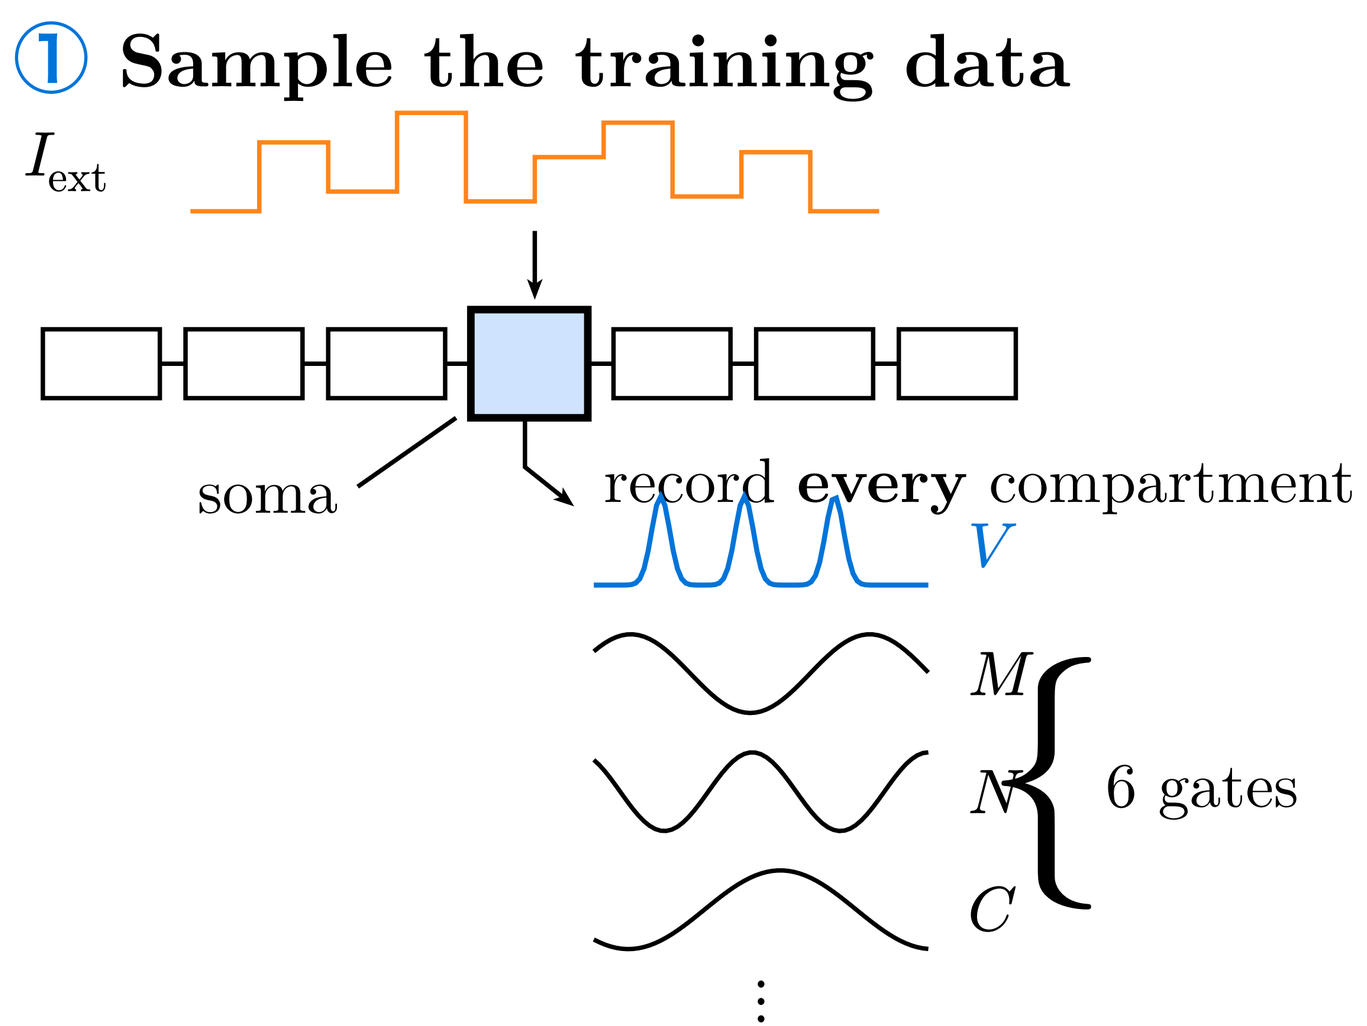

Inject a **random pulse train** at the soma; record V and **6 gates**.

② Compress gates

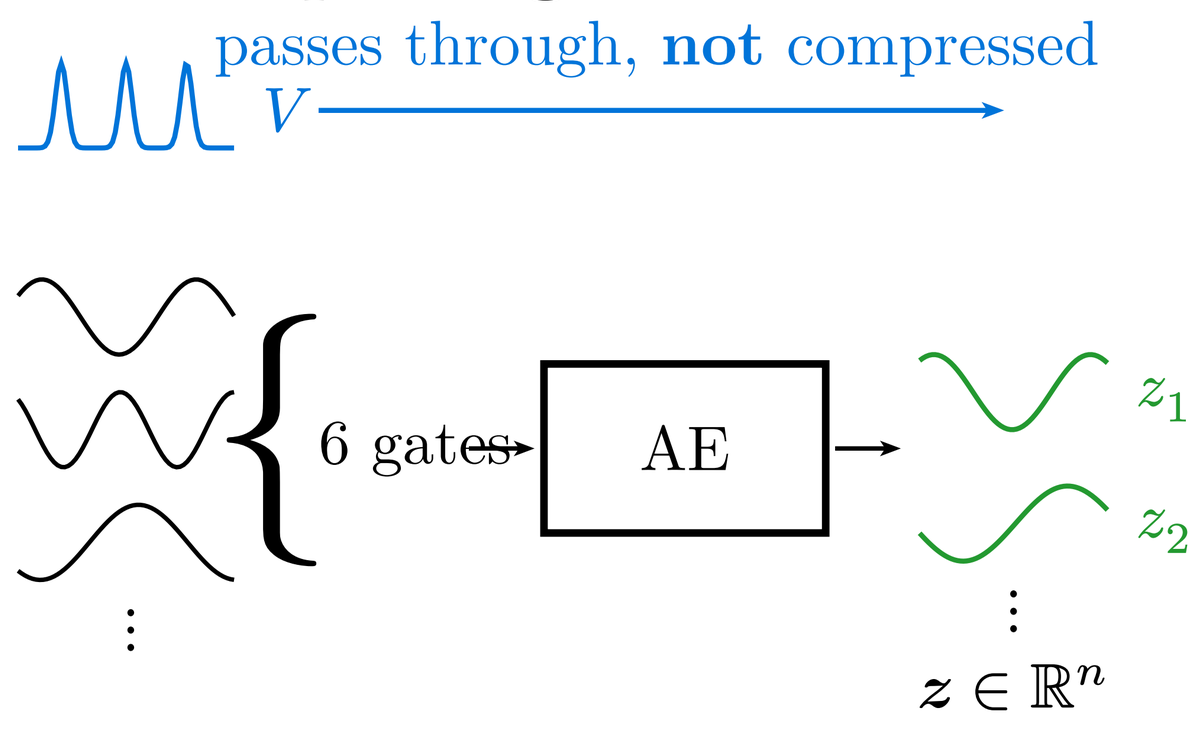

6 gates ride a **low-dimensional manifold** → $z \in \mathbb{R}^n$, $n = 5$.

③ Identify the latent variables of ODEs

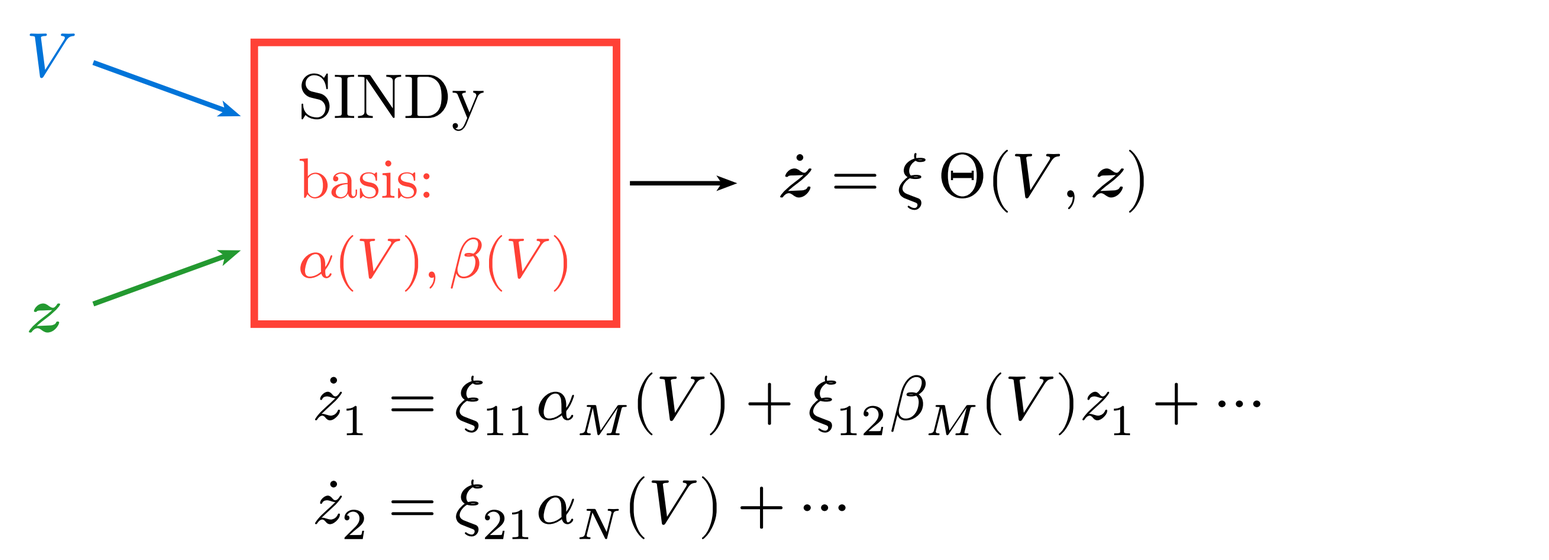

SINDy [3] fits **only** $\dot{z}$; $\dot{V}$ keeps **original physics**. Library is **physics-informed**: gates' own $\alpha(V), \beta(V)$.

④ Simulate: decoder-in-the-loop

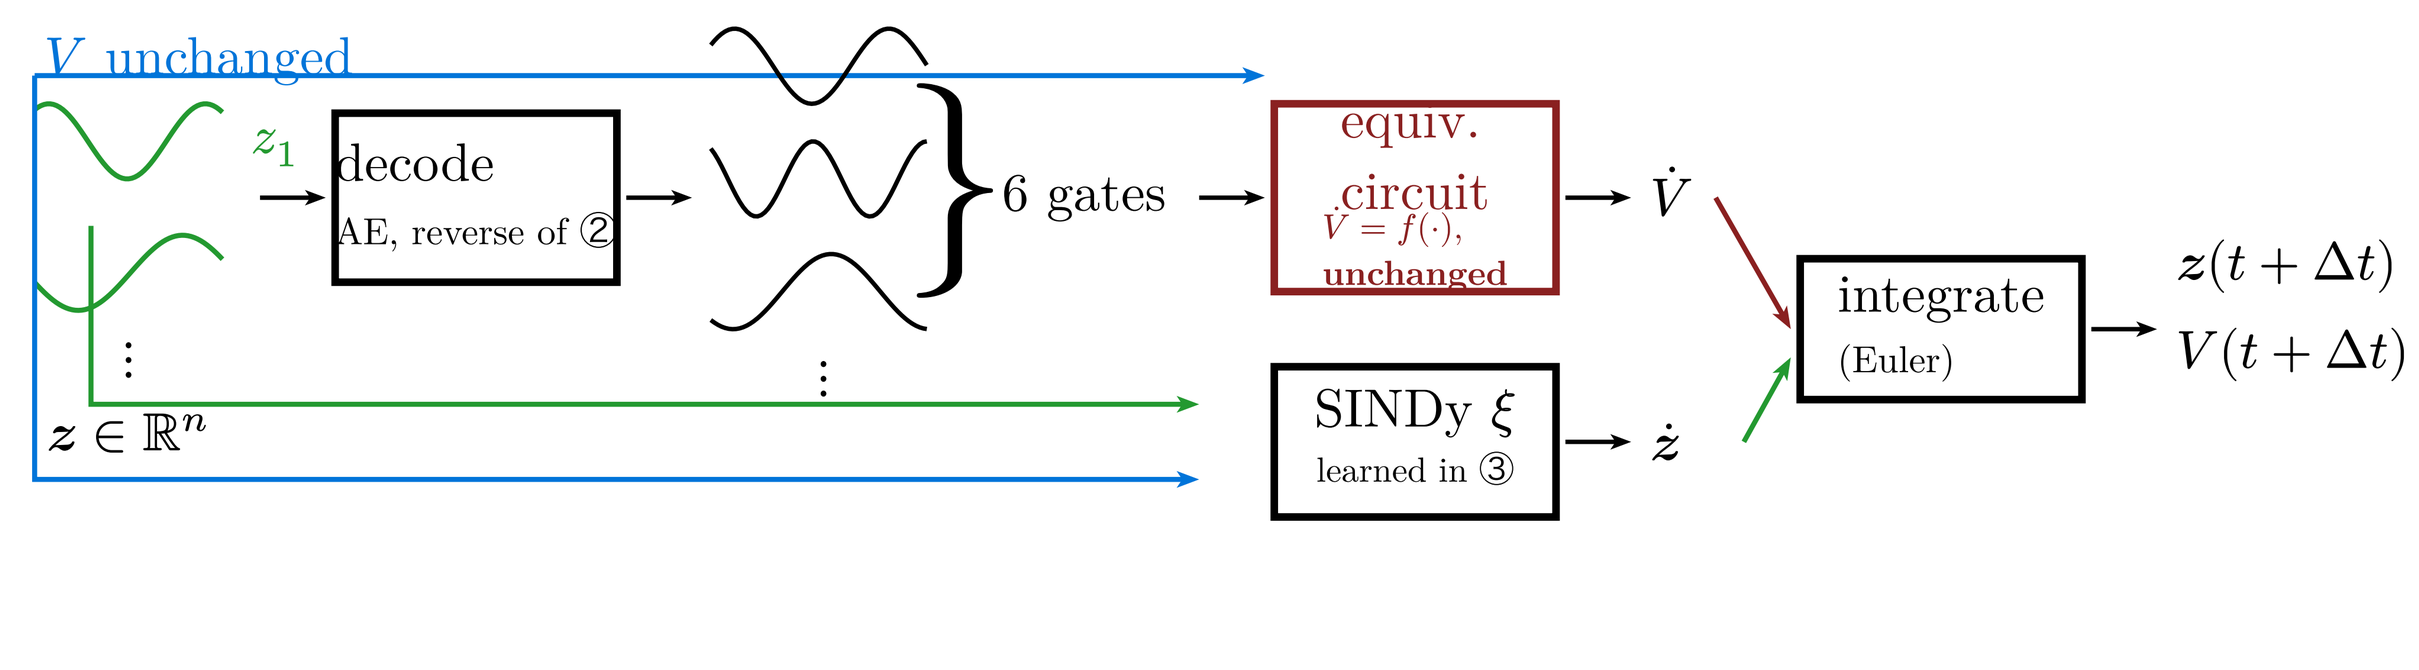

Each step: z → **decode** → gates feed the **unchanged** equivalent-circuit $\dot{V}$; SINDy updates z in place of the original gate ODEs.

Results and Discussion

Training Data to capture gate dynamics

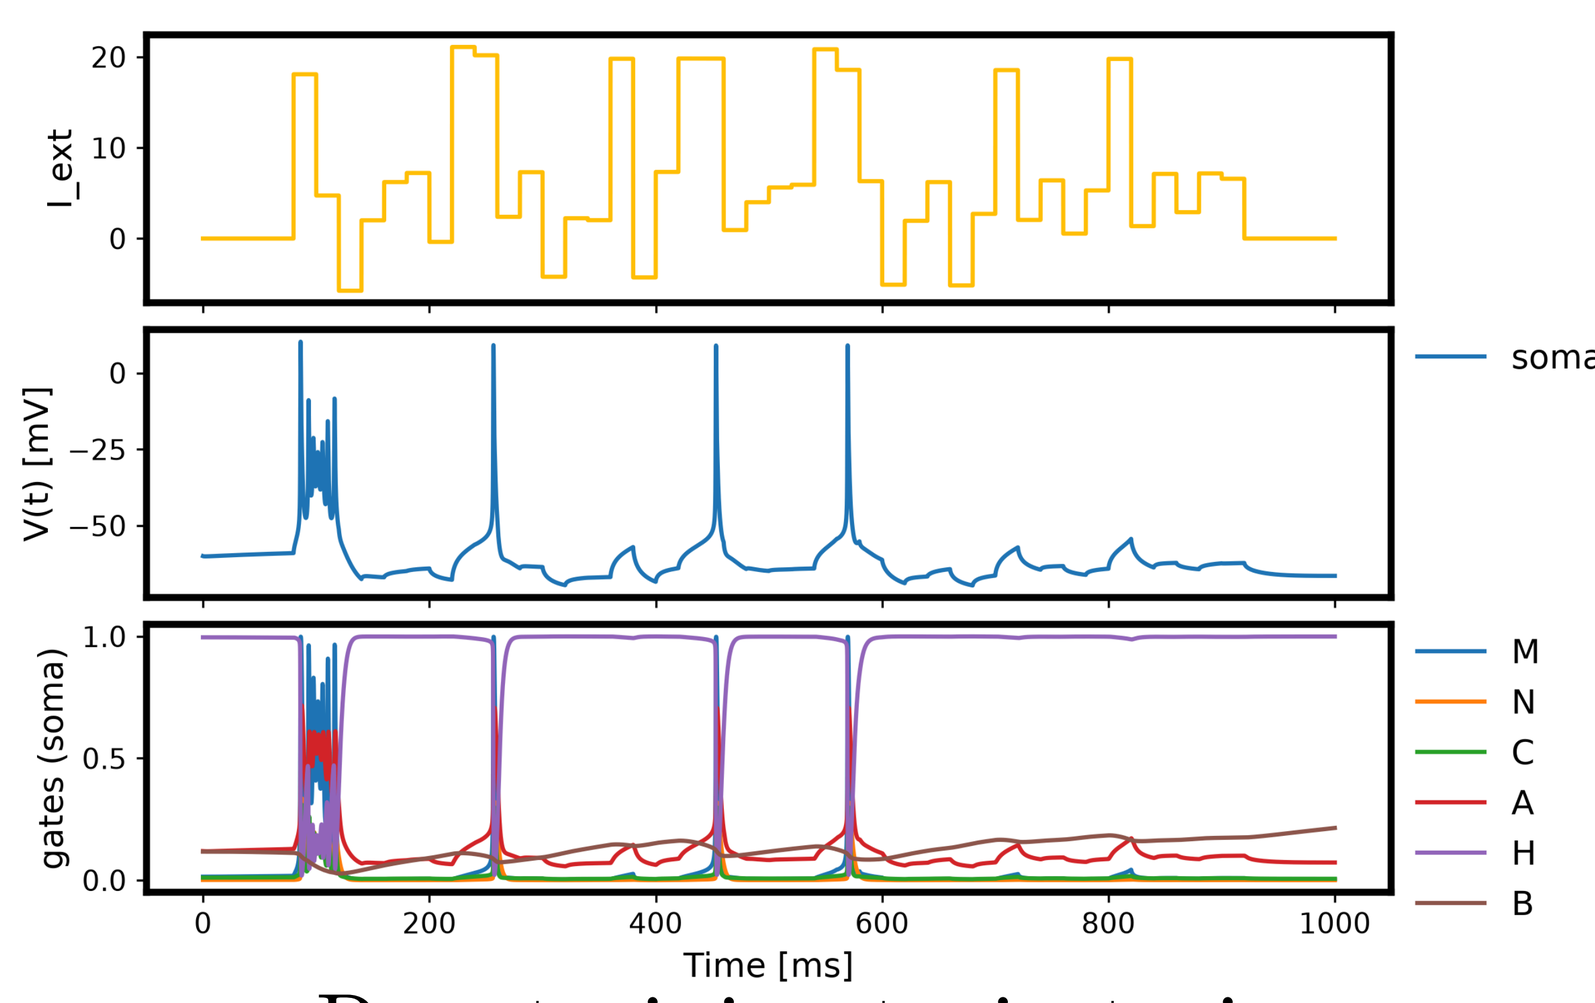

Raw training trajectories.

↓ compress

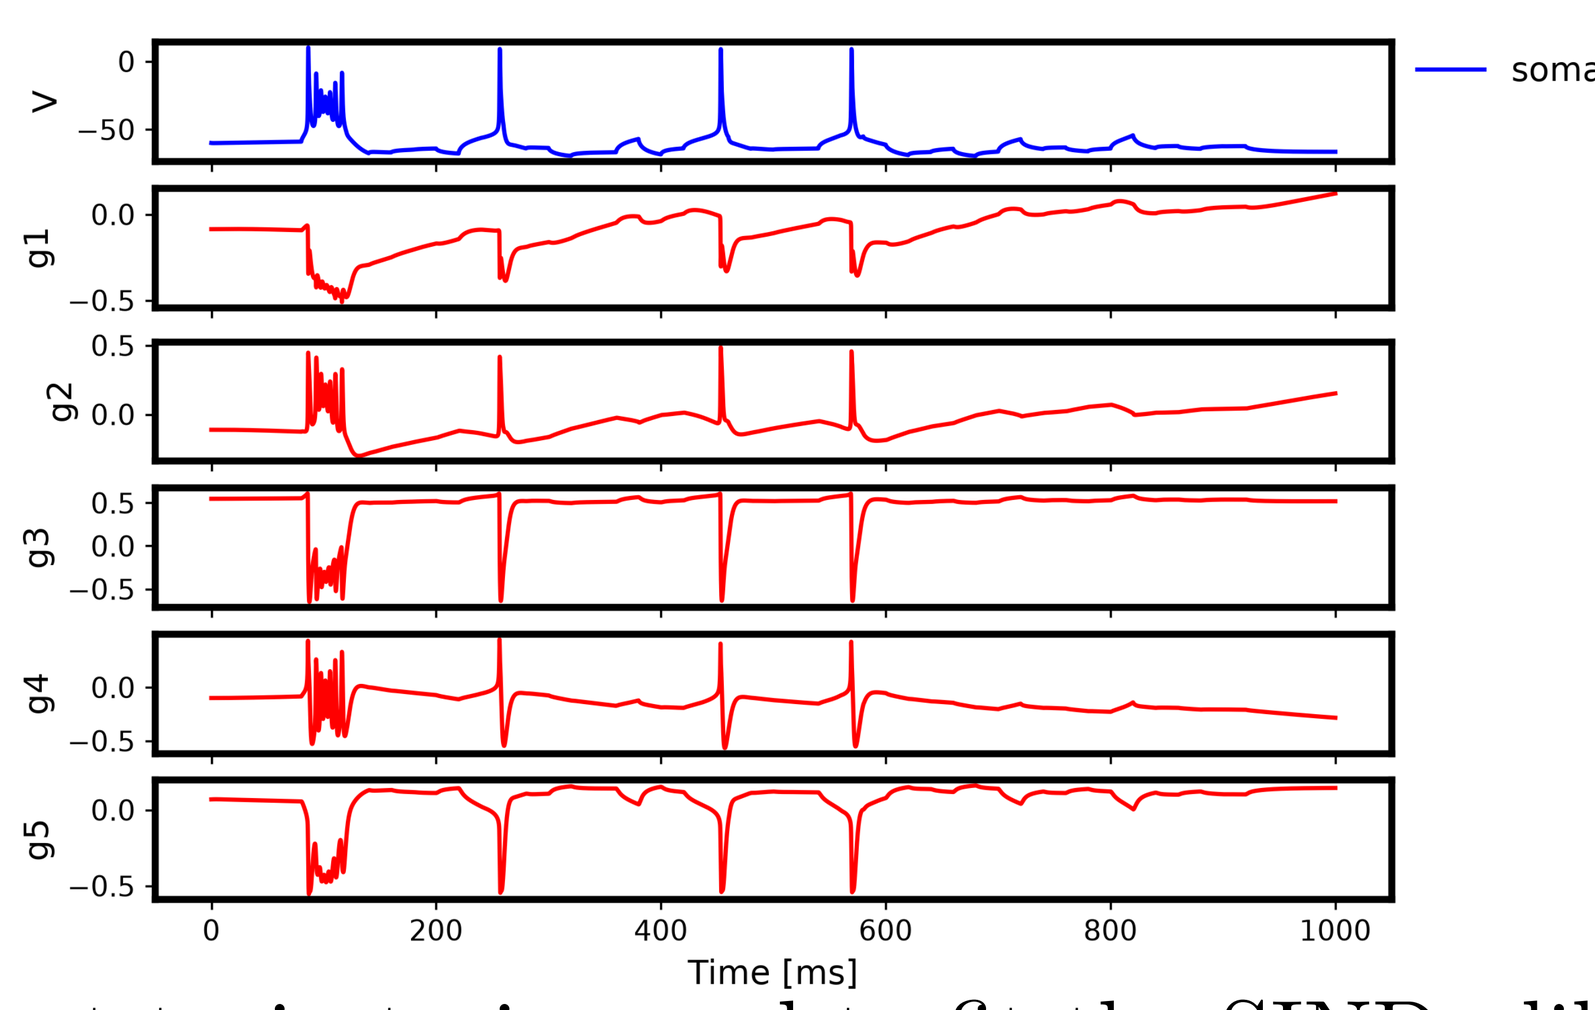

Latent trajectories used to fit the SINDy library.

Identified latent equations

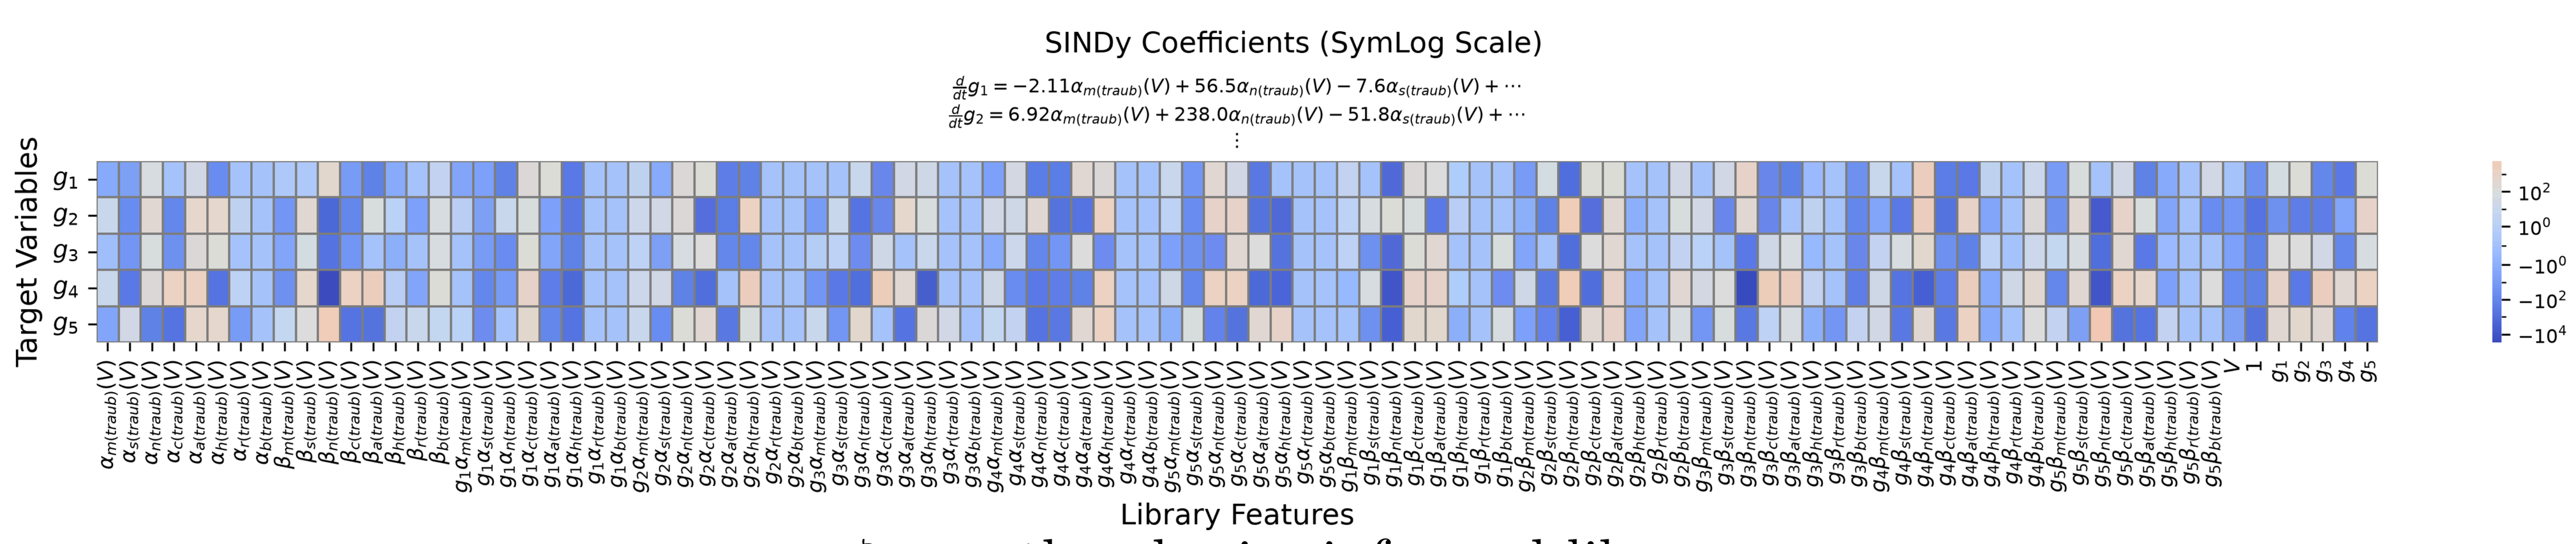

ξ over the physics-informed library.

- **79.6% non-zero** — accurate but **not sparse**.

Action Potential reproduction

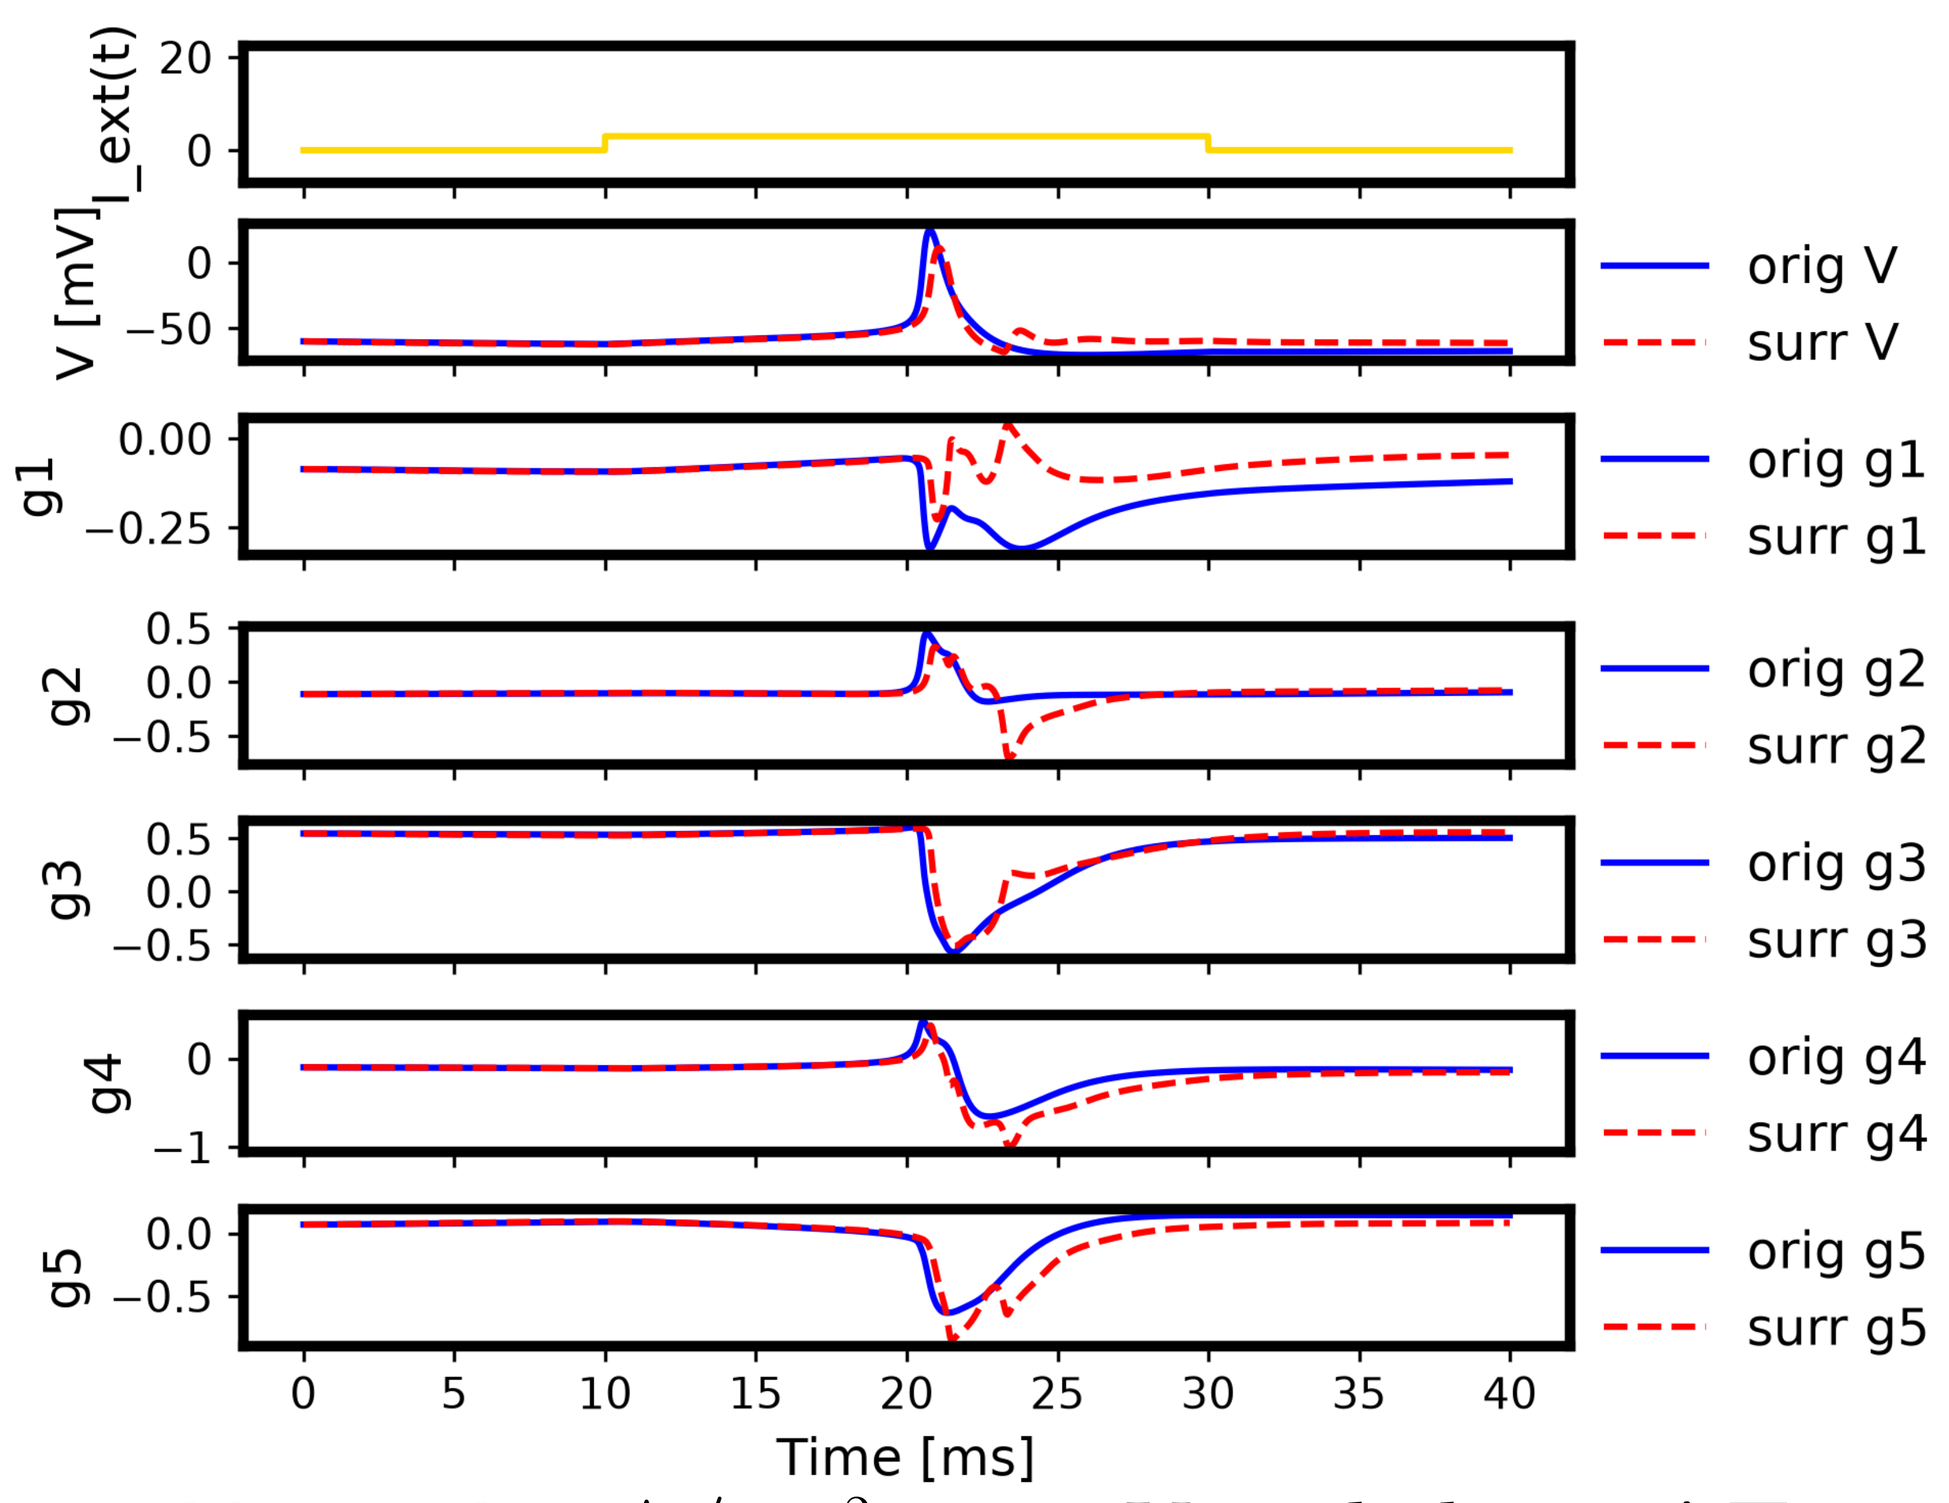

20 ms, 3 μ A/cm² step: V and the **5 AE latents.**

- latency err **0.3 ms**, AHP timing gap **3.1 ms**.
- peak **13 mV low** (amplitude gap **12.9 mV**), rise / fall rate gap **21.0** / **10.3 mV/ms** — yet AHP depth gap is only **0.28 mV**.

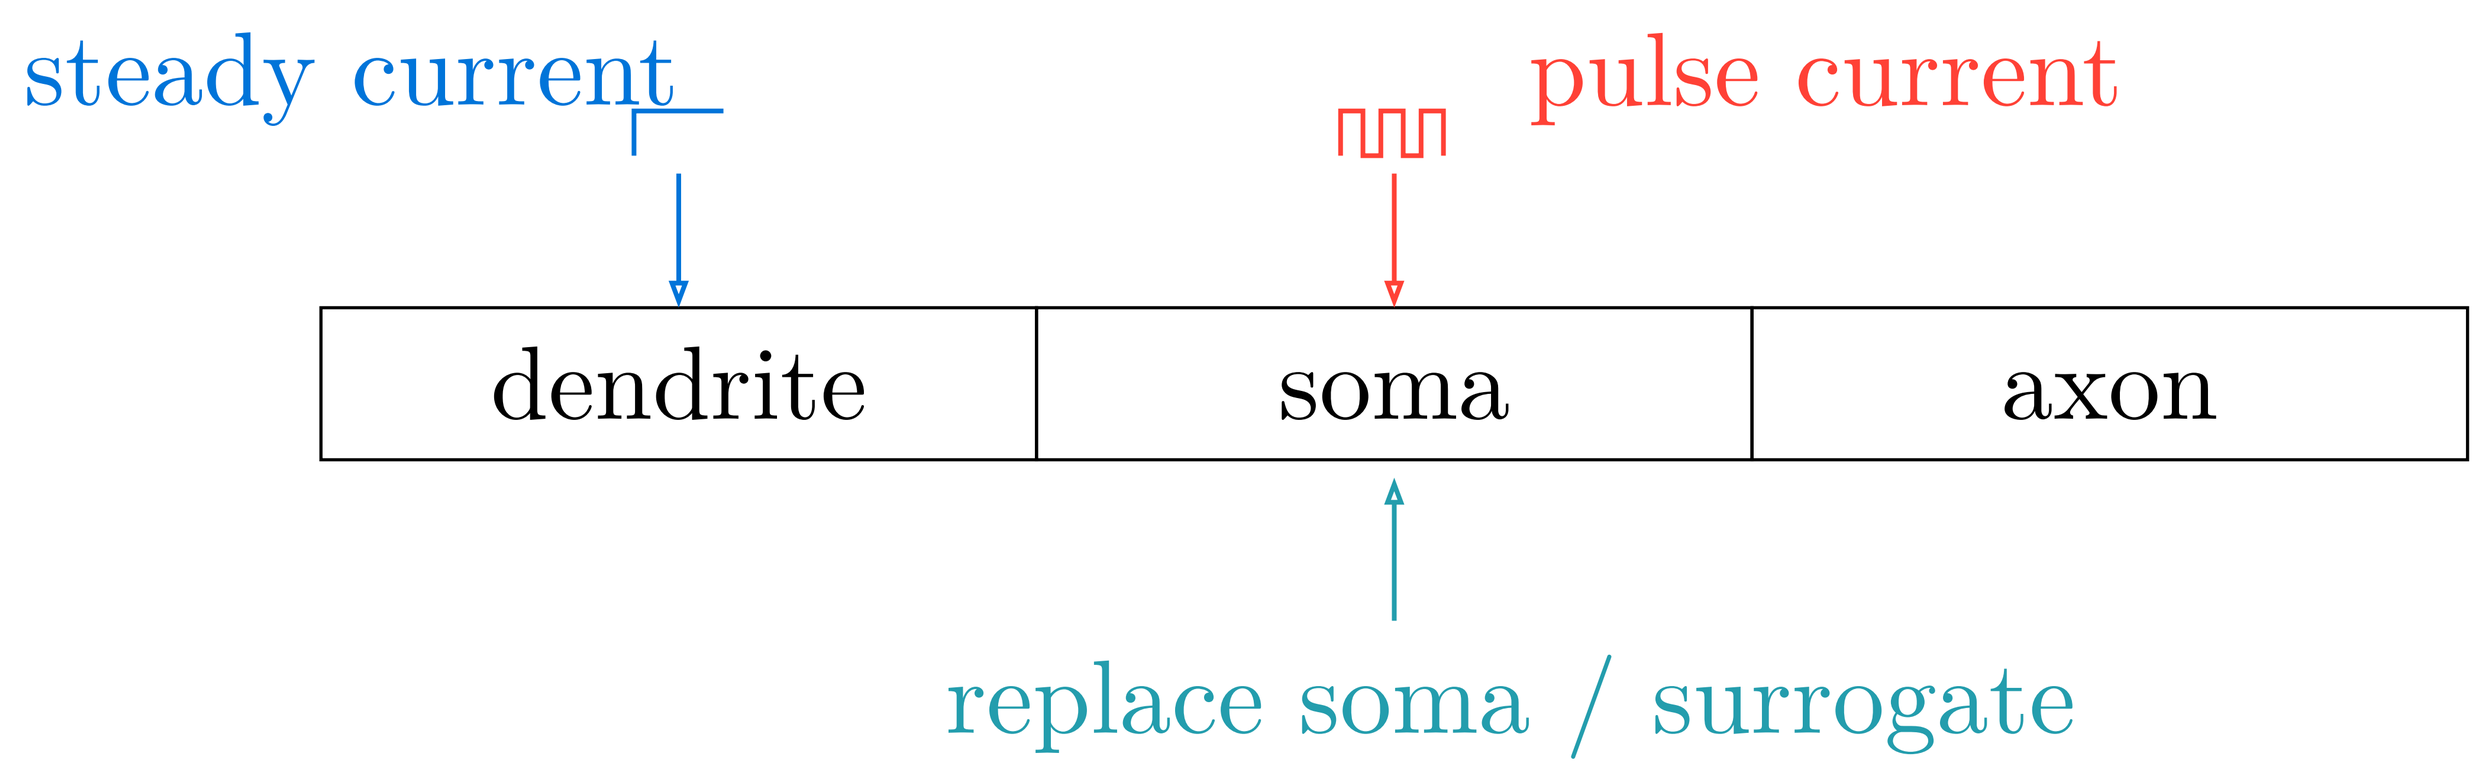

Steady current drives the dendrite; a pulse train drives the soma, whose compartment is replaced by the surrogate.

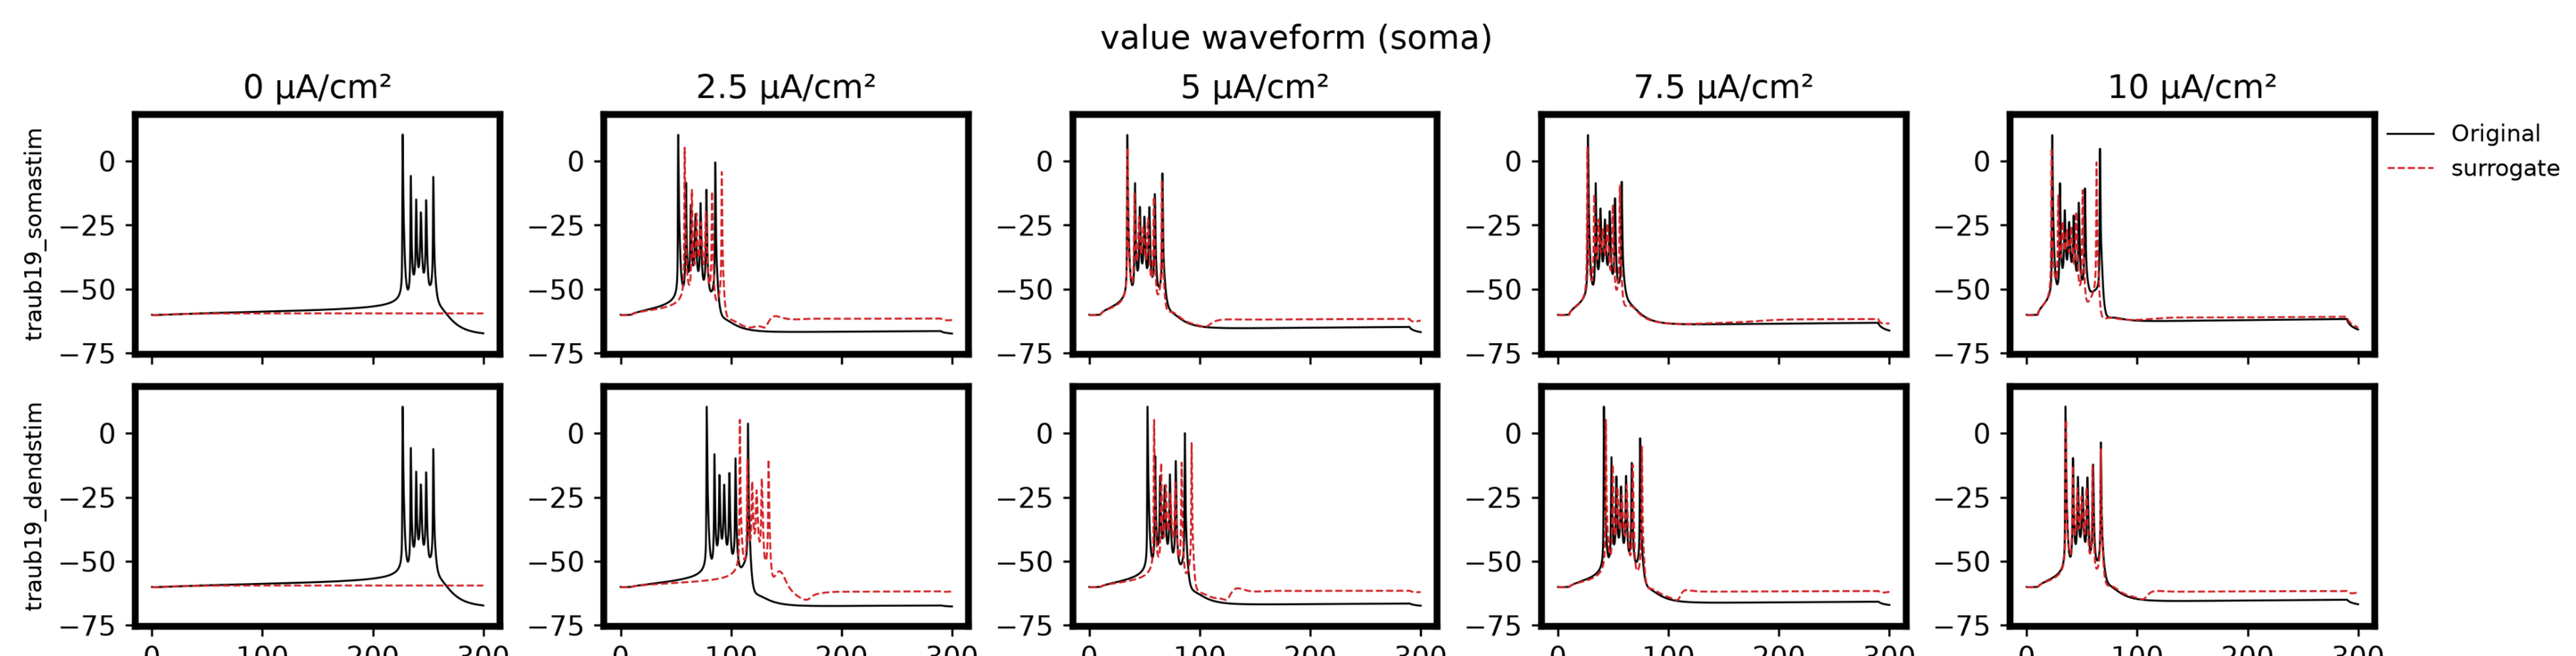

Amplitude sweep). **Top**: soma, as trained. **Bottom**: dendrite, **unseen**.

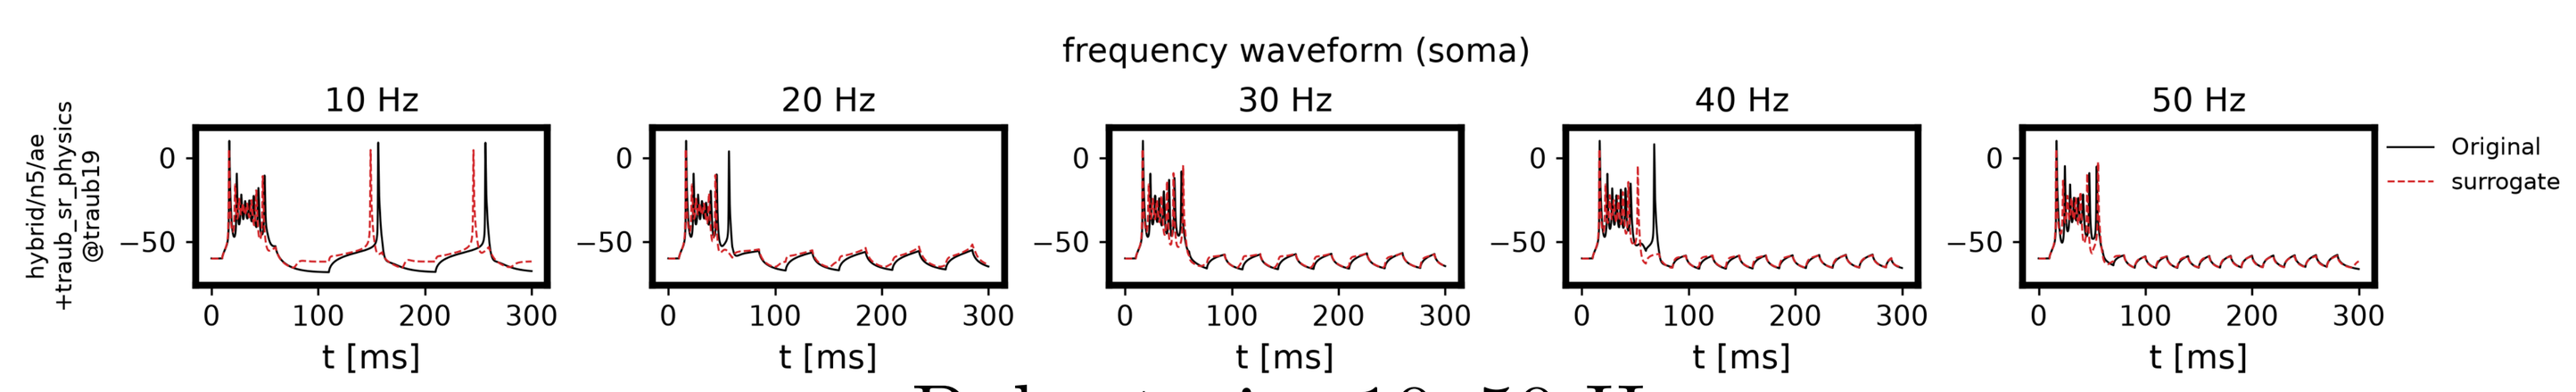

Pulse train, 10–50 Hz

- Bursts reproduced at **both sites** for $I \geq 5$; fires **too early** near threshold.
- Matches for $f \geq 20$ Hz; **drops later spikes** at 10 Hz.

Conclusion

- Latent dynamics preserve **timing**.
- Error concentrates in the **fast, steep transition** — suggests the **AE encoding (n=5)**, not the SINDy library, fails to preserve it.
- Replaced **all 19 compartments**, no divergence; transfers to **unseen site · frequency**.
- **Core finding**: SINDy succeeds **not because we compressed** (n: 6→5) — ⑤ shows the **same result uncompressed** ($n = 6$), so it is the **coordinate change itself** that makes gate dynamics learnable.
- Cost reduction follows **only if** compression matters — so it remains **unproven**: ξ is still dense (**79.6%** non-zero).

→ **Future**: sparsify ξ, push n down, test on other channel models.

Code — github.com/MunechikaHaruki/SINDyNeuroSurrogate

[1] [Online]. Available: https://neuromorpho.org/neuron_info.jsp?neuron_name=L16a

[2] R. D. Traub, R. K. Wong, R. Miles, and H. Michelson, "A Model of a CA3 Hippocampal Pyramidal Neuron Incorporating Voltage-Clamp Data on Intrinsic Conductances," *Journal of Neurophysiology*, vol. 66, no. 2, pp. 635–650, Aug. 1991, doi: 10.1152/jn.1991.66.2.635.

[3] K. Champion, B. Lusch, J. N. Kutz, and S. L. Brunton, "Data-Driven Discovery of Coordinates and Governing Equations," *Proceedings of the National Academy of Sciences*, vol. 116, no. 45, pp. 22445–22451, Nov. 2019, doi: 10.1073/pnas.1906995116.

Conflicts of Interest — The authors declare no conflicts of interest regarding this manuscript.