


Topology

*SW2 has been newly added to the network, but has not yet been configured.

1. Connect Laptop1 to SW2's console port to perform the following configurations:

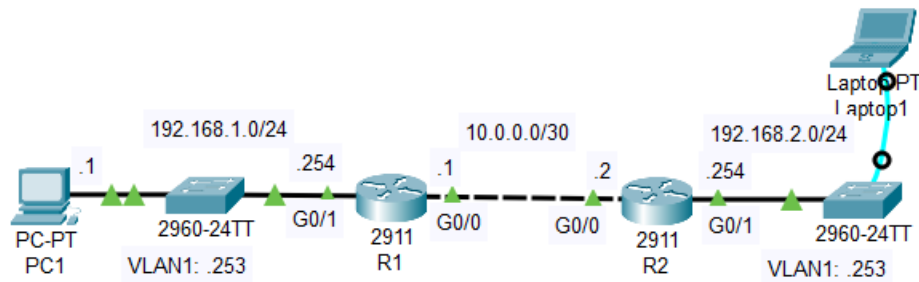

A console connection was used to connect Laptop 1's RS 232 port to the switch's console port.

Host name: SW2

Enable secret: ccna

Username/PW: jeremy/ccna

VLAN1 SVI: 192.168.2.253/24

Default gateway: R2

You need enable secret configured in order to enter privileged exec mode when connecting remotely.

Laptop1

Physical Config **Desktop** Programming Attributes

Terminal

```
Version ID : V02
CLEI Code Number : COM3L00BRA
Hardware Board Revision Number : 0x01

Switch Ports Model          SW Version        SW Image
-----
*    1 26    WS-C2960-24TT-L    15.0(2)SE4        C2960-LANBASEK9-M

Cisco IOS Software, C2960 Software (C2960-LANBASEK9-M), Version 15.0(2)SE4, RELEASE SOFTWARE (fc1)
Technical Support: http://www.cisco.com/techsupport
Copyright (c) 1986-2013 by Cisco Systems, Inc.
Compiled Wed 26-Jun-13 02:49 by mnguyen

Press RETURN to get started!

%LINK-5-CHANGED: Interface GigabitEthernet0/1, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/1, changed state to up

Switch>en
Switch#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
Switch(config)#hostname SW2
SW2(config)#enable secret ccna
SW2(config)#username ccna secret ccna
SW2(config)#int vlan 1
SW2(config-if)#192.168.2.253 255.255.255.0
^
% Invalid input detected at '^' marker.

SW2(config-if)#ip add 192.168.2.253 255.255.255.0
SW2(config-if)#no shutdown

SW2(config-if)#
%LINK-5-CHANGED: Interface Vlan1, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface Vlan1, changed state to up

SW2(config-if)#exit
SW2(config)#ip default-gateway 192.168.2.254
```

2. Configure the following console line security settings on SW2:

Authentication: Local user

Exec timeout: 5 minutes

```
SW2(config)#line con 0
SW2(config-line)#login local
SW2(config-line)#exec-timeout 5
```

3. Configure SW2 for remote access via SSH:

Domain name: jeremysitlab.com

RSA key size: 2048 bits

Authentication: Local user

Exec timeout: 5 minutes

Protocols: SSH only

+Limit access to PC1 ONLY

```
SW2#conf t
Enter configuration commands, one per line. End with CNTL/Z.
SW2(config)#ip domain name jeremysitlab.com
SW2(config)#crypto key generate rsa
The name for the keys will be: SW2.jeremysitlab.com
Choose the size of the key modulus in the range of 360 to 4096 for your
  General Purpose Keys. Choosing a key modulus greater than 512 may take
  a few minutes.

How many bits in the modulus [512]: 2048
% Generating 2048 bit RSA keys, keys will be non-exportable...[OK]

SW2(config)#access-list 1 permit host 192.168.1.1
*Feb 28 23:21:42.515: %SSH-5-ENABLED: SSH 1.99 has been enabled
SW2(config)#line vty 0 15
SW2(config-line)#login local
SW2(config-line)#exec-timeout 5
SW2(config-line)#transport input ssh
SW2(config-line)#access-class 1 in

R2>en
R2#ping 192.168.2.253

Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 192.168.2.253, timeout is 2 seconds:
..!!!
Success rate is 60 percent (3/5), round-trip min/avg/max = 0/0/0 ms

R2#ssh -l jeremy 192.168.2.253

% Connection refused by remote host
C:\>ssh -l ccna 192.168.2.253

Password:
```