

Agentic AI Integrated with Scientific Knowledge: Laboratory Validation in Systems Biology

Daniel Brunnsäker^{a,✉}, Alexander H. Gower^a, Prajakta Naval^b, Erik Y. Bjurström^b, Filip Kronström^a, Ievgeniia A. Tiukova^{b,c}, and Ross D. King^{a,d,e}

^aDepartment of Computer Science and Engineering, Chalmers University of Technology and University of Gothenburg, SE-41296 Gothenburg, Sweden

^bDepartment of Life Sciences, Chalmers University of Technology, SE-41296 Gothenburg, Sweden

^cDivision of Industrial Biotechnology, KTH Royal Institute of Technology, SE-10691 Stockholm, Sweden

^dDepartment of Chemical Engineering and Biotechnology, University of Cambridge, Cambridge CB3 0AS, United Kingdom

^eThe Alan Turing Institute, London NW1 2DB, United Kingdom

Automation is transforming scientific discovery by enabling systematic exploration of complex hypotheses. Large language models (LLMs) perform well across diverse tasks and promise to accelerate research, but often struggle to interact with logical structures. Here we present a framework integrating LLM-based agents with laboratory automation, guided by a logical scaffold incorporating symbolic relational learning, structured vocabularies, and experimental constraints. This integration reduces output incoherence and improves reliability in automated workflows.

We couple this AI-driven approach to automated cell-culture and metabolomics platforms, enabling hypothesis validation and refinement, yielding a flexible system for scientific discovery.

We validate the system in *Saccharomyces cerevisiae*, identifying novel interactions, including glutamate-induced synergistic growth inhibition in spermine-treated cells and aminoacidate's partial rescue of formic-acid stress. All hypotheses, experiments, and data are captured in a graph database employing controlled vocabularies. Existing ontologies are extended, and a novel representation of scientific hypotheses is presented using description logics. This work enables a more reliable, machine-driven discovery process in systems biology.

Laboratory Automation | Systems Biology | Machine Learning | Inductive Logic Programming | Automation of Science | Large Language Models
Correspondence: danbru@chalmers.se

Introduction

Artificial intelligence (AI) and laboratory automation are rapidly transforming science. AI enables the analysis of data that would otherwise be intractable and, when integrated with laboratory robotics, can automate scientific research—a capability essential for addressing the increasingly complex problems found in modern science (1–3). For example, comparatively simple model organisms, such as *Saccharomyces cerevisiae* (baker's yeast) and *Escherichia coli*, exhibit complexity far beyond what humans can interpret or validate experimentally within a reasonable timeframe (4). Reliable, scalable scientific discovery under these conditions requires integrated automated experimentation and computational analysis (4, 5).

The efficacy of scientists is determined by their scientific

ideas, agency (the tools and techniques available to them), and collaborative capacity. For AI scientists, deciding what agency we grant them is an important design question. In particular, real-world agency—the ability to directly control experiments—is vital for scientific discovery. Integration with laboratory robotics was a focus of the previous generation of robot scientists; these model-driven systems generated hypotheses in tightly controlled experimental spaces and collected empirical data in only a few data modalities (4, 6–8). Several variations of this approach have been applied in fields such as materials development and chemistry (9, 10). Yet the next generation of robot scientists must contend with increasingly complex scientific questions that demand more powerful tools for hypothesis generation, multimodal data integration, experimental design, and analysis (1).

One promising direction is to grant robot scientists access to large language models (LLMs), which have enabled AI systems to achieve impressive results in tasks that previously required human intelligence, including scientific discovery (3, 11). LLM-augmented approaches offer adaptability in how problems are formulated and in expanding the experimental scope—a major advantage in the natural sciences. Consequently, we see increasingly widespread use and impact of LLMs in scientific discovery, often via orchestrated multi-agent systems (12–19).

The adaptability of LLM-augmented approaches is particularly beneficial in systems biology research, which involves complex interaction networks and vast spaces of experimental conditions and data modalities (20). However, LLM outputs are often inconsistent, difficult to verify, and rarely subjected to rigorous experimental evaluation—issues compounded by siloed data practices that limit transparency and reuse (18). A further weakness of LLMs remains their inability, or at best inefficiency and unreliability, when interacting with formal languages and logical structures. Recent agentic systems mitigate this issue by granting the LLM agency to write and execute programs in high-level languages such as Python (17). However, these approaches generally rely on loosely typed message passing, shallow artifact tracking, and lack unified domain representations. As a result, they can generate brittle, unvalidated outputs that are difficult to

systematically audit (18).

Agentic systems for scientific discovery should make the best use of available scientific data and models for ideation, and report in a way that enables good collaboration and recording of knowledge. In many cases, including in systems biology, there is a wealth of structured data encoded according to well-defined rules. There is thus a need for frameworks that retain the flexibility of LLMs while grounding them in formal logic, exploiting background knowledge and meeting transparent data-sharing requirements (12, 17–19, 21).

Here we introduce a hybrid approach that couples language-driven flexibility with inductive logic and formal ontologies (see Fig. 1). The framework combines LLMs with the precision of relational learning (inductive logic programming, ILP) and community-adopted scientific ontologies to generate hypotheses grounded in empirical data and structured biological knowledge. The hypotheses are prioritised based on prior experimental results and can, thanks to their structured format, be automatically tested on laboratory automation platforms such as robotic liquid handlers, automated cultivation systems, and mass-spectrometry-based metabolomics (8, 22). All metadata, logs, and results can then be stored in a graph database that ensures transparency, reproducibility, and efficient reuse.

By integrating symbolic learning with ontologies and statistical inference, the framework overcomes key limitations of standard agentic LLM systems: it improves traceability, reduces speculative outputs, and enables higher degrees of auditability across the entire discovery loop.

This framework was evaluated through automated experimental testing of several data-driven hypotheses. For example, we observed glutamate-induced synergistic growth inhibition in spermine-treated cells and arginine-mediated enhancement of caffeine toxicity in caffeine-treated cells. We further applied it to test a metabolomics-informed prediction that led to the discovery of amino adipate-mediated rescue of formic acid stress. These results demonstrate the framework’s potential for automated, scalable, reproducible discovery in biological systems.

Results

Automated Systems Biology Research.

We built an automated experimental and computational framework by integrating LLMs; structured community databases; robotic liquid handling stations; an automated cell-culturing and sampling platform; an ion mobility-based mass spectrometry metabolomics workflow; and computational tools in R, Python and Prolog (8, 22–26). See Fig. 1 for a graphical overview of the process.

This framework is designed to automatically generate and experimentally evaluate hypotheses about cell biology. Testable hypotheses are generated by (i) data-mining semantically meaningful facts about *S. cerevisiae* phenotype and metabolism—extracted from structured community databases (27–31)—(ii) applying pattern mining to generate a logical rule (25, 26), and (iii) applying machine learning on metabolomics data to learn a testable implication associ-

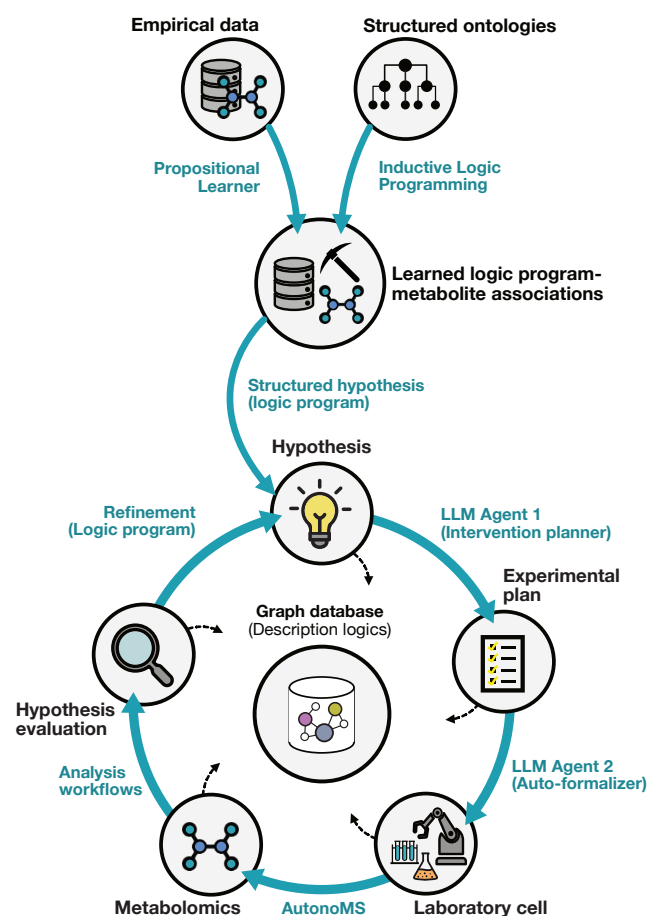


Fig. 1. An automated experimental framework enabling end-to-end biological discovery—from hypothesis generation to data integration. Hypotheses are generated by mining patterns from a Datalog database containing structured facts about yeast phenotype, physiology, and metabolism, using inductive logic programming. These are linked to metabolomics data via regression. Interventions to test each hypothesis are designed by a large language model (LLM), which incorporates real-world experimental constraints. The interventions are auto-formalized into machine-readable protocols and executed by an automated laboratory cell. Time-series growth data are collected throughout the experiments, followed by automated sample processing and acquisition of endpoint metabolic profiles via ion-mobility mass spectrometry, mediated by AutonoMS (22). All data—including results, intermediate outputs, and metadata are curated, analyzed, and integrated into a graph database for downstream access and reuse.

ated to the rule (32). The generated hypotheses are filtered and prioritized using prior experimental data. LLM agents then design experimental interventions to test these hypotheses and further formalize them into a machine-readable format with executable real-world constraints (33). Automated experiments are executed for each hypothesis, producing and processing biological samples to generate time-series growth data and endpoint metabolic profiles via ion-mobility-based mass spectrometry. After each run, the data are automatically curated and analysed, and presented in a concise, user-readable summary.

Each step of the process and accompanying experimental results are recorded in a graph database, including all LLM queries and responses, to ensure transparency and facilitate efficient reuse of data. Experimental data and metadata are saved using controlled vocabularies, utilising an

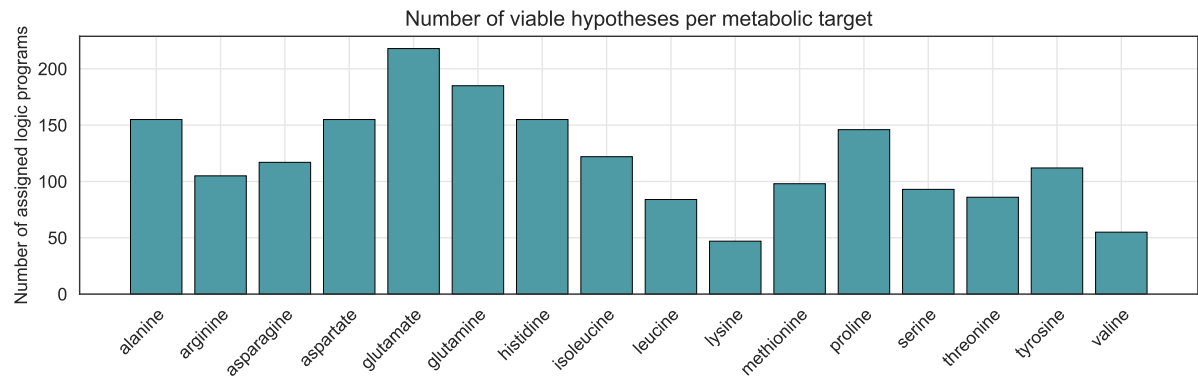


Fig. 2. Viable hypothesis counts per amino acid. Bar chart showing, for each amino acid, the number of logic programs with non-zero regression coefficients—i.e., the total number of viable hypotheses generated for that amino acid.

extended version of the Ascomycete Phenotype Ontology (APO) (27, 28). Hypotheses and their implications are represented using description logics. This approach allows reusing existing data when a generated hypothesis matches a previously executed experiment, as demonstrated for one hypothesis below (see *hypothesis 9* in table 1).

Linking metabolites to traits for hypothesis discovery.

To generate testable, data-driven hypotheses based on prior scientific knowledge, we constructed a Datalog database of approximately 60,000 phenotypical, physiological, and metabolic relations for *S. cerevisiae*. This database integrates curated datasets from several different sources, structured by established ontologies, and encoded as logic facts to enable structured reasoning (28–30). Datalog’s declarative structure enables clear expression of biological relationships and efficient querying across complex relational datasets (34).

To identify patterns that could explain observed phenotypes, we applied ILP, a methodology well-suited to learning interpretable, well-defined logic programs (i.e., rules) from structured, relational data (25, 26, 35). ILP-based pattern mining on this structured database yielded 735 distinct logic programs, 390 of which mapped uniquely to positive examples (gene deletion strains) from the metabolomics dataset of Mülleider et al. (32). We propositionalised each program into a binary feature (denoting whether the program covers a given example) and fitted a linear regression model to link these logic programs to metabolite measurements through regression coefficients. This produced 1933 independent hy-

potheses across 16 proteinogenic amino acids (see Fig. 2).

An overview of the hypothesis space can be seen in Sup. Note 1 and Sup. Table 1. A logic program and learned association can be seen below (also see *hypothesis 6* in table 1).

– Arginine, Cells(A) :=
ExhibitsPhenotype(A, Decreased Resistance, B, C),
CompoundName(B, Lithium(+1)),
Condition(C, Treatment : 0.1M Lithium Chloride).

In this context, this program can be interpreted as: cells (A) which have decreased resistance to lithium (B) when treated with 0.1M lithium chloride (C) are associated with lower intracellular arginine levels. The link between arginine levels and the resistance phenotype suggests the testable hypothesis that arginine supplementation will restore lithium resistance (i.e. \uparrow Arginine \Rightarrow \uparrow Lithium(+1) resistance).

Automated experiments identify interaction effects.

To evaluate the utility of the framework we conducted automated investigations on chemical stressor and nutrient intervention interactions (the most common type of hypothesis generated in the previous step). For each amino acid, the framework selected the highest-weighted hypothesis, chose an appropriate negative control from the model’s learned associations (see Methods), and ran the corresponding experiment—producing time-series growth curves, end-point metabolic profiles, effect sizes, and statistical evaluations.

Table 1. Summary of hypotheses selected for testing. The evaluation shows, for each hypothesis, whether the change in intracellular accumulation and the effect on resistance were (i) observed and (ii) in the predicted direction, and whether the negative control showed specificity. “-”, “+” indicates the observed or predicted sign of the change. “~” denotes an inconclusive change in accumulation. *Iterative hypothesis generated through data generated in hypothesis 4.. **Hypothesis tested using already acquired data. †Experiment tests inverse hypothesis, i.e. nutrient supplementation rather than reduction, and reversed effect.

Generated Hypothesis	Change in accumulation		Effect on resistance		Intervention specificity
	Observed	Predicted	Observed	Predicted	
Hypothesis 1 \downarrow Arginine \Rightarrow \uparrow Caffeine resistance†	+	+	-	-	Yes
Hypothesis 2 \uparrow Glutamate \Rightarrow \downarrow Spermine resistance	~	+	-	-	Yes
Hypothesis 3 \uparrow Glutamate \Rightarrow \downarrow Formic acid resistance	~	+	-	+	No
Hypothesis 4 \downarrow Glutamine \Rightarrow \downarrow Acetic acid resistance†	+	+	-	+	No
Hypothesis 5 \uparrow Lysine \Rightarrow \downarrow Hyperosmotic stress resistance (at 30% (w/v) sucrose)	+	+	+	-	Yes
Hypothesis 6 \downarrow Arginine \Rightarrow \downarrow Lithium(+1) resistance (at 0.1M lithium chloride)†	+	+	~	+	No
Hypothesis 7 \uparrow Proline \Rightarrow \uparrow Lactic acid resistance	+	+	~	+	No
Hypothesis 8* \uparrow Aminoacidipate \Rightarrow \uparrow Formic acid resistance (at 10mM formic acid)	-	+	+	+	Yes
Hypothesis 9** \uparrow Proline \Rightarrow \downarrow Formic acid resistance	~	+	~	-	No

Investigations were performed on five proteinogenic amino acids: L-glutamate, L-arginine, L-proline, L-glutamine, and L-lysine. Most investigations revealed significant interaction effects on growth in stressor-treated cells upon amino acid supplementation, several of which have not been previously discovered. An overview of all investigations is presented in table 1, with full statistical details in Sup. Note 7 and Sup. Table 2.

Hypothesis 1 (see table 1) was consistent with acquired empirical data (shown in Fig. 3A). The addition of L-arginine alone caused a modest reduction in AUC (area under the growth curve) (-2.5% per mM, $p < 0.05$), whereas caffeine treatment showed an inhibitory effect (-53.4% , $p < 0.001$). Their combined application resulted in a synergistic decrease relative to independent effects (-19.0% per mM, $p < 0.001$),

while the L-alanine negative control yielded a smaller decrease (-31.6% at 5mM, $p < 0.01$), confirming intervention specificity. Intracellular L-arginine accumulation increased significantly under high extracellular L-arginine supplementation ($p < 0.01$), confirming the validity of the intervention.

Hypothesis 2 was partially consistent with empirical data (see Fig. 3B). Addition of only L-glutamate yielded a small—but statistically insignificant—increase in AUC. However, it significantly sensitized the cells to spermine (-4.6% per mM, $p < 0.01$). Intracellular L-glutamate accumulation did not increase with supplementation, suggesting a downstream metabolite may be the actual mediator of changes in resistance. The L-alanine control increased resistance to spermine ($+45.5\%$ at 10mM, $p < 0.05$) and significantly decreased L-glutamate accumulation ($p < 0.001$).

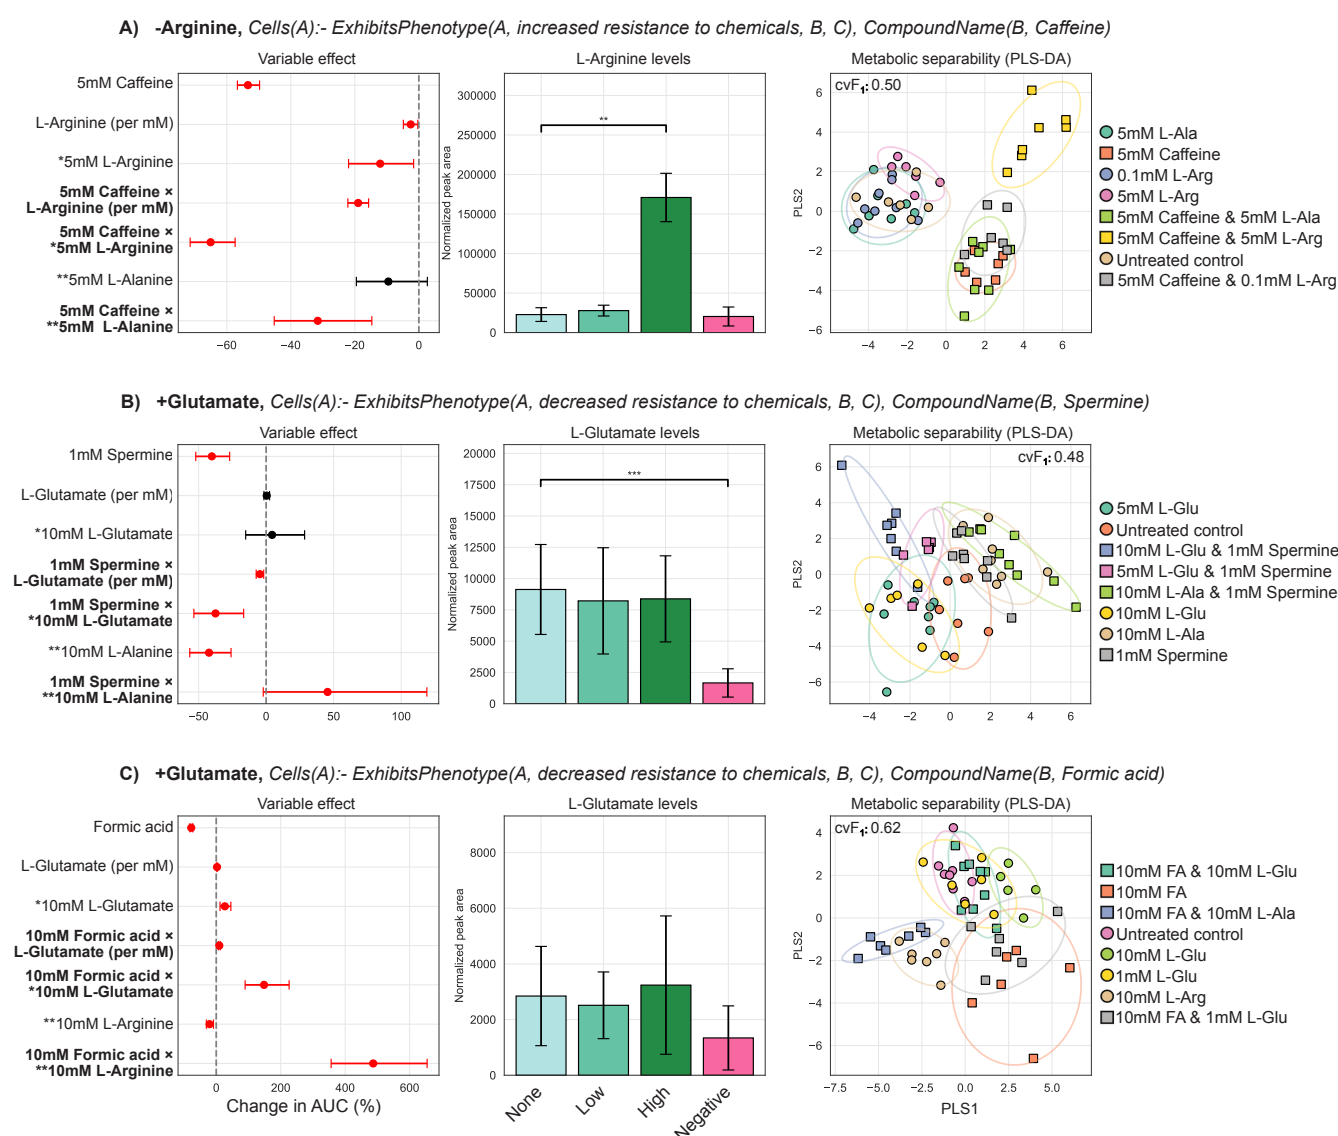


Fig. 3. Results from automated interaction experiments with examples of different outcomes. The title of each row denotes logic program that was tested along with the learned association that defines the intervention. The forest plot signifies the coefficients and confidence intervals (2.5% and 97.5%) derived from a generalized linear model using AUC as the response variable. Red highlights significant ($p < 0.05$) variable effects as calculated by a non-parametric bootstrap (5000 resamples). The bar-plot shows the intracellular accumulation of the intervention compound, with the error-bars representing the standard deviation. *None*, *Low* and *High* denote the levels of concentrations of the intervention compound. The PLS-DA loading plot visualizes the two-dimensional separability of the metabolic profiles of the experimental groups, confirming a metabolic change from the supplied interventions. The classification performance for the full five PLS-DA components can be seen in the corner. **Effect scaled to correspond to an equimolar dose of the negative control.* ***Negative control.*

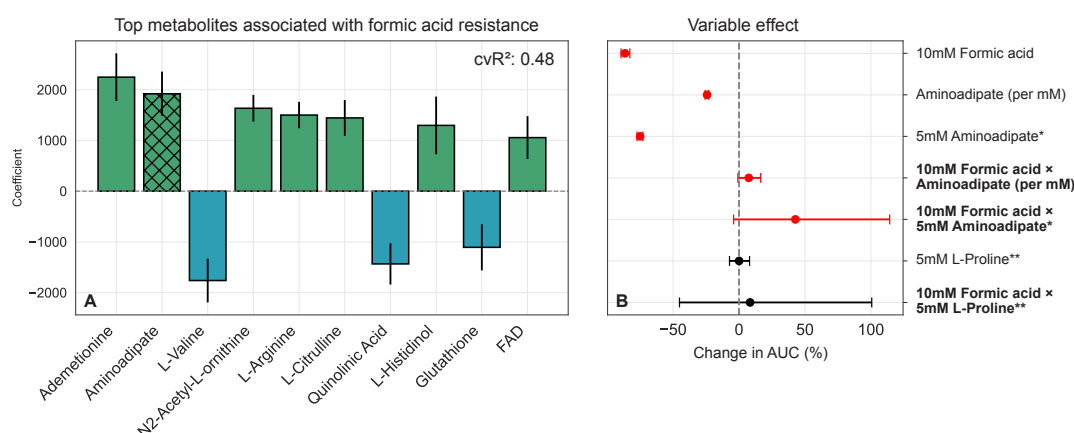


Fig. 4. Iterative hypothesis refinement. **A.** The bar-plot denotes the average magnitude of coefficients derived from a linear regressor when predicting for resistance to formic acid stress (using data derived from *hypothesis 4*, see Fig. 3B). Regression performance is presented as coefficient of determination across repeated cross validation (cvR^2). The hatched bar is the compound selected to generate the experiment (amino adipate). The error bars denote the standard deviation across cross validation folds. **B.** The forest plot signifies the coefficients and confidence intervals (2.5% and 97.5%) derived from a generalized linear model using AUC as the response variable. Red highlights significant ($p < 0.05$) variable effects as calculated by a non-parametric bootstrap (5000 resamples). The interaction terms are of special importance to the hypothesised logic program. *Effect scaled to correspond to an equimolar dose of the specificity control. **Negative control.

In a few select cases, the experimental validation of the hypothesis showed a non-predicted and non-specific interaction. For example, for *hypothesis 3*, as seen in Fig. 3C, the interaction effect between L-glutamate and formic acid was significant (+9.5% per mM, $p < 0.001$), but not in the predicted direction. The L-alanine negative control had a much larger effect on resistance under treatment compared to independent effects (+486% at 10 mM, $p < 0.001$), almost nullifying the effect of the stressor. L-glutamine and acetic acid (*hypothesis 4*) showed strong synergistic inhibition (−4.3% per mM, $p < 0.05$). However, L-leucine showed an equally strong effect (−36.9% at 10mM, $p < 0.01$), indicating the non-specificity of the intervention. L-glutamine was not significantly accumulated when supplemented, indicating a downstream mediator of reduced resistance.

Regarding *hypothesis 5*, L-lysine exhibited a specific, strong rescue effect against sucrose-induced hyper-osmotic stress (+8.9% per mM, $p < 0.001$), while valine produced a modest rescuing effect (+22.5% at 10 mM, $p < 0.05$). Intracellular L-lysine levels increased under the highest supplementation level ($p < 0.05$).

Hypothesis 6 suggested a rescuing effect of L-arginine supplementation on lithium-induced stress, but this was inconsistent with the data. Exposure to 100 mM lithium chloride severely reduced AUC (−84.6%, $p < 0.001$). The intervention had little effect on resistance outcome, although it did increase intracellular L-arginine accumulation at higher levels of supplementation ($p < 0.05$). The L-alanine negative control showed a synergistic decrease in AUC relative to independent effects (−15.9% at 5mM, $p < 0.05$) and decreased intracellular concentrations of arginine ($p < 0.05$). *Hypothesis 7* (involving L-proline and lactic acid) showed minimal impact on treatment outcome. Both the intervention and the negative control affected growth dynamics moderately, but only the L-alanine negative control reached statistical significance (−38.6% at 20mM, $p < 0.001$).

All outcomes—whether supporting or refuting the initial

hypothesis—are systematically recorded in a graph database.

Partial least squares discriminant analysis (PLS-DA) revealed clear separation of controls, interventions and stressors through their metabolic profiles. Cross-validation metrics indicated high model reliability, underscoring the consistency and specificity of the metabolomics data. Evaluation metrics and low dimensional representations of several investigations can be seen in Fig. 3. Processed data is stored in the graph database and raw data is stored in online repositories (see details in *data availability*).

Hypothesis refinement showed alleviation of formic acid stress by amino adipate.

Regularized linear regression was applied to data from *hypothesis 3* (visualized in Fig. 3B) to model growth dynamics as a function of formic acid-treated metabolic profiles. By interpreting the model's feature weights, this iterative analysis refined the initial hypothesis and led to a new, testable prediction. Based on the resulting ranked metabolites (see Fig. 4A), a logic program was constructed using experiment metadata and the highest-ranked locally available compound—amino adipate (see below).

```
+ Amino adipate, Cells(A) :=
  ExhibitsPhenotype(A, Increased Resistance, B, C),
  CompoundName(B, Formic acid),
  Condition(C, Treatment : 10mM Formic acid).
```

The hypothesis was fed into the initial step of the pipeline, and the experiment was subsequently performed. Results can be seen in Fig. 4B. Complete regression coefficients can be found in Sup. Table 3.

The results showed a partial rescue of formic acid stress (+7% per mM, $p < 0.05$) when combined with amino adipate, confirming the hypothesis. Note that the supplement and treatment are independently highly toxic to the cells (see Fig. 4B), and as such, the dynamics might be subject to saturation effects.

A database of hypotheses and experimental data enables the efficient reuse of experimental data.

Although our automated procedures improve efficiency, conducting experiments remains costly. To enable reuse of empirical data for initial assessment of hypotheses, and to fully record the hypotheses and experimental data, existing ontologies (e.g. APO) were extended and connected. We then transformed the generated hypotheses, the experimental protocols, and the empirical data into OWL-DL statements and recorded these in a graph database (Fig. 5AB), which can be queried for empirical data relevant for a particular hypothesis. The following hypothesis—suggesting an interaction between intracellular L-proline accumulation and resistance to formic acid stress—was generated by the initial stages of the automated procedure (see *hypothesis 9* in table 1).

+ Proline, Cells(A) :=
ExhibitsPhenotype(A, Decreased Resistance, B, C),
CompoundName(B, Formic acid)

Before executing any experiments, the database was queried for relevant empirical data. Proline was used as a negative control for *hypothesis 8*, meaning there are data from experiments conducted with proline supplementation and formic acid treatment. Returning these data from the database—see Fig. 5C—shows no decrease in resistance to formic acid stress, see Fig. 4B, which is inconsistent with the hypothesis. Therefore, this hypothesis can be de-prioritised for experimental validation, conserving valuable resources.

Discussion

The future of research lies in automated solutions. Advances in robotics, machine learning, and high-throughput technologies are transforming the scientific process (1, 3). These innovations help minimise human bias, accelerate research cycles, and reduce variation introduced by human error and incomplete recording of experimental protocols, environmental conditions, and other subtle factors that can influence outcomes (36–38). In this automated paradigm, algorithms design experiments, robots execute protocols, and the results are all automatically analysed, thus enabling exploration of vast experimental spaces beyond human throughput (4, 7, 8, 13). By codifying workflows and enforcing rigorous data-handling and reusability practices, such platforms ensure that every result is traceable, reproducible, and extensible. Ultimately, combining complex exploration with automated, quality-controlled systems promises to transform biology into a truly scalable, collaborative, and reliable discipline.

Building on this vision, we designed and evaluated an automated multi-agent framework that systematically produces and experimentally evaluates logic-derived, data-driven computational hypotheses, with metadata captured at every stage. We also demonstrate the utility of metabolomics data for evaluating interventions and for suggesting alternative explanations and follow-up experiments. Unlike typical agentic workflows—that orchestrate flexible yet fragile toolchains

with limited semantic structure—our framework formalizes knowledge representation from the outset. This foundation enables consistent hypothesis generation, rigorous tracking of experimental logic, and clearer links between data and interpretation.

Several hypotheses generated by our framework point to biologically relevant but previously underexplored interactions in *S. cerevisiae*. One example is the interaction between L-glutamate and spermine, despite these being two essential compounds connected to each other via several different reactions in glutathione metabolism (KEGG) (39).

Another previously uncharacterized finding is the interaction between L-arginine and caffeine, likely mediated by distinct regulation of the TORC1-complex. Caffeine acts as an inhibitor of TORC1 in yeast, and arginine is tightly linked to TORC1 activity (40, 41).

Even when outcomes diverged from predictions, the data revealed significant interactions between interventions and stressors—for example, between L-lysine and sucrose-induced hyper-osmotic stress. Lysine related genes are down-regulated under this stressor (42), but direct functional links remain sparse.

Through iterative hypothesis refinement, we demonstrate for the first time that aminoadipate confers resistance to formic acid stress, whereas L-glutamate’s role in modulating tolerance has been reported previously (43).

Testing these hypotheses highlighted mechanistic assumptions that proved limited. For example, treatments intended to increase intracellular glutamate sometimes failed to do so. In other cases (e.g., *hypotheses 2* and *3*), resistance phenotypes were likely driven by downstream metabolites rather than the supplemented compounds themselves. Interventions based on suggested metabolite concentrations may still modulate upstream or downstream reactions, explaining the disconnect between predicted concentrations and observed phenotypes (44). To capitalize on these insights, by archiving all outcomes under existing ontologies, the framework builds a knowledge base that supports future systems biology research and cross-study insights. Thus, the platform treats falsification as a valuable contribution rather than an uninformative failure.

The hypotheses generated and evaluated in this work are simple, but the framework can easily be extended to handle other types of hypotheses, such as those based on observed metabolite accumulations, changes in metabolite excretion rates, environmental stressors and drug-to-metabolite connections (relations present in the initial hypothesis generation steps, see Sup. Note 3). Its modular design also allows incorporation of additional data types, like transcriptomics and proteomics, with only minimal adjustments to the hypothesis-generation pipeline (45).

Although no intellectual input is needed from humans beyond defining the framework’s scope and limitations, the workflow is not fully automated: it still requires minimal human intervention for transferring sample plates between work stations. We also note that these actions are trivially automated should the method need to be scaled; moreover, adding

a more comprehensive orchestration layer could coordinate task scheduling, making it truly autonomous.

Looking forward, scaling this automated workflow would require strict selection of hypotheses to maximize information gain per run. Integrating richer logic, decision-theoretic frameworks, econometric modelling and metrics from information theory could allow the system to better formulate and prioritize experiments, saving resources and contributing to scientific knowledge in a faster and more ethically sound manner (1, 8, 46). More advanced LLMs, such as complex reasoning models, could also allow more sophisticated hypotheses to be explored.

In this work, we demonstrate a flexible multi-agent framework for end-to-end hypothesis generation and experimental validation—combining LLMs, relational learning, and automated laboratory workflows. Our approach leverages mass-spectrometry metabolomics—scalable, low-cost and automation friendly—to provide a rich information source to drive discovery, and deliver high-throughput, reproducible insights, firmly rooted in logic and community-adopted ontologies. We believe this platform lays the groundwork for a more reliable, machine-driven discovery process in systems biology, operating at unprecedented scale and rigour.

Methods

Frequent pattern mining.

The relational database used for hypothesis generation makes use of the *Saccharomyces* Genome Database (SGD), ChEBI, STITCH-DB, and the Yeast consensus model (Yeast9) as sources of relational data. All of the data used to create the database were downloaded using either AllianceGenome, STITCH-DB, or the Metabolic Atlas (all retrieved 2024-12-09) (27, 29–31, 47, 48).

The database consists of relations covering exhibited phenotypes of single gene deletant mutants and ontological descriptors of genetic and chemical perturbations. Additionally, it contains relations regarding protein-chemical interactions, and metabolism connected to the genes of interest (see Sup. Note 3 for a list of available relations). Only observables that are actionable within our experimental capacity were considered. This includes descriptors such as resistance to chemicals, compound accumulations and environmental sensitivities. Relations were filtered to only include facts derived from systematic mutation sets. The database is represented in Datalog, as its declarative structure enables clear and concise expression of biological relationships (34).

In order to extract biologically relevant patterns from the constructed database, relational learning was applied in the form of frequent pattern mining. These patterns were learned using the induce features mode in the ILP-engine aleph (v.5), utilizing a simplified version of the data-mining algorithm WARMR (25, 26). It is used to find frequent relational patterns using the deleted genes as positive examples, as in Brunnsäker et al. (45). The 25 genes with the most recorded phenotypes were used to construct the bottom-clause for the search (a bottom clause is the most specific clause that covers

a given example(s), serving as a starting point for generalization). Complete parameters and a more detailed description of the search can be found in Sup. Note 3.

The resulting patterns were propositionalised into a tabular dataset of logic programs covering 4678 single-gene deletants from the Mülleder et al. metabolomics dataset (32). When multiple propositionalised programs described the same examples, we prioritized the most detailed ones using a scored vocabulary.

Hypothesis weighting.

In order to link logic programs with a biological observable, the propositionalised logic programs were used as independent variables for predicting amino acid accumulations, as measured in Mülleder et al. (32). Associations were learned using an ElasticNet algorithm (49). Note that this makes the implicit assumption that it is an accumulation that underlies the hypothesis, not the functional flux. Learned coefficients were then averaged across 10-fold cross-validation. Each logic program was tied to the coefficients, providing a weight (and a testable association) for each logic program and amino acid present in the dataset. Logic programs with zero-valued coefficients are removed from the pool of hypotheses for each metabolite observable. Coefficients were scaled to unit ∞ -norm. Amino acids with a negative cvR^2 were removed from further consideration. Example hypotheses can be seen in the results.

Semantic recording of hypotheses.

The generated hypotheses have their origins in data downloaded from the *Saccharomyces* Genome Database (SGD), which records data using terms taken from ontologies: phenotypes are recorded using terminology defined in the *Ascomycete Phenotype Ontology* (APO) (27, 28), and chemical species are defined using terms from Chemical Entities of Biological Interest (ChEBI) (31).

APO was designed to record hypotheses about genotype–phenotype relations, and statements generally have four components: (1) the type of mutant; (2) the observable phenotype; (3) a qualifier on this observable (e.g. “increased”); and (4) the experiment type¹. The implicit definition of qualifiers in APO is for a mutant with respect to a wild-type strain, and is therefore insufficient for recording hypotheses concerning arbitrary changes in genotype or phenotype. We extend APO to include qualifying relations between collections of genotype and phenotype changes, called *organism states*. We also created relations to specify phenotypes that relate to chemical species, defined externally in ChEBI. These extensions are necessary to express the types of hypotheses handled in this work, for example: “cells with lower intracellular arginine levels exhibit increased resistance to caffeine.” Fig. 5A,B shows how this specific hypothesis is modelled using our framework.

The basic form of hypotheses in systems biology is $A \rightarrow B$, and for a hypothesis to be testable, A should be an

¹Note that experiment type will be absent in the case of a hypothesis not yet linked to any empirical data.

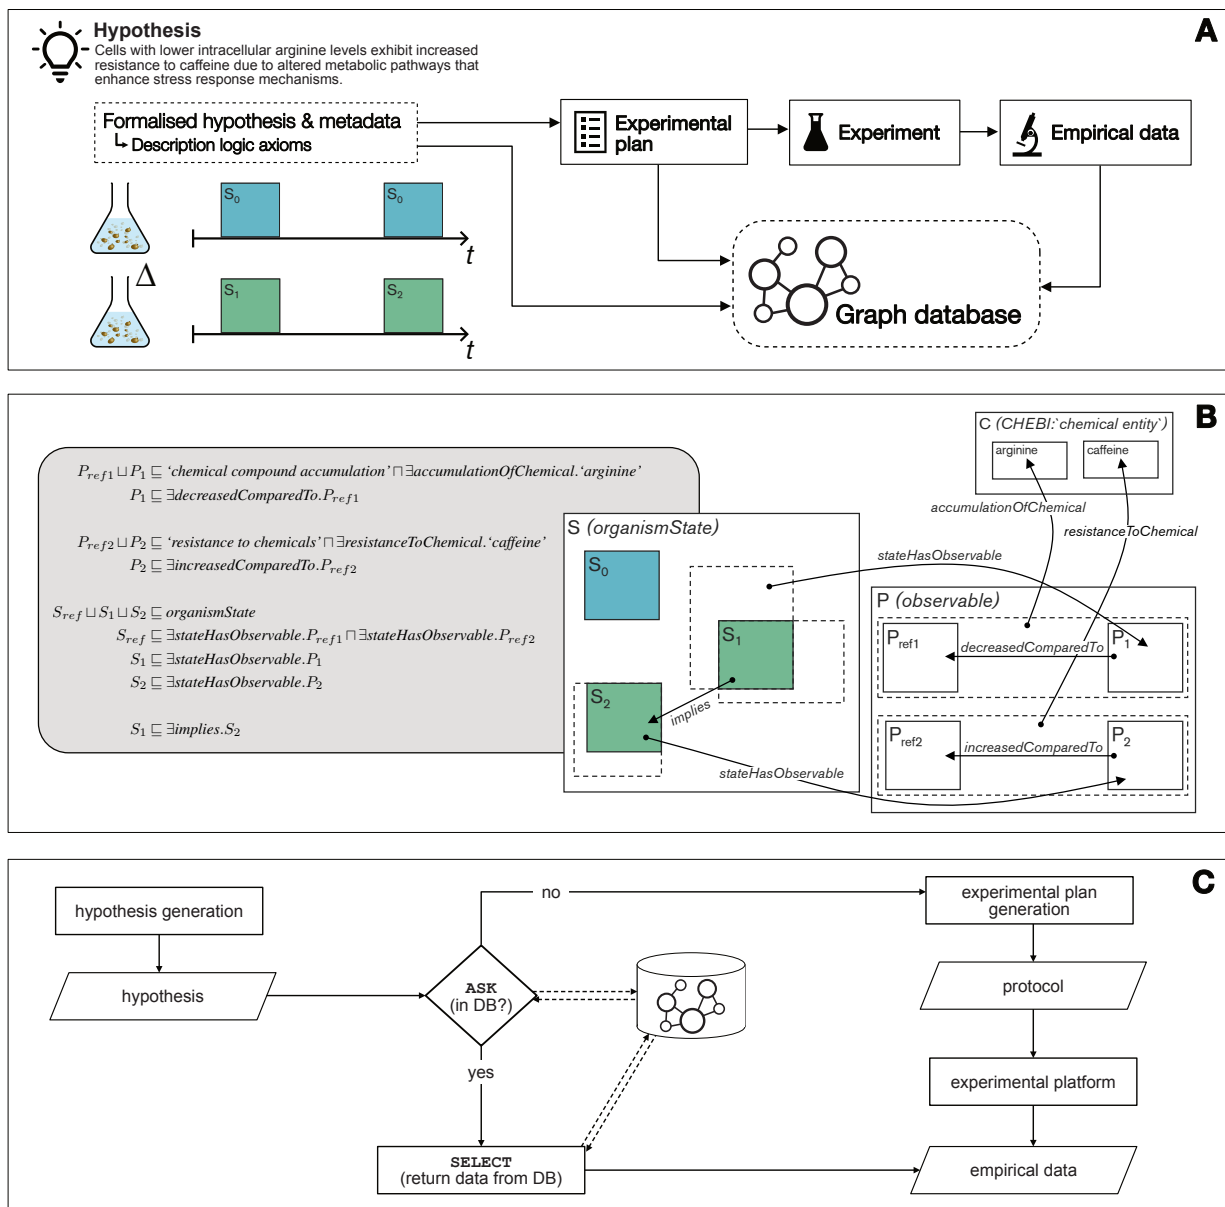


Fig. 5. Graph Database and description logics. **A.** The hypothesis, in its original form as a logic program and also with the LLM output, is formalised into description logic axioms using an extended version of the Ascomycete Phenotype Ontology (APO); the generated experimental plans are stored using terms from the Ontology for Biomedical Investigations (OBI); and empirical data is stored using terms from the Genesis ontology. **B.** (L) DL axioms expressing the same hypothesis shown in A; (R) a visual representation of the concept inclusions expressed in the statements (with a subset of the relations shown, for clarity). **C.** To make efficient use of data already collected, an **ASK** SPARQL query is executed on the graph database to identify if there are empirical data that can be relevant to the hypothesis; if yes, then a **SELECT** query is executed to return the data, else if no, the full automated experimental generation procedure is followed.

intervention achievable with the available laboratory equipment and consumables, and B is measurable. In our new terminology, A and B are *organism states*. The specific nature of the implication, $A \rightarrow B$, will vary in different domains, and as such the *implies* relation should be seen as a top-level term. In this work, given the prompt provided to the LLM, we can interpret *implies*(A, B) as

intervention to achieve state A will lead to an observation of state B , where an absence of intervention A will not[, and optionally where an alternative intervention A' (negative control) also will not lead to an observation of state B .]

For now we delegate the assessment of the truth of this relation for each hypothesis to the statistical analyses described.

The axioms introduced to extend APO were edited using Protégé (v5.6.4) (50). We transform each hypothesis to OWL-DL statements using Python scripts. The resulting quads are stored in datasets on Apache Jena Fuseki server (v4.5.0), building on the database system developed by Reder et al. (51). An example set of description logic axioms that record the hypothesis stated above, and the resulting OWL-DL statements (serialised in TriG format), is provided in Sup. Note 6.

Generative experimental design.

A standardized context (background, protocols and lab constraints) was used to prompt an LLM-agent for an initial, detailed explanation of a generated hypothesis and a basic experimental plan to test it. A negative control is automatically selected from a list of amino acids that have zero-valued coefficients for the generated hypothesis. The contexts, explanation and prompts are saved in the graph database for each hypothesis. Templates can be found in the GitHub repository (see *code availability*).

To ensure increased robustness, several hypothesis-plan variations are then generated with the same context, and a second LLM-agent picks the best one based on relevance to yeast physiology, safety and context fidelity. Note, that in order to comply with safety regulations of the laboratory setup in use, this final experimental plan is at this stage manually assessed for safety before being passed on.

A third LLM-agent auto-formalises the chosen experimental plan into a JSON-file, which is then validated against the original context and hypothesis. If it fails any check, the JSON is regenerated up to three times. Experimental plans are generated and auto-formalised via the OpenAI API using the GPT-4o model (v.2024-08-06) through the official Python client library (openai v.1.44.1) (33).

Using the formalised, machine-readable experimental protocol, the experimental variables are automatically identified, and a robust plate-layout is generated using PLAID (52). Using the layout, a library of stock compounds and the experimental protocol, a dispensing scheme with aspiration and dispensing targets and volumes for use with Hamilton Venus Software (v.5.0.1; Hamilton Company) is generated. An example scheme can be seen in Sup. Table 4.

A mass spectrometry run-list is automatically produced from the supplied protocol and user-defined parameters. The injection order is randomized to mitigate instrumental variation and systematic effects. Study quality control samples (sQCs) were placed systematically across the entire run-list, before and after biological samples, allowing for normalization and batch correction. Blocks of samples were separated by blank (extraction solvent) injections in order to assess analyte carry-over and background signal. An example run-list can be seen in Sup. Table 5.

Automated sample preparation and cultivation.

The generated plate-layout and dispensing schemes are executed on a Hamilton Microlab Star (using pre-prepared stocks of the available compounds) producing the microwell plate used for the experiment. Unless otherwise specified, experiments use minimal YNB medium (with ammonium sulfate, 2% glucose, and 75 µg/mL ampicillin, but no amino acids). The strain used to represent a reference genotype was selected to be Δho from the prototrophic strain collection constructed in Mülleder et al. (53)—due to the inertness of the deletion in non-mating-type contexts.

Each of the generated hypotheses were tested on separate microwell plates, allowing for up to 10 biological replicates per experimental condition, depending on the suggested intervention. Intervention and perturbation compounds present

in the library are dissolved in sterile milliQ-water.

To run the cultivation and sampling, an Overlord (v.2.0) script (the orchestration software used to control the robotics and instrumentation in Eve) is generated programmatically using predefined parameters, such as cultivation time and plate-reader configurations (4, 5, 8). For all of the experiments performed in this project, cultivation duration was set to 20h. See Sup. Note 2 for a complete description of the cultivation protocols used.

Automated sample processing.

Sampling for mass spectrometry analysis is automatically performed after experiment termination. Quenched samples are prepared by robotically passing the cultivation plate to a Bravo Automated Liquid Handling Platform and transferring the samples into -80°C methanol (99% purity). The ratio between sample and methanol is kept at 1:1 v/v. The quenching plate is then subsequently passed to a centrifuge, where it is centrifuged at 2240g for 10 minutes. The supernatant is then discarded and the pellet used for subsequent metabolite extraction.

Metabolite extraction is performed using a standardized, automated variation of the extraction protocol used in Brunnsåker et al. (5). Extraction is robotically performed in a Hamilton Microlab Star, where 150µL of 80% ethanol (pre-heated to boiling temperatures) is dispensed into the sample plate, which is placed on a Hamilton HeaterShaker add-on set at 100°C to avoid drops in temperature. The sample plate is shaken vigorously at 1600 rpm for 2 minutes to expedite resuspension of the quenched cells. The supernatant is transferred to a filter plate (0.2µm, VWR, 97052-124) and separated using positive pressure filtering (set at 40psi for 60 seconds).

Study QCs are prepared manually through overnight cultivation of Δho in reference conditions (30°C, YNB without amino acids). Samples are quenched in 1/1 (v/v) -80°C pure methanol, and subsequently, extracted in 80% ethanol heated to boiling temperatures through a water bath. The boiling ethanol is poured over the cells, and vortexed for 1 minute, and put back in the hot water bath for 4 minutes. The pellet is discarded, and the supernatant is stored in -80°C pending analysis. This is similar to protocols used in Brunnsåker et al. (5) and Reder et al. (22).

Growth metrics and hypothesis testing.

Growth curves are constructed from raw optical density (OD) readings at 600nm using a BMG Omega Polarstar. The growth curves are then automatically processed to remove outliers. Outlier detection is based on the median absolute deviation (MAD) of log-transformed area under the curve (AUC), total variation and final OD values. Wells exceeding a threshold of 3 MADs for any parameter are identified, excluded and reported. Curves are normalized to background by subtracting the average value of the three closest blanks on the microwell plate. The remaining curves are smoothed using locally estimated scatterplot smoothing (LOESS, statsmodels, v.0.14.4) (54). AUC is calculated using the composite trapezoidal rule on the smoothed curves

(numpy, v.1.24.3) (55).

The impact of treatment and intervention on growth dynamics are automatically tested using log-transformed AUC as the response variable, and fitting a generalized linear model (statsmodels, v.0.14.4) that included terms for treatment, the concentration of the intervention, an interaction term, and a separate flag for negative controls. To account for skewness and unequal variances, a non-parametric bootstrap (5000 resamples) is used to compute 95% confidence intervals and empirical p-values for each main and interacting effect. Example results can be seen in Fig. 3. The experimental variables, such as concentrations, are extracted from the auto-formalized protocols.

Automated metabolomics data acquisition and analysis.

An internal Collision Cross-Section (CCS) library was created using metabolites present in the Yeast9 Genome scale metabolic model as compounds of interest (29). CCS-values for relevant metabolites were acquired from AllCCS (56). In case of missing experimental records for common adducts of amino acids (as these are the main targets of the generated hypotheses), predicted CCS values from AllCCS were used.

Mass spectrometry analysis is performed using an Agilent RapidFire-365 and an Agilent 6560 DTIMS-QToF system (23, 24). The instrument Data acquisition and peak picking is done automatically via AutoMS, using a run-list generated from the hypothesis metadata and experimental protocol as the input (22). Peaks are identified based on both m/z (mass-to-charge ratio) and CCS (\AA^2) (57). The cartridge in use for all experiments was HILIC (Hydrophilic Interaction Liquid Chromatography). Details regarding mobile phases, method parameters, acquisition settings, demultiplexing parameters and peak picking parameters can be seen in Sup. Note 4 and Sup. Note 5.

The AutoMS-output (a tabular representation of identified metabolites with an associated peak area) is initially curated using sensor outputs from the RapidFire system, removing injections with insufficient injected sample ($\geq 600ms$). Peaks with an average area below the included blanks (extraction solvent), along with peaks with more than 1/3 missing detections across study samples, are excluded from further analysis. In case of several identified adducts per metabolite, the one with the lowest relative standard deviation (RSD) in the sQC samples is used. Samples are normalized using Probabilistic Quotient Normalization (PQN), utilising the sQC-samples as the reference spectra (58). Missing values are imputed with multivariate iterative imputation using RandomForest (59). Samples outside of the 95% Hotelling T2 ellipse (using PCA-derived principal components) and high unexplained residual variances (beyond 99th percentile) are treated as outliers, similar to quality control recommendations suggested by González-Domínguez *et al.* (60). Outlier reports are included in the experiment summaries found in the GitHub repository.

To estimate the validity of the LLM-suggested interventions (confirming intracellular accumulation), pairwise comparisons of the target metabolites across untreated condi-

tions is performed using a Wilcoxon rank-sum test (scipy, v.1.15.1) (61). Metabolic separability is classified using (5-component) partial least-squares discriminant analysis (PLS-DA), treating each experimental group as a separate class (mixOmics, v.6.22.0) (62). Classification performance is evaluated using the macro F_1 score.

Metabolites associated with resistance to treatment are determined with ElasticNetCV, using repeated cross-validation (scikit-learn v.1.2.2) (63). AUC of treated samples are used as the dependent variable. Example results can be seen in Fig. 3.

As part of the evaluation, metabolomics data were collected for each individual cultivation in the study, producing 976 separate biological injections, including 336 sQC injections. The metabolomics dataset spans 52 unique conditions, with 21 different nutrient compositions, and 8 treatments, including controls. Each condition has a minimum of 10 biological replicates and associated growth dynamics. See *data availability* for details.

Linking hypotheses and experimental plans to data.

We also record the experimental plans, and the resulting empirical data from completed experiments, using controlled vocabularies in a graph database. These plans and data are linked to the hypothesis through a combination of terms from existing ontologies and new terms. In the case of experimental protocols the terms are taken primarily from the Ontology for Biomedical Investigations (OBI) (64); and terms for growth and metabolomics are taken primarily from the Genesis ontology (51).

The JSON files containing the experimental protocols, and the tabular files containing growth and metabolomics data, are then mapped to relevant terms from existing ontologies using RMLMapper (v7.3.3); the mapping files can be found in the GitHub repository (see *code availability*).

Data availability

All data are included in the supplementary information or available from the authors. Mass-spectrometry data and associated metadata can be downloaded from Zenodo at <https://doi.org/10.5281/zenodo.15730908>.

Code availability

Code (including cultivation, quenching and extraction scripts), contexts, complete supplemental information and experimental results can be found on GitHub at <https://github.com/DanielBrunnsaker/GenExp>.

Bibliography

1. Sebastian Musslick, Laura K. Bartlett, Suyog H. Chandramouli, Marina Dubova, Fernand Gobet, Thomas L. Griffiths, Jessica Hullman, Ross D. King, J. Nathan Kutz, Christopher G. Lucas, Suhas Mahesh, Franco Pestilli, Sabina J. Sloman, and William R. Holmes. Automating the practice of science: Opportunities, challenges, and implications. *Proceedings of the National Academy of Sciences*, 122(5):e2401238121, February 2025. doi: 10.1073/pnas.2401238121. Publisher: Proceedings of the National Academy of Sciences.
2. Alexander H. Gower, Konstantin Korovin, Daniel Brunnsaker, Filip Kronström, Gabriel K. Reder, Ievgeniia A. Tiukova, Ronald S. Reiserer, John P. Wikswo, and Ross D. King. The Use of AI-Robotic Systems for Scientific Discovery, June 2024. arXiv:2406.17835 [cs].

3. Hector Zenil, Jesper Tegnér, Felipe S. Abrahão, Alexander Lavin, Vipin Kumar, Jeremy G. Frey, Adrian Weller, Larisa Soldatova, Alan R. Bundy, Nicholas R. Jennings, Koichi Takahashi, Lawrence Hunter, Saso Dzeroski, Andrew Briggs, Frederick D. Gregory, Carla P. Gomes, Jon Rowe, James Evans, Hiroaki Kitano, and Ross King. The Future of Fundamental Science Led by Generative Closed-Loop Artificial Intelligence, August 2023. arXiv:2307.07522 [cs].
4. Anthony Coutant, Katherine Roper, Daniel Trejo-Banos, Dominique Bouthinon, Martin Carpenter, Jacek Grzebyta, Guillaume Santini, Henry Soldano, Mohamed Elati, Jan Ramon, Céline Rouveiro, Larisa N. Soldatova, and Ross D. King. Closed-loop cycles of experiment design, execution, and learning accelerate systems biology model development in yeast. *Proceedings of the National Academy of Sciences*, 116(36):18142–18147, September 2019. ISSN 0027-8424, 1091-6490. doi: 10.1073/pnas.1900548116.
5. Daniel Brunsäker, Gabriel K. Reder, Nikul K. Soni, Otto I. Savolainen, Alexander H. Gower, Ievgeniia A. Tiukova, and Ross D. King. High-throughput metabolomics for the design and validation of a diauxic shift model. *npj Systems Biology and Applications*, 9(1):1–9, April 2023. doi: 10.1038/s41540-023-00274-9.
6. Ross D. King, Kenneth E. Whelan, Ffion M. Jones, Philip G. K. Reiser, Christopher H. Bryant, Stephen H. Muggleton, Douglas B. Kell, and Stephen G. Oliver. Functional genomic hypothesis generation and experimentation by a robot scientist. *Nature*, 427(6971): 247–252, January 2004. ISSN 1476-4687. doi: 10.1038/nature02236. Publisher: Nature Publishing Group.
7. Ross D. King, Jem Rowland, Stephen G. Oliver, Michael Young, Wayne Aubrey, Emma Byrne, Maria Liakata, Magdalena Markham, Pinar Pir, Larisa N. Soldatova, Andrew Sparkes, Kenneth E. Whelan, and Amanda Clare. The Automation of Science. *Science*, 324(5923):85–89, April 2009. doi: 10.1126/science.1165620. Publisher: American Association for the Advancement of Science.
8. Kevin Williams, Elizabeth Bilisland, Andrew Sparkes, Wayne Aubrey, Michael Young, Larisa N. Soldatova, Kurt De Grave, Jan Ramon, Michaela de Clare, Worachart Sirawaraporn, Stephen G. Oliver, and Ross D. King. Cheaper faster drug development validated by the repositioning of drugs against neglected tropical diseases. *Journal of the Royal Society, Interface*, 12(104):20141289, March 2015. ISSN 1742-5662. doi: 10.1098/rsif.2014.1289.
9. Peiran Zhang, Zhenhua Tian, Ke Jin, Kaichun Yang, Wesley Collyer, Joseph Rufo, Neil Upreti, Xianjun Dong, Luke P. Lee, and Tony Jun Huang. Automating life science labs at the single-cell level through precise ultrasonic liquid sample ejection: PULSE. *Microsystems & Nanoengineering*, 10(1):1–16, November 2024. ISSN 2055-7434. doi: 10.1038/s41378-024-00798-y. Publisher: Nature Publishing Group.
10. Nathan J. Szymanski, Bernardus Rendy, Yuxing Fei, Rishi E. Kumar, Tanjin He, David Miltsted, Matthew J. McDermott, Max Gallant, Ekin Dogus Cubuk, Amil Merchant, Haegyom Kim, Anubhav Jain, Christopher J. Bartel, Kristin Persson, Yan Zeng, and Gerbrand Ceder. An autonomous laboratory for the accelerated synthesis of novel materials. *Nature*, 624(7990):86–91, December 2023. ISSN 1476-4687. doi: 10.1038/s41586-023-06734-w. Publisher: Nature Publishing Group.
11. Microsoft Research AI4Science and Microsoft Azure Quantum. The Impact of Large Language Models on Scientific Discovery: a Preliminary Study using GPT-4, December 2023. arXiv:2311.07361 [cs].
12. Juraj Gottweis, Wei-Hung Weng, Alexander Daryin, Tao Tu, Anil Palepu, Petar Sirkovic, Artiom Myaskovsky, Felix Weissenberger, Keran Rong, Ryutarō Tanno, Khaled Saab, Dan Popovici, Jacob Blum, Fan Zhang, Katherine Chou, Avinatan Hassidim, Burak Gokturk, Amin Vahdat, Pushmeet Kohli, Yossi Matias, Andrew Carroll, Kavita Kulkarni, Nenad Tomašev, Yuan Guan, Vikram Dhillon, Eeshit Dhaval Vaishnav, Byron Lee, Tiago R. D. Costa, José R. Penadés, Gary Peltz, Yunhan Xu, Annalisa Pawloski, Alan Karthikesalingam, and Vivek Natarajan. Towards an AI co-scientist, February 2025. arXiv:2502.18864 [cs].
13. Daniil A. Boiko, Robert MacKnight, Ben Kline, and Gabe Gomes. Autonomous chemical research with large language models. *Nature*, 624(7992):570–578, December 2023. ISSN 1476-4687. doi: 10.1038/s41586-023-06792-0. Publisher: Nature Publishing Group.
14. Abbi Abdel-Rehim, Hector Zenil, Oghenejokpeme Orhobor, Marie Fisher, Ross J. Collins, Elizabeth Bourne, Gareth W. Fearnley, Emma Tate, Holly X. Smith, Larisa N. Soldatova, and Ross King. Scientific hypothesis generation by large language models: laboratory validation in breast cancer treatment. *Journal of the Royal Society Interface*, 22(227):20240674, June 2025. doi: 10.1098/rsif.2024.0674. Publisher: Royal Society.
15. Gabriel K. Reder, Carl Collins, Abbi Abdel Rehim, Larisa Soldatova, and Ross D. King. LLM-retrieval based scientific knowledge grounding. 2025.
16. Wanlu Lei, Caterina Fuster-Barceló, Gabriel Reder, Arrate Muñoz-Barrutia, and Wei Ouyang. BioImage.IO Chatbot: a community-driven AI assistant for integrative computational bioimaging. *Nature Methods*, 21(8):1368–1370, August 2024. ISSN 1548-7105. doi: 10.1038/s41592-024-02370-y. Publisher: Nature Publishing Group.
17. Ali Essam Ghareeb, Benjamin Chang, Ludovico Mitchener, Angela Yiu, Caralyn J. Szostkiewicz, Jon M. Laurent, Muhammed T. Razzak, Andrew D. White, Michaela M. Hinks, and Samuel G. Rodrigues. Robin: A multi-agent system for automating scientific discovery, May 2025. arXiv:2505.13400 [cs].
18. Sebastian Lobentanzer, Shaohong Feng, Noah Bruderer, Andreas Maier, Cankun Wang, Jan Baumbach, Jorge Abreu-Vicente, Nils Krehl, Qin Ma, Thomas Lemberger, and Julio Saez-Rodriguez. A platform for the biomedical application of large language models. *Nature Biotechnology*, 43(2):166–169, February 2025. ISSN 1546-1696. doi: 10.1038/s41587-024-02534-3. Publisher: Nature Publishing Group.
19. Chris Lu, Cong Lu, Robert Tjarko Lange, Jakob Foerster, Jeff Clune, and David Ha. The AI Scientist: Towards Fully Automated Open-Ended Scientific Discovery, September 2024. arXiv:2408.06292 [cs].
20. Hiroaki Kitano. Systems Biology: A Brief Overview. *Science*, 295(5560):1662–1664, March 2002. doi: 10.1126/science.1069492. Publisher: American Association for the Advancement of Science.
21. Marcel Binz, Stephan Alaniz, Adina Roskies, Balazs Aczel, Carl T. Bergstrom, Colin Allen, Daniel Schadt, Dirk Wulff, Jevin D. West, Qiong Zhang, Richard M. Shiffrin, Samuel J. Gershman, Vencislav Popov, Emily M. Bender, Marco Marelli, Matthew M. Botvinick, Zeynep Akata, and Eric Schulz. How should the advancement of large language models affect the practice of science? *Proceedings of the National Academy of Sciences*, 122(5): e2401227121, February 2025. doi: 10.1073/pnas.2401227121. Publisher: Proceedings of the National Academy of Sciences.
22. Gabriel K. Reder, Erik Y. Björström, Daniel Brunsäker, Filip Kronström, Praphapan Lasin, Ievgeniia Tiukova, Otto I. Savolainen, James N. Dodds, Jody C. May, John P. Wikswo, John A. McLean, and Ross D. King. AutoMS: Automated Ion Mobility Metabolomic Fingerprinting. *Journal of the American Society for Mass Spectrometry*, 35(3):542–550, March 2024. ISSN 1044-0305. doi: 10.1021/jasms.3c00396. Publisher: American Society for Mass Spectrometry. Published by the American Chemical Society. All rights reserved.
23. Brian T. Veach, Thilak K. Mudalige, and Peter Rye. RapidFire Mass Spectrometry with Enhanced Throughput as an Alternative to Liquid–Liquid Salt Assisted Extraction and LC/MS Analysis for Sulfonamides in Honey. *Analytical Chemistry*, 89(6):3256–3260, March 2017. ISSN 0003-2700. doi: 10.1021/acs.analchem.6b04889. Publisher: American Chemical Society.
24. Jody C. May, Cody R. Goodwin, Nichole M. Lareau, Katrina L. Leaprot, Caleb B. Morris, Ruwan T. Kurulugama, Alex Mordehai, Christian Klein, William Barry, Ed Darland, Gregor Overney, Kenneth Imatani, George C. Stafford, John C. Fjeldsted, and John A. McLean. Conformational Ordering of Biomolecules in the Gas Phase: Nitrogen Collision Cross Sections Measured on a Prototype High Resolution Drift Tube Ion Mobility-Mass Spectrometer. *Analytical Chemistry*, 86(4):2107–2116, February 2014. ISSN 0003-2700. doi: 10.1021/ac4038448. Publisher: American Chemical Society.
25. Ashwin Srinivasan. The Aleph Manual, 2007.
26. Ross D. King, Ashwin Srinivasan, and Luc Dehaspe. Warmr: a data mining tool for chemical data. *Journal of Computer-Aided Molecular Design*, 15(2):173–81, February 2001. doi: 10.1023/A:1008171016861.
27. J. Michael Cherry, Eurie L. Hong, Craig Amundsen, Rama Balakrishnan, Gail Binkley, Esther T. Chan, Karen R. Christie, Maria C. Costanzo, Selina S. Dwight, Stacia R. Engel, Dianna G. Fisk, Jodi E. Hirschman, Benjamin C. Hitz, Kalpana Karra, Cynthia J. Krieger, Stuart R. Miyasato, Rob S. Nash, Julie Park, Marek S. Skrzypek, Matt Simison, Shuai Weng, and Edith D. Wong. Saccharomyces Genome Database: the genomics resource of budding yeast. *Nucleic Acids Research*, 40(Database issue):D700–705, January 2012. ISSN 1362-4962. doi: 10.1093/nar/gkr1029.
28. Stacia R. Engel, Suzi Aleksander, Robert S. Nash, Edith D. Wong, Shuai Weng, Stuart R. Miyasato, Gavin Sherlock, and J. Michael Cherry. Saccharomyces Genome Database: advances in genome annotation, expanded biochemical pathways, and other key enhancements. *Genetics*, 229(3):iyae185, March 2025. ISSN 1943-2631. doi: 10.1093/genetics/iyae185.
29. Chengyu Zhang, Benjamin J. Sánchez, Feiran Li, Cheng Wei Quan Eiden, William T. Scott, Ulf W. Liebal, Lars M. Blank, Hendrik G. Mengers, Hingah Anton, Albert Tafur Rangel, Sebastián N. Mendoza, Lixin Zhang, Jens Nielsen, Hongzhong Lu, and Eduard J. Kerkhoven. Yeast9: a consensus genome-scale metabolic model for *S. cerevisiae* curated by the community. *Molecular Systems Biology*, 20(10):1134–1150, October 2024. ISSN 1744-4292. doi: 10.1038/s44320-024-00060-7. Num Pages: 1150 Publisher: John Wiley & Sons, Ltd.
30. Damian Szklarczyk, Alberto Santos, Christian von Mering, Lars Juhl Jensen, Peer Bork, and Michael Kuhn. STITCH 5: augmenting protein–chemical interaction networks with tissue and affinity data. *Nucleic Acids Research*, 44(D1):D380–D384, January 2016. ISSN 0305-1048. doi: 10.1093/nar/gkv1277.
31. Janna Hastings, Gareth Owen, Adriano Dekker, Marcus Ennis, Namrata Kale, Venkatesh Muthukrishnan, Steve Turner, Neil Swainston, Pedro Mendes, and Christoph Steinbeck. ChEBI in 2016: Improved services and an expanding collection of metabolites. *Nucleic acids research*, 44(1):1214–9, January 2016. ISSN 1362-4962. doi: 10.1093/nar/gkv1031.
32. Michael Mülleder, Enrica Calvani, Mohammad Tauger Alam, Richard Kangda Wang, Florian Eckerstorfer, Aleksej Zelezniak, and Markus Ralser. Functional Metabolomics Describes the Yeast Biosynthetic Regulome. *Cell*, 167(2):553–65, October 2016. doi: 10.1016/j.cell.2016.09.007.
33. OpenAI, Josh Achiam, Steven Adler, Sandhini Agarwal, Lama Ahmad, Ilge Akkaya, Florenzia Leoni Aleman, Diogo Almeida, Janko Altmenschmidt, Shyamal Anadkat, Red Avila, Igor Babuschkin, Suchir Balaji, Valerie Balcom, Paul Baltescu, Haiming Bao, Mohammad Bavarian, Jeff Belgum, Irwan Bello, Jake Berdine, Gabriel Bernadett-Shapiro, Christopher Berner, Lenny Bogdonoff, Oleg Boiko, Madeline Boyd, Anna-Luisa Brakman, Greg Brockman, Tim Brooks, Miles Brundage, Kevin Button, Trevor Cai, Rosie Campbell, Andrew Cann, Brittany Carey, Chelsea Carlson, Rory Carmichael, Brooke Chan, Che Chang, Fotis Chantzis, Derek Chen, Sully Chen, Ruby Chen, Jason Chen, Mark Chen, Ben Chess, Chester Cho, Casey Chu, Hyung Won Chung, Dave Cummings, Jeremiah Currier, Yunxing Dai, Cory Decareaux, Thomas Degry, Noah Deutsch, Damien Deville, Arka Dhar, David Dohan, Steve Dowling, Sheila Dunning, Adrien Ecoffet, Atty Eleti, Tyna Eloundou, David Farhi, Liam Fedus, Niko Felix, Simón Posada Fishman, Juston Forte, Isabella Fulford, Leo Gao, Elie Georges, Christian Gibson, Vik Goel, Tarun Gogineni, Gabriel Goh, Rapha Gontijo-Lopes, Jonathan Gordon, Morgan Grafstein, Scott Gray, Ryan Greene, Joshua Grosso, Shixiang Shane Gu, Yufei Guo, Chris Hallacy, Jesse Han, Jeff Harris, Yuchen He, Mike Heaton, Johannes Heidecke, Chris Hesse, Alan Hickey, Wade Hickey, Peter Hoeschele, Brandon Houghton, Kenny Hsu, Shengli Hu, Xin Hu, Joost Huizinga, Shantanu Jain, Shawn Jain, Joanne Jang, Angela Jiang, Roger Jiang, Haozhun Jin, Denny Jin, Shino Jomoto, Billie Jonn, Heewoo Jun, Tomer Kaftan, Łukasz Kaiser, Ali Kamali, Ingmar Kanitscheider, Nitish Shirish Keskar, Tabarak Khan, Logan Kilpatrick, Jong Wook Kim, Christina Kim, Yongjik Kim, Jan Hendrik Kirchner, Jamie Kiros, Matt Knight, Daniel Kokotajlo, Łukasz Kondraciuk, Andrew Kondrich, Aris Konstantinidis, Kyle Kosic, Gretchen Krueger, Vishal Kuo, Michael Lampe, Ikai Lan, Teddy Lee, Jan Leike, Jade Leung, Daniel Levy, Chak Ming Li, Rachel Lim, Molly Lin, Stephanie Lin, Mateusz Litwin, Theresa Lopez, Ryan Lowe, Patricia Lue, Anna Makanju, Kim Malfacini, Sam Manning, Todor Markov, Yaniv Markovski, Bianca Martin, Katie Mayer, Andrew Mayne, Bob McGrew, Scott Mayer McKinney, Christine McLeavey, Paul McMillan, Jake McNeil, David Medina, Aalok Mehta, Jacob Menick, Luke Metz, Andrey Mishchenko, Pamela Mishkin, Vinnie Monaco, Evan Morikawa, Daniel Mossing, Tong Mu, Mira Murati, Oleg Murat, David Mely, Ashvin Nair, Reiichiro Nakano, Rajeev Nayak, Arvind Neelakantan, Richard Ngo, Hyeonwoo Noh, Long Ouyang, Cullen O’Keefe, Jakub Pachocki, Alex Paino, Joe Palermo, Ashley Pantuliano, Giamattista Parascandolo, Joel Parish, Emy Parparita, Alex Passos, Mikhail Pavlov, Andrew Peng, Adam

- Perelman, Filipe de Avila Belbute Peres, Michael Petrov, Henrique Ponde de Oliveira Pinto, Michael, Pokorny, Michelle Pokrass, Vitthir H. Pong, Tolly Powell, Alethea Power, Boris Power, Elizabeth Proehl, Raul Puri, Alec Radford, Jack Rae, Aditya Ramesh, Cameron Raymond, Francis Real, Kendra Rimbach, Carl Ross, Bob Rotsted, Henri Roussez, Nick Ryder, Mario Saltarelli, Ted Sanders, Shibani Santurkar, Girish Sastry, Heather Schmidt, David Schnurr, John Schulman, Daniel Selsam, Kyla Sheppard, Toki Sherbakov, Jessica Shieh, Sarah Shoker, Pranav Shyam, Szymon Sidor, Eric Sigler, Maddie Simens, Jordan Sitkin, Katarina Slama, Ian Sohl, Benjamin Sokolowsky, Yang Song, Natalie Staudacher, Felipe Petroski Such, Natalie Summers, Ilya Sutskever, Jie Tang, Nikolas Tezak, Madeleine B. Thompson, Phil Tillet, Amin Tootoonchian, Elizabeth Tseng, Preston Tuggle, Nick Turley, Jerry Tworek, Juan Felipe Cerón Uribe, Andrea Vallone, Arun Vijayvergiya, Chelsea Voss, Carroll Wainwright, Justin Jay Wang, Alvin Wang, Ben Wang, Jonathan Ward, Jason Wei, C. J. Weinmann, Akila Welihinda, Peter Welinder, Jiayi Weng, Lilian Weng, Matt Wiethoff, Dave Willner, Clemens Winter, Samuel Wolrich, Hannah Wong, Lauren Workman, Sherwin Wu, Jeff Wu, Michael Wu, Kai Xiao, Tao Xu, Sarah Yoo, Kevin Yu, Qiming Yuan, Wojciech Zaremba, Rowan Zellers, Chong Zhang, Marvin Zhang, Shengjia Zhao, Tianhao Zheng, Juntang Zhuang, William Zhuk, and Barret Zoph. GPT-4 Technical Report, March 2024. arXiv:2303.08774 [cs].
- Luc Dehaspe and Hannu Toivonen. Discovery of frequent DATALOG patterns. *Data Mining and Knowledge Discovery*, 3(1):7–36, March 1999. doi: 10.1023/A:1009863704807.
- Stephen Muggleton, Luc De Raedt, David Poole, Ivan Bratko, Peter Flach, Katsumi Inoue, and Ashwin Srinivasan. ILP turns 20. *Machine Learning*, 86(1):3–23, January 2012. doi: 10.1007/s10994-011-5259-2.
- Katherine Roper, A. Abdel-Rehim, Sonya Hubbard, Martin Carpenter, Andrey Rzhetsky, Larisa Soldatova, and Ross D. King. Testing the reproducibility and robustness of the cancer biology literature by robot. *Journal of The Royal Society Interface*, 19(189):20210821, April 2022. doi: 10.1098/rsif.2021.0821.
- Marcus R. Munafò, Brian A. Nosek, Dorothy V. M. Bishop, Katherine S. Button, Christopher D. Chambers, Nathalie Percie du Sert, Uri Simonsohn, Eric-Jan Wagenmakers, Jennifer J. Ware, and John P. A. Ioannidis. A manifesto for reproducible science. *Nature Human Behaviour*, 1(1):0021, January 2017. ISSN 2397-3374. doi: 10.1038/s41562-016-0021. Publisher: Nature Publishing Group.
- John P. A. Ioannidis. Why Most Published Research Findings Are False. *PLOS Medicine*, 2(8):e124, August 2005. ISSN 1549-1676. doi: 10.1371/journal.pmed.0020124. Publisher: Public Library of Science.
- Minoru Kanehisa, Miho Furumichi, Yoko Sato, Masayuki Kawashima, and Mari Ishiguro-Watanabe. KEGG for taxonomy-based analysis of pathways and genomes. *Nucleic Acids Research*, 51(1):587–92, January 2023. doi: 10.1093/nar/gkac963.
- Duygu Dikicioglu, Elif Dereli Eke, Serpil Eraslan, Stephen G. Oliver, and Betül Kirdar. Saccharomyces cerevisiae adapted to grow in the presence of low-dose rapamycin exhibit altered amino acid metabolism. *Cell Communication and Signaling*, 16(1):85, November 2018. ISSN 1478-811X. doi: 10.1186/s12964-018-0298-y.
- Aaron Reinke, Jenny C. Y. Chen, Sofia Aronova, and Ted Powers. Caffeine Targets TOR Complex 1 and Provides Evidence for a Regulatory Link between the FRB and Kinase Domains of Tor1p*. *Journal of Biological Chemistry*, 281(42):31616–31626, October 2006. ISSN 0021-9258. doi: 10.1016/S0021-9258(19)84075-9.
- Daniel J Erasmus, George K van der Merwe, and Hennie J.J. van Vuuren. Genome-wide expression analyses: Metabolic adaptation of *Saccharomyces cerevisiae* to high sugar stress. *FEMS Yeast Research*, 3(4):375–399, June 2003. ISSN 1567-1356. doi: 10.1016/S1567-1356(02)00203-9.
- Lingjie Zeng, Zaiyong Si, Xuemei Zhao, Pixue Feng, Jinxiang Huang, Xiufeng Long, and Yi Yi. Metabolome analysis of the response and tolerance mechanisms of *Saccharomyces cerevisiae* to formic acid stress. *The International Journal of Biochemistry & Cell Biology*, 148:106236, July 2022. ISSN 1357-2725. doi: 10.1016/j.biocel.2022.106236.
- Abdul-Hamid Emwas, Kacper Szczepski, Inas Al-Younis, Joanna Izabela Lachowicz, Mariusz Jaremkó. Fluxomics - New Metabolomics Approaches to Monitor Metabolic Pathways. *Frontiers in Pharmacology*, 13, March 2022. ISSN 1663-9812. doi: 10.3389/fphar.2022.805782. Publisher: Frontiers.
- Daniel Brunnsåker, Filip Kronström, Ievgeniia A Tiukova, and Ross D King. Interpreting protein abundance in *Saccharomyces cerevisiae* through relational learning. *Bioinformatics*, 40(2):btae050, February 2024. ISSN 1367-4811. doi: 10.1093/bioinformatics/btae050.
- Ross D. King, Teresa Scassa, Stefan Kramer, and Hiroaki Kitano. Stockholm declaration on AI ethics: why others should sign. *Nature*, 626(8000):716–716, February 2024. doi: 10.1038/d41586-024-00517-7. Bandiera_abtest: a Cg_type: Correspondence Publisher: Nature Publishing Group Subject_term: Machine learning, Ethics.
- The Alliance of Genome Resources Consortium. Updates to the Alliance of Genome Resources central infrastructure. *Genetics*, 227(1):iyae049, May 2024. ISSN 1943-2631. doi: 10.1093/genetics/iyae049.
- Feiran Li, Yu Chen, Mihail Anton, and Jens Nielsen. GotEnzymes: an extensive database of enzyme parameter predictions. *Nucleic Acids Research*, 51(1):583–6, January 2023. doi: 10.1093/nar/gkac831.
- Hui Zou and Trevor Hastie. Regularization and Variable Selection Via the Elastic Net. *Journal of the Royal Statistical Society Series B: Statistical Methodology*, 67(2):301–320, April 2005. ISSN 1369-7412. doi: 10.1111/j.1467-9868.2005.00503.x.
- Mark A. Musen. The protégé project: a look back and a look forward. *AI Matters*, 1(4):4–12, June 2015. doi: 10.1145/2757001.2757003.
- Gabriel K Reder, Alexander H Gower, Filip Kronström, Rushikesh Halle, Vinay Mahamuni, Amit Patel, Harshal Hayatnagarkar, Larisa N Soldatova, and Ross D King. Genesis-DB: a database for autonomous laboratory systems. *Bioinformatics Advances*, 3(1):vbadi02, January 2023. ISSN 2635-0041. doi: 10.1093/bioadv/vbadi02.
- María Andreína Francisco Rodríguez, Jordi Carreras Puigvert, and Ola Spjuth. Designing microplate layouts using artificial intelligence. *Artificial Intelligence in the Life Sciences*, 3: 100073, December 2023. ISSN 2667-3185. doi: 10.1016/j.aiisci.2023.100073.
- Michael Mülleder, Floriana Capuano, Pinar Pir, Stefan Christen, Uwe Sauer, Stephen G. Oliver, and Markus Ralser. A prototrophic deletion mutant collection for yeast metabolomics and systems biology. *Nature Biotechnology*, 30(12):1176–1178, December 2012. ISSN 1546-1696. doi: 10.1038/nbt.2442. Publisher: Nature Publishing Group.
- William S. Cleveland, , and Susan J. Devlin. Locally Weighted Regression: An Approach to Regression Analysis by Local Fitting. *Journal of the American Statistical Association*, 83(403):596–610, September 1988. ISSN 0162-1459. doi: 10.1080/01621459.1988.10478639. Publisher: ASA Website _eprint: <https://www.tandfonline.com/doi/pdf/10.1080/01621459.1988.10478639>.
- Charles R. Harris, K. Jarrod Millman, Stéfan J. van der Walt, Ralf Gommers, Pauli Virtanen, David Cournapeau, Eric Wieser, Julian Taylor, Sebastian Berg, Nathaniel J. Smith, Robert Kern, Matti Picus, Stephan Hoyer, Marten H. van Kerkwijk, Matthew Brett, Allan Haldane, Jaime Fernández del Río, Mark Wiebe, Pearu Peterson, Pierre Gérard-Marchant, Kevin Sheppard, Tyler Reddy, Warren Weckesser, Hameer Abbasi, Christoph Gohlke, and Travis E. Oliphant. Array programming with NumPy. *Nature*, 585(7825):357–362, September 2020. ISSN 1476-4687. doi: 10.1038/s41586-020-2649-2. Publisher: Nature Publishing Group.
- Haosong Zhang, Mingdu Luo, Hongmiao Wang, Fandong Ren, Yandong Yin, and Zheng-Jiang Zhu. ALLCCS2: Curation of Ion Mobility Collision Cross-Section Atlas for Small Molecules Using Comprehensive Molecular Representations. *Analytical Chemistry*, 95(37): 13913–13921, September 2023. ISSN 0003-2700. doi: 10.1021/acs.analchem.3c02267. Publisher: American Chemical Society.
- Kendra J. Adams, Brian Pratt, Neelanjan Bose, Laura G. Dubois, Lisa St. John-Williams, Kevin M. Perrott, Karina Ky, Pankaj Kapahi, Vagisha Sharma, Michael J. MacCoss, M. Arthur Moseley, Carol A. Colton, Brendan X. MacLean, Birgit Schilling, and J. Will Thompson. Skyline for Small Molecules: A Unifying Software Package for Quantitative Metabolomics. *Journal of Proteome Research*, 19(4):1447–1458, April 2020. ISSN 1535-3893. doi: 10.1021/acs.jproteome.9b00640. Publisher: American Chemical Society.
- Frank Dieterle, Alfred Ross, Götz Schlotterbeck, and Hans Senn. Probabilistic Quotient Normalization as Robust Method to Account for Dilution of Complex Biological Mixtures. Application in 1H NMR Metabonomics. *Analytical Chemistry*, 78(13):4281–4290, July 2006. ISSN 0003-2700. doi: 10.1021/ac051632c. Publisher: American Chemical Society.
- Runmin Wei, Jingye Wang, Mingming Su, Erik Jia, Shaoqiu Chen, Tianlu Chen, and Yan Ni. Missing Value Imputation Approach for Mass Spectrometry-based Metabolomics Data. *Scientific Reports*, 8(1):663, January 2018. ISSN 2045-2322. doi: 10.1038/s41598-017-19120-0. Publisher: Nature Publishing Group.
- Álvaro González-Domínguez, Núria Estanyol-Torres, Carl Brunius, Rikard Landberg, and Raúl González-Domínguez. QComics: Recommendations and Guidelines for Robust, Easily Implementable and Reportable Quality Control of Metabolomics Data. *Analytical Chemistry*, 96(3):1064–1072, January 2024. ISSN 0003-2700. doi: 10.1021/acs.analchem.3c03660. Publisher: American Chemical Society.
- Pauli Virtanen, Ralf Gommers, Travis E. Oliphant, Matt Haberland, Tyler Reddy, David Cournapeau, Evgeni Burovski, Pearu Peterson, Warren Weckesser, Jonathan Bright, Stéfan J. van der Walt, Matthew Brett, Joshua Wilson, K. Jarrod Millman, Nikolay Mayorov, Andrew R. J. Nelson, Eric Jones, Robert Kern, Eric Larson, C. J. Carey, İlhan Polat, Yu Feng, Eric W. Moore, Jake VanderPlas, Denis Laxalde, Josef Perktold, Robert Cimrman, Ian Henriksen, E. A. Quintero, Charles R. Harris, Anne M. Archibald, Antônio H. Ribeiro, Fabian Pedregosa, and Paul van Mulbregt. SciPy 1.0: fundamental algorithms for scientific computing in Python. *Nature Methods*, 17(3):261–272, March 2020. ISSN 1548-7105. doi: 10.1038/s41592-019-0686-2. Publisher: Nature Publishing Group.
- Florian Rohart, Benoît Gautier, Amrit Singh, and Kim-Anh Lê Cao. mixOmics: An R package for 'omics feature selection and multiple data integration. *PLOS Computational Biology*, 13(11):e1005752, November 2017. ISSN 1553-7358. doi: 10.1371/journal.pcbi.1005752. Publisher: Public Library of Science.
- Fabian Pedregosa, Gaël Varoquaux, Alexandre Gramfort, Vincent Michel, Bertrand Thirion, Olivier Grisel, Matthieu Blondel, Peter Prettenhofer, Ron Weiss, Vincent Dubourg, Jake Vanderplas, Alexandre Passos, David Cournapeau, Matthieu Brucher, Matthieu Perrot, and Édouard Duchesnay. Scikit-learn: Machine Learning in Python. *Journal of Machine Learning Research*, 12(85):2825–2830, 2011. ISSN 1533-7928.
- Anita Bandrowski, Ryan Brinkman, Mathias Brochhausen, Matthew H. Brush, Bill Bug, Marcus C. Chibucos, Kevin Clancy, Mélanie Courtot, Dirk Derom, Michel Dumontier, Liju Fan, Jennifer Fong, Gilberto Fragoso, Frank Gibson, Alejandra González-Beltrán, Melissa A. Haendel, Yongqun He, Mervi Heiskanen, Tina Hernandez-Boussard, Mark Jensen, Yu Lin, Allyson L. Lister, Phillip Lord, James Malone, Elisabetta Manduchi, Monnie McGee, Norman Morrison, James A. Overton, Helen Parkinson, Bjoern Peters, Philippe Rocca-Serra, Alan Ruttenberg, Susanna-Assunta Sansone, Richard H. Scheuermann, Daniel Schober, Barry Smith, Larisa N. Soldatova, Christian J. Stockert Jr, Chris F. Taylor, Carlo Tornai, Jessica A. Turner, Randi Vita, Patricia L. Whetzel, and Jie Zheng. The Ontology for Biomedical Investigations. *PLOS ONE*, 11(4):e0154556, April 2016. ISSN 1932-6203. doi: 10.1371/journal.pone.0154556. Publisher: Public Library of Science.

ACKNOWLEDGEMENTS

The authors gratefully acknowledge the members of the Ross King Group at Chalmers University and Cambridge University for their insights and discussions. We also thank the members of the Chalmers Mass Spectrometry Infrastructure for their help and technical expertise. Additionally, we thank the Ralser Lab at Charité-Universitätsmedizin Berlin for providing the yeast strains used in this study. This work was partially supported by the Wallenberg AI, Autonomous Systems and Software Program (WASP) funded by the Knut and Alice Wallenberg Foundation

AUTHOR CONTRIBUTIONS

D.B. and R.D.K. conceptualized the study. D.B. and A.H.G. designed the generation and analysis framework. D.B. and P.N. designed the experimental pipelines and the integration between platforms. A.H.G., F.K. and D.B. designed the ontologies and databases. D.B., P.N. and E.Y.B. executed the experiments. D.B., E.Y.B. and I.A.T. analysed the results. D.B., A.H.G. and R.D.K. wrote the manuscript. All authors reviewed the manuscript.