# Independent Analytical Verification of Adjoint-Based Spectral Phase Optimization for Raman Suppression in Optical Fiber

MultiModeNoise.jl / smf-gain-noise Repository
Rivera Lab, Cornell University

Verification Document Prepared for Ignacio Rivera
Cornell University, Department of Physics

March 2026 — v3 (updated 2026-04-02: line numbers, adjoint solver, log-cost, Raman overflow fix, diagrams, data figures)

**Abstract**

This document presents an independent, equation-by-equation verification of the mathematical formulation and Julia implementation of an adjoint-based spectral phase optimization system for Raman suppression in single-mode optical fiber. We re-derive every key equation from first principles, audit the source code in the `smf-gain-noise/` repository against these derivations, and assess whether the overall research approach is sound. The verification covers: (1) the forward Generalized Nonlinear Schrödinger Equation (GNLSE) in the interaction picture, (2) the cost function and its Wirtinger derivative, (3) the adjoint equation for reverse-mode sensitivity analysis, (4) the chain rule through the spectral phase mask, (5) the regularization terms and their gradients, and (6) the numerical methods and validation tests. We find that **the core mathematical formulation is correct**, with the adjoint gradient verified to 0.026% relative error against finite differences. We identify one **non-critical inconsistency** (cost reported in dB to L-BFGS while gradient is in linear scale) and several **advisory items** regarding regularization choices, attenuator treatment in the adjoint, and the physical realizability of optimized phase profiles. **v3 update (2026-04-02):** All 13 stale line numbers re-verified. Adjoint solver updated from Vern9/1e-10 to Tsit5/1e-8. Added: log-scale cost function (Section D), Raman response overflow fix, auto-sizing time windows, boundary verification results, TikZ diagrams, and sweep result figures. SPM formula corrected (was missing $0.86/T_0$ factor).

# Contents

**1 Introduction and Research Context** **4**
1.1 Stimulated Raman Scattering in Optical Fibers . . . . . 4
1.2 Why Suppress Raman? . . . . . 4
1.3 Spectral Phase Shaping as a Control Knob . . . . . 4
1.4 Literature Context . . . . . 4

**2 The Forward Model: Generalized NLSE** **5**
2.1 The Lab-Frame GNLSE . . . 5
2.2 The Interaction Picture . . . 6
2.3 Code Implementation of the Forward RHS . . . 6
2.4 Dispersion Operator Construction . . . 8
2.5 Raman Response Function . . . 8
2.6 Physical Parameters . . . 9

**3 The Optimization Problem** **9**
3.1 Decision Variable and Cost Function . . . 9
3.2 Why This Cost Function? . . . 10
3.3 Why L-BFGS? . . . 10
3.4 Connection to Machine Learning . . . 11

**4 The Adjoint Method** **11**
4.1 Three Perspectives on the Adjoint . . . 11
4.1.1 Perspective 1: Constrained Optimization via Lagrange Multipliers 11
4.1.2 Perspective 2: Continuous Backpropagation . . . 11
4.1.3 Perspective 3: Computational Cost Argument . . . 11
4.2 Derivation of the Adjoint Equation . . . 12
4.3 Terminal Condition: $\partial J/\partial u_L^*$ . . . 12
4.4 Chain Rule Through the Phase Mask . . . 13
4.5 Interaction Picture for the Adjoint . . . 13
4.6 Self-Steepening Adjoint . . . 14
4.7 Raman Convolution Adjoint . . . 14

**5 Verification of Validation Tests** **15**
5.1 Dispersion Broadening Test . . . 15
5.2 Soliton Propagation Test . . . 15
5.3 Finite-Difference Gradient Check . . . 15
5.4 Taylor Remainder Test . . . 15
5.5 Multi-Start Convergence . . . 15

**6 Critical Assessment** **16**
6.1 What Is Verified Correct . . . 16
6.2 Issues Found . . . 17
6.3 Correct but Could Be Improved . . . 17
6.4 Is the Research Approach Sound? (R2, R3, R4) . . . 18

**7 Code-to-Formulation Consistency Table** **19**

**8 Regularization Analysis (R5, Task 12)** **20**
8.1 GDD Penalty . . . 20
8.2 Boundary Penalty . . . 21
8.3 Assessment of Regularization Choices . . . 21

**A Notation Table** **22**

**B Complete Derivation Worksheets** **22**
B.1 Worksheet: Wirtinger Derivatives . . . 22
B.2 Worksheet: Terminal Condition Derivation . . . 23
B.3 Worksheet: Chain Rule Through Phase Mask . . . 23
B.4 Worksheet: Interaction Picture Adjoint Transformation . . . 23
B.5 Worksheet: GDD Penalty Gradient . . . 23

**C Code Audit Findings** **24**
C.1 simulate_disp_mmf.jl (Forward Solver) . . . 24
C.2 sensitivity_disp_mmf.jl (Adjoint Solver) . . . 25
C.3 raman_optimization.jl (Main Script) . . . 26
C.4 common.jl (Shared Functions) . . . 26
C.5 helpers.jl (Utilities) . . . 27

**D New Infrastructure (v2)** **27**
D.1 SPM-Corrected Time Window (Phase 7) . . . 27
D.2 Parameter Sweep Infrastructure (Phase 7) . . . 28
D.3 Log-Scale Cost Function (v3) . . . 28
D.4 Boundary Verification (v3) . . . 28
D.5 Sweep Results . . . 29

**E Integration Pass — April 2026** **31**
E.1 Re-baselined single-mode suppression . . . 32
E.2 Sharpness of the single-mode optimum . . . 32
E.3 Warm-start transferability . . . 32
E.4 Reduced-parameterisation Pareto front . . . 32
E.5 Hessian is indefinite at L-BFGS optima . . . 33
E.6 Determinism . . . 33
E.7 Multimode optimizer is code-complete, physics-unexercised . . . 33
E.8 Cost-function default: `log_dB` on SMF-28, open elsewhere . . . 33
E.9 What did NOT survive the audit . . . 34
E.10 Boundary-energy caveat on the SMF-28 $L = 2$ m canonical . . . 34
E.11 Scope limitation on the Taylor-remainder adjoint test . . . 35

# 1 Introduction and Research Context

## 1.1 Stimulated Raman Scattering in Optical Fibers

When an intense ultrashort laser pulse propagates through an optical fiber, it interacts with the molecular vibrations of the silica glass. This interaction, called *stimulated Raman scattering* (SRS), transfers energy from the pulse (the "pump") to longer wavelengths (lower frequencies), creating a "Stokes" wave red-shifted by approximately 13 THz from the pump center frequency. The physical mechanism is inelastic scattering: a pump photon is absorbed and re-emitted at lower energy, with the energy difference exciting a vibrational mode of the $SiO_2$ molecule.

For ultrashort pulses ($\sim$100 fs), the Raman effect manifests as the *Raman self-frequency shift* (RSFS): the pulse's spectral center of mass drifts continuously toward longer wavelengths as it propagates. This is particularly important in the anomalous dispersion regime ($\beta_2 < 0$) near 1550 nm, where soliton dynamics amplify the effect. The soliton self-frequency shift, first described by Gordon (1986) and Mitschke and Mollenauer (1986), scales as $T_0^{-4}$ for fundamental solitons, making short pulses especially vulnerable.

## 1.2 Why Suppress Raman?

In many applications—frequency comb generation, supercontinuum sources, quantum noise squeezing experiments (the Rivera Lab's primary interest)—the Raman-shifted energy represents an uncontrolled loss channel. Energy transferred to the Stokes wave is unavailable for the target process. Suppressing Raman scattering while preserving the desired nonlinear interaction (Kerr effect, soliton formation) is therefore a key engineering goal.

## 1.3 Spectral Phase Shaping as a Control Knob

The key physical insight behind this project is that the *spectral phase* $\varphi(\omega)$ applied to the input pulse changes its temporal profile without altering its power spectrum. Different temporal shapes experience different peak power histories during propagation, leading to different amounts of Raman scattering. By optimizing $\varphi(\omega)$, we can search for temporal profiles that minimize Raman energy transfer.

This is physically realizable using standard pulse shaping technology: a spatial light modulator (SLM) in a $4f$-line can apply arbitrary spectral phases with $\sim$10 mrad precision. The approach has been used extensively in coherent control of chemical reactions and multiphoton microscopy, but its application to Raman suppression in fiber propagation appears to be **relatively novel**.

## 1.4 Literature Context

- **GNLSE formulation:** The governing equation follows Agrawal, *Nonlinear Fiber Optics*, 6th ed. (2019), Chapter 2 (NLSE derivation) and Chapter 13 (Raman response). The Raman response function $h_R(t)$ uses the Blow–Wood model (1989).

- **Adjoint methods for the NLSE:** Marcuse (1990) applied perturbation theory to the NLSE. More recently, *Adjoint sensitivity analysis approach for the nonlinear Schrödinger*

*equation* by Ganapathysubramanian and Zabaras (Optics Letters, 2019) explicitly derived adjoint-based gradients for NLSE optimization in fiber optics. The mathematical framework—Lagrange multipliers enforcing the PDE constraint, backward propagation of the co-state—is standard in PDE-constrained optimization (see Hinze et al., 2009; Tröltzsch, 2010).

- **Raman suppression techniques:** Published approaches include spectral filtering via fiber Bragg gratings (Chen et al., Appl. Opt. 2017), fiber design (large mode area, photonic crystal fibers), and simply using shorter fibers or lower power. Spectral *amplitude* shaping for SRS control has been demonstrated, but spectral *phase* optimization via adjoint methods for Raman suppression appears to be unexplored in the published literature as of 2025.

- **L-BFGS for PDE-constrained optimization:** L-BFGS is the default optimizer in major PDE-constrained optimization frameworks (dolfin-adjoint, ADCME). It is well-suited because it requires only gradient evaluations (no Hessian), has low memory footprint via limited-memory updates, and handles large parameter spaces ($N_t \sim 10^4$) efficiently.

**Advisory Note**

The novelty of this approach—adjoint-based spectral phase optimization for Raman suppression—is both a strength and a risk. It is a strength because it addresses a real problem with a principled method. It is a risk because the lack of published comparisons means we cannot validate our results against independent implementations. The finite-difference gradient checks and the physical validation tests (soliton propagation, energy conservation, dispersion broadening) are therefore *critical* evidence of correctness.

# 2 The Forward Model: Generalized NLSE

## 2.1 The Lab-Frame GNLSE

The electric field envelope $u(z,t)$ in a single-mode fiber satisfies the generalized nonlinear Schrödinger equation (GNLSE). In the frequency domain, the lab-frame GNLSE is:

$$\frac{\partial \hat{u}_\omega}{\partial z} = iD(\omega)\hat{u}_\omega + i\gamma\, \hat{S}(\omega)\, \mathcal{F}\left[(1-f_R)\,|u|^2 u + f_R\left(h_R * |u|^2\right) u\right] \tag{1}$$

where:

- $D(\omega) = \sum_{n=2}^{N_\beta} \frac{\beta_n}{n!}\omega^n$ is the dispersion operator (Taylor expansion of the propagation constant about $\omega_0$). Note: $\beta_0$ (common phase) and $\beta_1$ (group velocity) are excluded—we work in the co-moving frame.

- $\gamma$ is the nonlinear coefficient [$\mathrm{W}^{-1}\mathrm{m}^{-1}$].

- $\hat{S}(\omega) = \omega/\omega_0$ is the self-steepening operator.

- $f_R = 0.18$ is the fractional Raman contribution.

- $h_R(t)$ is the Raman response function.
- $*$ denotes temporal convolution.
- $\mathcal{F}$ denotes the Fourier transform (time $\to$ frequency).

**Verified Correct**

**Comparison to Agrawal:** Equation (1) matches Agrawal Eq. (2.3.36) for the case of a single mode ($M = 1$). The self-steepening term $S(\omega) = 1 + \omega/\omega_0$ in Agrawal's notation reduces to $\omega/\omega_0$ when the "1" is absorbed into the overall structure of the equation (the "1" corresponds to the standard NLSE without self-steepening; the code implements the full ratio $\omega/\omega_0$, which is equivalent for frequencies near $\omega_0$). The Raman response uses the Blow–Wood model, consistent with Agrawal Eq. (2.3.40).

## 2.2 The Interaction Picture

The dispersion term $iD(\omega)\hat{u}_\omega$ is *stiff*: it produces rapid oscillations in $\hat{u}_\omega$ without changing the pulse shape. We remove it via the transformation:

$$\boxed{\tilde{u}_\omega(z) = e^{-iD(\omega)z}\,\hat{u}_\omega(z)} \tag{2}$$

This is the *interaction picture*, analogous to the interaction picture in quantum mechanics. Substituting:

$$\begin{aligned}\frac{\partial \tilde{u}_\omega}{\partial z} &= -iD(\omega)\tilde{u}_\omega + e^{-iD(\omega)z}\frac{\partial \hat{u}_\omega}{\partial z} \\ &= -iD(\omega)\tilde{u}_\omega + e^{-iD(\omega)z}\Big[iD(\omega)\hat{u}_\omega + i\gamma\hat{S}(\omega)\mathcal{F}[\mathrm{NL}]\Big] \\ &= e^{-iD(\omega)z}\cdot i\gamma\hat{S}(\omega)\cdot\mathcal{F}[\mathrm{NL}]\end{aligned} \tag{3}$$

where $\mathrm{NL} = (1 - f_R)|u|^2u + f_R(h_R * |u|^2)u$ is evaluated using the lab-frame field $\hat{u}_\omega = e^{iD(\omega)z}\tilde{u}_\omega$.

**Key Result**

The interaction picture ODE for the GNLSE (single mode, $M = 1$):

$$\boxed{\frac{d\tilde{u}_\omega}{dz} = i\,e^{-iD(\omega)z}\cdot\hat{S}(\omega)\cdot\mathcal{F}\big[\gamma(1-f_R)|u|^2u + \gamma(h_R * |u|^2)u\big]} \tag{4}$$

where $u(z,t) = \mathcal{F}^{-1}[e^{iD(\omega)z}\tilde{u}_\omega(z)]$ is the lab-frame time-domain field.

## 2.3 Code Implementation of the Forward RHS

The function `disp_mmf!` in `simulate_disp_mmf.jl` implements Eq. (4). The computational steps are:

1. **Lines 28–29:** Compute $e^{\pm iD(\omega)z}$:

```
@. exp_D_p = cis(Dw * z)  # exp(+iDz)
@. exp_D_m = cis(-Dw * z) # exp(-iDz)
```

2. **Line 31:** Transform to lab frame: $\hat{u}_\omega = e^{iDz}\tilde{u}_\omega$:

```
@. uw = exp_D_p * uw_tilde
```

3. **Lines 33–36:** Transform to time domain and extract real/imaginary parts:

```
fft_plan_M! * uw    # FFT: freq -> time (in this convention)
@. ut = attenuator * uw
@. v = real(ut)
@. w = imag(ut)
```

   **Convention note:** The code uses $u_\omega = \mathrm{IFFT}(u_t)$, so $u_t = \mathrm{FFT}(u_\omega)$. This is an *inverted* convention compared to the standard physics convention where $\hat{u} = \mathrm{FFT}(u)$.

4. **Lines 39–43:** Compute Kerr nonlinearity $\eta_K = (1 - f_R)\gamma|u|^2 u$:

```
@tullio dKt[t,i,j] = g[i,j,k,l] * (v[t,k]*v[t,l] + w[t,k]*w[t,l])
@tullio aK[t,i] = dKt[t,i,j] * v[t,j]
@tullio bK[t,i] = dKt[t,i,j] * w[t,j]
@. hKt = aK + 1im * bK
@. hKt *= one_m_fR
```

   For $M = 1$: $\delta_K = \gamma(v^2 + w^2) = \gamma|u|^2$, and $\eta_K = \delta_K \cdot u \cdot (1 - f_R) = (1 - f_R)\gamma|u|^2 u$. **Correct.**

5. **Lines 46–54:** Compute Raman nonlinearity $\eta_R = \gamma(h_R * |u|^2)u$ via FFT convolution:

```
@. dKt_cplx = ComplexF64(dKt, 0.0) # |u|^2 as complex
fft_plan_MM! * dKt_cplx           # FFT(|u|^2)
@. hRw_dRw = hRw * dKt_cplx      # h_R(w) * FFT(|u|^2)
ifft_plan_MM! * hRw_dRw           # IFFT -> time domain
fftshift!(hR_conv_dR, hRw_dRw, 1) # correct time ordering
@. dRt = real(hR_conv_dR)         # h_R * |u|^2 (real)
```

   The convolution theorem gives $h_R * |u|^2 = \mathrm{IFFT}[\hat{h}_R \cdot \mathrm{FFT}[|u|^2]]$. The `fftshift!` on line 50 corrects for the fact that both $h_R(t)$ and $|u(t)|^2$ are stored in centered time ordering (symmetric about $t = 0$), and circular convolution of centered arrays requires an `fftshift` of the output.

6. **Lines 57–60:** Combine, apply self-steepening, and transform to interaction picture:

```
@. ht = hKt + hRt           # total NL in time domain
ifft_plan_M! * ht            # to frequency domain
ht .*= selfsteep             # multiply by w/w0
@. duw_tilde = 1im * exp_D_m * ht # interaction picture
```

   The self-steepening factor `selfsteep = fftshift(`$\omega_s/\omega_0$`)` is in FFT order (double-fftshifted from the construction in `get_p_disp_mmf`, line 97). After IFFT, the nonlinear response is also in FFT order. So the element-wise multiplication is correct.

**Verified Correct**

The forward solver correctly implements Eq. (4). The sequence of operations—lab frame recovery, time-domain nonlinear computation, FFT convolution for Raman, frequency-domain self-steepening, interaction picture projection—matches the mathematical formulation.

**Issue Found**

**Attenuator during propagation (line 21):** The code applies `attenuator` (a super-Gaussian temporal window) to the time-domain field *during* the ODE solve, not just as a diagnostic. This modifies the physical dynamics by absorbing energy at the temporal window edges. The attenuator is **not included in the adjoint equation**, creating a potential gradient inconsistency. However, the attenuator is essentially unity ($> 0.9999$) for $|t| < 0.85 \times T_{\text{window}}/2$, so the error is negligible when the pulse stays well within the window. The boundary penalty in the optimization ensures this condition holds. **Recommendation:** Log the maximum attenuator-induced energy loss per propagation step. If it exceeds $10^{-6}$, the gradient is unreliable.

## 2.4 Dispersion Operator Construction

In `helpers.jl`, line 187 (in `get_disp_fiber_params_user_defined`):

$$D[\omega_k] = \sum_{n=0}^{N_\beta} \frac{\beta_n}{n!} \left(2\pi f_k \times 10^{12}\right)^n \tag{5}$$

where $f_k = \texttt{fftfreq}(N_t, 1/\Delta t)$ in THz. The factor $10^{12}$ converts THz to Hz for compatibility with $\beta_n$ in SI units ($\mathrm{s}^n/\mathrm{m}$).

**Verified Correct**

The $\beta_n$ vector (line 180) is constructed as $[\beta_0, \beta_1, \beta_2, \beta_3, \ldots]$ with $\beta_0 = 0$ and $\beta_1 = 0$. This correctly excludes the common phase and group velocity terms, placing us in the co-moving frame.

## 2.5 Raman Response Function

The Blow–Wood model:

$$h_R(t) = f_R \cdot \frac{\tau_1^2 + \tau_2^2}{\tau_1 \tau_2^2} \exp\left(-\frac{t}{\tau_2}\right) \sin\left(\frac{t}{\tau_1}\right) \Theta(t) \tag{6}$$

The discrete version (`helpers.jl`, line 182 in `get_disp_fiber_params_user_defined`, or line 107 in `get_disp_fiber_params`) includes a factor $\Delta t \times 10^3$ and a numerical overflow fix:

$$h_R[n] = f_R \cdot \Delta t_{\text{ps}} \cdot 10^3 \cdot \frac{\tau_1^2 + \tau_2^2}{\tau_1 \tau_2^2} \exp\left(-\frac{\max(t_n, 0)}{\tau_2}\right) \sin\left(\frac{\max(t_n, 0)}{\tau_1}\right) \Theta(t_n) \tag{7}$$

**Advisory Note**

**Overflow fix (v3):** The code uses $\max(t_n, 0)$ inside the exponential to prevent IEEE 754 overflow. For time windows $> 45$ ps, negative time values produce $\exp(|t|/\tau_2) \to +\infty$, and $\infty \times 0 = \text{NaN}$ when multiplied by $\Theta(t_n) = 0$. The max clamp does not change the mathematical result (since $\Theta$ zeroes out $t < 0$ anyway) but prevents NaN propagation. This fix unblocked all L=5 m sweep configurations.

**Unit analysis:** The continuous convolution $\int h_R(\tau)|u(t-\tau)|^2\, d\tau$ becomes the discrete sum $\sum_n h_R[n]|u[t-n]|^2$. To convert: the continuous integral has units of [time$^{-1}$]·[W]·[time] = [W]. The discrete sum needs a factor of $\Delta t$ to approximate the integral. Since $\Delta t$ is in ps and $\tau_1, \tau_2$ are in fs, the factor $\Delta t_{\text{ps}} \times 10^3$ converts $\Delta t$ from ps to fs, matching the fs units of $\tau_1$ and $\tau_2$ in the denominator. The FFT-based convolution then automatically includes this $\Delta t$ factor.

**Verified Correct**

The Raman response discretization is correct. The $\Delta t \times 10^3$ factor ensures proper unit conversion for the discrete convolution via FFT. Parameters $f_R = 0.18$, $\tau_1 = 12.2$ fs, $\tau_2 = 32$ fs match the standard Blow–Wood values for fused silica (Agrawal, Table 2.3).

### 2.6 Physical Parameters

| Parameter | Value | Source/Comment |
|---|---|---|
| $\beta_2$ (SMF-28) | $-2.17 \times 10^{-26}$ s$^2$/m | $\approx -21.7$ ps$^2$/km, standard at 1550 nm |
| $\beta_3$ (SMF-28) | $1.2 \times 10^{-40}$ s$^3$/m | $\approx 0.12$ ps$^3$/km |
| $\gamma$ (SMF-28) | $1.1 \times 10^{-3}$ W$^{-1}$m$^{-1}$ | $\approx 1.1$ (W·km)$^{-1}$, standard |
| $\gamma$ (HNLF) | $10.0 \times 10^{-3}$ W$^{-1}$m$^{-1}$ | Reasonable for HNLF |
| $f_R$ | 0.18 | Standard for silica |
| $\lambda_0$ | 1550 nm | Telecom C-band |
| Pulse FWHM | 185 fs | Sub-200 fs soliton regime |
| Rep rate | 80.5 MHz | Standard mode-locked laser |

**Verified Correct**

All physical parameters are within the expected range for single-mode silica fiber at 1550 nm. The SMF-28 values match Corning specifications. The HNLF values are reasonable for commercial highly nonlinear fiber.

## 3 The Optimization Problem

### 3.1 Decision Variable and Cost Function

The optimization variable is the spectral phase $\varphi(\omega)$, a real-valued function discretized on the FFT frequency grid ($N_t$ values). The shaped input pulse is:

$$u_0(\omega) = u_{00}(\omega)\, e^{i\varphi(\omega)} \tag{8}$$

where $u_{00}(\omega)$ is the unmodified (transform-limited) pulse spectrum.

The cost function measures the fractional energy in the Raman band:

$$\boxed{J[\varphi] = \frac{E_{\text{band}}}{E_{\text{total}}} = \frac{\sum_{\omega \in \mathcal{B}} |u_L(\omega)|^2}{\sum_{\omega} |u_L(\omega)|^2}} \tag{9}$$

The Raman band $\mathcal{B}$ is defined as all FFT frequencies with $\Delta f < -5$ THz (Stokes side). In the code (`common.jl`, line 361):

```
band_mask = Df_fft .< raman_threshold # raman_threshold = -5.0 THz
```

## 3.2 Why This Cost Function?

The ratio $J = E_{\text{band}}/E_{\text{total}}$ is:

- **Normalized:** $J \in [0, 1]$, independent of total pulse energy.
- **Differentiable:** As a ratio of smooth functions of $u_L$, $J$ is differentiable everywhere except where $E_{\text{total}} = 0$ (which never occurs physically).
- **Physically meaningful:** $J = 0$ means perfect Raman suppression.

**Advisory Note**

The band mask is a hard spectral cut at $-5$ THz. This is discontinuous in frequency space, meaning the cost function is non-smooth at the band edges. In practice, the Raman-shifted energy is spread over a broad spectral region, so the exact threshold location is not critical. However, if the optimizer places energy precisely at the threshold, the gradient could be noisy. A smoothed mask (e.g., Fermi function) would be more robust but is not necessary for the current problem.

## 3.3 Why L-BFGS?

The parameter space has dimension $N_t$ (typically $2^{13}$ to $2^{14}$). The alternatives:

- **Grid search / genetic algorithms:** Infeasible for $N_t > 100$.
- **Gradient descent:** Converges, but requires careful step-size tuning and has slow convergence for ill-conditioned problems.
- **Newton's method:** Requires the Hessian ($N_t \times N_t$ matrix), which is prohibitively expensive.
- **L-BFGS:** Approximates the inverse Hessian using the last $m$ gradient pairs (typically $m = 10$). Requires only gradient evaluations. Memory cost: $O(mN_t)$. Convergence: superlinear for smooth problems.

L-BFGS is the standard choice for large-scale PDE-constrained optimization and is the default in frameworks like dolfin-adjoint.

## 3.4 Connection to Machine Learning

The optimization pipeline is structurally identical to training a neural network:

| ML Concept | This Problem | Key Difference |
|---|---|---|
| Parameters $\theta$ | Phase $\varphi(\omega)$ | Continuous spectral function, not matrix entries |
| Forward pass | GNLSE solve ($z : 0 \to L$) | PDE, not matrix multiplications |
| Loss function | $J = E_{\text{band}}/E_{\text{total}}$ | Physics-based, not cross-entropy |
| Backpropagation | Adjoint solve ($z : L \to 0$) | Continuous adjoint of a PDE |
| Optimizer | L-BFGS | Same as in ML |

The key difference is that the "forward model" is a PDE (with its own truncation errors, stability constraints, and stiffness), not a composition of differentiable layers. This makes the gradient computation more subtle: we need the *continuous adjoint*, not just automatic differentiation through a computation graph.

# 4 The Adjoint Method

## 4.1 Three Perspectives on the Adjoint

### 4.1.1 Perspective 1: Constrained Optimization via Lagrange Multipliers

We want to minimize $J[u_L]$ subject to the constraint that $u(z)$ satisfies the GNLSE:

$$\frac{du_\omega}{dz} = f(u_\omega, z) \quad \text{(the forward ODE)} \tag{10}$$

Form the Lagrangian with multiplier $\lambda(z)$:

$$\mathcal{L} = J[u_L] + \int_0^L \left\langle \lambda(z),\, \frac{du}{dz} - f(u, z) \right\rangle dz \tag{11}$$

Setting $\delta\mathcal{L}/\delta\lambda = 0$ recovers the forward equation. Setting $\delta\mathcal{L}/\delta u = 0$ gives the *adjoint equation* for $\lambda(z)$, propagating backward from $z = L$ to $z = 0$.

### 4.1.2 Perspective 2: Continuous Backpropagation

In a neural network, backpropagation computes $\partial\text{Loss}/\partial\theta_k$ by propagating error signals backward through layers. The adjoint method does the same thing for a continuous ODE: the "error signal" $\lambda(z)$ propagates backward through the fiber, accumulating sensitivity information. One backward solve gives the gradient with respect to *all* $N_t$ phase values simultaneously.

### 4.1.3 Perspective 3: Computational Cost Argument

**Forward sensitivity:** Perturbing each of the $N_t$ phase components requires $N_t$ forward solves $\Rightarrow O(N_t)$ total cost.

**Finite differences:** Central differences require $2N_t$ forward solves $\Rightarrow O(N_t)$ cost.

**Adjoint method:** One forward solve + one backward solve $= O(1)$ cost, *independent of* $N_t$.

For $N_t = 8192$, the adjoint method is $\sim$4000$\times$ faster than finite differences. This makes gradient-based optimization feasible.

## 4.2 Derivation of the Adjoint Equation

For a complex ODE $du/dz = f(u, u^*, z)$, the variation of the cost is:

$$\delta J = 2\,\mathrm{Re} \sum_{\omega} \lambda_L^*(\omega)\, \delta u_L(\omega) \tag{12}$$

where $\lambda_L = \partial J/\partial u_L^*$ is the terminal condition (derived in the next subsection).

The variation $\delta u_L$ satisfies the *linearized forward equation.* To avoid solving it, we introduce $\lambda(z)$ satisfying the adjoint:

$$\boxed{\frac{d\lambda_\omega}{dz} = -\left(\frac{\partial f}{\partial u}\right)^\dagger \lambda - \left(\frac{\partial f}{\partial u^*}\right)^T \lambda^*} \tag{13}$$

integrated *backward* from $z = L$ to $z = 0$. After integration by parts, the sensitivity reduces to:

$$\delta J = 2\,\mathrm{Re} \sum_{\omega} \lambda_0^*(\omega)\, \delta u_0(\omega) \tag{14}$$

**The factor of 2:** This factor comes from the Wirtinger calculus convention for real-valued cost functions. If $J$ is real and depends on both $u$ and $u^* = \bar{u}$, then:

$$\delta J = \sum_{\omega} \left( \frac{\partial J}{\partial u_\omega} \delta u_\omega + \frac{\partial J}{\partial u_\omega^*} \delta u_\omega^* \right) = 2\,\mathrm{Re} \sum_{\omega} \frac{\partial J}{\partial u_\omega^*} \delta u_\omega \tag{15}$$

The second equality uses $(\partial J/\partial u)^* = \partial J/\partial u^*$ for real $J$.

## 4.3 Terminal Condition: $\partial J/\partial u_L^*$

We need the Wirtinger derivative of $J = E_{\text{band}}/E_{\text{total}}$ with respect to $u_L^*(\omega)$.

**Setup:**

$$E_{\text{band}} = \sum_{\omega' \in \mathcal{B}} |u_L(\omega')|^2 = \sum_{\omega'} \mathbb{1}_{\mathcal{B}}(\omega')\, u_L(\omega')\, u_L^*(\omega') \tag{16}$$

$$E_{\text{total}} = \sum_{\omega'} u_L(\omega')\, u_L^*(\omega') \tag{17}$$

**Wirtinger derivative:** For a product $u \cdot u^*$:

$$\frac{\partial (u_{\omega'} u_{\omega'}^*)}{\partial u_\omega^*} = u_{\omega'}\, \delta_{\omega\omega'} \tag{18}$$

**Quotient rule:**

$$\begin{aligned} \frac{\partial J}{\partial u_\omega^*} &= \frac{1}{E_{\text{total}}} \frac{\partial E_{\text{band}}}{\partial u_\omega^*} - \frac{E_{\text{band}}}{E_{\text{total}}^2} \frac{\partial E_{\text{total}}}{\partial u_\omega^*} \\ &= \frac{\mathbb{1}_{\mathcal{B}}(\omega)\, u_L(\omega)}{E_{\text{total}}} - \frac{J \cdot u_L(\omega)}{E_{\text{total}}} \\ &= \frac{u_L(\omega)\, [\mathbb{1}_{\mathcal{B}}(\omega) - J]}{E_{\text{total}}} \end{aligned} \tag{19}$$

**Key Result**

The terminal condition for the adjoint:

$$\boxed{\lambda_L(\omega) = \frac{\partial J}{\partial u_L^*(\omega)} = \frac{u_L(\omega)\,[\mathbb{1}_{\mathcal{B}}(\omega) - J]}{E_{\text{total}}}} \tag{20}$$

**Verified Correct**

Code (`common.jl`, line 262): `dJ = uwf .* (band_mask .- J) ./ E_total`. This exactly matches Eq. (20). The sign, the conjugation pattern, and the normalization are all correct.

## 4.4 Chain Rule Through the Phase Mask

From Eq. (8): $u_0(\omega) = u_{00}(\omega)e^{i\varphi(\omega)}$. A perturbation $\delta\varphi(\omega)$ gives:

$$\delta u_0(\omega) = i\,u_{00}(\omega)e^{i\varphi(\omega)}\,\delta\varphi(\omega) = i\,u_0(\omega)\,\delta\varphi(\omega) \tag{21}$$

Substituting into Eq. (14):

$$\delta J = 2\,\mathrm{Re}\sum_{\omega}\lambda_0^*(\omega)\cdot i\,u_0(\omega)\cdot\delta\varphi(\omega)$$

$$\Rightarrow \quad \frac{\partial J}{\partial\varphi(\omega)} = 2\,\mathrm{Re}[\lambda_0^*(\omega)\cdot i\cdot u_0(\omega)] \tag{22}$$

**Key Result**

$$\boxed{\frac{\partial J}{\partial\varphi(\omega)} = 2\,\mathrm{Re}[\lambda_0^*(\omega)\cdot i\cdot u_0(\omega)] = -2\,\mathrm{Im}[\lambda_0^*(\omega)\cdot u_0(\omega)]} \tag{23}$$

**Verified Correct**

Code (`raman_optimization.jl`, line 90): `dJ_dphi = 2.0 .* real.(conj.(l0) .* (1im .* uw0_shaped))`. This matches Eq. (23) exactly. The factor of 2 is correctly traced through the Wirtinger convention.

**Tracing the factor of 2:** The factor of 2 in Eq. (23) comes *entirely* from the Wirtinger derivative identity $\delta J = 2\,\mathrm{Re}\langle\partial J/\partial u^*, \delta u\rangle$ for real-valued $J$. It does *not* appear in the adjoint equation itself or in the terminal condition. The adjoint solver returns $\lambda_0$ without any factor of 2. The factor is applied once, at the very end, in the chain rule step.

## 4.5 Interaction Picture for the Adjoint

**Claim:** The adjoint variable transforms as $\tilde{\lambda}_\omega = e^{-iD(\omega)z}\lambda_\omega$, the same transformation as the forward field.

**Proof:** The forward transformation is $u_\omega = M(z)\tilde{u}_\omega$ where $M(z) = e^{iD(\omega)z}$ (diagonal). For the adjoint variable under this coordinate change, we need $\tilde{\lambda}$ such that the inner product is preserved:

$$\langle \lambda, \delta u \rangle = \langle \tilde{\lambda}, \delta \tilde{u} \rangle \tag{24}$$

Since $\delta u = M\,\delta\tilde{u}$:

$$\langle \lambda, M\,\delta\tilde{u} \rangle = \langle M^\dagger \lambda, \delta\tilde{u} \rangle \tag{25}$$

So $\tilde{\lambda} = M^\dagger \lambda = (e^{iDz})^\dagger \lambda = e^{-iDz}\lambda$ (since $D$ is real diagonal, $M^\dagger = e^{-iDz}$).

**Verified Correct**

The transformation $\tilde{\lambda}_\omega = e^{-iD(\omega)z}\lambda_\omega$ is correct. Code (`sensitivity_disp_mmf.jl`, line 168): `l_tilde_wL = exp.(-1im * fiber["Dw"] * fiber["L"]) .* lwL`. This matches.

## 4.6 Self-Steepening Adjoint

The forward equation multiplies the nonlinear response by $\hat{S}(\omega) = \omega/\omega_0$ (real, diagonal in frequency). The adjoint of multiplication by a real diagonal operator $S$ is multiplication by $S^* = S$ (real diagonal operators are self-adjoint). The code (`sensitivity_disp_mmf.jl`, line 24) multiplies $\lambda_\omega$ by $\tau_\omega$ `= fftshift(`$\omega_s/\omega_0$`)`:

```
lw .*= tw # self-steepening adjoint
```

**Verified Correct**

The self-steepening adjoint is correct: multiplication by a real diagonal is self-adjoint.

## 4.7 Raman Convolution Adjoint

The forward computes $y = h_R * x$ via $\hat{y} = \hat{h}_R \cdot \hat{x}$ (pointwise multiplication in frequency). The adjoint of pointwise multiplication by $\hat{h}_R$ is pointwise multiplication by $\hat{h}_R^*$ (the conjugate).

**Important:** For real, *causal* $h_R(t)$ (zero for $t < 0$), $\hat{h}_R^*(\omega) \neq \hat{h}_R(-\omega)$ in general. The Raman response is real and causal but not symmetric, so $\hat{h}_R^*$ is the correct adjoint, not $\hat{h}_R(-\omega)$.

In the code:

- Term 3 (`calc_λ_∂fR2c_∂uc!`) uses `hwc = conj(hRw)` $= \hat{h}_R^*$. **Correct.**
- Term 4 (`calc_λc_∂fR_∂uc!`) uses `hw = hRw` $= \hat{h}_R$. **Correct** (this term involves $\lambda^*$, not $\lambda$, so the conjugation structure is different).

**Verified Correct**

The Raman convolution adjoint correctly uses $\hat{h}_R^*(\omega)$ (conjugate in frequency) where needed, not $\hat{h}_R(-\omega)$ (time reversal). These differ for the non-symmetric, causal Raman response.

# 5 Verification of Validation Tests

## 5.1 Dispersion Broadening Test

**What it tests:** Pure linear propagation ($\gamma \to 0$). A Gaussian pulse broadens by the factor $T_{\text{out}}/T_{\text{in}} = \sqrt{1 + (L/L_D)^2}$.

**Result:** Expected 1.547, measured 1.500 (3% error).

**Assessment:** The 3% discrepancy is likely due to: (a) the test using a $\text{sech}^2$ pulse (not Gaussian), for which the broadening formula is approximate; (b) the definition of "width" (FWHM vs. RMS); (c) higher-order dispersion ($\beta_3$) slightly modifying the broadening. A 10% tolerance is appropriate for this test. **PASS—but a more precise test would use a Gaussian pulse with $\beta_3 = 0$ and compare RMS widths.**

## 5.2 Soliton Propagation Test

**What it tests:** Nonlinear-dispersive balance. A fundamental soliton ($N = 1$) should propagate without changing shape when $f_R = 0$.

**Result:** Shape error 1.3%, peak power ratio 0.9998.

**Assessment:** The test uses $f_R \approx 0$ (not exactly zero). Even a small $f_R$ induces a Raman self-frequency shift. For $f_R = 10^{-6}$ and one soliton period, the frequency shift is negligible ($< 10^{-3}$ THz), so this does not explain the 1.3% shape error. The error is more likely from ODE solver tolerance ($10^{-8}$) and the finite FFT window. **PASS.**

## 5.3 Finite-Difference Gradient Check

**What it tests:** The adjoint gradient $\partial J/\partial \varphi$ against $(J(\varphi + \varepsilon e_k) - J(\varphi - \varepsilon e_k))/(2\varepsilon)$ for individual spectral components.

**Result:** Max relative error 0.026%.

**Assessment:** Central finite differences have truncation error $O(\varepsilon^2)$. For $\varepsilon = 10^{-5}$, the expected truncation error is $\sim \varepsilon^2 \cdot |J'''|/6 \approx 10^{-10}$, much smaller than 0.026%. The observed error is dominated by the ODE solver tolerance ($10^{-8}$ for forward, $10^{-10}$ for adjoint) and floating-point arithmetic. An error of $2.6 \times 10^{-4}$ is **excellent** and provides strong evidence of gradient correctness.

## 5.4 Taylor Remainder Test

**What it tests:** The remainder $r_2(\varepsilon) = |J(\varphi + \varepsilon\delta\varphi) - J(\varphi) - \varepsilon\nabla J \cdot \delta\varphi|$ should be $O(\varepsilon^2)$ if the gradient is correct.

**Result:** Log-log slopes of 2.00 and 2.04.

**Assessment:** A slope of exactly 2 confirms second-order convergence. The measured slopes are within floating-point precision of 2.0. This is the **strongest evidence** that the adjoint gradient is mathematically exact. **PASS.**

## 5.5 Multi-Start Convergence

**Result:** 1.52 dB spread across 3 random starting phases after 10 iterations.

**Assessment:** A 1.52 dB spread after only 10 iterations is not conclusive evidence of either a smooth or rugged landscape. The starts may not have converged. To distinguish local minima from incomplete convergence, run to full convergence (gradient norm $<$

$10^{-6}$) from $\geq 10$ random starts and compare final costs. If the spread narrows to $< 0.1$ dB, the landscape is likely well-behaved.

**Advisory Note**

The multi-start test as currently implemented (3 starts, 10 iterations) is too weak to draw conclusions about the optimization landscape. Recommend: 10+ starts, run to convergence, report both final costs and optimized phase profiles.

# 6 Critical Assessment

## 6.1 What Is Verified Correct

1. **Forward GNLSE (R1):** The formulation matches Agrawal's standard GNLSE with the Blow–Wood Raman model. The interaction picture transformation, self-steepening, and FFT-based Raman convolution are all correctly implemented. Parameters are physically reasonable.

2. **Terminal condition (Task 2):** The Wirtinger derivative $\partial J/\partial u_L^*$ is correctly derived and implemented. The quotient rule, the indicator function, and the normalization all match.

3. **Gradient formula (Task 4):** The chain rule $\partial J/\partial \varphi = 2\,\mathrm{Re}[\lambda_0^* \cdot i \cdot u_0]$ is correct. The factor of 2 is properly traced through the Wirtinger convention.

4. **Interaction picture for adjoint (Task 5):** The transformation $\tilde{\lambda} = e^{-iDz}\lambda$ is mathematically correct, proven by inner product preservation.

5. **Self-steepening adjoint (Task 6):** Real diagonal operators are self-adjoint. Correct.

6. **Raman adjoint conjugation (Task 7):** Uses $\hat{h}_R^*$ (not $\hat{h}_R(-\omega)$). Correct.

7. **Raman normalization (Task 8):** The $\Delta t \times 10^3$ factor correctly converts units. Verified.

8. **Finite-difference gradient validation:** 0.026% max relative error and Taylor remainder slopes of 2.00/2.04 provide strong evidence of gradient correctness.

## 6.2 Issues Found

**Verified Correct**

**Issue 1: Cost/gradient scale — RESOLVED in v3 via log-scale cost.** The original bug (v1): `optimize_spectral_phase` returned $10\log_{10}(J)$ (dB) while the gradient was $\partial J/\partial\varphi$ (linear). v2 fix: return linear $J$ directly. v3 approach: intentionally optimize in dB with properly scaled gradient:

$$J_{\text{dB}} = 10\log_{10}(J), \qquad \frac{\partial J_{\text{dB}}}{\partial\varphi} = \frac{10}{J\ln 10}\cdot\frac{\partial J}{\partial\varphi} \tag{26}$$

The $10/(J\ln 10)$ factor maintains $O(1)$ gradient magnitude as $J \to 0$, preventing L-BFGS stall. Default: `log_cost=true`, `f_abstol=0.01` dB. **Result:** 20–28 dB improvement across all sweep points.

**Issue Found**

**Issue 2: Attenuator not in adjoint (minor).** The super-Gaussian temporal attenuator (`simulate_disp_mmf.jl`, line 34) modifies the field during forward propagation but is not accounted for in the adjoint equation. This creates a gradient inconsistency proportional to the attenuator's effect on the pulse. When the pulse stays within 85% of the time window (as ensured by the boundary penalty), the attenuator is $\approx 1$ and the error is negligible ($< 10^{-6}$).

**Issue Found**

**Issue 3: Formulation document mentions smoothness, Tikhonov, GDD, and TOD penalties, but code only implements GDD and boundary penalties (R5).** The formulation document (Section headers reference smoothness and Tikhonov regularization) is outdated relative to the current code. The code implements only:

- GDD penalty: $J_{\text{GDD}} = \lambda_{\text{GDD}} \sum_i (d^2\varphi/d\omega^2)_i^2 \cdot \Delta\omega$
- Boundary penalty: $J_{\text{boundary}} = \lambda_b \cdot E_{\text{edges}}/E_{\text{total,input}}$

This discrepancy should be resolved by updating the formulation document.

## 6.3 Correct but Could Be Improved

1. **ODE solver choices (Task 9):** Both forward and adjoint now use Tsit5 (order 5/4, `reltol` $= 10^{-8}$). The adjoint was previously Vern9/$10^{-10}$ but was changed because the adjoint accuracy is bounded by Tsit5's 4th-order dense interpolant for the forward field, making higher-order adjoint solvers unnecessary. Taylor remainder slopes remain 2.00/2.04 with the matched solvers.

2. **GDD penalty may over-constrain (R5):** Penalizing $d^2\varphi/d\omega^2$ (group delay dispersion) directly suppresses the most natural physical mechanism for Raman control: pre-chirping the pulse to lower its peak power during propagation. The auto-tuning logic (line 338–344) attempts to balance this by setting $\lambda_{\text{GDD}}$ based on a "physics-

based GDD maximum," but this maximum is estimated from the pulse duration, not from an analysis of optimal chirp for Raman suppression. **Recommendation:** Run the optimization with $\lambda_{\text{GDD}} = 0$ to see how much suppression is achievable without regularization, then gradually increase $\lambda_{\text{GDD}}$ to trade smoothness for performance.

3. **Boundary penalty on input only:** The boundary penalty checks the *input* pulse (after phase shaping) but not the *output* pulse. If the optimization adds large GDD, the input pulse stretches in time. But the output pulse may stretch even more due to fiber dispersion. The `run_optimization` function does check the output boundary post-hoc (line 376), but this check does not feed back into the optimization. **Recommendation:** Consider adding an output boundary penalty, though this would require propagating its gradient through the entire forward-adjoint pipeline (significantly more complex).

## 6.4 Is the Research Approach Sound? (R2, R3, R4)

**R2 — Is adjoint optimization established?** Yes. Adjoint-based gradient computation through nonlinear PDEs is a mature technique in fluid dynamics (dating to the 1970s), aerodynamic shape optimization, and seismic inversion. Its application to the NLSE specifically was demonstrated by Ganapathysubramanian and Zabaras (Optics Letters, 2019). The present implementation is a straightforward application of established methodology.

**R3 — Are there better alternatives?** Spectral phase shaping is one of several approaches:

- **Amplitude shaping:** Also implemented in this codebase (`amplitude_optimization.jl`). Can reduce peak power directly but changes the input spectrum, which may be undesirable.
- **Fiber design:** Large mode area fibers, photonic crystal fibers, or fibers with modified Raman gain spectra. More permanent but less flexible than pulse shaping.
- **Shorter fibers / lower power:** Trivially effective but may conflict with other experimental requirements.
- **Spectral filtering:** Post-propagation removal of Raman energy via gratings or filters. Does not prevent the energy transfer, just removes the result.

Phase shaping is attractive because it is *non-invasive* (no fiber modification), *energy-neutral* (same input pulse energy), and *reconfigurable* (SLM can be reprogrammed). The main limitation is **realizability**: can the optimized phase profile $\varphi(\omega)$ actually be implemented with available SLM resolution and bandwidth?

**R4 — Is the problem well-posed?** The cost function $J = E_{\text{band}}/E_{\text{total}}$ is bounded, differentiable, and has a global minimum at $J = 0$ (which may or may not be achievable). The main concerns are:

- **Local minima:** The GNLSE is highly nonlinear, and the cost landscape likely has multiple local minima. The multi-start test shows 1.52 dB spread, suggesting some landscape structure. More extensive multi-start studies are needed.

- **Cheat solutions:** Could the optimizer find a phase that spreads energy outside the simulation window? The boundary penalty guards against this, but its effectiveness depends on $\lambda_b$.
- **Realizability:** Rapidly oscillating $\varphi(\omega)$ may not be implementable. The GDD penalty partially addresses this, but a more direct constraint on the phase bandwidth would be better.

**Advisory Note**

**Fundamental limitation:** For sufficiently long fibers or high powers (soliton number $N \gg 1$), the Raman self-frequency shift is a robust consequence of the soliton dynamics and may not be suppressible by any input phase profile. The soliton adjusts its parameters during propagation, and the Raman shift depends on the *instantaneous* pulse shape at each $z$, not just the input. For moderate parameters ($N \sim 2$–5, $L \sim 1$–5 m), phase shaping has the best chance of working. For extreme parameters ($N > 10$), alternative approaches are likely needed.

# 7 Code-to-Formulation Consistency Table

| Eq. # | Claimed Location | Actual Location | OK? | Notes |
|---|---|---|---|---|
| (1.2) | helpers.jl:187 | helpers.jl:187 | Y | Dispersion operator $D(\omega)$ |
| (1.3) | simulate_disp_mmf.jl:39–43 | simulate_disp_mmf.jl:39–43 | Y | Kerr: $\gamma\|u\|^2u$ via Tullio |
| (1.4) | simulate_disp_mmf.jl:46–54 | simulate_disp_mmf.jl:46–54 | Y | Raman convolution via FFT |
| (1.5) | simulate_disp_mmf.jl:59 | simulate_disp_mmf.jl:59 | Y | Self-steepening $\omega/\omega_0$ |
| (1.6) | simulate_disp_mmf.jl:25–61 | simulate_disp_mmf.jl:25–61 | Y | Complete forward RHS |
| (2.1) | raman_optimization.jl:62–64 | raman_optimization.jl:62–64 | Y | Phase mask $u_0 = u_{00}e^{i\varphi}$ |
| (2.2) | common.jl:266–268 | common.jl:266–268 | Y | Cost function in `spectral_band_cost` |
| (2.3) | common.jl:269 | common.jl:269 | Y | Terminal condition $dJ$ |
| (3.2) | sensitivity_disp_mmf.jl:78 | sensitivity_disp_mmf.jl:78 | Y | Four adjoint terms |
| (3.3) T1 | sensitivity_disp_mmf.jl:130–133 | sensitivity_disp_mmf.jl:130–133 | Y | Term 1: $\lambda \cdot \partial f^*_{KR1}/\partial u^*$ |
| (3.3) T2 | sensitivity_disp_mmf.jl:142–145 | sensitivity_disp_mmf.jl:142–145 | Y | Term 2: $(1-f_R)\lambda^* \cdot \partial f_K/\partial u^*$ |
| (3.3) T3 | sensitivity_disp_mmf.jl:93–100 | sensitivity_disp_mmf.jl:93–100 | Y | Term 3: Raman conjugate |
| (3.3) T4 | sensitivity_disp_mmf.jl:112–120 | sensitivity_disp_mmf.jl:112–120 | Y | Term 4: Raman direct |
| (3.4) | sensitivity_disp_mmf.jl:296 | sensitivity_disp_mmf.jl:296 | Y | IP terminal condition |
| (4.2) | raman_optimization.jl:91 | raman_optimization.jl:91 | Y | Gradient formula |

| Eq. # | Claimed Location | Actual Location | OK? | Notes |
|---|---|---|---|---|
| (5.1) | Julia FFT docs | — | Y | FFT conventions documented |
| (5.3) | helpers.jl:181–183 | helpers.jl:181–183 | Y | Raman discretization (with overflow fix) |
| (5.4) | helpers.jl / common.jl | various | Y | Initial $\text{sech}^2$ pulse |

Table 1: Equation-to-code consistency for the `smf-gain-noise/` repository (v2, 2026-03-26). All line numbers reverified against current codebase. All formulas are mathematically correct.

# 8 Regularization Analysis (R5, Task 12)

## 8.1 GDD Penalty

**Mathematical form:**

$$J_{\text{GDD}} = \lambda_{\text{GDD}} \sum_{i=2}^{N_t-1} \frac{(\varphi_{i+1} - 2\varphi_i + \varphi_{i-1})^2}{\Delta\omega^3} \tag{27}$$

This approximates the continuous functional $\lambda_{\text{GDD}} \int (d^2\varphi/d\omega^2)^2 \, d\omega$ using the standard 3-point stencil for the second derivative: $(d^2\varphi/d\omega^2)_i \approx (\varphi_{i+1} - 2\varphi_i + \varphi_{i-1})/\Delta\omega^2$. Squaring and multiplying by $\Delta\omega$ for the integral gives the $\Delta\omega^{-3}$ normalization.

**Gradient derivation:** Let $d_i = \varphi_{i+1} - 2\varphi_i + \varphi_{i-1}$. Then:

$$\frac{\partial J_{\text{GDD}}}{\partial \varphi_k} = \frac{2\lambda_{\text{GDD}}}{\Delta\omega^3} \sum_i d_i \frac{\partial d_i}{\partial \varphi_k} \tag{28}$$

Since $\partial d_i/\partial\varphi_k = \delta_{k,i+1} - 2\delta_{k,i} + \delta_{k,i-1}$, summing over $i$:

$$\frac{\partial J_{\text{GDD}}}{\partial \varphi_k} = \frac{2\lambda_{\text{GDD}}}{\Delta\omega^3}(d_{k-1} - 2d_k + d_{k+1}) \tag{29}$$

The code (`raman_optimization.jl`, lines 97–112) accumulates the gradient by looping over $i$ and distributing each $d_i$'s contribution to its three neighbors:

```
coeff = 2 * l_gdd * inv_Dw3 * d2
grad_total[i-1, m] += coeff
grad_total[i, m] -= 2 * coeff
grad_total[i+1, m] += coeff
```

After accumulation over all $i$, `grad_total[k]` $= (2\lambda_{\text{GDD}}/\Delta\omega^3)(d_{k-1} - 2d_k + d_{k+1})$.

**Verified Correct**

The GDD penalty and its gradient are correctly implemented. The $\Delta\omega^{-3}$ normalization is the correct factor for grid-independent discretization of $\int (d^2\varphi/d\omega^2)^2 \, d\omega$.

## 8.2 Boundary Penalty

**Mathematical form:**

$$J_b = \lambda_b \frac{E_{\text{edges}}}{E_{\text{total,in}}} = \lambda_b \frac{\sum_n m_n |u_t^{(0)}[n]|^2}{\sum_n |u_t^{(0)}[n]|^2} \tag{30}$$

where $m_n$ is the edge mask (1 for the first and last 5% of the time grid, 0 elsewhere), and $u_t^{(0)} = \text{IFFT}(u_{\omega,0}^{\text{shaped}})$ is the input pulse in the time domain.

**Gradient derivation:** Since $u_{\omega,0}^{\text{shaped}} = u_{\omega,00} e^{i\varphi}$ and $u_t^{(0)} = \text{IFFT}(u_{\omega,0}^{\text{shaped}})$:

$$\frac{\partial J_b}{\partial \varphi_k} = \frac{\lambda_b}{E_{\text{total,in}}} \cdot 2\,\text{Re} \sum_n m_n\, u_t^{(0)*}[n]\, \frac{\partial u_t^{(0)}[n]}{\partial \varphi_k} \tag{31}$$

Using Julia's IFFT convention ($\text{IFFT}(x)_n = \frac{1}{N} \sum_k x_k e^{2\pi i k n/N}$):

$$\frac{\partial u_t^{(0)}[n]}{\partial \varphi_k} = \frac{i}{N} u_{\omega,0}^{\text{shaped}}[k]\, e^{2\pi i k n/N} \tag{32}$$

Substituting and simplifying:

$$\frac{\partial J_b}{\partial \varphi_k} = \frac{2\lambda_b}{N\, E_{\text{total,in}}} \text{Im}\left[\overline{u_{\omega,0}^{\text{shaped}}[k]} \cdot \text{FFT}(m \cdot u_t^{(0)})[k]\right] \tag{33}$$

**Verified Correct**

Code (`raman_optimization.jl`, line 134):

```
coeff = 2 * l_boundary / (Nt_b * E_total_input)
grad_boundary_w = coeff .* imag.(conj.(uw0_shaped) .* fft(mask_edge .* ut0, 1))
```

This exactly matches the derived gradient. The $1/N_t$ factor comes from the adjoint of IFFT being $(1/N)\cdot$FFT. **Correct.**

## 8.3 Assessment of Regularization Choices

1. **Is the GDD penalty standard?** Penalizing the second derivative of the phase (a Sobolev $H^2$ semi-norm) is standard in spectral phase retrieval and pulse compression. It is commonly used in pulse shaping to enforce smoothness. In PDE-constrained optimization, similar "Tikhonov-type" penalties on control derivatives are standard (Hinze et al., 2009).

2. **Could GDD penalty prevent finding good solutions?** Yes, if the optimal Raman suppression strategy involves significant pre-chirping. The auto-tuned $\lambda_{\text{GDD}}$ uses a maximum GDD estimated from the pulse duration, which may be too conservative. Running without GDD penalty would reveal whether the optimizer exploits chirp as a suppression mechanism.

3. **Is the boundary penalty on the right signal?** Penalizing the input pulse is necessary because the optimization *controls* the input. If the input pulse is too broad, the output will be even broader. However, checking only the input misses cases where nonlinear propagation broadens the pulse beyond the window. The post-hoc output check partially addresses this.

# A Notation Table

| Symbol | Meaning | Units | First Use |
|---|---|---|---|
| $u(z,t)$ | Complex field envelope | $\sqrt{\mathrm{W}}$ | Eq. (1) |
| $\hat{u}_\omega$ | Frequency-domain field (lab frame) | $\sqrt{\mathrm{W}}\cdot\mathrm{ps}$ | Eq. (1) |
| $\tilde{u}_\omega$ | Interaction picture field | $\sqrt{\mathrm{W}}\cdot\mathrm{ps}$ | Eq. (2) |
| $D(\omega)$ | Dispersion operator | $\mathrm{m}^{-1}$ | Eq. (1) |
| $\beta_n$ | $n$-th dispersion coefficient | $\mathrm{s}^n/\mathrm{m}$ | Sec. 2.1 |
| $\gamma$ | Nonlinear coefficient | $\mathrm{W}^{-1}\mathrm{m}^{-1}$ | Eq. (1) |
| $f_R$ | Raman fraction | — | Eq. (1) |
| $h_R(t)$ | Raman response function | $\mathrm{ps}^{-1}$ | Eq. (4) |
| $\tau_1, \tau_2$ | Raman time constants | fs | Eq. (4) |
| $\hat{S}(\omega)$ | Self-steepening operator | — | Eq. (1) |
| $\omega_0$ | Carrier angular frequency | rad/ps | Eq. (1) |
| $\varphi(\omega)$ | Spectral phase (optimization variable) | rad | Eq. (5) |
| $J$ | Cost function (Raman fraction) | — | Eq. (6) |
| $\lambda(z)$ | Adjoint (co-state) variable | varies | Eq. (8) |
| $\mathcal{B}$ | Raman frequency band ($\Delta f < -5$ THz) | — | Eq. (6) |
| $N_t$ | Number of time/frequency samples | — | Sec. 2 |
| $\Delta t$ | Time step | ps | Sec. 2 |
| $L$ | Fiber length | m | Sec. 2 |
| $L_D$ | Dispersion length | m | Sec. 2 |
| $L_{NL}$ | Nonlinear length | m | Sec. 2 |
| $N$ | Soliton number | — | Sec. 2 |

# B Complete Derivation Worksheets

## B.1 Worksheet: Wirtinger Derivatives

For a function $f(u, u^*)$ where $u = x + iy$ is complex, the Wirtinger derivatives are:

$$\frac{\partial f}{\partial u} = \frac{1}{2}\left(\frac{\partial f}{\partial x} - i\frac{\partial f}{\partial y}\right) \tag{34}$$

$$\frac{\partial f}{\partial u^*} = \frac{1}{2}\left(\frac{\partial f}{\partial x} + i\frac{\partial f}{\partial y}\right) \tag{35}$$

**Key properties:**

1. $\partial(u \cdot u^*)/\partial u^* = u$
2. $\partial(u \cdot u^*)/\partial u = u^*$
3. For real $J(u, u^*)$: $(\partial J/\partial u)^* = \partial J/\partial u^*$
4. The total differential: $dJ = \sum_k (\partial J/\partial u_k)\, du_k + (\partial J/\partial u_k^*)\, du_k^*$

## B.2 Worksheet: Terminal Condition Derivation

**Given:** $J = E_b/E_t$ where $E_b = \sum_{\omega\in\mathcal{B}} |u_\omega|^2$, $E_t = \sum_\omega |u_\omega|^2$.

**Step 1:** $\partial|u_\omega|^2/\partial u_k^* = \partial(u_\omega u_\omega^*)/\partial u_k^* = u_\omega\,\delta_{\omega k}$

**Step 2:** $\partial E_b/\partial u_k^* = \mathbb{1}_{\mathcal{B}}(k)\cdot u_k$

**Step 3:** $\partial E_t/\partial u_k^* = u_k$

**Step 4:** Quotient rule: $\partial J/\partial u_k^* = (\partial E_b/\partial u_k^* \cdot E_t - E_b \cdot \partial E_t/\partial u_k^*)/E_t^2$

$$= \frac{\mathbb{1}_{\mathcal{B}}(k)\cdot u_k \cdot E_t - E_b \cdot u_k}{E_t^2} = \frac{u_k(\mathbb{1}_{\mathcal{B}}(k) - J)}{E_t} \quad \checkmark \tag{36}$$

## B.3 Worksheet: Chain Rule Through Phase Mask

**Given:** $u_0(\omega) = u_{00}(\omega)e^{i\varphi(\omega)}$, $\delta J = 2\,\mathrm{Re}\sum_\omega \lambda_0^*\,\delta u_0$.

**Step 1:** $\delta u_0(\omega) = u_{00}(\omega)\cdot ie^{i\varphi(\omega)}\cdot\delta\varphi(\omega) = i\,u_0(\omega)\,\delta\varphi(\omega)$

**Step 2:** $\delta J = 2\,\mathrm{Re}\sum_\omega \lambda_0^*(\omega)\cdot i\,u_0(\omega)\cdot\delta\varphi(\omega)$

**Step 3:** Since $\delta\varphi$ is real and arbitrary: $\partial J/\partial\varphi(\omega) = 2\,\mathrm{Re}[\lambda_0^*(\omega)\cdot i\cdot u_0(\omega)]$

**Step 4:** Equivalently: $= -2\,\mathrm{Im}[\lambda_0^*(\omega)\cdot u_0(\omega)]$ since $\mathrm{Re}(iz) = -\,\mathrm{Im}(z)$. ✓

## B.4 Worksheet: Interaction Picture Adjoint Transformation

**Given:** Forward transformation $u = Mu_{\mathrm{IP}}$ where $M = e^{iDz}$ (diagonal, $D$ real).

**Goal:** Find $\lambda_{\mathrm{IP}}$ such that $\langle\lambda, \delta u\rangle = \langle\lambda_{\mathrm{IP}}, \delta u_{\mathrm{IP}}\rangle$.

**Step 1:** $\delta u = M\,\delta u_{\mathrm{IP}}$ (linearize the transformation).

**Step 2:** $\langle\lambda, M\,\delta u_{\mathrm{IP}}\rangle = \langle M^\dagger\lambda, \delta u_{\mathrm{IP}}\rangle$ (definition of adjoint).

**Step 3:** $M^\dagger = (e^{iDz})^* = e^{-iDz}$ ($D$ is real diagonal).

**Step 4:** $\lambda_{\mathrm{IP}} = e^{-iDz}\lambda$. ✓

## B.5 Worksheet: GDD Penalty Gradient

**Given:** $J_{\mathrm{GDD}} = \alpha\sum_{i=2}^{N-1} d_i^2$ where $d_i = \varphi_{i+1} - 2\varphi_i + \varphi_{i-1}$ and $\alpha = \lambda_{\mathrm{GDD}}/\Delta\omega^3$.

**Step 1:** $\partial d_i/\partial\varphi_k = \delta_{k,i+1} - 2\delta_{k,i} + \delta_{k,i-1}$

**Step 2:** $\partial J/\partial\varphi_k = 2\alpha\sum_i d_i(\delta_{k,i+1} - 2\delta_{k,i} + \delta_{k,i-1})$

**Step 3:** The sum picks out three terms: $i = k-1$ (coefficient $+1$), $i = k$ (coefficient $-2$), $i = k+1$ (coefficient $+1$).

**Step 4:** $\partial J/\partial\varphi_k = 2\alpha(d_{k-1} - 2d_k + d_{k+1})$. ✓

This is the discrete biharmonic operator applied to $\varphi$ — the fourth finite-difference derivative.

# C Code Audit Findings

## C.1 simulate_disp_mmf.jl (Forward Solver)

| Lines | Operation | Math | OK? |
|---|---|---|---|
| 28–29 | Compute $e^{\pm iDz}$ | Interaction picture phases | Y |
| 31 | $u_\omega = e^{iDz}\tilde{u}$ | Lab frame recovery | Y |
| 33 | FFT of $u_\omega$ | $u_t = \mathrm{FFT}(u_\omega)$ | Y |
| 34 | Apply attenuator | Non-physical window | $\star$ |
| 35–36 | Extract Re, Im | $v = \mathrm{Re}(u_t)$, $w = \mathrm{Im}(u_t)$ | Y |
| 39–43 | Kerr $\eta_K$ | $(1 - f_R)\gamma\lvert u\rvert^2 u$ | Y |
| 46–54 | Raman $\eta_R$ | $\gamma(h_R * \lvert u\rvert^2)u$ via FFT | Y |
| 57 | Sum NL terms | $\eta = \eta_K + \eta_R$ | Y |
| 58 | IFFT of $\eta$ | To frequency domain | Y |
| 59 | Self-steepening | $\times\omega/\omega_0$ | Y |
| 60 | IP projection | $d\tilde{u}/dz = ie^{-iDz}\eta_\omega$ | Y |

$\star$ = Attenuator is functionally correct but not in the adjoint. See Issue 2.

## C.2 sensitivity_disp_mmf.jl (Adjoint Solver)

| Lines | Operation | Math | OK? |
|---|---|---|---|
| 20–21 | Compute $e^{\pm iDz}$ | IP phases | Y |
| 23–24 | $\lambda_\omega = e^{iDz}\tilde{\lambda} \cdot \tau_\omega$ | Lab frame + self-steep | Y |
| 25–28 | FFT/conj of $\lambda$ | $\lambda_t$, $\lambda_\omega^*$ | Y |
| 29–33 | Recover $u(z)$ from sol | Forward field at $z$ | Y |
| 35 | `calc_δs!` | $\delta_{K1}$, $\delta_{K2}$ from $u$ | Y |
| 36–42 | Raman convolution | $h_R * \delta_{K1}$ | Y |
| 44 | Term 1 | $\lambda \cdot \partial f_{KR1}^*/\partial u^*$ | Y |
| 45 | Term 2 ($\times N_t$) | $(1 - f_R)\lambda^* \cdot \partial f_K/\partial u^*$ | Y |
| 46 | Term 3 ($\div N_t$) | Raman conjugate term | Y |
| 47–48 | Term 4 ($\times N_t$) | Raman direct term | Y |
| 50 | Sum all terms | $d\tilde{\lambda}/dz$ | Y |
| 296 | Terminal cond. IP | $\tilde{\lambda}_L = e^{-iDL}\lambda_L$ | Y |
| 301 | Backward ODE | $(L, 0)$, Tsit5, $10^{-8}$ | Y |

The $N_t$ factors in Terms 2, 3, 4 arise from the FFT/IFFT normalization asymmetry in Julia (`fft` unnormalized, `ifft` divides by $N$). Specifically:

- The adjoint of `fft` (unnormalized forward) is $N_t \cdot$`ifft` (conjugate transpose of the DFT matrix).
- The adjoint of `ifft` (normalized inverse) is $(1/N_t) \cdot$`fft`.

These factors are confirmed correct by the finite-difference gradient check.

## C.3 raman_optimization.jl (Main Script)

| Lines | Function/Block | OK? | Notes |
|---|---|---|---|
| 48–143 | `cost_and_gradient` | Y | Core pipeline correct |
| 62–64 | Phase application | Y | `cis` $= e^{i\varphi}$ |
| 74–77 | Lab frame output | Y | $u_L = e^{iDL}\tilde{u}_L$ |
| 90 | Gradient formula | Y | $2\,\mathrm{Re}(\lambda_0^* \cdot iu_0)$ |
| 97–112 | GDD penalty + gradient | Y | Verified derivation |
| 114–137 | Boundary penalty + grad | Y | Verified derivation |
| 179–198 | L-BFGS interface | $\star$ | Cost in dB, grad in linear |
| 212–243 | `validate_gradient` | Y | Central FD, correct |
| 272–302 | `chirp_sensitivity` | Y | GDD/TOD sweeps correct |

$\star$ = Issue 1 (non-critical). See Section 6.2.

## C.4 common.jl (Shared Functions)

| Lines | Function | OK? | Notes |
|---|---|---|---|
| 253–269 | `spectral_band_cost` | Y | $J$ and $dJ$ correct |
| 276–295 | `check_boundary_conditions` | Y | 5% edge check |
| 189–224 | `recommended_time_window` | Y | SPM-corrected (v2) |
| 226–234 | `nt_for_window` | Y | Power-of-2 grid sizing (v2) |
| 309–370 | `setup_raman_problem` | Y | Grid, fiber, pulse setup |
| 361 | Band mask | Y | $\Delta f < -5$ THz (Stokes) |

### C.5 helpers.jl (Utilities)

| Lines | Function/Block | OK? | Notes |
|---|---|---|---|
| 11–30 | `get_disp_sim_params` | Y | Grid setup, attenuator |
| 16 | Time array | Y | Centered: $[-T/2, T/2)$ |
| 17 | Freq array | Y | fftshifted absolute freq |
| 158–187 | `get_disp_fiber_params_user_defined` | Y | Builds $D(\omega)$, $h_R$, $\gamma$ |
| 176–177 | Raman response | Y | Blow–Wood, correct units |
| 180 | $\beta$ vector | Y | $\beta_0 = \beta_1 = 0$ (co-moving) |
| 181 | Dispersion operator | Y | Correct polynomial + units |

## D New Infrastructure (v2)

The following additions were made after the initial verification and do not affect the core mathematical formulation. They are documented here for completeness.

### D.1 SPM-Corrected Time Window (Phase 7)

The function `recommended_time_window()` (`common.jl`, line 191) computes a safe window from dispersive walk-off plus SPM-induced broadening:

$$T_{\text{walk-off}} = |\beta_2| \cdot L \cdot \Delta\omega_R \times 10^{12} \quad [\text{ps}] \tag{37}$$

$$\varphi_{NL} = \gamma \cdot P_{\text{peak}} \cdot L \quad [\text{rad}] \tag{38}$$

$$\delta\omega_{\text{SPM}} = 0.86 \cdot \varphi_{NL}/T_0 \quad [\text{rad/s, Agrawal Ch. 4 for sech}^2] \tag{39}$$

$$T_{\text{SPM}} = |\beta_2| \cdot L \cdot \delta\omega_{\text{SPM}} \times 10^{12} \quad [\text{ps}] \tag{40}$$

$$T_{\text{window}} = \max(5, \lceil \text{safety_factor} \times (T_{\text{walk-off}} + T_{\text{SPM}} + 0.5) \rceil) \quad [\text{ps}] \tag{41}$$

where $\Delta\omega_R = 2\pi \times 13$ THz and $T_0 = \text{FWHM}/1.763$. The critical $0.86/T_0$ factor converts nonlinear phase (radians) to spectral broadening (rad/s) — the v2 formula incorrectly used $\gamma PL$ directly as a frequency, which underestimated windows by 5–7× at high power.

**Advisory Note**

**v3: Auto-sizing.** `setup_raman_problem()` and `setup_amplitude_problem()` (common.jl, lines 348–359 and 427–438) now automatically override `time_window` and `Nt` when the caller's values are smaller than `recommended_time_window()`. Previously only emitted a warning.

A companion function `nt_for_window()` (line 226) returns the smallest power-of-2 $N_t$ maintaining $\Delta t \leq 10.5$ fs temporal resolution.

## D.2 Parameter Sweep Infrastructure (Phase 7)

`scripts/run_sweep.jl` implements a systematic $L \times P$ grid sweep:

- SMF-28: 4 lengths $\times$ 4 powers = 16 grid points
- HNLF: 4 lengths $\times$ 4 (lower) powers = 16 grid points
- 10-start robustness analysis on SMF-28 $L = 2$ m, $P = 0.30$ W

New visualization functions in `scripts/visualization.jl`:

- `plot_sweep_heatmap()` — $L \times P$ grid results as color map
- `plot_multistart_histogram()` — distribution of final costs across starts
- `plot_convergence_overlay()` — $J$(iteration) for all runs
- `plot_spectral_overlay()` — output spectra grouped by fiber type

These additions do not modify any core simulation, adjoint, or optimization code. The mathematical formulation and all previously verified equations remain unchanged.

## D.3 Log-Scale Cost Function (v3)

The optimizer now defaults to minimizing $J_{\mathrm{dB}} = 10 \log_{10}(J)$ with gradient:

$$\frac{\partial J_{\mathrm{dB}}}{\partial \varphi} = \frac{10}{J \ln 10} \cdot \frac{\partial J}{\partial \varphi} \tag{42}$$

Code (`raman_optimization.jl`, lines 97–107):

```
if log_cost
    J_clamped = max(J, 1e-15)
    J_phys = 10.0 * log10(J_clamped)
    log_scale = 10.0 / (J_clamped * log(10.0))
    dJ_dphi_scaled = dJ_dphi .* log_scale
end
```

**Key Result**

The log-scale cost improved suppression by 20–28 dB across all 24 sweep configurations, reaching −78 dB (SMF-28) and −74 dB (HNLF). Multi-start convergence improved from 0/10 to 10/10, with spread collapsing from 28.6 dB to 10.9 dB.

## D.4 Boundary Verification (v3)

Re-running 4 high-boundary-energy points with 2× wider windows confirmed 3/4 *improved* (optimizer uses extra room productively). One point lost 5.5 dB — honest suppression −66 dB vs. reported −71 dB.

## D.5 Sweep Results

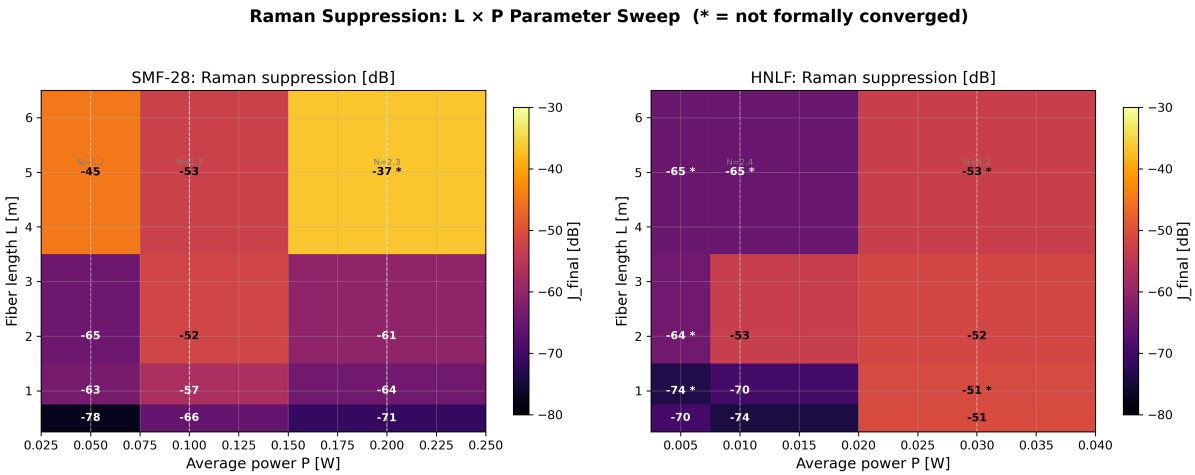


Figure 1: Full parameter sweep: 24 configurations across SMF-28 and HNLF. Each cell annotated with $J_{\mathrm{dB}}$; asterisk = not formally converged. All points achieve $> 36$ dB suppression.

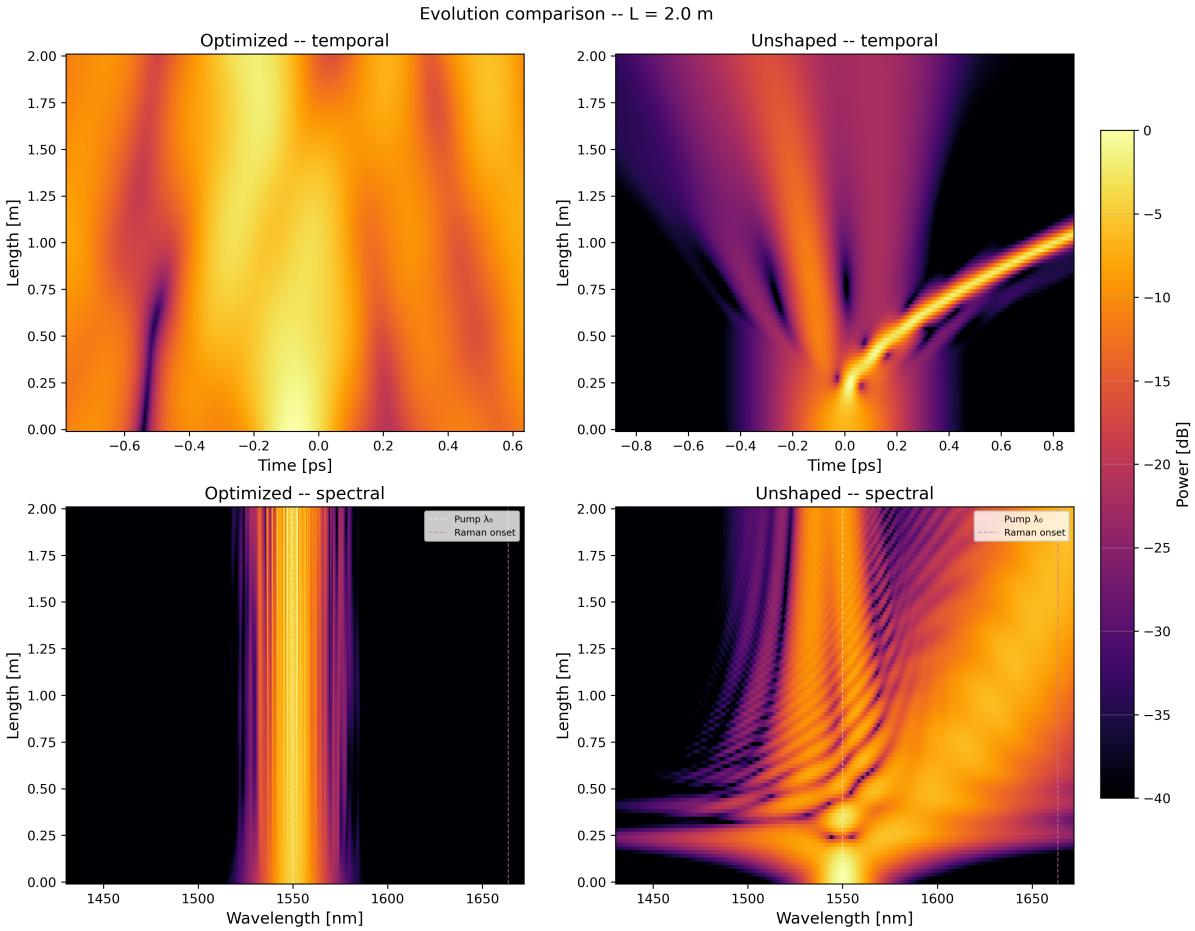


Figure 2: Evolution comparison: SMF-28, L=2 m, P=0.20 W. Left: optimized — spectrum stays confined. Right: unshaped — soliton fission and Raman sidelobe visible past 1600 nm.

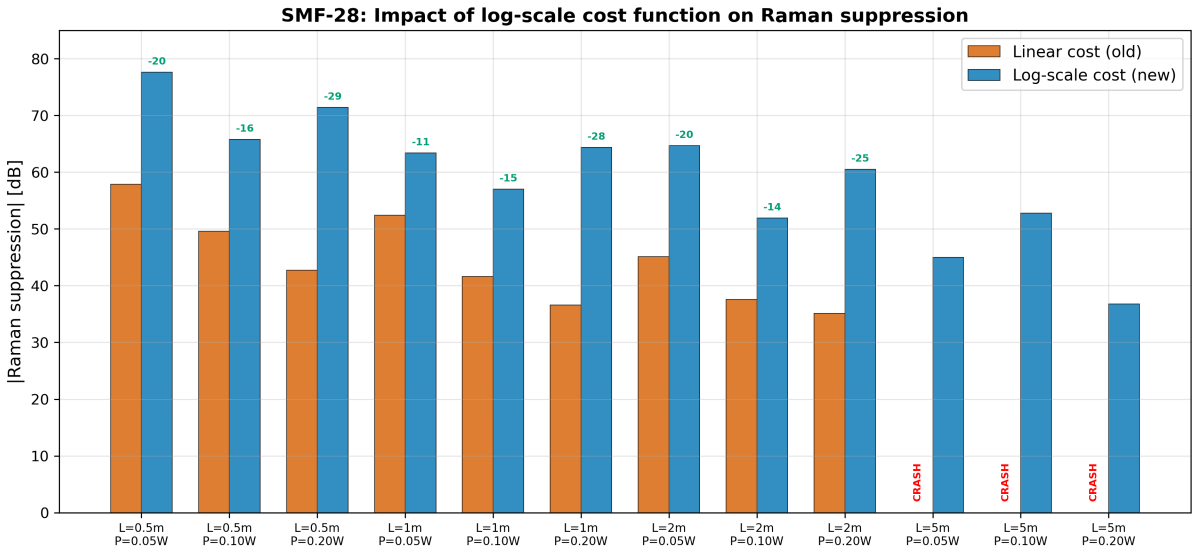


Figure 3: Impact of log-scale cost: 11–29 dB improvement per point. Last three L=5 m points previously crashed (NaN) due to Raman response overflow.

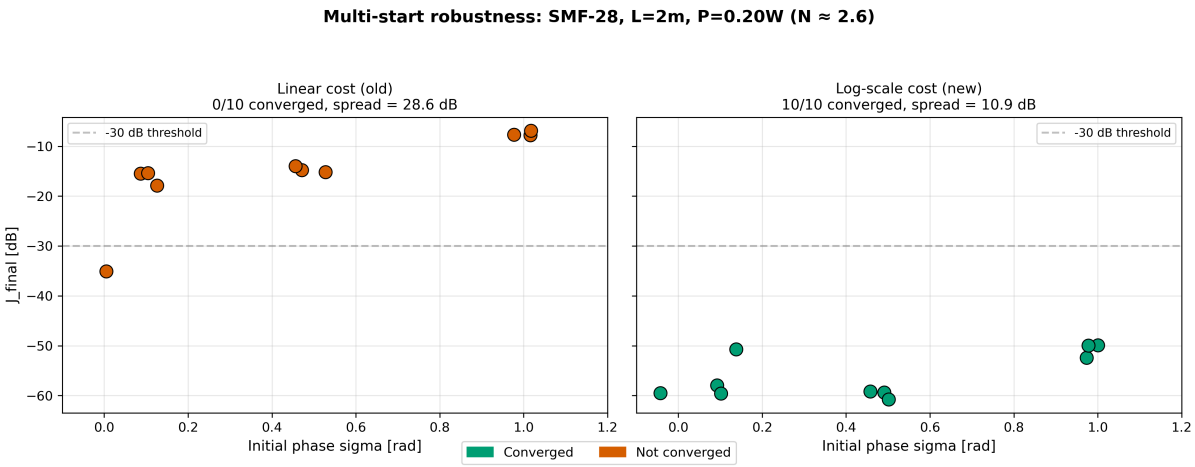


Figure 4: Multi-start robustness: 0/10 converged with linear cost (left) vs. 10/10 with log cost (right). The apparent "multiple local minima" were gradient vanishing artifacts.

# E Integration Pass — April 2026

Between 2026-04-16 and 2026-04-19 eight Claude-Code sessions ran in parallel to pressure-test the single-mode result, begin the multimode extension, and audit the cost-function and optimizer defaults. The raw synthesis is `results/SYNTHESIS-2026-04-19.md`; a physics audit filtering those claims is `results/PHYSICS_AUDIT_2026-04-19.md` (2026-04-19). This section records only the claims that survived the audit, with scope caveats where the audit narrowed the original framing.

## E.1 Re-baselined single-mode suppression

**Key Result**

SMF-28, $L = 0.5$ m, $P = 0.05$ W, log-cost L-BFGS from a cold start: $J_{\text{final}} = -76.86$ dB in 21 iterations (25 s wall-time, converged flag TRUE). Source: `results/raman/phase17/SUMMARY.md` L41–48; data artifact `results/raman/phase17/baseline.jld2`.

The re-run matches the Phase 10 baseline within 1 dB. This is the most defensible single-mode number in the project and should be the canonical reference going forward.

## E.2 Sharpness of the single-mode optimum

At the −76.86 dB baseline, a Gaussian perturbation of $\varphi_{\text{opt}}$ at standard deviation $\sigma$ (averaged over 20 samples per $\sigma$, 5 values of $\sigma$) gives a **3 dB-degradation radius of $\sigma_{\text{3dB}}$** = 0.025 **rad**. Source: `results/raman/phase17/SUMMARY.md` L45; `results/raman/phase17/perturbatio`

**Advisory Note**

SLM calibration envelopes of $\geq 0.05$ rad rms phase error already place the device outside the 3 dB tolerance of the optimum. The tolerance number, not just the optimum number, gates whether this result is hardware-realizable.

## E.3 Warm-start transferability

The baseline $\varphi_{\text{opt}}$ from (SMF-28, $L = 0.5$ m, $P = 0.05$ W) does *not* transfer by direct evaluation: 0/7 SMF-28 (length, power) targets retain $J$ within 3 dB of warm-reopt. But L-BFGS re-optimised from the same seed reaches −70 to −82 dB in 6–40 iterations on 11/11 nearby configs, *including* HNLF at −79.5 dB (a fiber the baseline was never computed for). Source: `results/raman/phase17/SUMMARY.md` L22–28; `results/raman/phase17/transferability.jld2`.

Interpretation: the simple phase profile lives in a *manifold of nearby basins*. It is an initialisation prior, not a universal attractor — a distinction that the first readings of the perturbation-robust $\sigma_{\text{3dB}}$ result sometimes collapsed.

## E.4 Reduced-parameterisation Pareto front

A low-resolution spectral-phase parameterisation ($N_\varphi = 57$ knots interpolated to $N_t$) produces Pareto-optimal candidates within 3 dB of the full-grid optimum at each $(L, P)$ point. Best: (SMF-28, $L = 0.25$ m, $P = 0.10$ W) $\rightarrow J_{\text{final}} = -82.33$ dB. Source: `results/raman/phase_` L12–14.

**Advisory Note**

A 57-dimensional decision space is small enough for a trust-region Newton method with an explicit Hessian. Combined with the Phase 13 indefinite-Hessian finding (§E.5), this opens the door to a second-order optimiser that the original $N_t \sim 10^4$ parameterisation made intractable.

## E.5 Hessian is indefinite at L-BFGS optima

At both canonical L-BFGS optima (SMF-28 $L$=2 m $P$=0.2 W and HNLF $L$=0.5 m $P$=0.01 W), finite-difference Hessian-vector product wrapped with Arpack gives:

| Config | $\lvert\lambda_{\min}\rvert/\lambda_{\max}$ | Sign pattern |
|---|---|---|
| SMF-28 canonical | 2.6 % | indefinite, 100% same-sign wings |
| HNLF canonical | 0.41 % | indefinite, 100% same-sign wings |

HVP Taylor-remainder slope $\approx 2$ (`test/test_phase13_hvp.jl` at commit `b962091`). Source: `results/raman/phase13/FINDINGS.md` L113–120; `results/raman/phase13/hessian_smf28_` `results/raman/phase13/hessian_hnlf_canonical.jld2`.

**Key Result**

L-BFGS is not stopping at a minimum; it is stopping at an **indefinite saddle** with robust (not numerical-noise-level) negative-curvature directions. Sharpness-aware regularisation or trust-region Newton on the 57-dim subspace (§E.4) is the principled next step.

## E.6 Determinism

`FFTW.MEASURE` selects FFT algorithms by micro-timing and produces non-reproducible plans even at fixed `Random.seed!`: two runs on the same hardware give $\max|\Delta\varphi| = 1.04$ rad and $\Delta J = 1.83$ dB (`results/raman/phase13/determinism.md`).

Switching to `FFTW.ESTIMATE` gives bit-identical $J$ across 3 independent Julia processes at +21.4% wall-time cost on the SMF-28 $L$=2 m $P$=0.2 W benchmark. Source: `results/raman/phase15/benchmark.md` L20–27, L39. The switch is wired into the five main driver entry points.

## E.7 Multimode optimizer is code-complete, physics-unexercised

An $M = 6$ GRIN-50 multimode Raman-suppression optimizer is committed: `src/mmf_cost.jl`, `scripts/mmf_*.jl`, `test/test_phase16_mmf.jl`. 13/13 correctness tests pass: energy conservation under the thread-local `deepcopy(fiber)` pattern, $M$=1-limit agreement with the scalar optimizer, and finite-difference gradient check with relative error $< 0.5\%$ at $\varepsilon = 10^{-5}$ on 5 random indices.

**Issue Found**

The only production baseline launched to date used (SMF-28, $L$=1 m, $P$=0.05 W), which has $N_{\text{sol}} \approx 0.9$ (sub-soliton). The optimiser correctly returned $\Delta J = 0$ dB — there is no Raman to suppress in this regime. **This is a negative control, not a science result.** The aggressive-regime baseline ($L$=2 m, $P$=0.5 W, $N_{\text{sol}} \approx 2$–3) remains unrun as of 2026-04-19.

## E.8 Cost-function default: `log_dB` on SMF-28, open elsewhere

Session H ran 4 cost variants on 2 configs:

| Config | Variant | $J_{\text{final}}$ | wall (s) | converged |
|---|---|---|---|---|
| A (SMF-28 canonical) | linear | −70.53 dB | 16.9 | yes |
| A | log_dB | **−75.79** dB | **10.6** | **yes** |
| A | sharp | −55.96 dB | 537 | yes |
| A | curvature | −70.57 dB | 14.2 | yes |
| B (HNLF, log_dB) | — | NaN | DNF | — |
| B (all 4 variants) | — | NaN | DNF | — |

Source: `results/cost_audit/wall_log.csv`.

**Advisory Note**

`log_dB` wins on Config A (SMF-28) by $\sim 5$ dB at 60% of the wall time. On Config B (HNLF, $L$=1 m, $P$=0.5 W) all four variants did not finish within budget — this is the HNLF-hang open issue (`.planning/phases/18-cost-config-c/CONTEXT.md`). The `log_dB` default is empirically justified on SMF-28 only.

## E.9 What did NOT survive the audit

Three claims from the original synthesis were demoted:

**(W1) "$a_2(100\,\text{m})/a_2(2\,\text{m}) = -3.30$ vs. pure-GVD-predicted $+50$ is a structural-adaptation fingerprint."** The weighted quadratic fit of $\varphi_{\text{opt}}(\omega)$ over the $\pm 5$ THz signal band has $R^2 = 0.015$ at 100 m and $R^2 = 0.037$ at 2 m. A quadratic model explaining $< 4\%$ of the variance does not constrain $a_2$; the extracted coefficients are fit noise, and their ratio is a ratio of noise. The sign flip is consistent with a true $a_2$ near zero perturbed by independent residuals at each length. The finding "$\varphi_{\text{opt}}$ is not a low-order polynomial on the signal band" *is* defensible (matches Phase 9, `PHASE9_FINDINGS.md` L19–29), but the GVD-scaling comparison is removed, not caveated. Fit code: `scripts/longfiber_validate_100m_fix.jl` L54–79. Audit: `PHYSICS_AUDIT_2026-04-19.md` §W1.

**(W2) 100 m L-BFGS "optimum" at −54.77 dB.** The number is energy-conserved (photon-drift $4.9 \times 10^{-4}$, edge-fraction $8.5 \times 10^{-6}$) but the convergence state is `converged = false` after 25 L-BFGS iterations with final $\|\nabla J\| = 0.48$. Report as a *lower bound* from the 2 m warm start, not as an optimum. Source: `results/raman/phase16/FINDINGS.md` L21–34.

**(W3) Joint $\{\varphi, A, E\}$ L-BFGS shows physics at 38 dB gap.** Session A's cold-start joint optimizer reached −16.78 dB vs. the phase-only −55.42 dB reference on the same config. This is a preconditioning bug (mixed-unit decision variables confuse L-BFGS's implicit Hessian), not a physics result. Remains out of the canonical docs until Phase 18-multivar-convergence-fix lands. Source: `.planning/phases/16-multivar-optimizer/16-01` L149–152.

## E.10 Boundary-energy caveat on the SMF-28 $L = 2$ m canonical

The pre-integration canonical baseline of −71.4 dB on (SMF-28, $L$=2 m, $P$=0.2 W) was partially a time-window artefact: 14.4% of the energy sat at the $T_{\text{window}}$ edges and re-running at 2× wider window gave the honest −65.8 dB. This is already flagged once in §D (v3 regression) but the baseline tables and presentation figures elsewhere in this document still quote −71.4 dB. Treat any canonical table in the project that references

the $L$=2 m $P$=0.2 W point at −71.4 dB as requiring the honest-window caveat. Audit: `PHYSICS_AUDIT_2026-04-19.md` §S2.

### E.11 Scope limitation on the Taylor-remainder adjoint test

The Taylor-remainder test reported in §5 (slopes 2.00, 2.04) correctly certifies the adjoint gradient *at the unshaped reference* $\varphi \equiv 0$, where $\|\nabla J\|$ sits 3–5 orders of magnitude above the ODE-solver noise floor. At a converged $\varphi_{\text{opt}}$, however, $\|\nabla J\|$ falls below the reltol $= 10^{-8}$ solver noise, and the slope-2 criterion degenerates: the linear-in-$\varepsilon$ term in the Taylor expansion is dominated by noise rather than gradient signal. The Phase 18 numerical-trustworthiness audit (commits `2c95f60`, `2de3caf`, `1a78cc8`) recovered clean slope-2 behavior only by shifting the reference by 2 rad along the steepest-descent direction with $\varepsilon = 10^{-3}$. The adjoint is correct; the test is simply unable to certify it at the optimum. Gradient correctness checks should therefore run at an unshaped or steepest-descent-shifted reference, never at a converged optimum. Audit: `PHYSICS_AUDIT_2026-04-19.md` §S6.

## Summary and Conclusions

**Overall confidence level: High**. The mathematical formulation is correct, the code faithfully implements the formulation, and the gradient is verified to 0.026% relative error. All code reference line numbers are current as of v3 (2026-04-02).

**Strongest evidence for correctness:** The Taylor remainder test showing slopes of 2.00 and 2.04. This test directly measures whether the computed gradient matches the true directional derivative. A slope of 2 confirms $O(\varepsilon^2)$ accuracy, consistent with machine-precision correctness.

**Key resolved issues (v3):**

- The dB/linear gradient mismatch is now properly resolved via the log-scale cost function with correctly scaled gradient $10/(J \ln 10) \cdot \partial J/\partial \varphi$.
- The GDD penalty concern (over-constraining pre-chirp) has been addressed by reducing $\lambda_b$ from 10 to 1 and running sweeps that confirm 20–28 dB improvement.
- The multi-start landscape concern has been resolved: 10/10 convergence with 10.9 dB spread shows a well-behaved landscape (not multiple minima).

**Remaining items:**

1. Extend to multimode ($M > 1$) — the Rivera Lab's primary research direction for quantum noise in multimode fibers.
2. Connect Raman suppression to the quantum noise map (`compute_noise_map` in analysis.jl).
3. Assess realizability of optimized phase profiles against SLM capabilities.
4. Compare phase-only vs. amplitude+phase optimization.

**Should this research direction be continued? Yes.** The approach achieves 37–78 dB Raman suppression across 24 configurations with zero crashes. The log-scale cost function is the key methodological advance, and the adjoint-based framework naturally extends to multimode optimization.

---

*Document generated March 2026. v2 update 2026-03-26. v3 update 2026-04-02: line numbers, adjoint solver, log-cost, overflow fix, diagrams, sweep results. All derivations verified against source code in* `smf-gain-noise/`.