

**FEDERAL INSTITUTE OF
SCIENCE AND TECHNOLOGY
(FISAT)TM**

HORMIS NAGAR, MO O KKANNO OR

ANGAMALY-683577



'FOCUS ON EXCELLENCE'

NETWORKING AND SYSTEM ADMINISTRATION

.....
LABORATORY RECORD

Name: ALEENA PAUL

Branch: MASTER OF COMPUTER APPLICATION

Semester: 2 Batch: SEMESTER -2 A Roll No: 10

**FEDERAL INSTITUTE OF
SCIENCE AND TECHNOLOGY
(FISAT)TM**
HORMIS NAGAR, MOOKKANNOOR
ANGAMALY-683577



'FOCUS ON EXCELLENCE'

Name : ALEENA PAUL

Branch : MASTER OF COMPUTER APPLICATION

Semester : 2

Roll No: 10

University Exam RegNo: FIT20MCA-2010

CERTIFICATE

This is to certify that this is a Bonafide record of the Practical work done and submitted to Kerala Technological University in partial fulfilment for the award of the Master Of Computer Applications is a record of the original research work done by ALEENA PAUL in the NETWORKING AND SYSTEM ADMINISTRATION Laboratory of the Federal Institute of Science and Technology during the academic year 2020-2021.

Signature of Staff in Charge

Name:

Date:

Signature of H.O.D

Name:

Date of University practical examination

Signature of

Internal Examiner

Signature of

External Examiner

CONTENT

SI No:	Date:	Name of Experiment:	Page No:	Signature of Staff –In – Charge:
1		COMPONENT IDENTIFICATION	5	
2		LINUX COMMANDS	38	
3		FILE SYSTEM	49	
4		SHELL SCRIPT	60	
5		LAMP STOCK SERVER INSTALLATION	74	
6		LARAVEL SERVER INSTALLATION	85	
7		NETWORKING COMMANDS	99	
8		WIRE SHARK	104	
9		VIRTUAL BOX INSTALLATION	111	


EXPERIMENT-1

BASIC INTRODUCTORY CONCEPT OF COMPUTER HARDWARE

What is Computer?

A computer is a programmable electronic device that accepts raw data as input and processes it with a set of instructions (a program) to produce the result as output. It renders output just after performing mathematical and logical operations and can save the output for future use. It can process numerical as well as non-numerical calculations. History of Computers.

History of Computers

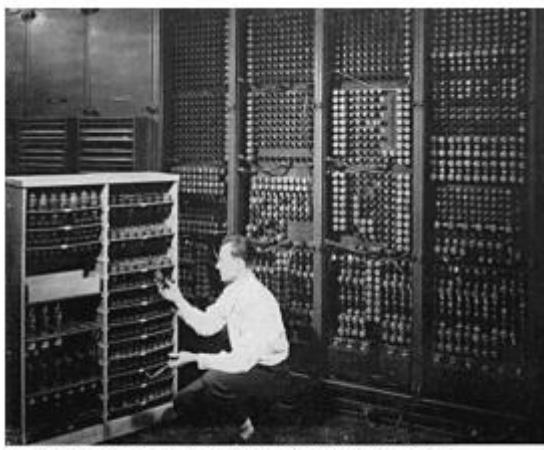


Since the evolution of humans, devices have been used for calculations for thousands of years. One of the earliest and well-known devices was an abacus. Then in 1822, the father of computers, **Charles Babbage** began developing the

first mechanical computer.

Computer Hardware

Computer hardware includes the physical parts of a computer, such as the case, central processing unit (CPU), monitor, mouse, keyboard, computer data storage, graphics card, sound card, speakers and motherboard. Hardware is typically directed by the software to execute any command or instruction. A combination of hardware and software forms a usable computing system, although other systems exist with only hardware.

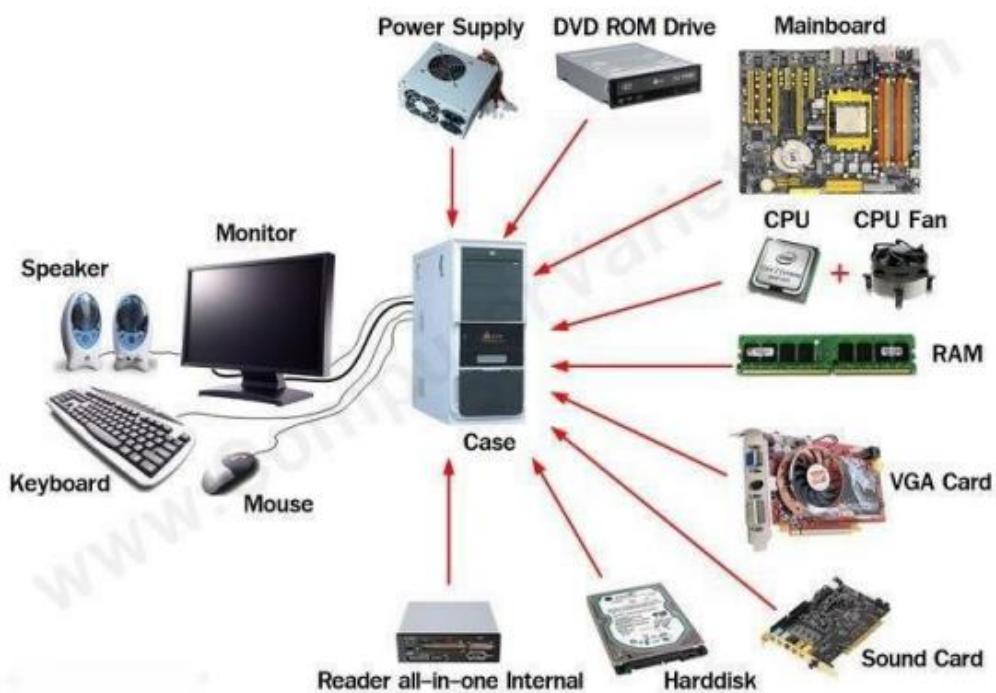

The following are the basic components that will be detailed:-

1. Motherboard
2. RAM Modules
3. Daughter cards
4. Bus slots
5. SMPS
6. Internal Storage Devices
7. Interfacing Ports

2. MOTHERBOARD

A motherboard (also called mainboard, main circuit board, system board, baseboard, planar board , logic board or mobo) is the main printed circuit board (PCB) in general-purpose computers and other expandable systems. It holds and allows communication between many of the crucial electronic components of a system, such as the central processing unit (CPU) and memory, and provides connectors for other peripherals. Unlike a backplane, a motherboard usually contains significant sub-systems, such as the central processor, the chipset's input/output and memory controllers, interface connectors, and other components integrated for general use.



Motherboard means specifically a PCB with expansion capabilities. As the name suggests, this board is often referred to as the "mother" of all components attached to it, which often include peripherals, interface cards, and daughter cards: soundcards, video cards, network cards, host bus adapters, TV tuner cards, IEEE 1394 cards; and a variety of other custom components.


FEATURES OF MOTHERBOARD

- Motherboard varies greatly in supporting various types of components.
- Motherboard supports a single type of CPU and few types of memories.
- Video cards, hard disks, sound cards have to be compatible with the motherboard to function properly.
- Motherboards, cases, and power supplies must be compatible to work properly together.

TYPES OF MOTHERBOARDS

2.1 AT motherboard

These motherboards have bigger physical dimensions of hundreds of millimetres and hence they are not the right fit for the mini desktop category of computers.

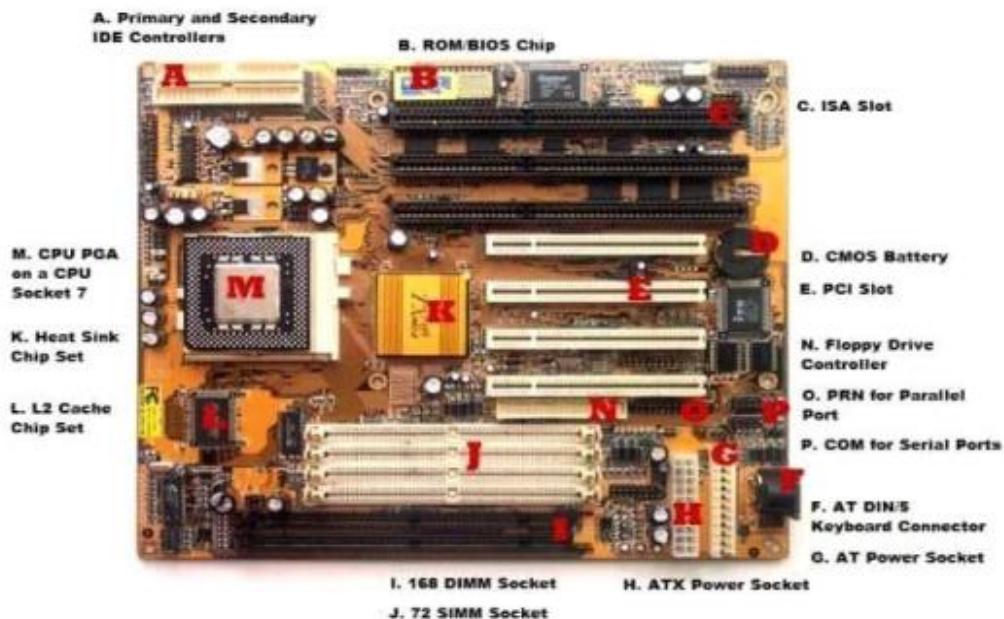

2.2 ATX Motherboards

ATX denotes Advanced technology extended, It was developed by Intel during the 1990s and it was an improved version over an earlier version of AT motherboard. It is smaller in size when compared to AT and it provides interchangeability of the connected components.

2.3 BTX Motherboard

BTX denotes Balanced Technology Extended, intended to manage demands of new technologies in terms of more power requirements hence generation of more heat.

2.4 Pico BTX Motherboard

These boards are smaller in size and hence the word Pico. Two expansion slots are supported in spite of being sharing the top half of BTX. Half-height or riser cards are its unique features and it supports the demands of digital applications.

2.5 Mini ITX Motherboard

It's a miniature version of motherboard. Designed in the early 2000s and its dimension is 17 x 17 cm. Mainly used in small form factor (SFF) computer due to its lower power consumption and faster cooling ability.

MAIN COMPONENTS OF MOTHERBOARD

2.1 FLOPPY DISC CONTROLLER

A floppy disk controller (FDC) is an electronic chip controller used as an interface between a computer and a floppy disk drive. Modern computers have this chip embedded in the motherboard, whereas they were a separate component when they were originally introduced.

A floppy disk controller (FDC) is a specially designed chip that controls the reading and writing functionality of a floppy drive. An FDC can support up to four floppy disk drives at a time. The controller is connected to the system bus of the CPU and appears as a set of I/O ports to the computer. It is usually also linked to a serial bus of the direct memory access (DMA) controller. In an x86 computer, the floppy disk controller uses IRQ6, whereas interrupt schemes are used on other systems. Data transmission is often done by FDC while in DMA mode.



Floppy disk controller functions (FDC)

- Translate data bits into FM, MFM, M²FM, or GCR format to be able to record them
- Interpret and execute commands such as seek, read, write, format, etc.
- Error detection with check sums generation and verification, like CRC
- Synchronize data with phase-locked loop(PLL)

2.2 Serial Ports




Serial Ports provide an interface to connect serial lines to prepare a serial communication. Serial ports are typically used in modem, mouse, security cameras etc. A Serial port uses DB-9 connector, a 9 pin D-Shaped Connector which connects to the transmission line. A serial port provides a serial communication using one line and thus have no dependency on other wire's speed and its length can be extended as per the need.

2.3 Parallel Ports



Parallel ports provide an interface to connect multiple lines to prepare a parallel communication to send large data at a time. Parallel ports are used in connecting printers, hard-drives, CD-drives etc. All lines speed should be same to avoid error and cross-talk issues. To avoid such issues, the wires are kept small in length. A parallel port uses D-25 connector, a 25 pin D- Shaped connector which connects to the transmission wires.

2.4 The Expansion Buses

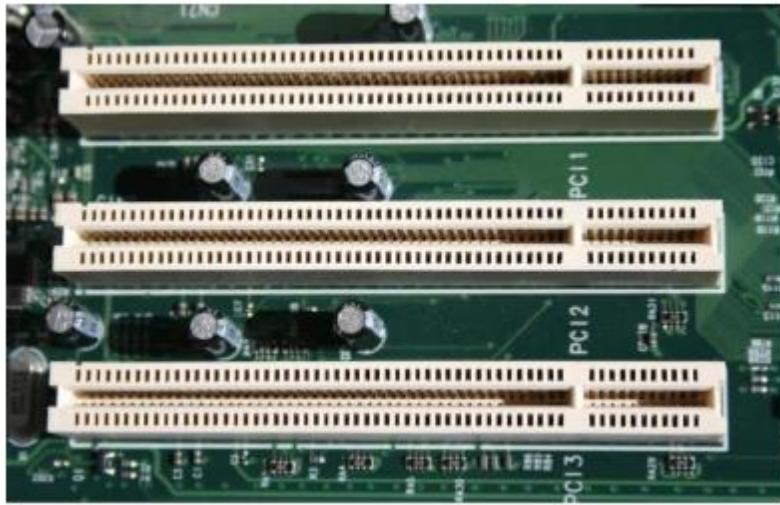

An expansion bus is an input/output pathway from the CPU to peripheral devices and it is typically made up of a series of slots on the motherboard. Expansion boards(cards) plug into the bus. PCI is the most common expansion bus in a PC and other hardware platforms. PCI stands for Peripheral Component Interface; PCI slot allows you to insert expansion cards into your computer. Buses carry signals such as data, memory addresses, power, and control signals from component to component. Other types of buses include ISA and EISA. Expansion buses enhance the PCs capabilities by allowing users to add missing features in their computers by slotting adapter cards into expansion slots.

2.5 The Computer Chip-sets



A chipset is a group of small circuits that coordinate the flow of data to and from a PC's key components. These key components include the CPU itself, the main memory, the secondary cache, and any devices situated on the buses. A chip set also controls data flow to and from hard disks and other devices connected to the IDE channels.

A computer has got two main chipsets:

- **The North Bridge** (also called the memory controller) is in charge of controlling transfers between the processor and the RAM, which is why it is located physically near the processor. It is sometimes called the GMCH, for Graphic and Memory Controller Hub.

- **The South Bridge** (also called the input/output controller or expansion controller) handles communications between slower peripheral devices. It is also called the ICH (I/O Controller Hub). The term "bridge" is generally used to designate a component which connects two buses. Chipset manufacturers include SIS, VIA, ALI, and OPTI.

3. RANDOM ACCESS MEMORY

Introduction

RAM, which stands for Random Access Memory, is a hardware device generally located on the motherboard of a computer and acts as an internal memory of the CPU. It allows CPU store data, program, and program results when you switch on the computer. It is the read and write memory of a computer, which means the information can be written to it as well as read from it.



RAM comes in the form of a chip that is individually mounted on the motherboard or in the form of several chips on a small board connected to the motherboard. It is the main memory of a computer. It is faster to write to and read from as compared to other memories such as a hard disk drive (HDD), solid-state drive (SSD), optical drive, etc.

A computer's performance mainly depends on the size or storage capacity of the RAM. If it does not have sufficient RAM (random access memory) to run the OS and software programs, it will result in slower performance. So, the more RAM a computer has, the faster it will work. Information stored in RAM is accessed randomly, not in a sequence as on a CD or hard drive. So, its access time is much faster.

CHARACTERISTICS OF RAM

3.1 SDRAM AND DDR

Memory modules are labelled with either SDRAM (Synchronous Dynamic Random_Access Memory) or DDR (Double Data Rate). DDR RAM, as the "double data rate" name suggests, offers much faster speeds than SDRAM. Each generation of DDR, such as DDR2 and DDR3, offers performance improvements over the one preceding it.

3.2 SPEED

The two numbers often quoted first on memory module specifications -- for example, "DDRxxx/PCxxxx" -- indicate the maximum clock speed and maximum

transfer rate the device can operate at -- and the higher the better. The stated clock speed is actually double the real figure, so a stick of RAM labelled DDR3-1333 PC3200 offers a clock speed of 666 MHz and a transfer rate of 3,200 MB/s.

3.3 PINS

Essentially, the number of pins a memory module has indicates the number of connections it has to the motherboard -- and thus which motherboards it's compatible with. More pins mean more data can be transferred at once, for faster operation overall, though performance is based on a variety of different factors, including CPU speed and the motherboard configuration.

3.4 VOLTS

The voltage rating associated with a memory module -- for example, 2.5 V -- indicates how much power it draws from the motherboard in order to operate properly. RAM sticks that can work at lower voltages use up less power and give off less heat, and are therefore more suitable for smaller systems such as laptops.

3.5 CAS LATENCY

CAS (Column Address Strobe) Latency, sometimes abbreviated to just "CL," indicates the time it takes for a memory module to return data to the CPU. A lower CAS Latency indicates RAM that performs faster.


3.6 TIMING

Memory modules feature other timings besides CAS Latency, usually listed as a series of numbers after the other specifications. In order after CAS Latency, they

are RAS (Row Address Strobe) to CAS delay, RAS Precharge, Active to Precharge delay and, optionally, command rate. These timings are only really of interest to advanced technical users, as the impact they have on performance is very small.

3.7 REDUNDANCY

The redundancy built into a memory module indicates its ability to recover from errors and to alert the operating system to a problem, rather than just allowing it to crash and lose your data. More expensive and critical server memory uses Error Checking and Correcting Redundancy, or ECC, in order to detect and correct errors wherever possible.

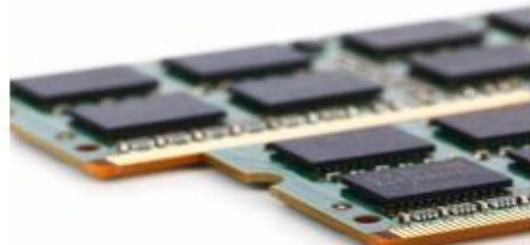


Different Types of RAMS

RAM(Random Access Memory) is a part of computer's Main Memory which is directly accessible by CPU. RAM is used to Read and Write data into it which is accessed by CPU randomly. RAM is volatile in nature, it means if the power goes off, the stored information is lost. RAM is used to store the data that is currently processed by the CPU. Most of the programs and data that are modifiable are stored in RAM.

Integrated RAM chips are available in two form:

1. SRAM(Static RAM)
2. DRAM(Dynamic RAM)

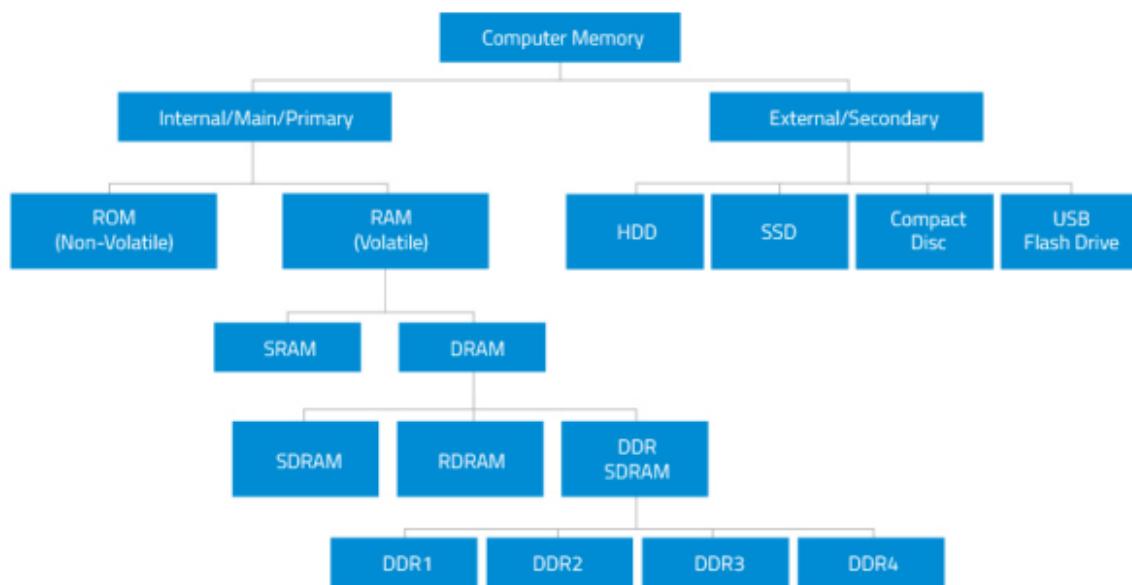

3.1 SRAM

The SRAM memories consist of circuits capable of retaining the stored information as long as the power is applied. That means this type of memory requires constant power. SRAM memories are used to build Cache Memory.

3.2 DRAM

DRAM stores the binary information in the form of electric charges that applied to capacitors. The stored information on the capacitors tend to lose over a period of time and thus the capacitors must be periodically recharged to retain their usage. The main memory is generally made up of DRAM chips.

Functions

3.1. Reading Files

Hard drives can store vast numbers of files, but compared to other computer components, drives run very slowly. Accessing hard drive files -- especially when those files are scattered across the drive due to fragmentation -- requires the drive to move its mechanical read/write head back and forth and to wait for the spinning platters to spin into the correct position. Even though drives spin at thousands of rotations per minute, this process causes a noticeable delay when reading files. To lessen the slowdown, computers store files in RAM after the files are first read from the drive. RAM has no moving parts, so the files can load very quickly during subsequent uses.

3.2 Temporary Storage

In addition to storing files read from the hard drive, RAM also stores data that programs are actively using but that doesn't need to be saved permanently. By keeping this data in RAM, programs can work with it quickly, improving speed and responsiveness.

3.3 RAM Size

If RAM works so much faster than the hard drive, why not load all of the computer's data into RAM? One major reason: computers have far less RAM than drive space. As of publication, hard drive sizes range from a few hundred gigabytes in laptops to 10TB in high-end enterprise systems. Most home computers have between 1 and 4TB of drive space.

4. DAUGHTER C



Motherboard with daughter card

To disable a daughter board, the user must physically remove it from the motherboard. Daughter boards do not provide new functions to the circuit like an expansion but they extend the circuitry of the circuit in which they are plugged into.

Functionalities of daughter board:

- It is known as the piggyback board, riser card, daughter card etcetera.
- A daughter board is smaller than a motherboard and may have some slots like the motherboard.
- A daughter board is a printed circuit board which is connected to the motherboard or expansion card.
- Unlike expansion card, daughter boards are directly connected to the motherboard by soldering.
- Daughter boards do not provide new functions to the circuit like an expansion but they extend the circuitry of the circuit in which they are plugged into.
- Daughter boards are released by the vendors as an update of motherboard or expansion card.

List of daughter cards


- Video Card: This is also referred to as the graphics adapter, display adapter or video adapter.
- Sound Card: To handle sound, to insert a microphone or connect a speaker this sound card is used.
- Network Interface Card: This is also referred as NIC. The computer can be connected to a network only with the use of this network interface card.
- Ethernet Card: Ethernet card is used to connect computers to computers. A cable is used to connect the Ethernet cards in each computer to make a network.

5. SWITCHED- MODE POWER SUPPLY

Switched-mode power supply Introduction A switched-mode power supply (switching_mode power supply, switch-mode power supply, switched power supply, SMPS, or switcher) is an electronic power supply that incorporates a switching regulator to convert electrical power efficiently. Its function is to convert a level of voltage to the voltage or current required by the client through different forms of architecture.



WORKING

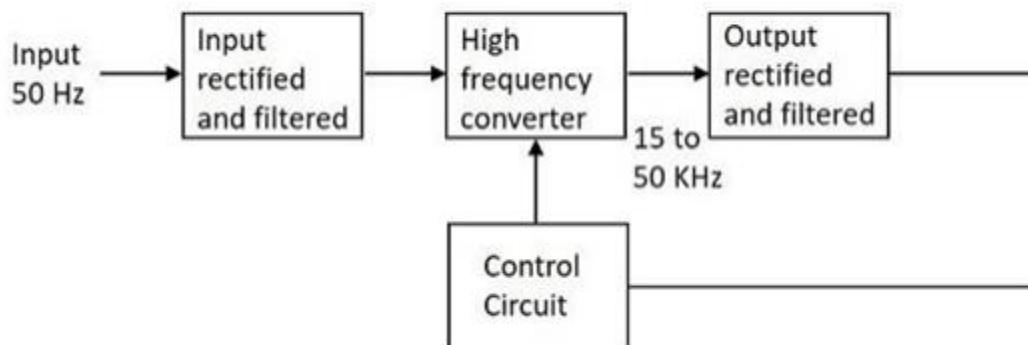

The working of SMPS is simply understood by knowing that the transistor used in LPS is used to control the voltage drop while the transistor in SMPS is used as a controlled switch. The AC input supply signal 50 Hz is given directly to the rectifier and filter circuit combination without using any transformer. A fast switching device such as a Power transistor is employed in this section, which switches ON and OFF according to the variations and this output is given to the primary of the transformer. This is a regulated output voltage which is then given to the control circuit, which is a feedback circuit.

6. INTERNAL STORAGE DEVICES

A storage device is any type of computing hardware that is used for storing, porting or extracting data files and objects. Storage devices can hold and store information both temporarily and permanently. They may be internal or external to a computer. Some storage devices are classed as 'internal' which means they are inside the computer case. At the most basic level, internal storage is needed to hold the operating system so that the computer is able to access the input and output devices. It will also be used to store the applications software that you use and more than likely, the original copies of your data files.

Internal storage allows the data and applications to be loaded very rapidly into memory, ready for use. The data can be accessed much faster than data which is stored on an external storage device. This is because internal storage devices are connected directly to the motherboard and its data bus whereas external devices are connected through a hardware interface such as USB, which means they are considerably slower to access.

The main disadvantage of internal storage is that when the hard disk fails (and it will), all the data and applications may be lost. This can be avoided to some extent by using more than one hard disk within the machine. Each hard disk has a copy of all the data, so if one fails the other can carry on. This is called a RAID array. An alternative is to use external drives for backup.

Examples of Internal storage devices

- Hard Disk
- SSD

- RAM

6.1 HARD DISK


A hard disk drive (sometimes abbreviated as a hard drive, HD, or HDD) is a non_volatile data storage device. It is usually installed internally in a computer, attached directly to the disk controller of the computer's motherboard. It contains one or more platters, housed inside of an air-sealed casing. Data is written to the platters using a magnetic head, which moves rapidly over them as they spin.

Internal hard disks reside in a drive bay, connected to the motherboard using an ATA, SCSI, or SATA cable. They are powered by a connection to the computer's PSU (power supply unit).

Hard disk, Magnetic storage medium for a microcomputer. Hard disks are flat, circular plates made of aluminum or glass and coated with a magnetic material. Hard disks for personal computers can store up to several gigabytes (billions of bytes) of information. Data are stored on their surfaces in concentric tracks. A small electromagnet, called a magnetic head, writes a binary digit (1 or 0) by magnetizing tiny spots on the spinning disk in different directions and reads digits by detecting the magnetization direction of the spots. A computer's hard drive is a device consisting of several hard disks, read/write heads, a drive motor to spin the disks, and a small amount of circuitry, all sealed in a metal case to protect the disks from dust. In addition to referring to the disks themselves, the term hard disk is also used to refer to the whole hard drive.

Computers rely on hard disk drives (HDDs) to store data permanently. They are storage devices used to save and retrieve digital information that will be required for future reference.

Hard drives are non-volatile, meaning that they retain data even when they do not have power. The information stored remains safe and intact unless the hard drive is destroyed or interfered with. The information is stored or retrieved in a random-access manner as opposed to sequential access. This implies that blocks of data can be accessed at any time they are required without going through other data blocks.

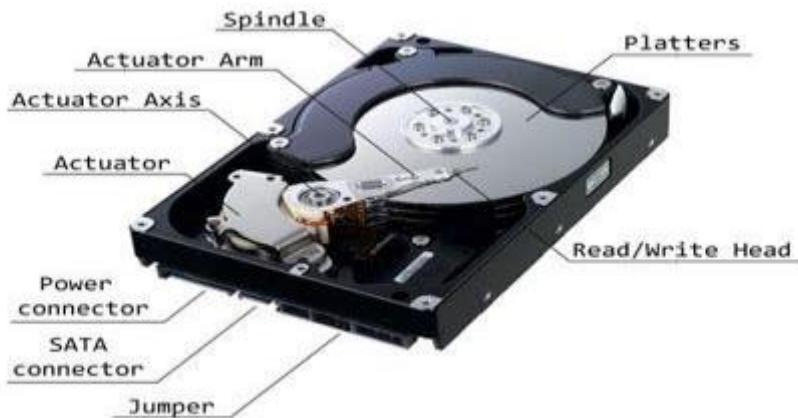

6.2 SOLID STATE DRIVE

A solid-state drive (SSD) is a solid-state storage device that uses integrated circuit assemblies to store data persistently, typically using flash memory, and functioning as secondary storage in the hierarchy of computer storage. It is also sometimes called a solid-state device or a solid-state disk, even though SSDs lack the physical spinning disks and movable read–write heads used in hard disk drives (HDDs) and floppy disks.

Compared with electromechanical drives, SSDs are typically more resistant to physical shock, run silently, and have quicker access time and lower latency.

SSDs store data in semiconductor cells. SSDs have a limited number of writes, and slow as they reach storage capacity.



6.3 RAM

RAM (Random Access Memory) is the internal memory of the CPU for storing data, program, and program result. It is a read/write memory which stores data until the machine is working. As soon as the machine is switched off, data is erased.

RAM is volatile, i.e. data stored in it is lost when we switch off the computer or if there is a power failure. RAM is small, both in terms of its physical size and in

the amount of data it can hold.



RAM is of two types –

- Static RAM (SRAM)
- Dynamic RAM (DRAM)

Static RAM (SRAM)

The word static indicates that the memory retains its contents as long as power is being supplied. However, data is lost when the power gets down due to volatile nature. SRAM chips use a matrix of 6-transistors and no capacitors. Transistors do not require power to prevent leakage, so SRAM need not be refreshed on a regular basis.

Dynamic RAM

(DRAM) DRAM, unlike SRAM, must be continually refreshed in order to maintain the data. This is done by placing the memory on a refresh circuit that rewrites the data several hundred times per second. DRAM is used for most system memory as it is cheap and small.

6.4 SOME OTHER STORAGE DEVICES

- Magnetic Storage Device
- Optical Storage Device
- Flash Memory Device
- Online and Cloud
- Paper Storage



7. COMPUTER PORTS

WHAT IS MEANT BY A PORT?

A port in a computer network is a communication endpoint whereas, in an operating system, it is a logical construct, recognizes precise method otherwise a network service type. These endpoints recognize the combination of every protocol and its address through 16-bit unsigned numbers, called the port number. The protocols that use port numbers are the TCP (Transmission Control Protocol) and UDP (User Datagram Protocol). The port number in every computer networking uses an IP address of the type of protocol & the host

What is Port in Computer/Computer Port?

A computer port or a communication port is a connection point used as an interface between the computer & the peripherals like keyboard, mouse, printer, display unit, monitor, flash drive and speaker. The computer port transmits the data from any peripheral to the computer. In general, the communication ports are available in two type like Serial Ports as well as Parallel Ports.



Characteristics of Computer Ports

The characteristics of the computer port include the following.

- It is an interface between external devices as well as a computer.

- Ports on the motherboard can be connected using an external device cable by plugging in.
- The external devices which are connected through via ports are the keyboard, mouse, microphone, monitor, speakers, etc.


Types of Computer Ports

There are different types of ports available in a computer network. Some of them are:

- PS/2
- Serial Port
- Parallel Port
- Ethernet
- VGA Port
- USB Port
- DVI Port
- HDMI Port
- Display Port

7.1 PS/2 PORTS:

PS/2 is a type of port used by older computers for connecting input devices such as keyboards and mice. The port was introduced with IBM's Personal System/2 computer in 1987 (which was abbreviated "PS/2"). The PS/2 port has six pins and is roughly circular in shape.

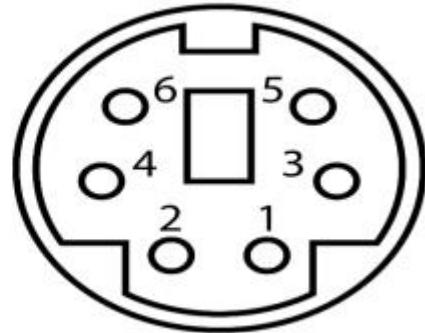

7.2 SERIAL PORT:

A serial port is an interface that allows a PC to transmit or receive data one bit at a time. It is one of the oldest types of interfaces commonly used to connect printers and external modems to a PC. Compared to a parallel port, the data transfer rate of a serial port is slower. Normally, a serial port is a male port, while a parallel port is a female port. The serial port standard is RS-232. This standard is used for transmitting serial communication between devices.



7.3 PARALLEL PORT:

Parallel port is a type of interface found on computers (personal and otherwise) for connecting peripherals. Parallel ports send multiple bits of data at once (parallel communication), as opposed to serial communication, in which bits are sent one at a time. Parallel port is an interface between computer and peripheral devices like printers with parallel communication.



7.4 ETHERNET:

A Ethernet port is a jack or socket on a computer that allows the use of an Ethernet connector. These ports are essential in allowing the creation of local area networks (LANs). An Ethernet port is usually found on networking devices, including computers, routers, video game consoles, modems, and televisions. Ethernet is a communication system that allows multiple local devices to share information and work together.



7.5 VGA PORT:

Abbreviated VGA, Video Graphics Array is a standard type of connection for video devices such as monitors and projectors. Generally, VGA refers to the types of cables, ports, and connectors used to connect monitors to video cards.



7.6 USB PORT:

A USB port is a standard cable connection interface for personal computers and consumer electronics devices. USB stands for Universal Serial Bus, USB ports allow USB devices to be connected to each other with and transfer digital data over USB cables.



7.7 HDMI PORT:

Full form of HDMI is High-Definition Multimedia Interface.

HDMI is a proprietary audio/video interface for transmitting uncompressed video data and compressed or uncompressed digital audio data from an HDMI-compliant source device, such as a display controller, to a compatible computer monitor, video projector, digital television, or digital audio device.



7.8 DISPLAY PORT:

DisplayPort is a digital display interface developed by a consortium of PC and chip manufacturers and standardized by the Video Electronics Standards Association. Display Port is a digital display interface with optional multiple channel audio and other forms of data. Display Port is developed with an aim of replacing VGA and DVI ports as the main interface between a computer and monitor.



EXPERIMENT-2

LINUX COMMANDS

Q1.Create the directories and files as given in the above directory structure.
Directories are mentioned as (d).Files should be filled with necessary text data.

```
aleena@aleena:~$ ls
a Desktop  Downloads  fisatfile.txt  Music  Public  Videos
b dev      fileA    jane        newfile  Templates
c Documents  fileB    library      Pictures  tmp

aleena@aleena:~$ cd Desktop
aleena@aleena:~/Desktop$ ls
INDIA

aleena@aleena:~/Desktop$ cd INDIA
aleena@aleena:~/Desktop/INDIA$ mkdir KERALA
aleena@aleena:~/Desktop/INDIA$ mkdir TN
aleena@aleena:~/Desktop/INDIA$ mkdir AP
aleena@aleena:~/Desktop/INDIA$ ls
AP  KERALA  TN

aleena@aleena:~/Desktop/INDIA$ cd KERALA
aleena@aleena:~/Desktop/INDIA/KERALA$ cat>culture.txt
This is about the culture of Kerala.
aleena@aleena:~/Desktop/INDIA/KERALA$ cat>language.txt
The language of kerala is malayalam.
aleena@aleena:~/Desktop/INDIA/KERALA$ cat>dress.txt
halfsaree
kurti
saree
skrit
jubba
churidar
lungi
shirt
pant
aleena@aleena:~/Desktop/INDIA/KERALA$ cd..
cd..: command not found
aleena@aleena:~/Desktop/INDIA/KERALA$ cd ..
aleena@aleena:~/Desktop/INDIA$ cd TN
aleena@aleena:~/Desktop/INDIA/TN$ cat>farm.txt
In Tamil nadu major plantation crops are cashew,coffee,tea,betel wine,rubber,arecanut,coconut,bamboo and cocoa.
aleena@aleena:~/Desktop/INDIA/TN$ cat>land.txt
Tamil Nadu is a state in southern India.Its capital and largest city is chennai.
aleena@aleena:~/Desktop/INDIA/TN$ cd ..
aleena@aleena:~/Desktop/INDIA$ cd AP
aleena@aleena:~/Desktop/INDIA/AP$ mkdir DEVELOPMENT
aleena@aleena:~/Desktop/INDIA/AP$ cat>industry.txt
Automobiles and auto components industry,textiles and apparels,poultry farming,IT industries in AP.
aleena@aleena:~/Desktop/INDIA/AP$ cat>general.txt
Andra Pradesh is the state in the south-eastern costal region of India.
aleena@aleena:~/Desktop/INDIA/AP$ cat>farmers.txt
Andra Pradesh's total population,appropriately 62% or 46 lakh families are dependend on the agriculture and allied sectors.
aleena@aleena:~/Desktop/INDIA/AP$
```

Q2. List your present working directory.

```
aleena@aleena:~/Desktop/INDIA/AP$ pwd  
/home/aleena/Desktop/INDIA/AP  
aleena@aleena:~/Desktop/INDIA/AP$ |
```

Q3. Move to the root directory.

```
aleena@aleena:~/Desktop/INDIA/AP$ cd /  
aleena@aleena:$ ls  
bin boot cdrom dev etc home lib lib32 lib64 libx32 lost+found media mnt opt proc root run sbin snap srv swapfile sys tmp usr var  
aleena@aleena:$ |
```

Q4. Copy the files Culture to the folder AP.

```
aleena@aleena:~/Desktop/INDIA/KERALA$ cp culture.txt ~/Desktop/INDIA/AP  
aleena@aleena:~/Desktop/INDIA/KERALA$ ls  
culture.txt dress.txt language.txt  
aleena@aleena:~/Desktop/INDIA/KERALA$ cd ..  
aleena@aleena:~/Desktop/INDIA$ cd AP  
aleena@aleena:~/Desktop/INDIA/AP$ ls  
culture.txt DEVELOPMENT farmers.txt general.txt industry.txt  
aleena@aleena:~/Desktop/INDIA/AP$ |
```

Q5. Display the content of the file ‘general’

```
aleena@aleena:~/Desktop/INDIA/AP$ cat general.txt  
Andra Pradesh is the state in the south-eastern costal region of India.  
aleena@aleena:~/Desktop/INDIA/AP$ |
```

Q6. Move the file ‘language’ to the directory AP/Developm

```
aleena@aleena:~/Desktop/INDIA/KERALA$ mv language.txt ~/Desktop/INDIA/AP/DEVELOPMENT
aleena@aleena:~/Desktop/INDIA/KERALA$ cd ..
aleena@aleena:~/Desktop/INDIA$ cd AP
aleena@aleena:~/Desktop/INDIA/AP$ cd DEVELOPMENT
aleena@aleena:~/Desktop/INDIA/AP/DEVELOPMENT$ ls
language.txt
aleena@aleena:~/Desktop/INDIA/AP/DEVELOPMENT$
```

Q7. List all the files in the folder AP

```
aleena@aleena:~/Desktop/INDIA/AP/DEVELOPMENT$ cd ..
aleena@aleena:~/Desktop/INDIA/AP$ ls
culture.txt DEVELOPMENT farmers.txt general.txt industry.txt
aleena@aleena:~/Desktop/INDIA/AP$
```

Q8. List first 10 lines of the file ‘Dress’

```
aleena@aleena:~/Desktop/INDIA/KERALA$ head -10 dress.txt
halfsaree
kurti
saree
skrit
jubba
churidar
lungi
shirt
pant
aleena@aleena:~/Desktop/INDIA/KERALA$
```

Q9. List the last 10 lines of the file ‘Dress’

```
aleena@aleena:~/Desktop/INDIA/KERALA$ tail -10 dress.txt
halfsaree
kurti
saree
skrit
jubba
churidar
lungi
shirt
pant
aleena@aleena:~/Desktop/INDIA/KERALA$
```

Q10. List all the files in AP in long listing format

```
aleena@aleena:~/Desktop/INDIA/AP$ ls -l
total 20
-rw-rw-r-- 1 aleena aleena 37 Aug 30 20:23 culture.txt
drwxrwxr-x 2 aleena aleena 4096 Aug 30 20:34 DEVELOPMENT
-rw-rw-r-- 1 aleena aleena 124 Aug 30 20:04 farmers.txt
-rw-rw-r-- 1 aleena aleena 72 Aug 30 20:01 general.txt
-rw-rw-r-- 1 aleena aleena 100 Aug 30 19:58 industry.txt
aleena@aleena:~/Desktop/INDIA/AP$
```

Q11. List the files in AP which begin with the character ‘f’

```
aleena@aleena:~/Desktop/INDIA/AP$ ls f*
farmers.txt
aleena@aleena:~/Desktop/INDIA/AP$
```

Q12. List the files page by page

```
aleena@aleena:~/Desktop/INDIA/AP$ ls -la | more
total 28
drwxrwxr-x 3 aleena aleena 4096 Aug 30 20:23 .
drwxrwxr-x 5 aleena aleena 4096 Aug 30 19:43 ..
-rw-rw-r-- 1 aleena aleena 37 Aug 30 20:23 culture.txt
drwxrwxr-x 2 aleena aleena 4096 Aug 30 20:34 DEVELOPMENT
-rw-rw-r-- 1 aleena aleena 124 Aug 30 20:04 farmers.txt
-rw-rw-r-- 1 aleena aleena 72 Aug 30 20:01 general.txt
-rw-rw-r-- 1 aleena aleena 100 Aug 30 19:58 industry.txt
aleena@aleena:~/Desktop/INDIA/AP$
```

Q13. Remove the file ‘general’

```
aleena@aleena:~/Desktop/INDIA/AP$ ls
culture.txt DEVELOPMENT farmers.txt general.txt industry.txt
aleena@aleena:~/Desktop/INDIA/AP$ rm -i general.txt
rm: remove regular file 'general.txt'? y
aleena@aleena:~/Desktop/INDIA/AP$ ls
culture.txt DEVELOPMENT farmers.txt industry.txt
aleena@aleena:~/Desktop/INDIA/AP$
```

Q14. Change the permission of the file ‘Culture’ as only read permission to all

```
aleena@aleena:~/Desktop/INDIA/AP$ chmod g-wx culture.txt
aleena@aleena:~/Desktop/INDIA/AP$ ls
drwxrwxr-x 2 aleena aleena 4096 Aug 30 20:34 DEVELOPMENT
-rw-rw-r-- 1 aleena aleena 124 Aug 30 20:04 farmers.txt
-rw-rw-r-- 1 aleena aleena 72 Aug 30 20:01 general.txt
-rw-rw-r-- 1 aleena aleena 100 Aug 30 19:58 industry.txt
aleena@aleena:~/Desktop/INDIA/AP$
```

Q15. List the lines of the file which contains a string ‘Saree’

```
aleena@aleena:~/Desktop/INDIA/KERALA$ cat>Dress.txt
Salwar
Saree
Skirt
Pant
aleena@aleena:~/Desktop/INDIA/KERALA$ grep 'Saree' Dress.txt
Saree
aleena@aleena:~/Desktop/INDIA/KERALA$
```

Q16. Use man command to get the syntax of wc command.

```
WC(1)                               User Commands                               WC(1)

NAME
    wc - print newline, word, and byte counts for each file

SYNOPSIS
    wc [OPTION]... [FILE]...
    wc [OPTION]... --files0-from=F

DESCRIPTION
    Print newline, word, and byte counts for each FILE, and a total line if more than one FILE is specified. A word is a non-zero-length sequence of characters delimited by white space.
    With no FILE, or when FILE is -, read standard input.

    The options below may be used to select which counts are printed, always in the following order: newline, word, character, byte, maximum line length.

    -c, --bytes
        print the byte counts

    -m, --chars
        print the character counts

    -l, --lines
        print the newline counts

    --files0-from=F
        read input from the files specified by NUL-terminated names in file F; If F is - then read names from standard input

    -L, --max-line-length
        print the maximum display width

    -w, --words
        print the word counts

    --help
        display this help and exit

    --version
        output version information and exit

AUTHOR
    Written by Paul Rubin and David MacKenzie.

REPORTING BUGS
    GNU coreutils online help: <https://www.gnu.org/software/coreutils/>
    Report wc translation bugs to <https://translationproject.org/team/>

COPYRIGHT
    Manual page wc(1) line 1 (press h for help or q to quit)
```

Q17. Count the number of characters, words, lines in the directory listing

```
aleena@aleena:~/Desktop/INDIA/KERALA$ wc -mwl ~/Desktop/INDIA/KERALA/Dress.txt
4 4 24 /home/aleena/Desktop/INDIA/KERALA/Dress.txt
aleena@aleena:~/Desktop/INDIA/KERALA$
```

Q18. Put a listing of the files in your directory into a file called filelist.

```
aleena@aleena:~$ ls -l >> filelist.txt
aleena@aleena:~$ cat filelist.txt
total 64
-rw-rw-r-- 1 aleena aleena 0 Aug 16 10:34 a
-rw-rw-r-- 1 aleena aleena 0 Aug 16 10:34 b
-rw-rw-r-- 1 aleena aleena 0 Aug 16 10:34 c
drwxr-xr-x 3 aleena aleena 4096 Aug 30 21:38 Desktop
drwxrwxr-x 3 aleena aleena 4096 Aug 16 09:54 dev
drwxr-xr-x 2 aleena aleena 4096 May 25 19:55 Documents
drwxr-xr-x 2 aleena aleena 4096 May 25 19:55 Downloads
-rw-rw-r-- 1 aleena aleena 18 Aug 16 10:49 fileA
-rw-rw-r-- 1 aleena aleena 36 Aug 16 10:51 fileB
-rw-rw-r-- 1 aleena aleena 0 Aug 30 21:38 filelist.txt
-rw-rw-r-- 1 aleena aleena 72 Aug 16 11:10 fisatfile.txt
drwxrwxr-x 2 aleena aleena 4096 Aug 16 10:38 jane
drwxrwxr-x 5 aleena aleena 4096 Aug 16 10:54 library
drwxr-xr-x 2 aleena aleena 4096 May 25 19:55 Music
drwxrwxr-x 2 aleena aleena 4096 Aug 16 10:25 newfile
drwxr-xr-x 2 aleena aleena 4096 Jun 24 16:11 Pictures
drwxr-xr-x 2 aleena aleena 4096 May 25 19:55 Public
drwxr-xr-x 2 aleena aleena 4096 May 25 19:55 Templates
drwxrwxr-x 2 aleena aleena 4096 Aug 16 10:38 tmp
drwxr-xr-x 2 aleena aleena 4096 May 25 19:55 Videos
aleena@aleena:~$
```

Q19. List the status of all process running in your system.

```
aleena@aleena:~/Desktop/INDIA/KERALA$ ps -aux
USER      PID %CPU %MEM    VSZ   RSS TTY      STAT START  TIME COMMAND
root      1  0.0  0.6 167736 11724 ?        Ss  19:07  0:03 /sbin/init splash
root      2  0.0  0.0     0   0 ?        I<  19:07  0:00 [kthreadd]
root      3  0.0  0.0     0   0 ?        I<  19:07  0:00 [rcu_gp]
root      4  0.0  0.0     0   0 ?        I<  19:07  0:00 [rcu_par_gp]
root      6  0.0  0.0     0   0 ?        I<  19:07  0:00 [kworker/0:0H-kblockd]
root      9  0.0  0.0     0   0 ?        I<  19:07  0:00 [mm_percpu_wq]
root     10  0.0  0.0     0   0 ?        S   19:07  0:00 [ksoftirqd/0]
root     11  0.0  0.0     0   0 ?        I   19:07  0:02 [rcu_sched]
root     12  0.0  0.0     0   0 ?        S   19:07  0:00 [migration/0]
root     13  0.0  0.0     0   0 ?        S   19:07  0:00 [idle_inject/0]
root     14  0.0  0.0     0   0 ?        S   19:07  0:00 [cpuhp/0]
root     15  0.0  0.0     0   0 ?        S   19:07  0:00 [cpuhp/i]
root     16  0.0  0.0     0   0 ?        S   19:07  0:00 [idle_inject/1]
root     17  0.0  0.0     0   0 ?        S   19:07  0:00 [migration/1]
root     18  0.0  0.0     0   0 ?        S   19:07  0:00 [ksoftirqd/1]
root     20  0.0  0.0     0   0 ?        I<  19:07  0:00 [kworker/1:0H-kblockd]
root     21  0.0  0.0     0   0 ?        S   19:07  0:00 [kdevtmpfs]
root     22  0.0  0.0     0   0 ?        I<  19:07  0:00 [netns]
root     23  0.0  0.0     0   0 ?        S   19:07  0:00 [rcu_tasks_kthre]
root     24  0.0  0.0     0   0 ?        S   19:07  0:00 [rcu_tasks_rude_]
root     25  0.0  0.0     0   0 ?        S   19:07  0:00 [rcu_tasks_trace]
root     26  0.0  0.0     0   0 ?        S   19:07  0:00 [kauditfd]
root     27  0.0  0.0     0   0 ?        S   19:07  0:00 [khungtaskd]
root     28  0.0  0.0     0   0 ?        S   19:07  0:00 [oom_reaper]
root     29  0.0  0.0     0   0 ?        I<  19:07  0:00 [writeback]
root     30  0.0  0.0     0   0 ?        S   19:07  0:00 [kcompactd0]
root     31  0.0  0.0     0   0 ?        SN  19:07  0:00 [ksmd]
root     32  0.0  0.0     0   0 ?        SN  19:07  0:00 [khugepaged]
root     78  0.0  0.0     0   0 ?        I<  19:07  0:00 [kintegrityd]
root     79  0.0  0.0     0   0 ?        I<  19:07  0:00 [kblockd]
root     80  0.0  0.0     0   0 ?        I<  19:07  0:00 [blkcg_punt_bio]
root     81  0.0  0.0     0   0 ?        I<  19:07  0:00 [tpm_dev_wq]
root     82  0.0  0.0     0   0 ?        I<  19:07  0:00 [ata_sff]
root     83  0.0  0.0     0   0 ?        I<  19:07  0:00 [md]
root     84  0.0  0.0     0   0 ?        I<  19:07  0:00 [edac-poller]
root     85  0.0  0.0     0   0 ?        I<  19:07  0:00 [devfreq_wq]
root     87  0.0  0.0     0   0 ?        S   19:07  0:00 [watchdogd]
root     89  0.0  0.0     0   0 ?        I<  19:07  0:00 [pm_wq]
root     91  0.0  0.0     0   0 ?        S   19:07  0:00 [kswapd0]
root     92  0.0  0.0     0   0 ?        S   19:07  0:00 [ecryptfs-kthrea]
root     94  0.0  0.0     0   0 ?        I<  19:07  0:00 [kthrotld]
root     95  0.0  0.0     0   0 ?        I<  19:07  0:00 [acpi_thermal_pm]
root     96  0.0  0.0     0   0 ?        S   19:07  0:00 [scsi_eh_0]
root     97  0.0  0.0     0   0 ?        I<  19:07  0:00 [scsi_tmf_0]
```

Q20. List the disk partitions in your hard disk.

```
aleena@aleena:~$ lsblk
NAME   MAJ:MIN RM  SIZE RO TYPE MOUNTPOINT
loop0   7:0     0  55.5M 1 loop /snap/core18/2074
loop1   7:1     0  55.4M 1 loop /snap/core18/2128
loop2   7:2     0  219M 1 loop /snap/gnome-3-34-1804/66
loop3   7:3     0  219M 1 loop /snap/gnome-3-34-1804/72
loop4   7:4     0   51M 1 loop /snap/snap-store/518
loop5   7:5     0  64.8M 1 loop /snap/gtk-common-themes/1514
loop6   7:6     0  32.3M 1 loop /snap/snapd/12704
loop7   7:7     0  65.1M 1 loop /snap/gtk-common-themes/1515
loop8   7:8     0   51M 1 loop /snap/snap-store/547
loop9   7:9     0  32.3M 1 loop /snap/snapd/12883
sda      8:0     0 100.0G 0 disk
|---sda1  8:1     0  512M 0 part /boot/efi
|---sda2  8:2     0   1K 0 part
|---sda5  8:5     0 100.2G 0 part /
sr0    11:0     1  58.2M 0 rom  /media/aleena/VBox_GAs_6.1.22
aleena@aleena:~$
```

Q21. Redirect the output of the top program to a file called ‘errors’.

```
aleena@aleena:~$ top >> error.txt
aleena@aleena:~$ cat error.txt

top - 21:46:48 up 2:39, 1 user, load average: 0.07, 0.14, 0.07
Tasks: 190 total, 1 running, 189 sleeping, 0 stopped, 0 zombie
%Cpu(s): 2.2 us, 0.9 sy, 0.4 ni, 96.2 id, 0.0 wa, 0.0 ht, 0.2 sl, 0.0 st
Mem Mem: 1861.0 total, 137.5 free, 811.9 used, 911.6 buff/cache
Mib Swap: 2048.0 total, 2048.0 free, 0.0 used. 871.5 avail Mem
Change delay from 3.0 to 1.0
      PID   USER      PR  NI    VIRT    RES    SHR %CPU %MEM COMMAND
 1610 aleena  20   0 4264784 402508 135328 5 2.6 21.1 3:05.75 gnome-shell
 3777 aleena  20   0 20516 3932 3260 R 1.3 0.2 0:00.10 top
 3780 aleena  20   0 443436 27532 14912 S 1.3 1.4 0:00.64 tracker-store
1373 aleena  20   0 869888 99660 54036 S 0.9 5.2 1:11.46 Xorg
3787 aleena  39  19 1224712 34800 24288 S 0.9 1.8 0:00.52 tracker-extract
2871 aleena  20   0 823068 51068 38592 S 0.4 2.7 0:28.31 gnome-terminal-
 1 root  20   0 167736 11724 8488 S 0.0 0.6 0:03.42 systemd
 2 root  20   0 0 0 0 S 0.0 0.0 0:00.01 kthreadd
 3 root  0 -20 0 0 0 I 0.0 0.0 0:00.00 rcu_gp
 4 root  0 -20 0 0 0 I 0.0 0.0 0:00.00 rcu_par_gp
 6 root  0 -20 0 0 0 I 0.0 0.0 0:00.00 kworker/0:0H-kblockd
 9 root  0 -20 0 0 0 I 0.0 0.0 0:00.00 mm_percpu_wq
10 root  20   0 0 0 0 S 0.0 0.0 0:00.20 ksoftirqd/0
11 root  20   0 0 0 0 I 0.0 0.0 0:02.40 rcu_sched
12 root  rt  0 0 0 0 S 0.0 0.0 0:00.17 migration/0
13 root  -51  0 0 0 0 S 0.0 0.0 0:00.00 idle_inject/0
14 root  20   0 0 0 0 S 0.0 0.0 0:00.00 cpuhp/0
15 root  20   0 0 0 0 S 0.0 0.0 0:00.00 cpuhp/1
16 root  -51  0 0 0 0 S 0.0 0.0 0:00.00 idle_inject/1
17 root  rt  0 0 0 0 S 0.0 0.0 0:00.48 migration/1
18 root  20   0 0 0 0 S 0.0 0.0 0:00.14 ksoftirqd/1
20 root  0 -20 0 0 0 I 0.0 0.0 0:00.00 kworker/1:0H-kblockd
21 root  20   0 0 0 0 S 0.0 0.0 0:00.00 kdevtmpfs
22 root  0 -20 0 0 0 I 0.0 0.0 0:00.00 netns
23 root  20   0 0 0 0 S 0.0 0.0 0:00.00 rcu_tasks_kthre
24 root  20   0 0 0 0 S 0.0 0.0 0:00.00 rCU_TASKS_RUDE_
25 root  20   0 0 0 0 S 0.0 0.0 0:00.00 rCU_TASKS_TRACE_
26 root  20   0 0 0 0 S 0.0 0.0 0:00.00 kaudited
27 root  20   0 0 0 0 S 0.0 0.0 0:00.01 khungtaskd
28 root  20   0 0 0 0 S 0.0 0.0 0:00.00 oom_reaper
29 root  0 -20 0 0 0 I 0.0 0.0 0:00.00 writeback
30 root  20   0 0 0 0 S 0.0 0.0 0:00.00 kcompactd0
31 root  25  5 0 0 0 S 0.0 0.0 0:00.00 ksmd
32 root  39  19 0 0 0 S 0.0 0.0 0:00.00 khugepaged
78 root  0 -20 0 0 0 I 0.0 0.0 0:00.00 kintegrityd
79 root  0 -20 0 0 0 I 0.0 0.0 0:00.00 kblockd
80 root  0 -20 0 0 0 I 0.0 0.0 0:00.00 blkcg_punt_bio
81 root  0 -20 0 0 0 I 0.0 0.0 0:00.00 tpm_dev_wq
82 root  0 -20 0 0 0 I 0.0 0.0 0:00.00 ata_sff
```

EXPERIMENT-3

EXPLORING LINUX FILE SYSTEM

It makes sense to explore the Linux filesystem from a terminal window,

In fact, that is the name of the first tool you'll install to help you on the way: tree.

If you are using Ubuntu or Debian, you can do:

`sudo apt install tree`

Once installed, stay in your terminal window and run tree like this:

`$ tree /`

The / in the instruction above refers to the root directory. The root directory is the one from which all other directories branch off from. When you run tree and tell it to start with /, you will see the whole directory tree, all directories and all the subdirectories in the whole system, with all their files, fly by.

If you have been using your system for some time, this may take a while, because, even if you haven't generated many files yourself, a Linux system and its apps are always logging, caching, and storing temporary files. The number of entries in the file system can grow quite quickly. Instead, try this:

`tree -L 1 /`

And you should see a listing similar to what is shown in Figure 1.

```
[base) sunil@debian:~$ tree -L 1 /
/
├── bin  -> usr/bin
├── boot
├── dev
├── etc
├── home
├── initrd.img  -> boot/initrd.img-4.19.0-14-amd64
├── initrd.img.old  -> boot/initrd.img-4.19.0-13-amd64
├── lib  -> usr/lib
├── lib32  -> usr/lib32
├── lib64  -> usr/lib64
└── libx32  -> usr/libx32
├── lost+found
├── media
├── mnt
├── opt
├── proc
└── root
├── run
├── sbin  -> usr/sbin
├── snap
├── srv
├── sys
└── tmp
├── usr
└── var
├── vmlinuz  -> boot/vmlinuz-4.19.0-14-amd64
└── vmlinuz.old  -> boot/vmlinuz-4.19.0-13-amd64

?3 directories, 4 files
(base) sunil@debian:~$ ]
```

Figure 1: tree

The instruction above can be translated as “show me only the 1st Level of the directory tree starting at / (root)“. The -L option tells tree how many levels down you want to see.

Most Linux distributions will show you the same or a very similar layout to what you can see in the image above. This means that even if you feel confused now,

master this, and you will have a handle on most, if not all, Linux installations in the whole wide world.

Now, let's look at what each directory is used for. While we go through each, you can peek at their contents using ls.

Directories

From top to bottom, the directories you are seeing are as follows.

/bin

/bin is the directory that contains binaries, that is, some of the applications and programs you can run. You will find the ls program mentioned above in this directory, as well as other basic tools for making and removing files and directories, moving them around, and so on. There are more bin directories in other parts of the file system tree, but we'll be talking about those in a minute.

/boot

The /boot directory contains files required for starting your system. If you mess

up one of the files in here, you may not be able to run your Linux and it is a pain to repair. On the other hand, don't worry too much about destroying your system by accident: you have to have superuser privileges to do that.

/dev

/dev contains device files. Many of these are generated at boot time or even on the fly. For example, if you plug in a new webcam or a USB pendrive into your

machine, a new device entry will automatically pop up here. /etc /etc is the directory where names start to get confusing.

/etc

gets its name from the earliest Unixes and it was literally “et cetera” because it was the dumping ground for system files administrators were not sure where else to put.

Nowadays, it would be more appropriate to say that etc stands for “Everything to configure,” as it contains most, if not all system-wide configuration files. For example, the files that contain the name of your system, the users and their passwords, the names of machines on your network and when and where the partitions on your hard disks should be mounted are all in here. Again, if you are new to Linux, it may be best if you don’t touch too much in here until you have a better understanding of how things work.

/home

/home is where you will find your users’ personal directories. In my case, under /home there are two directories: /home/paul, which contains all my stuff; and /home/guest, in case anybody needs to borrow my computer.

/lib

/lib is where libraries live. Libraries are files containing code that your applications can use. They contain snippets of code that applications use to draw windows on your desktop, control peripherals, or send files to your hard disk.

There are more lib directories scattered around the file system, but this one, the

one hanging directly off of / is special in that, among other things, it contains the all-important kernel modules. The kernel modules are drivers that make things like your video card, sound card, WiFi, printer, and so on, work.

/media

The /media directory is where external storage will be automatically mounted when you plug it in and try to access it. As opposed to most of the other items on this list, /media does not hail back to 1970s, mainly because inserting and detecting storage (pen drives, USB hard disks, SD cards, external SSDs, etc) on the fly, while a computer is running, is a relatively new thing.

/mnt

The /mnt directory, however, is a bit of remnant from days gone by. This is where you would manually mount storage devices or partitions. It is not used very often nowadays.

/opt

The /opt directory is often where software you compile (that is, you build yourself from source code and do not install from your distribution repositories) sometimes lands. Applications will end up in the /opt/bin directory and libraries in the /opt/lib directory.

A slight digression: another place where applications and libraries end up in is /usr/local. When software gets installed here, there will also be /usr/local/bin and /usr/local/lib directories. What determines which software goes where is how the developers have configured the files that control the compilation and installation process.

/proc

/proc, like /dev is a virtual directory. It contains information about your computer, such as information about your CPU and the kernel your Linux system is running. As with /dev, the files and directories are generated when your computer starts, or on the fly, as your system is running and things change.

/root

/root is the home directory of the superuser (also known as the “Administrator”) of the system. It is separate from the rest of the users’ home directories BECAUSE YOU ARE NOT MEANT TO TOUCH IT. Keep your own stuff in your own directories, people.

/run

/run is another new directory. System processes use it to store temporary data for their own nefarious reasons.

/sbin

/sbin is similar to /bin, but it contains applications that only the superuser (hence the initial s) will need. You can use these applications with the sudo command that temporarily concedes you superuser powers on many distributions. /sbin typically contains tools that can install stuff, delete stuff and format stuff. As you can imagine, some of these instructions are lethal if you use them improperly, so handle with care.

/usr

The /usr directory was where users' home directories were originally kept back in the early days of UNIX. However, now /home is where users kept their stuff as we saw above. These days, /usr contains a mish-mash of directories which in turn contain applications, libraries, documentation, wallpapers, icons and a long list of other stuff that need to be shared by applications and services.

You will also find bin, sbin and lib directories in /usr. What is the difference with their root-hanging cousins? Not much nowadays. Originally, the /bin directory (hanging off of root) would contain very basic commands, like ls, mv and rm; the kind of commands that would come pre-installed in all UNIX/Linux installations, the bare minimum to run and maintain a system. /usr/bin on the other hand would contain stuff the users would install and run to use the system as a work station, things like word processors, web browsers, and other apps. But many modern Linux distributions just put everything into /usr/bin and have /bin point to /usr/bin just in case erasing it completely would break something. So, while Debian, Ubuntu and Mint still keep /bin and /usr/bin (and /sbin and /usr/sbin) separate; others, like Arch and its derivatives just have one “real” directory for binaries, /usr/bin, and the rest or *bins are “fake” directories that point to /usr/bin.

/srv

The /srv directory contains data for servers. If you are running a web server from your Linux box, your HTML files for your sites would go into /srv/http (or /srv/www). If you were running an FTP server, your files would go into /srv/ftp.

/sys

/sys is another virtual directory like /proc and /dev and also contains information from devices connected to your computer.

In some cases you can also manipulate those devices. I can, for example, change the brightness of the screen of my laptop by modifying the value stored in the /sys/devices/pci0000:00/0000:00:02.0/drm/card1/card1-eDP-1/intel_backlight/brightness file (on your machine you will probably have a different file). But to do that you have to become superuser. The reason for that is, as with so many other virtual directories, messing with the contents and files in /sys can be dangerous and you can trash your system. DO NOT TOUCH until you are sure you know what you are doing.

/tmp

/tmp contains temporary files, usually placed there by applications that you are running. The files and directories often (not always) contain data that an application doesn't need right now, but may need later on.

You can also use /tmp to store your own temporary files — /tmp is one of the few directories hanging off / that you can actually interact with without becoming superuser.

/var

/var was originally given its name because its contents was deemed variable, in that it changed frequently. Today it is a bit of a misnomer because there are many other directories that also contain data that changes frequently, especially the

virtual directories we saw above.

Be that as it may, /var contains things like logs in the /var/log subdirectories.

Logs are files that register events that happen on the system. If something fails in the kernel, it will be logged in a file in /var/log; if someone tries to break into your computer from outside, your firewall will also log the attempt here. It also contains spools for tasks. These “tasks” can be the jobs you send to a shared printer when you have to wait because another user is printing a long document, or mail that is waiting to be delivered to users on the system.

Your system may have some more directories we haven’t mentioned above. In the screenshot, for example, there is a /snap directory. That’s because the shot was captured on an Ubuntu system. Ubuntu has recently incorporated [snap](#) packages as a way of distributing software. The /snap directory contains all the files and the software installed from snaps.

/var/log/syslog contains lot of system related logfiles.

That is the root directory covered, but many of the subdirectories lead to their own set of files and subdirectories. Figure 2 gives you an overall idea of what the basic file system tree looks like (the image is kindly supplied under a CC By-SA license by Paul Gardner) and [Wikipedia has a break down with a summary of what each directory is used for.](#)

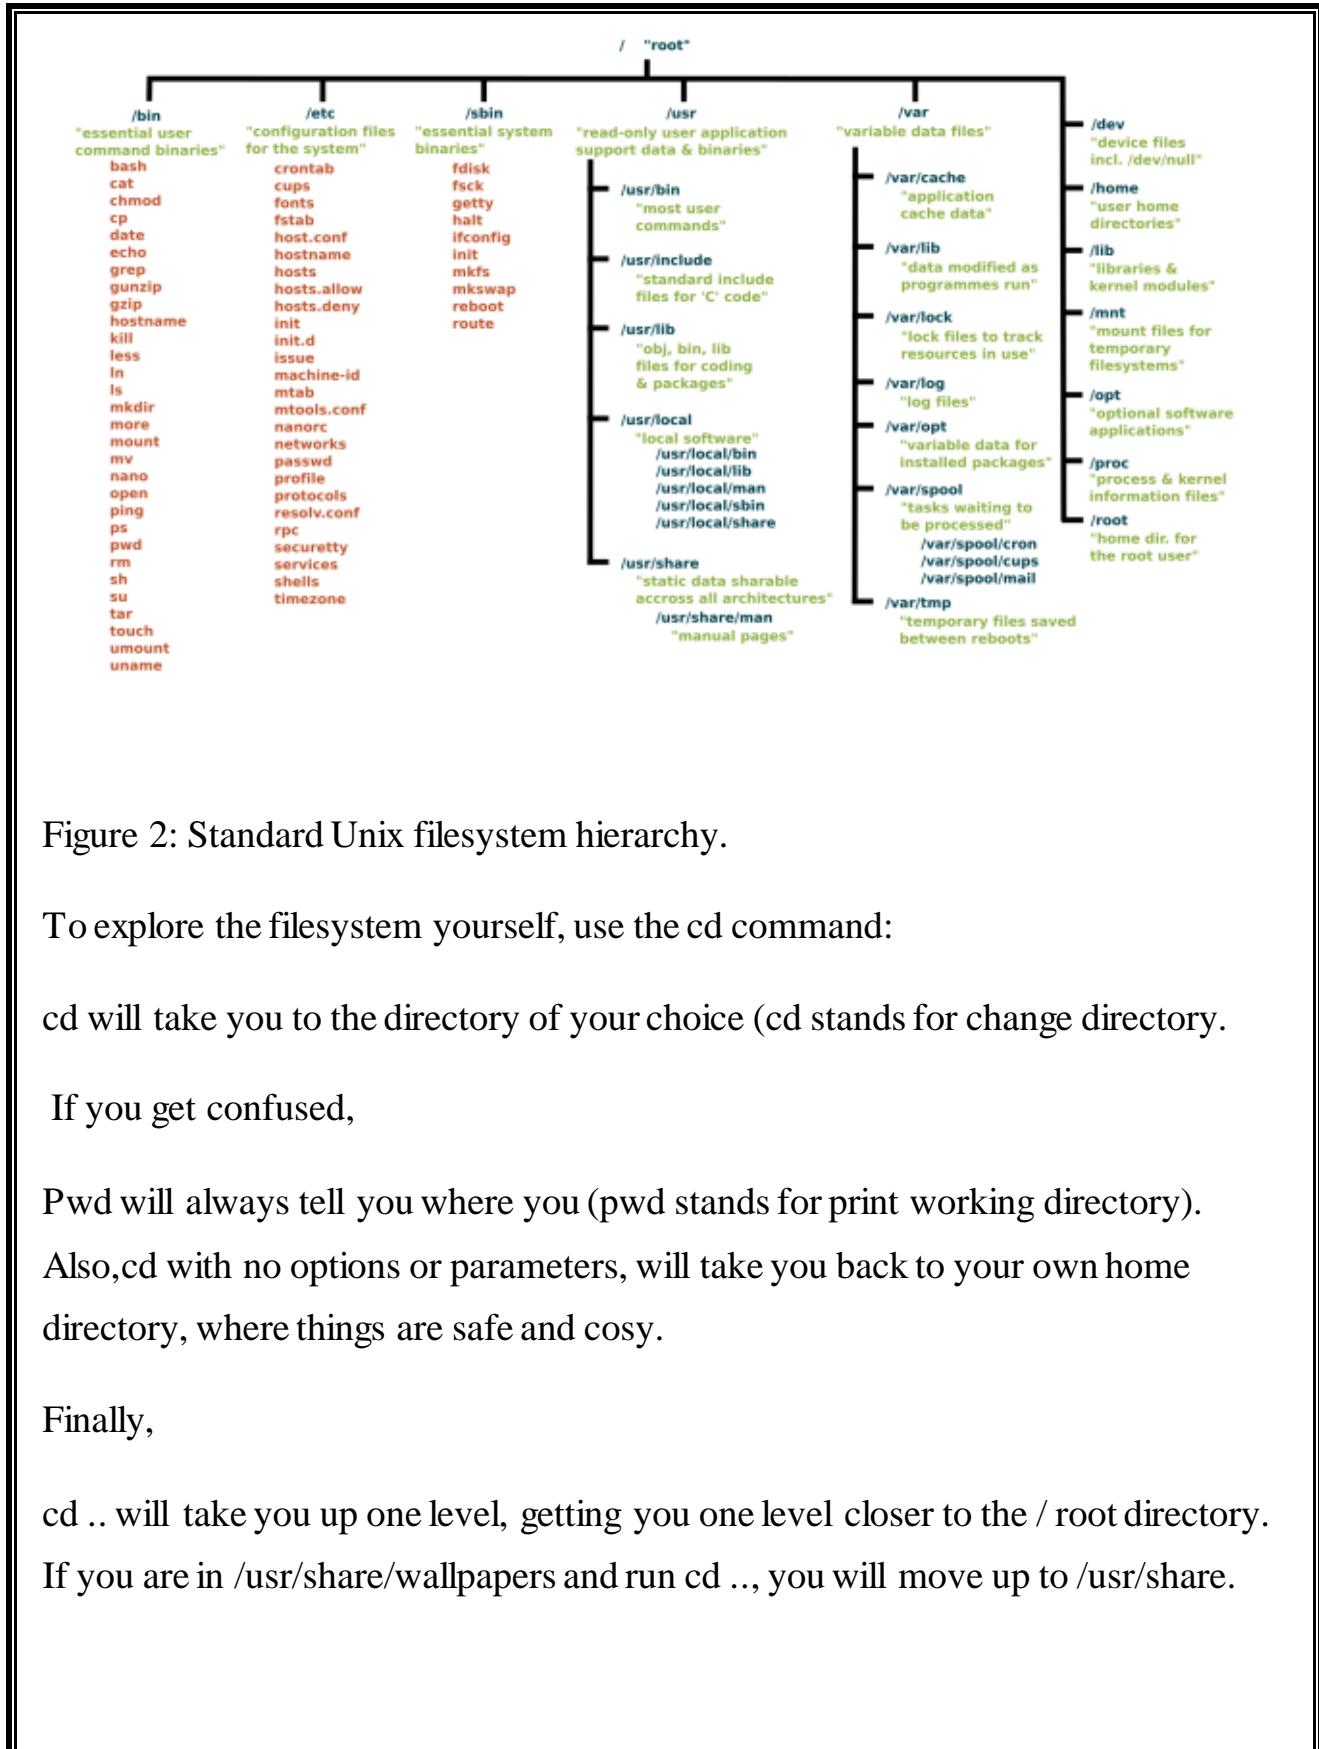


Figure 2: Standard Unix filesystem hierarchy.

To explore the filesystem yourself, use the cd command:

cd will take you to the directory of your choice (cd stands for change directory).

If you get confused,

Pwd will always tell you where you (pwd stands for print working directory).

Also, cd with no options or parameters, will take you back to your own home directory, where things are safe and cosy.

Finally,

cd .. will take you up one level, getting you one level closer to the / root directory.

If you are in /usr/share/wallpapers and run cd .., you will move up to /usr/share.

To see what a directory contains, use ls or simply ls to list the contents of the directory you are in right now. And, of course, you always have tree to get an overview of what lays within a directory. Try it on /usr/share — there is a lot of interesting stuff in there.

Although there are minor differences between Linux distributions, the layout for their filesystems are mercifully similar. So much so that you could say: once you know one, you know them all. And the best way to know the filesystem is to explore it. So go forth with tree, ls, and cd into uncharted territory.

You cannot damage your filesystem just by looking at it, so move from one directory to another and take a look around

Material adapted from <https://www.linux.com/training-tutorials/linux-filesystem-explained/>

EXPERIMENT-4

SHELL COMMANDS

1. Write a Shell program to display a given message.

Program

```
echo "Enter a message"
read msg
echo "The given message is :$msg"
```

```
hp@hp-HP-Laptop-15s-du0xxx:~$ vi s1.sh
hp@hp-HP-Laptop-15s-du0xxx:~$ chmod +x s1.sh
hp@hp-HP-Laptop-15s-du0xxx:~$ ./s1.sh
enter a message
hello
The given message is : hello
hp@hp-HP-Laptop-15s-du0xxx:~$ █
```

2. Write a shell script to evaluate arithmetic operations.

Program

```
echo “enter two integer number”
read a
read b
c=`expr $a + $b``
echo “sum=$c”
c=`expr $a - $b``
echo “sub=$c”
```

```
c=`expr $a / $b`  
echo "div=$c"  
c=`expr $a \* $b`  
echo "multiplication=$c"
```

```
c=`expr $a % $b`  
echo "remainder=$c"
```

```
[root@onworks ~]# cd /tmp  
[root@onworks ~]# nano exp1.sh  
[root@onworks ~]# chmod +x exp1.sh  
[root@onworks ~]# ./exp1.sh  
enter two integer number  
5  
3  
sum=8  
sub=2  
div=1  
multiplication=15  
remainder=2  
[root@onworks ~]#
```

3. Write a shell Script to determine largest among three integer number.

Program

```
echo "enter three integer number"  
read a  
read b  
read c  
if [ $a -ge $b ]  
then  
if [ $a -ge $c ]
```

```
then
echo "$a is largest number"
else

echo "$c is largest number"
fi
elif [ $b -ge $c ]
then
echo "$b is largest number"
else
echo "$c is largest number"
fi
```

```
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$ nano 3.sh
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$ chmod +x 3.sh
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$ ./3.sh
./3.sh: line 1: ech: command not found
2
3
4
4 is largest number
```

4. Write a shell script to compare two string.

Program

```
echo "enter two string"
read a
read b
if [ -z $a ]
then
```

```
echo " First String is empty: Null String"  
fi  
if [ -z $b ]  
then  
echo " First String is empty: Null String"  
fi  
if [ $a = $b ]  
then  
echo "Strings are equal: strings Matched"  
else  
echo "Strings are not equal: Strings not match"  
fi
```

```
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$ nano 4.sh  
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$ chmod +x 4.sh  
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$ ./4.sh  
enter two strings  
world  
hello  
strings are not equal:strings not match  I  
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$
```

5. Write a shell script to read and check the directory exists or not, if not make directory.

Program

```
echo "enter name of directory"  
read dir  
if [ -d $dir ]  
then
```

```
echo "Directory $dir Exists!"
```

```
else
```

```
mkdir $dir
```

```
fi
```

```
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$ nano 5.sh
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$ chmod +x 5.sh
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$ ./5.sh
enter name of directory
abc
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$ cd abc
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~/abc$
```

6. Write a shell script to read and check the file exists or not, if not make file.

Program

```
echo "enter name of file"
```

```
read filename
```

```
if [ -f $filename ]
```

```
then
```

```
echo "File $filename Exists!"
```

```
else
```

```
touch $filename
```

```
fi
```

```
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$ cd abc
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~/abc$ nano 6.sh
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~/abc$ chmod +x 6.sh
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~/abc$ ./6.sh
enter name of file
hello
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~/abc$ cat hello
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~/abc$ ./6.sh
enter name of file
hello
file hello exists
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~/abc$
```

7. Write a shell script to implement menu driven program to perform all arithmetic operation using case statement.

Program

```
echo "enter two integer values"
read a
read b
echo -e "Menu \n 1 for Addition \n 2 for Subtraction \n 3 for Multiplication \n 4
for Division \n 5 for Remainder"
echo "enter choice"
read ch
case $ch in
1) echo "Sum=$(expr $a + $b)";
2) echo "Substraction=$(expr $a - $b)";
3) echo "Multiplication=$(expr $a \* $b)";
4) echo "Division=$(expr $a / $b)";
5) echo "Remainder=$(expr $a % $b)";
6) echo "invalid Choice:Try Again!"
esac
```

```
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$ nano 7.sh
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$ chmod +x 7.sh
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$ ./7.sh
enter two integer values
3
4
menu
 1: Addition
 2: Subtraction
 3: Multiplication
 4: Division
 5: Remainder
enter choice
1
SUM=7
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$ █
```

8. Write a shell script to do:

- display list of directory contents
- Name of current directory
- Who is logged on
- Long listing of directory contents according to choose of user.

Program

```
echo -e "Menu \n 1 for listing directory content \n 2 for print name of current directory \n 3 for Show who is logged on \n 4 Show directory content using long listing format"

echo "enter your choice"

read ch
```

```
case $ch in
```

- 1) ls;;
- 2) pwd;;
- 3) who;;
- 4) ls -l;; *)

echo “Invalid Choice: Try Again!!”

esac

```
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$ nano 8.sh
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$ chmod +x 8.sh
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$ ./8.sh
menu
 1 for listing directory content
 2 for print name of current directory

 3 for show who is logged on
 4 show directory content using long listing format
enter your choice
1
7.sh Desktop Downloads Pictures snap      Videos
8.sh Documents Music   Public   Templates
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$ █
```

```
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$ ./8.sh
menu
 1 for listing directory content
 2 for print name of current directory

 3 for show who is logged on
 4 show directory content using long listing format
enter your choice
2
/home/onworks
```

```
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$ ./8.sh
menu
 1 for listing directory content
 2 for print name of current directory

 3 for show who is logged on
 4 show directory content using long listing format
enter your choice
3
onworks :0          2020-11-29 12:25 (:0)
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$ ./8.sh
```

```
onworks@onworks-Standard-PC-1440FX-PIIX-1996:~/8.sh
menu
1 for listing directory content
2 for print name of current directory

3 for show who is logged on
4 show directory content using long listing format
enter your choice
4
total 44
-rwxrwxr-x 1 onworks onworks 419 Sep 25 15:45 7.sh
-rwxrwxr-x 1 onworks onworks 298 Sep 25 15:50 8.sh
drwxr-xr-x 2 onworks onworks 4096 Nov 29 2020 Desktop
drwxr-xr-x 2 onworks onworks 4096 Nov 29 2020 Documents
drwxr-xr-x 2 onworks onworks 4096 Nov 29 2020 Downloads
drwxr-xr-x 2 onworks onworks 4096 Nov 29 2020 Music
drwxr-xr-x 2 onworks onworks 4096 Nov 29 2020 Pictures
drwxr-xr-x 2 onworks onworks 4096 Nov 29 2020 Public
drwxr-xr-x 3 onworks onworks 4096 Nov 29 2020 snap
drwxr-xr-x 2 onworks onworks 4096 Nov 29 2020 Templates
drwxr-xr-x 2 onworks onworks 4096 Nov 29 2020 Videos
onworks@onworks-Standard-PC-1440FX-PIIX-1996:~$
```

9. Write a shell script to get input details like name, roll number and marks and print them using command line arguments.

Program

```
cat > Studentdetail
echo "Name of the student: $1"
echo "Roll Number of the student: $2"
echo "Marks of the student: $3"
ctrl+D
```

```
./ Studentdetail your name your roll no marks
```

```
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$ cat>Studentdetail
echo "Name of the student:$1"
echo "Roll number of the student:$2"
echo "Marks of the student:$3"
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$ chmod +x Studentdetail
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$ ./Studentdetail anu 2 0
Name of the student:anu
Roll number of the student:2
Marks of the student:0
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$ █
```

10. Understand the differences between Echo statement using single quote , double quote and without quotes.

Program

Cat< file1.sh

a=12

echo \$a

echo "\$a"

echo '\$a'

```
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$ nano exp13.sh
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$ chmod +x exp13.sh
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$ ./exp13.sh
./exp13.sh: line 1: file1.sh: No such file or directory
12
12
$a
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$ █
```

11. To check whether there is any entry in the month of May in the system log.

Program

Cat>a.txt

India is my country

Fisat is a college

```
cntrl d  
cat a.txt|grep 'fisat'
```

```
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$ cat>a.txt  
india is my country  
fisat is a college  
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$ cat a.txt|grep 'fisat'  
fisat is a college  
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$
```

12. Implement arithmetic calculator using Functions

Program

```
add()  
{  
    i=$1  
    j=$2  
    ((k=i+j))  
    echo Sum is $k  
  
}  
sub()  
{  
    i=$1  
    j=$2  
    ((k=i-j))  
    echo Sum is $k  
}
```

```
mul()
{
    i=$1
    j=$2
    ((k=i*j))
    echo Sum is $k
}

echo "Enter your option: 1: Add, 2:Subtract, 3: Multiply"
read i
case $i in
    1) add 1 2;;
    2) sub 1 2;;
    3) mul 1 2;;
esac
```

```
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$ nano 12.sh
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$ chmod +x 12.sh
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$ ./12.sh
Enter your option: 1: Add, 2:Subtract, 3: Multiply
1
sum is 3
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$ ./12.sh
Enter your option: 1: Add, 2:Subtract, 3: Multiply
2
difference is -1
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$ ./12.sh
Enter your option: 1: Add, 2:Subtract, 3: Multiply
3
product is 2
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$
```

13. To find the sum of n natural numbers.

a.Using for loop

Program

```
sum=0  
for ((i=0;i<10;i++))  
do  
((sum=sum+i))  
done  
echo $sum
```

```
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$ nano exp13.sh  
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$ chmod +x exp13.sh  
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$ ./exp13.sh  
45  
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$ █
```

b.Using While loop

Program

```
i=0  
sum=0  
while ((i<10));do  
((sum=sum+i))  
((i=i+1))  
done  
echo $sum
```

```
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$ nano exp13.sh
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$ chmod +x exp13.sh
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$ ./exp13.sh
45
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$
```

EXPERIMENT-5

Installing LAMP on Ubuntu

Step 1: Update Package Repository Cache

Before you begin:

1. Open the terminal either by using the **CTRL+ALT+T** keyboard shortcut or by searching for the word terminal in **Ubuntu**
2. Make sure to update the package repository cache to ensure it installs the latest versions of the software. To do so, type in the following command:

`sudo apt-get update`

```
hp@hp-HP-Laptop-15s-du0xxx:~$ sudo apt-get update
Get:1 http://in.archive.ubuntu.com/ubuntu focal InRelease [265 kB]
Hit:2 https://screenrec.com/download/ubuntu stable InRelease
Get:3 http://security.ubuntu.com/ubuntu focal-security InRelease [114 kB]
Get:4 http://security.ubuntu.com/ubuntu focal-security/main amd64 DEP-11 Metadata [27.6 kB]
Get:5 http://security.ubuntu.com/ubuntu focal-security/universe amd64 DEP-11 Metadata [61.0 kB]
Get:6 http://security.ubuntu.com/ubuntu focal-security/multiverse amd64 DEP-11 Metadata [2,464 B]
Get:1 http://in.archive.ubuntu.com/ubuntu focal InRelease [265 kB]
Get:1 http://in.archive.ubuntu.com/ubuntu focal InRelease [265 kB]
Get:1 http://in.archive.ubuntu.com/ubuntu focal InRelease [265 kB]
Hit:7 http://in.archive.ubuntu.com/ubuntu focal-updates InRelease
Hit:8 http://in.archive.ubuntu.com/ubuntu focal-backports InRelease
Fetched 463 kB in 2min 36s (2,977 B/s)
Reading package lists... Done
hp@hp-HP-Laptop-15s-du0xxx:~$
```

Step 2: Install Apache

1. To install Apache, run the following command in the terminal:


```
sudo apt-get install apache2
```

```
Reading package lists... Done
hp@hp-HP-Laptop-15s-du0xxx:~$ sudo apt-get install apache2
Reading package lists... Done
Building dependency tree
Reading state information... Done
The following packages were automatically installed and are no longer required:
  enchant geoip-database libbind9-161 libboost-filesystem1.67.0
  libboost-iostreams1.67.0 libdns-export1107 libdns1107 libdns1109 libenchant1c2a
  libexiv2-14 libfprint0 libgeoip1 libgspell-1-1 libgutenprint-common
  libgutenprint9 libiptc0 libirs161 libisc-export1104 libisc1104 libisc1105
  libisccc161 libiscfg163 liblvm9 liblwres161 libnfs12 liboauth0
  printer-driver-gutenprint python3-asn1crypto shim ubuntu-software
  ubuntu-system-service
Use 'sudo apt autoremove' to remove them.
The following additional packages will be installed:
  apache2-bin apache2-data apache2-utils libapr1 libaprutil1
  libaprutil1-dbd-sqlite3 libaprutil1-ldap liblua5.2-0
Suggested packages:
  apache2-doc apache2-suexec-pristine | apache2-suexec-custom
The following NEW packages will be installed:
  apache2 apache2-bin apache2-data apache2-utils libapr1 libaprutil1
  libaprutil1-dbd-sqlite3 libaprutil1-ldap liblua5.2-0
0 upgraded, 9 newly installed, 0 to remove and 66 not upgraded.
Need to get 1,819 kB of archives.
After this operation, 7,938 kB of additional disk space will be used.
Do you want to continue? [Y/n] 
```

Press **y** (yes) and hit **ENTER** to permit the installation.

2. To ensure Apache is running, enter the Localhost of your server in the address bar and press **ENTER**.

The test Apache web server page should display as below.

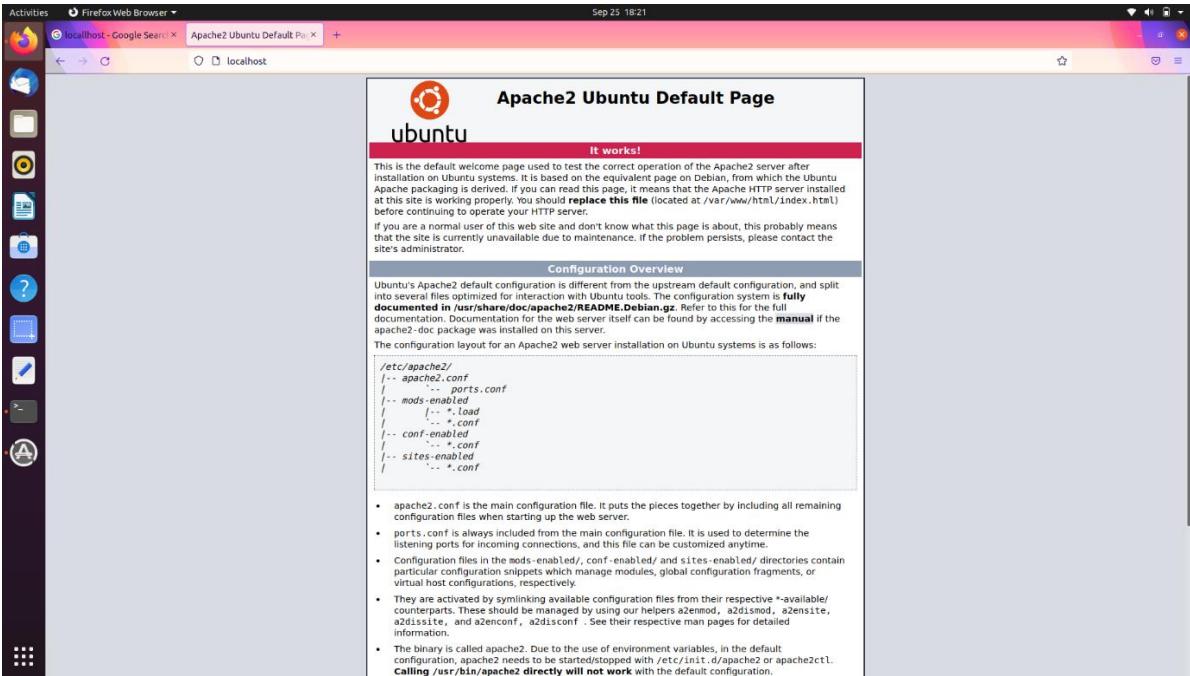

Step 3: Install PHP

1. To install PHP, run the following command:

```
$ sudo apt-get install php7.4
```

```
[p@hp-HP-Laptop-15s-du0xxx: ~]# sudo apt-get install php7.4
Reading package lists... Done
Building dependency tree
Reading state information... Done
The following packages were automatically installed and are no longer required:
  enchant geoip-database libbbind9-161 libboost-filesystem1.67.0 libboost-iostreams1.67.0 libdns-export1107 libdns1107 libdns1109 libenchant1c2a libexiv2-14 libfprint0 libgeoip1 libgspell-1-1
  libgutenprint-common libgutenprint9 libiptc0 libirs161 libisc-export1104 libisc1104 libiscc161 libisccfg163 liblvm9 liblwres161 libnfs12 liboauth0 printer-driver-gutenprint
  python3-asn1crypto shim ubuntu-software ubuntu-system-service
Use 'sudo apt autoremove' to remove them.
The following additional packages will be installed:
  libapache2-mod-php7.4 php-common php7.4-cli php7.4-common php7.4-json php7.4-opcache php7.4-readline
Suggested packages:
  php-pear
The following NEW packages will be installed:
  libapache2-mod-php7.4 php-common php7.4-cli php7.4-common php7.4-json php7.4-opcache php7.4-readline
0 upgraded, 8 newly installed, 0 to remove and 66 not upgraded.
Need to get 4,015 kB of archives.
After this operation, 18.0 MB of additional disk space will be used.
Do you want to continue? [Y/n] [
```

Press **y** and **ENTER** to allow the installation.

Step 4: Restart Apache

After the php installation you must restart the Apache service.

Enter the command:

```
$ sudo /etc/init.d/apache2 restart
```

Step 5: Test PHP Processing on Web Server

1. Create a basic **PHP script** and save it to the “web root” directory. This is necessary for Apache to find and serve the file correctly. This directory is located at **/var/www/html/**.

To create a file in that directory, type in the following command:


```
sudo nano /var/www/html/test.php
```

```
hp@hp-HP-Laptop-15s-du0xxx:~$ sudo nano /var/www/html/test.php
[sudo] password for hp:
hp@hp-HP-Laptop-15s-du0xxx:~$ █
```

This command opens the **bank file**.

2. Inside the file, type in the valid PHP code:

```
<?php
    Echo " test php ";
?>
```

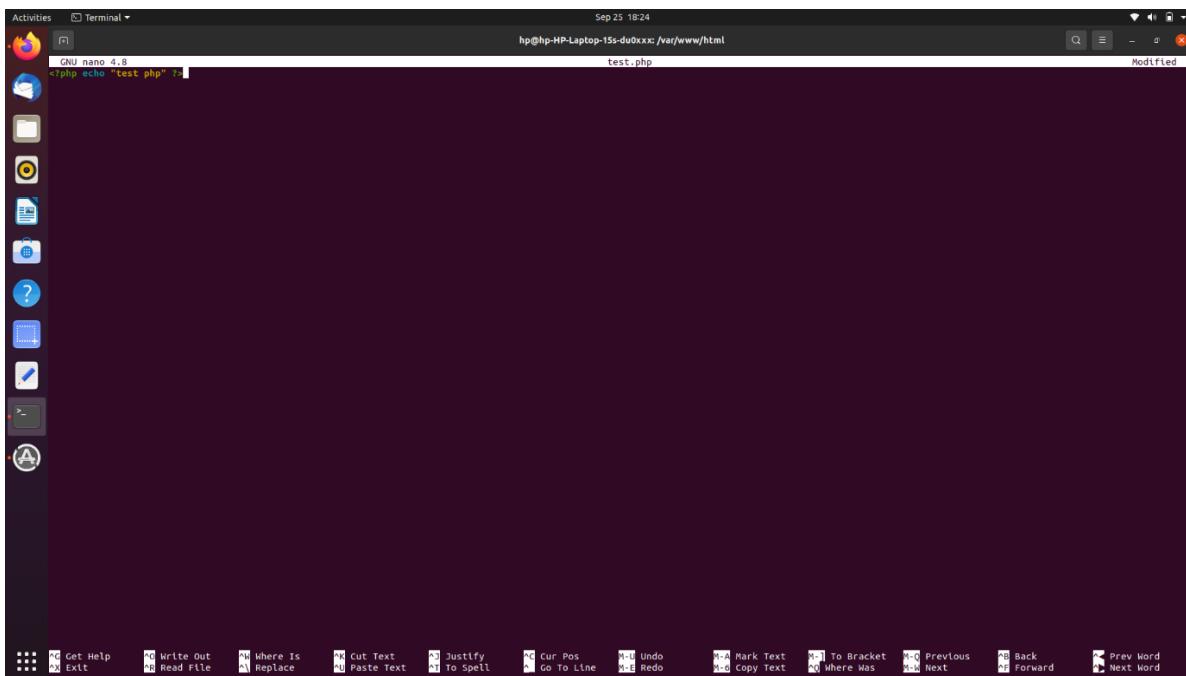

A screenshot of a terminal window titled "Terminal" in the "Activities" dock. The window shows a dark-themed terminal interface with a command-line interface (CLI) for the GNU nano 4.8 editor. The current file is "test.php". The code in the editor is:


```
<?php echo "test php" ?>
```

The terminal window has a standard Linux-style menu bar at the top with options like "File", "Edit", "View", "Insert", "Format", "Search", "Text", "Help", and "Edit". Below the menu bar is a toolbar with icons for various functions. The bottom of the window contains a status bar with keyboard shortcuts for various operations.

Press **CTRL + X** to save and close the file. Press **y** and **ENTER** to confirm.

4. Then check the code are run correctly in php.open the browser enter the

Ip address (localhost/test.php). It show the below image

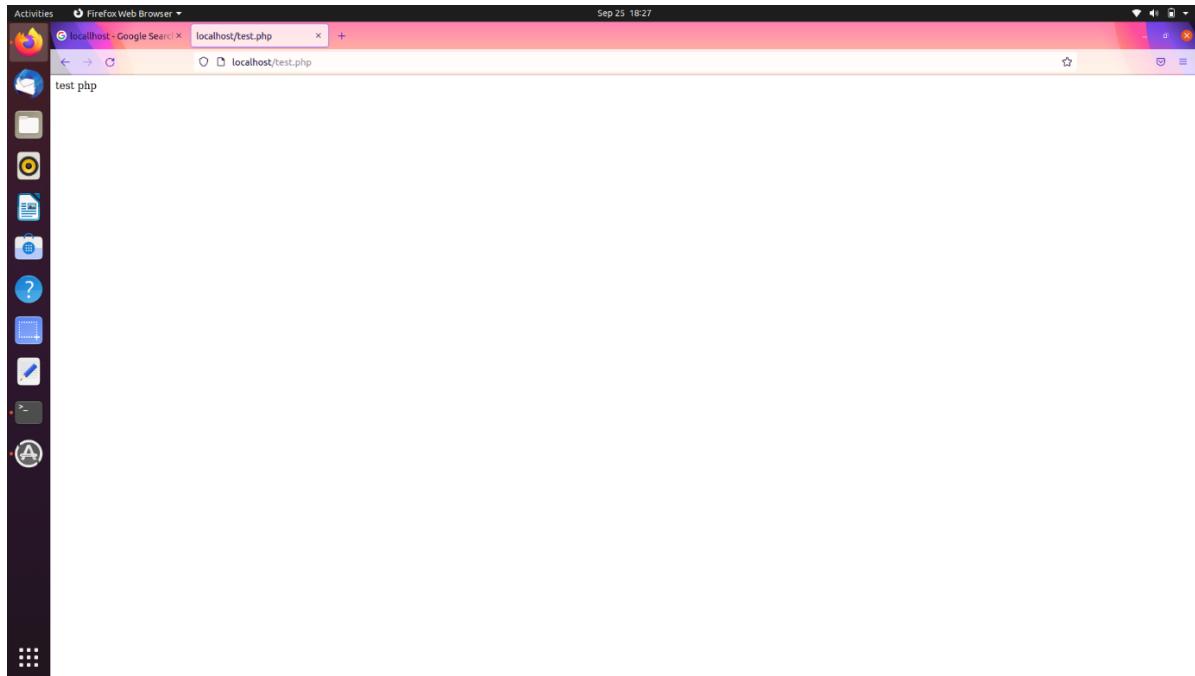

Step 6: Install Mysql server

1. To install Mysql server, run the following command:

```
$ sudo apt-get install mysql-server
```

```
Other options:
hp@hp-HP-Laptop-15s-du0xxx:~$ sudo apt-get install mysql-server
Reading package lists... Done
Building dependency tree
Reading state information... Done
The following packages were automatically installed and are no longer required:
  enchant geoip-database libbind9-161 libboost-filesystem1.67.0
  libboost-iostreams1.67.0 libdns-export1107 libdns1107 libdns1109
  libenchant1c2a libxiv2-14 libfprint0 libgeoip1 libgspell-1-1
  libgutenprint-common libgutenprint9 libiptc0 libirs161 libisc-export1104
  libisc1104 libisc1105 libisccc161 libisccfg163 liblvm9 liblwres161 libnfs12
  liboauth0 printer-driver-gutenprint python3-asn1crypto shim ubuntu-software
  ubuntu-system-service
Use 'sudo apt autoremove' to remove them.
The following additional packages will be installed:
  libaio1 libcgi-fast-perl libcgi-pm-perl libevent-core-2.1-7
  libevent-pthreads-2.1-7 libfcgi-perl libhtml-template-perl libmecab2
  mecab-ipadic mecab-ipadic-utf8 mecab-utils mysql-client-8.0
  mysql-client-core-8.0 mysql-server-8.0 mysql-server-core-8.0
Suggested packages:
```

2. Then it's asking us for a root password. enter the password. Again, we get to repeat it

Step 7: Check the Mysql server

1. To check Mysql server, run the following command
\$ mysql -u root -p

- Enter the root password and press enter

```
hp@hp-HP-Laptop-15s-du0xxx:~$ mysql -u root -p
Enter password:
ERROR 1045 (28000): Access denied for user 'root'@'localhost' (using password: YES)
hp@hp-HP-Laptop-15s-du0xxx:~$ mysql -u root -p
Enter password:
Welcome to the MySQL monitor.  Commands end with ; or \g.
Your MySQL connection id is 19
Server version: 8.0.26-0ubuntu0.20.04.2 (Ubuntu)

Copyright (c) 2000, 2021, Oracle and/or its affiliates.

Oracle is a registered trademark of Oracle Corporation and/or its
affiliates. Other names may be trademarks of their respective
owners.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

mysql> create database testdb;
Query OK, 1 row affected (0.01 sec)

mysql> show databases;
+-----+
| Database      |
+-----+
| information_schema |
| mysql          |
| performance_schema |
| sys            |
| testdb         |
+-----+
5 rows in set (0.00 sec)

mysql> █
```

2 . Create a database testdb and show it

- Enter the command
Create database testdb;
Show databases;
- So mysql is working then exit the mysql prompt just enter **exit**;

Step 8: Install PHP Myadmin

1. To install PHP Myadmin, run the following command:

```
$ sudo apt-get install phpMyAdmin
```

```

hp@hp-HP-Laptop-15s-du0xxx:~$ sudo apt-get install phpmyadmin
[sudo] password for hp:
Reading package lists... Done
Building dependency tree
Reading state information... Done
The following packages were automatically installed and are no longer required:
acl app color-data enchant geoip-database gnome-control-center-faces gsfonts hplip-data libbind9-161 libboost-filesystem1.67.0 libboost-iostreams1.67.0 libcolor-gtk1
libcolorhug2 libdns-export1107 libdns1107 libenchant1c2a libexiv2-14 libfbprint0 libgeoip1 libgsound0 libgspell-1-1 libgssdp-1.2-0 libgupnp-1.0-2 libgupnp-dlna-2.0-3
libgutenprint-common libgutenprint9 libieee1284-3 libimagequant0 libiptc0 libirs161 libisc1104 libisc1105 libisccfg163 liblvm9 liblwres161 libnfs12 libauth0
librygel-core-2.6-2 librygel-db-2.6-2 librygel-renderer-2.6-2 librygel-server-2.6-3 libsanx-common libwebpnu3 mobile-broadband-provider-info network-manager-gnome
printer-driver-gutenprint printer-driver-postscript3 python3-asn1crypto python3-macaronbakery python3-olefile python3-pil python3 protobuf python3-pynacaroons python3-renderpm python3-reportlab
python3-reportlab-accel python3-rfc3339 python3-tz rygel shin ubuntu-software ubuntu-system-service
Use 'sudo apt autoremove' to remove them.
The following additional packages will be installed:
dbconfig-common dbconfig-mysql libjs-jquery libjs-openlayers libjs-sphinxdoc libjs-underscore libonig5 libzip5 php-bz2 php-curl php-gd php-google-recaptcha
php-mbstring php-mysql php-phptyadmin-notranslator php-phptyadmin-shapefile php-phptyadmin-sql-parser php-psr-cache php-psr-container php-psr-log php-symfony-cache
php-symfony-cache-contracts php-symfony-expression-language php-symfony-service-contracts php-symfony-var-exporter php-tcpdf php-twig php-twig-extensions php-xml php-zip php7.4-bz2 php7.4-curl
php7.4-gd php7.4-mbstring php7.4-mysql php7.4-xnl php7.4-zip
Suggested packages:
php-libsodium php-mcrypt php-gmp php-symfony-service-implementation php-imagine php-twig-doc php-symfony-translation php-recode php-gd2 php-pragmarx-google2fa php-bacon-gr-code
php-sayoul-ufz-php-server
Recommended packages:
php-mcrypt
The following NEW packages will be installed:
dbconfig-common dbconfig-mysql libjs-jquery libjs-openlayers libjs-sphinxdoc libjs-underscore libonig5 libzip5 php-bz2 php-curl php-gd php-google-recaptcha
php-mbstring php-mysql php-phptyadmin-notranslator php-phptyadmin-shapefile php-phptyadmin-sql-parser php-psr-cache php-psr-container php-psr-log php-symfony-cache
php-symfony-cache-contracts php-symfony-expression-language php-symfony-service-contracts php-symfony-var-exporter php-tcpdf php-twig php-twig-extensions php-xml php-zip php7.4-bz2 php7.4-curl
php7.4-gd php7.4-mbstring php7.4-mysql php7.4-xnl php7.4-zip phptyadmin
0 upgraded, 41 newly installed, 0 to remove and 61 not upgraded.
Need to get 16.0 MB of archives.
After this operation, 71.8 MB of additional disk space will be used.
Do you want to continue? [Y/n] 

```

Press **y** and **ENTER** to allow the installation

2. Then its ask what type of server, we have Apache2 is set by default that's what we want then press ok
3. Then a configuration prompt are open . here we're going to just choose yes and then it ask the input password for phpmyadmin
4. Then check it correct . go to the localhost/phpmyadmin. Here we can not found it so
We have to actually edit the file php is located in Apache2 folder.
5. Enter the following command to edit the file
\$ sudo nano/etc/php7.4/apache2.php.ini
6. Then we need to uncomment an **extension=mysql.so**. find it the file just remove the
Semicolon.
7. Then enter **ctrl+x** to save

Step 9: Restart Apache

After the php installation you must restart the Apache service.

Enter the command:

```
$ sudo /etc/init.d/apache2 restart
```

Step 9.1:Include phpmyadmin in apache configuration

1. Enter the command:


```
$ sudo nano/etc/apache2/apache2.conf
```

2. Type the following command to the nano editor

Include /etc/phpmyadmin/apache.conf

3. Then enter **ctrl+x** to save

4. Then again restart the apache

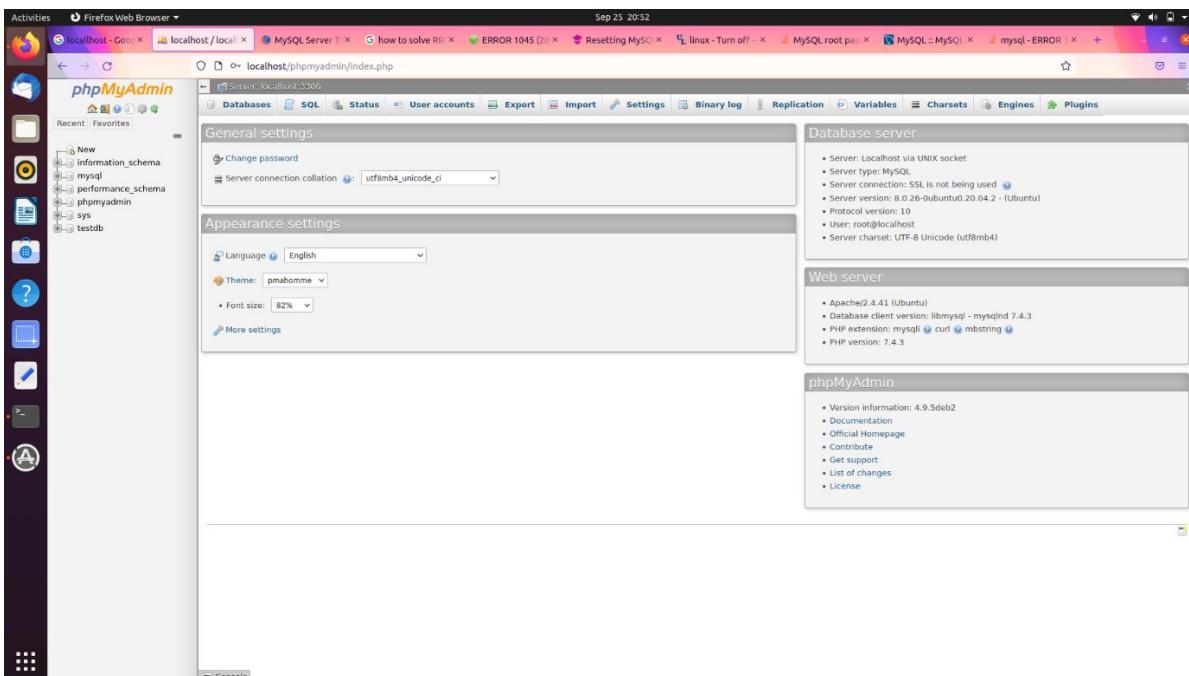

EXPERIMENT-6

Laravel installation On Ubuntu with Apache

Step 1 – Install Apache Web Server

Let's open up a Terminal and do first thing first update your package list using Sudo apt update command.

\$ sudo apt update

After updating your package list install apache webserver

\$ sudo apt install apache2

\$ systemctl status apache2

```
ebin@ebin-VirtualBox:~$ sudo apt install apache2
Reading package lists... Done
Building dependency tree
Reading state information... Done
The following packages were automatically installed and are no longer required:
  linux-headers-5.11.0-25-generic linux-hwe-5.11-headers-5.11.0-25 linux-image-5.11.0-25-generic linux-modules-5.11.0
  linux-modules-extra-5.11.0-25-generic
Use 'sudo apt autoremove' to remove them.
The following additional packages will be installed:
  apache2-bin apache2-data apache2-utils
Suggested packages:
  apache2-doc apache2-suexec-pristine | apache2-suexec-custom
The following packages will be upgraded:
  apache2 apache2-bin apache2-data apache2-utils
4 to upgrade, 0 to newly install, 0 to remove and 78 not to upgrade.
Need to get 1,518 kB of archives.
After this operation, 4,096 B of additional disk space will be used.
Do you want to continue? [Y/n] y
Get:1 http://in.archive.ubuntu.com/ubuntu focal-updates/main amd64 apache2 amd64 2.4.41-4ubuntu3.5 [95.5 kB]
Get:2 http://in.archive.ubuntu.com/ubuntu focal-updates/main amd64 apache2-bin amd64 2.4.41-4ubuntu3.5 [1,180 kB]
Get:3 http://in.archive.ubuntu.com/ubuntu focal-updates/main amd64 apache2-data all 2.4.41-4ubuntu3.5 [159 kB]
Get:4 http://in.archive.ubuntu.com/ubuntu focal-updates/main amd64 apache2-utils amd64 2.4.41-4ubuntu3.5 [84.2 kB]
Fetched 1,518 kB in 1s (1,216 kB/s)
```

Now, check the status of apache server whether it is running or not.

If the Apache server not running then use the following command to start apache serve and add to boot startup.


\$ systemctl start apache2

\$ systemctl enable apache2

```
ebin@ebin-VirtualBox:~$ systemctl status apache2
● apache2.service - The Apache HTTP Server
   Loaded: loaded (/lib/systemd/system/apache2.service; enabled; vendor preset: enabled)
   Active: active (running) since Tue 2021-09-28 13:53:55 IST; 6min ago
     Docs: https://httpd.apache.org/docs/2.4/
 Main PID: 2749 (apache2)
    Tasks: 7 (limit: 4650)
   Memory: 14.8M
      CGroup: /system.slice/apache2.service
              ├─2749 /usr/sbin/apache2 -k start
              ├─2750 /usr/sbin/apache2 -k start
              ├─2753 /usr/sbin/apache2 -k start
              ├─2754 /usr/sbin/apache2 -k start
              ├─2755 /usr/sbin/apache2 -k start
              ├─2756 /usr/sbin/apache2 -k start
              └─2757 /usr/sbin/apache2 -k start

Sep 28 13:53:55 ebin-VirtualBox systemd[1]: Starting The Apache HTTP Server...
Sep 28 13:53:55 ebin-VirtualBox apachectl[2747]: AH00558: apache2: Could not reliably determine the server's fully qualified name, using ebin-VirtualBox for Port 80
Sep 28 13:53:55 ebin-VirtualBox systemd[1]: Started The Apache HTTP Server.
[lines 1-19/19 (END)]
```


Open browser, goto localhost and check if default apache server page is available or not

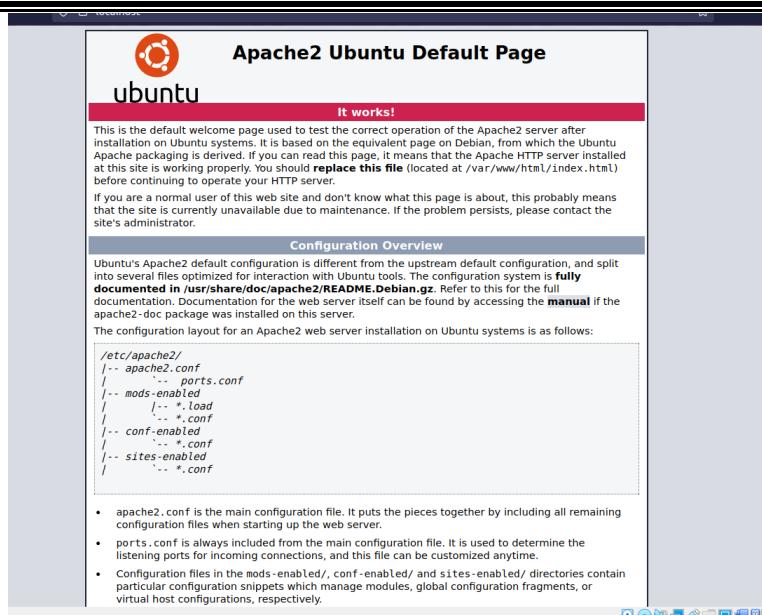

Step 2 – Install and Configure PHP 7.4

To install Laravel 8.x, at least you must have PHP ≥ 7.3 on your system. And by default, the official Ubuntu 20.04 repository provides PHP 7.4 packages. Install PHP 7.4 packages using the apt command below.

```
$ sudo apt install libapache2-mod-php php php-common php-xml php-gd  
php-opcache php-mbstring php-tokenizer php-json php-bcmath php-zip  
unzip
```

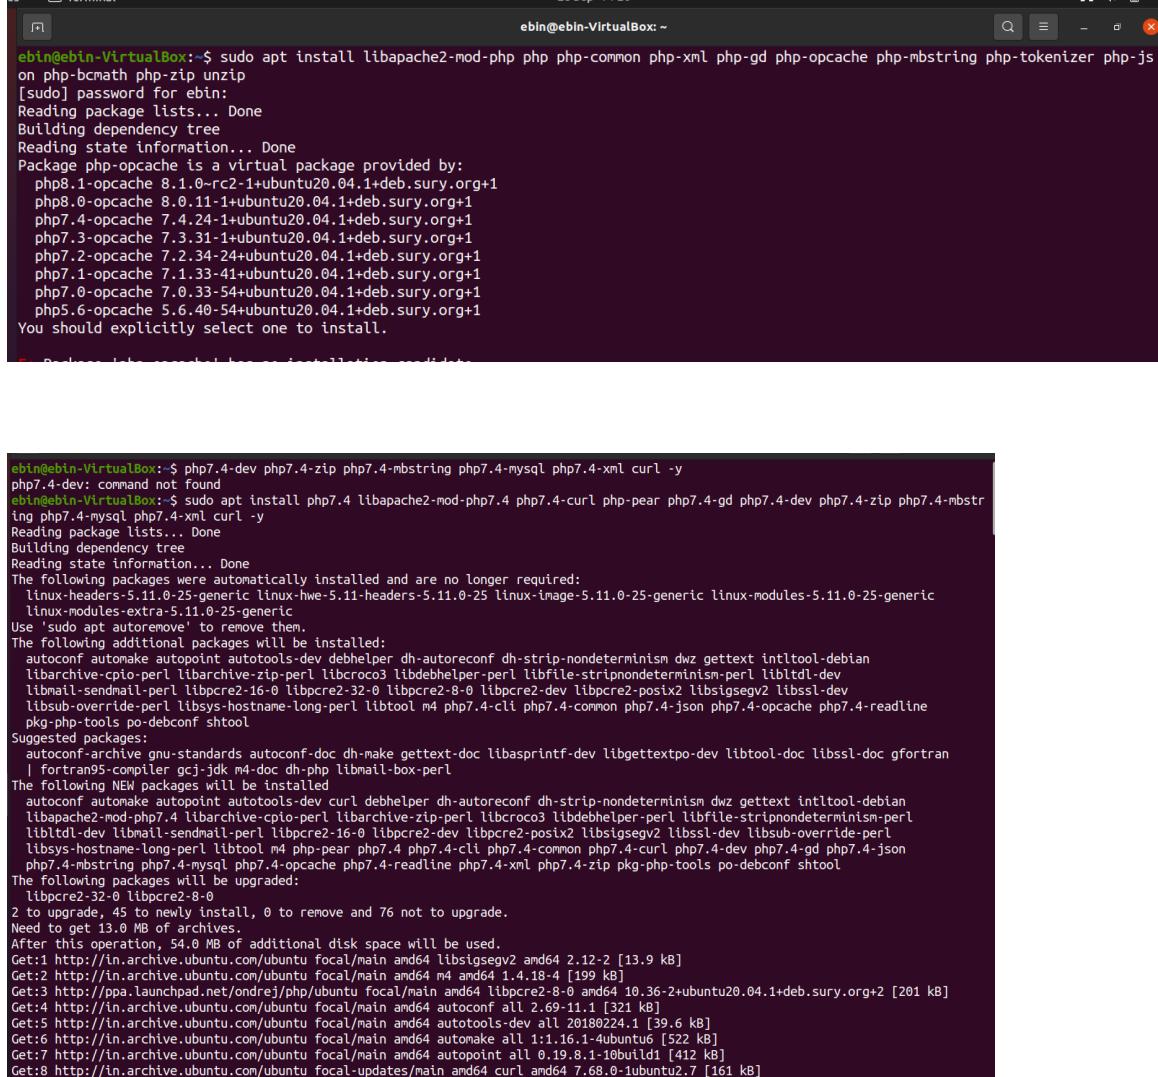

```

ebin@ebin-VirtualBox:~$ sudo apt install libapache2-mod-php php php-common php-xml php-gd php-opcache php-mbstring php-tokenizer php-jis
[sudo] password for ebin:
Reading package lists... Done
Building dependency tree
Reading state information... Done
Package php-opcache is a virtual package provided by:
  php8.1-opcache 8.1.0-rc2-1+ubuntu20.04.1+deb.sury.org+1
  php8.0-opcache 8.0.11-1+ubuntu20.04.1+deb.sury.org+1
  php7.4-opcache 7.4.24-1+ubuntu20.04.1+deb.sury.org+1
  php7.3-opcache 7.3.31-1+ubuntu20.04.1+deb.sury.org+1
  php7.2-opcache 7.2.34-24+ubuntu20.04.1+deb.sury.org+1
  php7.1-opcache 7.1.33-41+ubuntu20.04.1+deb.sury.org+1
  php7.0-opcache 7.0.33-54+ubuntu20.04.1+deb.sury.org+1
  php5.6-opcache 5.6.40-54+ubuntu20.04.1+deb.sury.org+1
You should explicitly select one to install.

-- Prepending local priority to all packages in the list.

```



```

ebin@ebin-VirtualBox:~$ php7.4-dev php7.4-zip php7.4-mbstring php7.4-mysql php7.4-xml curl -y
php7.4-dev: command not found
ebin@ebin-VirtualBox:~$ sudo apt install php7.4 libapache2-mod-php7.4 php7.4-curl php-pear php7.4-gd php7.4-dev php7.4-zip php7.4-mbstring php7.4-mysql php7.4-xml curl -y
Reading package lists... Done
Building dependency tree
Reading state information... Done
The following packages were automatically installed and are no longer required:
  linux-headers-5.11.0-25-generic linux-hwe-5.11-headers-5.11.0-25 linux-image-5.11.0-25-generic linux-modules-5.11.0-25-generic
  linux-modules-extra-5.11.0-25-generic
Use 'sudo apt autoremove' to remove them.
The following additional packages will be installed:
  autoconf automake autopoint autotools-dev debhelper dh-autoreconf dh-strip-nondeterminism dwz gettext intltool-debian
  libarchive-cpio-perl libarchive-zip-perl libcrc03 libdebhelper-perl libfile-stripnondeterminism-perl libltdl-dev
  libmail-sendmail-perl libpcre2-16-0 libpcre2-32-0 libpcre2-8-0 libpcre2-dev libpcre2-posix2 libsigsegv2 libssl-dev
  libsub-override-perl libsys-hostname-long-perl libtool m4 php7.4-cgi php7.4-common php7.4-json php7.4-opcache php7.4-readline
  pkg-php-tools po-debconf shtool
Suggested packages:
  autoconf-archive gnu-standards autoconf-doc dh-make gettext-doc libasprintf-dev libgettextpo-dev libtool-doc libssl-doc gfortran
  | libtran95-compiler gcj-jdk m4-doc dh-php libmail-box-perl
The following NEW packages will be installed
autoconf automake autopoint autotools-dev curl debhelper dh-autoreconf dh-strip-nondeterminism dwz gettext intltool-debian
libarchive-cpio-perl libarchive-zip-perl libcrc03 libdebhelper-perl libfile-stripnondeterminism-perl
libltdl-dev libmail-sendmail-perl libpcre2-16-0 libpcre2-dev libpcre2-posix2 libsigsegv2 libssl-dev libsub-override-perl
libsys-hostname-long-perl libtool m4 php-pear php7.4-cgi php7.4-common php7.4-curl php7.4-dev php7.4-gd php7.4-json
php7.4-mbstring php7.4-mysql php7.4-opcache php7.4-readline php7.4-xml php7.4-zip pkg-php-tools po-debconf shtool
The following packages will be upgraded:
  libpcre2-32-0 libpcre2-8-0
2 to upgrade, 45 to newly install, 0 to remove and 76 not to upgrade.
Need to get 13.0 MB of archives.
After this operation, 54.0 MB of additional disk space will be used.
Get:1 http://in.archive.ubuntu.com/ubuntu focal/main amd64 libsigsegv2 amd64 2.12-2 [13.9 kB]
Get:2 http://in.archive.ubuntu.com/ubuntu focal/main amd64 m4 amd64 1.4.18-4 [199 kB]
Get:3 http://ppa.launchpad.net/ondrej/php/ubuntu focal/main amd64 libpcre2-8-0 amd64 10.36-2+ubuntu20.04.1+deb.sury.org+2 [201 kB]
Get:4 http://in.archive.ubuntu.com/ubuntu focal/main amd64 autotools-all 2.69-11.1 [321 kB]
Get:5 http://in.archive.ubuntu.com/ubuntu focal/main amd64 autotools-dev all 20180224.1 [39.6 kB]
Get:6 http://in.archive.ubuntu.com/ubuntu focal/main amd64 automake all 1:1.16.1-4ubuntu6 [522 kB]
Get:7 http://in.archive.ubuntu.com/ubuntu focal/main amd64 autopoint all 0.19.8.1-10build1 [412 kB]
Get:8 http://in.archive.ubuntu.com/ubuntu focal-updates/main amd64 curl amd64 7.68.0-1ubuntu2.7 [161 kB]

```

Now go ahead and make tweak changes in PHP ini file and set `cgi.fix_pathinfo` set to be 0. If this number is kept as a 1, the php interpreter will do its best to process the file that is as near to the requested file as possible. This is a possible security risk. If this number is set to 0, conversely, the interpreter will only process the exact file path—a much safer alternative.

```

$ cd /etc/php/7.4/apache2
$ sudo nano php.ini

```

Press **ctrl+w** and search for the word “**cgi.fix**” the uncomment the line and set it to 0.

...
cgi.fix_pathinfo=0

...

```
ebin@ebin-VirtualBox:~$ cd /etc/php
ebin@ebin-VirtualBox:/etc/php$ ls
7.4  8.0
ebin@ebin-VirtualBox:/etc/php$ cd 7.4/
ebin@ebin-VirtualBox:/etc/php/7.4$ ls
apache2  cli  mods-available
ebin@ebin-VirtualBox:/etc/php/7.4$ cd apache2/
ebin@ebin-VirtualBox:/etc/php/7.4/apache2$ ls
conf.d  php.ini
ebin@ebin-VirtualBox:/etc/php/7.4/apache2$ sudo nano php.ini
ebin@ebin-VirtualBox:/etc/php/7.4/apache2$ sudo nano php.ini
ebin@ebin-VirtualBox:/etc/php/7.4/apache2$ █
```

```
GNU nano 4.8                                     php.ini
; **You CAN safely turn this off for IIS, in fact, you MUST.**
; http://php.net/cgi.force-redirect
;cgi.force_redirect = 1

; if cgi.nph is enabled it will force cgi to always sent Status: 200 with
; every request. PHP's default behavior is to disable this feature.
;cgi.nph = 1

; if cgi.force_redirect is turned on, and you are not running under Apache or Netscape
; (iPlanet) web servers, you MAY need to set an environment variable name that PHP
; will look for to know it is OK to continue execution. Setting this variable MAY
; cause security issues, KNOW WHAT YOU ARE DOING FIRST.
; http://php.net/cgi.redirect-status-env
;cgi.redirect_status_env =

; cgi.fix_pathinfo provides *real* PATH_INFO/PATH_TRANSLATED support for CGI. PHP's
; previous behaviour was to set PATH_TRANSLATED to SCRIPT_FILENAME, and to not grok
; what PATH_INFO is. For more information on PATH_INFO, see the cgi specs. Setting
; this to 1 will cause PHP CGI to fix its paths to conform to the spec. A setting
; of zero causes PHP to behave as before. Default is 1. You should fix your scripts
; to use SCRIPT_FILENAME rather than PATH_TRANSLATED.
; http://php.net/cgi.fix-pathinfo
;cgi.fix_pathinfo=1

; if cgi.discard_path is enabled, the PHP CGI binary can safely be placed outside
; of the web tree and people will not be able to circumvent .htaccess security.
;cgi.discard_path=1

; FastCGI under IIS supports the ability to impersonate
; security tokens of the calling client. This allows IIS to define the
; security context that the request runs under. mod_fastcgi under Apache

```

^G Get Help ^O Write Out ^W Where Is ^K Cut Text ^J Justify ^C Cur Pos M-U Undo
 ^X Exit ^R Read File ^A Replace ^U Paste Text ^T To Spell ^L Go To Line M-E Redo

```
GNU nano 4.8                                     php.ini
; **You CAN safely turn this off for IIS, in fact, you MUST.**
; Thunderbird Mail /etc/cgi.force-redirect
;cgi.force_redirect = 1

; if cgi.nph is enabled it will force cgi to always sent Status: 200 with
; every request. PHP's default behavior is to disable this feature.
;cgi.nph = 1

; if cgi.force_redirect is turned on, and you are not running under Apache or Netscape
; (iPlanet) web servers, you MAY need to set an environment variable name that PHP
; will look for to know it is OK to continue execution. Setting this variable MAY
; cause security issues, KNOW WHAT YOU ARE DOING FIRST.
; http://php.net/cgi.redirect-status-env
;cgi.redirect_status_env =

; cgi.fix_pathinfo provides *real* PATH_INFO/PATH_TRANSLATED support for CGI. PHP's
; previous behaviour was to set PATH_TRANSLATED to SCRIPT_FILENAME, and to not grok
; what PATH_INFO is. For more information on PATH_INFO, see the cgi specs. Setting
; this to 1 will cause PHP CGI to fix its paths to conform to the spec. A setting
; of zero causes PHP to behave as before. Default is 1. You should fix your scripts
; to use SCRIPT_FILENAME rather than PATH_TRANSLATED.
; http://php.net/cgi.fix-pathinfo
;cgi.fix_pathinfo=0

; if cgi.discard_path is enabled, the PHP CGI binary can safely be placed outside
; of the web tree and people will not be able to circumvent .htaccess security.
;cgi.discard_path=1

; FastCGI under IIS supports the ability to impersonate
; security tokens of the calling client. This allows IIS to define the
; security context that the request runs under. mod_fastcgi under Apache

```

^G Get Help ^O Write Out ^W Where Is ^K Cut Text ^J Justify ^C Cur Pos M-U Undo
 ^X Exit ^R Read File ^A Replace ^U Paste Text ^T To Spell ^L Go To Line M-E Redo

Press Ctrl + x then y to Save and Exit.

Now Restart The apache service.

\$ systemctl restart apache2

Step 3 – Install Composer PHP Packages Management

Install the composer package manager go ahead and download and install Composer. and move the composer .phar file to usr/local/bin/composer directory.

**\$ sudo apt install curl
\$ curl -sS https://getcomposer.org/installer | php
\$ sudo mv composer.phar /usr/local/bin/composer**

```
ebin@ebin-VirtualBox:~$ sudo apt install curl
Reading package lists... Done
Building dependency tree
Reading state information... Done
curl is already the newest version (7.68.0-1ubuntu2.7).
The following packages were automatically installed and are no longer required:
  linux-headers-5.11.0-25-generic linux-hwe-5.11-headers-5.11.0-25 linux-image-5.11.0-25-generic linux-modules-5.11.0-25-
  generic
Use 'sudo apt autoremove' to remove them.
0 to upgrade, 0 to newly install, 0 to remove and 76 not to upgrade.
ebin@ebin-VirtualBox:~$ curl -sS https://getcomposer.org/installer | php
All settings correct for using Composer
Downloading...

Composer (version 2.1.8) successfully installed to: /home/ebin/composer.phar
Use it: php composer.phar

ebin@ebin-VirtualBox:~$ sudo mv composer.phar /usr/local/bin/composer
ebin@ebin-VirtualBox:~$
```

```
ebin@ebin-VirtualBox:~$ composer --version
Composer version 2.1.8 2021-09-15 13:55:14
ebin@ebin-VirtualBox:~$
```

Step 4 – Install Laravel 8.x on Ubuntu 20.04

Now install Laravel Framework using composer, just type composer global require Laravel/installer It will take a while to complete download its dependencies.

```
ebin@ebin-VirtualBox:~$ composer global require laravel/installer
Changed current directory to /home/ebin/.config/composer
Using version ^4.2 for laravel/installer
./composer.json has been created
Running composer update laravel/installer
Loading composer repositories with package information
Updating dependencies
Lock file operations: 13 installs, 0 updates, 0 removals
- Locking laravel/installer (v4.2.8)
- Locking psr/container (1.1.1)
- Locking symfony/console (v5.3.7)
- Locking symfony/deprecation-contracts (v2.4.0)
- Locking symfony/polyfill-ctype (v1.23.0)
- Locking symfony/polyfill-intl-grapheme (v1.23.1)
- Locking symfony/polyfill-intl-normalizer (v1.23.0)
- Locking symfony/polyfill-mbstring (v1.23.1)
- Locking symfony/polyfill-php73 (v1.23.0)
- Locking symfony/polyfill-php80 (v1.23.1)
- Locking symfony/process (v5.3.7)
- Locking symfony/service-contracts (v2.4.0)
- Locking symfony/string (v5.3.7)
Writing lock file
Installing dependencies from lock file (including require-dev)
Package operations: 13 installs, 0 updates, 0 removals
- Downloading symfony/polyfill-php80 (v1.23.1)
- Downloading symfony/process (v5.3.7)
```

As you had seen above image, all packages have been installed on the ‘`~/.config/composer`’ directory. Next, we need to add the ‘bin’ directory to the PATH environment through the `~/.bashrc` configuration. So Now Edit the `~/.bashrc` configuration using nano command.

\$ nano `~/.bashrc`

And add the following line at the end of the file.

```
...
export PATH="$HOME/.config/composer/vendor/bin:$PATH"
...
```

```
GNU nano 4.8                               /home/ebin/.bashrc
# Add an "alert" alias for long running commands. Use like so:
# sleep 10; alert
alias alert='notify-send --urgency=low -i "$( [ $? = 0 ] && echo terminal ||

# Alias definitions.
# You may want to put all your additions into a separate file like
# ~/.bash_aliases, instead of adding them here directly.
# See /usr/share/doc/bash-doc/examples in the bash-doc package.

if [ -f ~/.bash_aliases ]; then
    . ~/.bash_aliases
fi

# enable programmable completion features (you don't need to enable
# this, if it's already enabled in /etc/bash.bashrc and /etc/profile
# sources /etc/bash.bashrc).
if ! shopt -oq posix; then
    if [ -f /usr/share/bash-completion/bash_completion ]; then
        . /usr/share/bash-completion/bash_completion
    elif [ -f /etc/bash_completion ]; then
        . /etc/bash_completion
    fi
fi
export PATH="$HOME/.config/composer/vendor/bin:$PATH"
'

^G Get Help      ^O Write Out     ^W Where Is      ^K Cut Text      ^J Justify
^X Exit          ^R Read File     ^\ Replace       ^U Paste Text   ^T To Spell
```

Press Ctrl + x then y to Save and Exit.

Now reload your bashrc configuration using the source command.

\$ source ~/.bashrc

Now echo \$PATH. It will return your “Bin” directory path for the Composer package.

\$ echo \$PATH

```
ebin@ebin-VirtualBox:~$ nano ~/.bashrc
ebin@ebin-VirtualBox:~$ nano ~/.bashrc
ebin@ebin-VirtualBox:~$ source ~/.bashrc
ebin@ebin-VirtualBox:~$ echo $PATH
/home/ebin/.config/composer/vendor/bin:/usr/local/sbin:/usr/local/bin:/usr/sbin
/usr/local/games:/snap/bin
ebin@ebin-VirtualBox:~$
```

The ‘bin’ directory for the composer packages has been added to the \$PATH environment variable. And as a result, you can use the command ‘laravel’ to start and create a new project. Now go ahead and type Laravel new then your project name to start a new Laravel project.

\$ laravel new myapp1

This will take a while to download all dependencies required by Laravel.

```
ebin@ebin-VirtualBox:~$ laravel new myapp1
[laravel logo]

Creating a "laravel/laravel" project at "./myapp1"
Installing laravel/laravel (v8.6.2)
- Downloading laravel/laravel (v8.6.2)
- Installing laravel/laravel (v8.6.2): Extracting archive
Created project in /home/ebin/myapp1
> @php -r "file_exists('.env') || copy('.env.example', '.env');"
Loading composer repositories with package information
Updating dependencies
Lock file operations: 110 installs, 0 updates, 0 removals
- Locking asm89/stack-cors (v2.0.3)
- Locking brick/math (0.9.3)
- Locking dflydev/dot-access-data (v3.0.1)
- Locking doctrine/inflector (2.0.3)
- Locking doctrine/instantiator (1.4.0)
- Locking doctrine/lexer (1.2.1)
- Locking dragonmantank/cron-expression (v3.1.0)
- Locking egulias/email-validator (2.1.25)
- Locking facade/flare-client-php (1.9.1)
- Locking facade/ignition (2.13.1)
- Locking facade/ignition-contracts (1.0.2)
- Locking fakerphp/faker (v1.16.0)
```

Here you can see the installation of my new project myapp1 finished. You can also see inside my home directory a new directory has been created with my project name.

Step 5 – Finally Configure Apache for Laravel and test it

First, add your project directory to www-data group use the following command

```
$ sudo chgrp -R www-data /home/ebin/myapp1
```

-R flag is recursive, Recursive means all subdirectory and files under your project directory become changed to the “www-data” group.

Also, you need to change access permission 775 of the storage directory under your project. So, go ahead and use the following command.

```
$ sudo chmod -R 775 /home/ebin/myapp1/storage
```

```
ebin@ebin-VirtualBox:~$ cd home
bash: cd: home: No such file or directory
ebin@ebin-VirtualBox:~$ pwd
/home/ebin
ebin@ebin-VirtualBox:~$ /home/ebin/myapp1
bash: /home/ebin/myapp1: Is a directory
ebin@ebin-VirtualBox:~$ cd /home/ebin/myapp1
ebin@ebin-VirtualBox:~/myapp1$ cd ..
ebin@ebin-VirtualBox:~$ sudo chgrp -R www-data /home/ebin/myapp1
[sudo] password for ebin:
ebin@ebin-VirtualBox:~$ sudo chmod -R 775 /home/ebin/myapp1/storage
ebin@ebin-VirtualBox:~$ █
```

Now create an apache vhost configuration go to the following directory and create a vhost config file using nano file editor.

```
$ cd /etc/apache2/sites-available/
$ sudo nano myapp1.com.conf
```

And paste the following line inside the file.

```
<VirtualHost *:80>
```

```
    ServerName myapp1.com
```

```
        ServerAdmin admin@myapp1.com  
        DocumentRoot /home/ebin/myapp1/public
```

```
        <Directory /home/ebin/myapp1>  
            Options Indexes MultiViews  
            AllowOverride None  
            Require all granted  
        </Directory>
```

```
        ErrorLog ${APACHE_LOG_DIR}/error.log  
        CustomLog ${APACHE_LOG_DIR}/access.log combined  
</VirtualHost>
```

//All Red colored text must be changed as per your//

```
ebin@ebin-VirtualBox:~$ cd /etc/apache2/sites-available/  
ebin@ebin-VirtualBox:/etc/apache2/sites-available$ sudo nano myapp1.com.conf  
ebin@ebin-VirtualBox:/etc/apache2/sites-available$ █
```

```
GNU nano 4.8                                         myapp1.com.conf
<VirtualHost *:80>
    ServerName myapp1.com

    ServerAdmin admin@myapp1.com
    DocumentRoot /home/ebin/myapp1/public

    <Directory /home/ebin/myapp1>
        Options Indexes MultiViews
        AllowOverride None
        Require all granted
    </Directory>

    ErrorLog ${APACHE_LOG_DIR}/error.log
    CustomLog ${APACHE_LOG_DIR}/access.log combined
</VirtualHost>

[ Read 16 lines ]
[G] Get Help   [O] Write Out   [W] Where Is   [K] Cut Text   [J] Justify
[X] Exit      [R] Read File   [A] Replace   [U] Paste Text  [T] To Spell
```

Now enable mod rewrite for apache2 just type

\$ sudo a2enmod rewrite

Now enable your site, just type

\$ sudo a2ensite myapp1.com.conf

Finally, Restart the apache service, type

\$ systemctl restart apache2

```
ebin@ebin-VirtualBox:~$ cd /etc/apache2/sites-available/
ebin@ebin-VirtualBox:/etc/apache2/sites-available$ sudo nano myapp1.com.conf
ebin@ebin-VirtualBox:/etc/apache2/sites-available$ sudo nano myapp1.com.conf
ebin@ebin-VirtualBox:/etc/apache2/sites-available$ sudo a2enmod rewrite
Enabling module rewrite.
To activate the new configuration, you need to run:
    systemctl restart apache2
ebin@ebin-VirtualBox:/etc/apache2/sites-available$ sudo a2ensite myapp1.com.conf
Enabling site myapp1.com.
To activate the new configuration, you need to run:
    systemctl reload apache2
ebin@ebin-VirtualBox:/etc/apache2/sites-available$ systemctl restart apache2
ebin@ebin-VirtualBox:/etc/apache2/sites-available$
```

As you are in a local environment you need a local dns resolver for your site. Go ahead and edit /etc/hosts file, add a dns record for your site then save the file.

\$ sudo nano /etc/hosts

```
...
127.0.0.1 myapp1.com
```

```
ebin@ebin-VirtualBox:~$ sudo nano /etc/hosts
```


```
GNU nano 4.8                               /etc/hosts
127.0.0.1      localhost
127.0.1.1      ebin-VirtualBox

# The following lines are desirable for IPv6 capable hosts
::1          ip6-localhost ip6-loopback
fe00::0      ip6-localnet
ff00::0      ip6-mcastprefix
ff02::1      ip6-allnodes
ff02::2      ip6-allrouters

127.0.0.1    myapp1.com

[ Read 11 lines ]
^G Get Help      ^O Write Out      ^W Where Is      ^K Cut Text      ^J Justify
^X Exit         ^R Read File       ^\ Replace       ^U Paste Text     ^T To Spell
```

Now get back to the web browser and open a tab then type your project hostname.

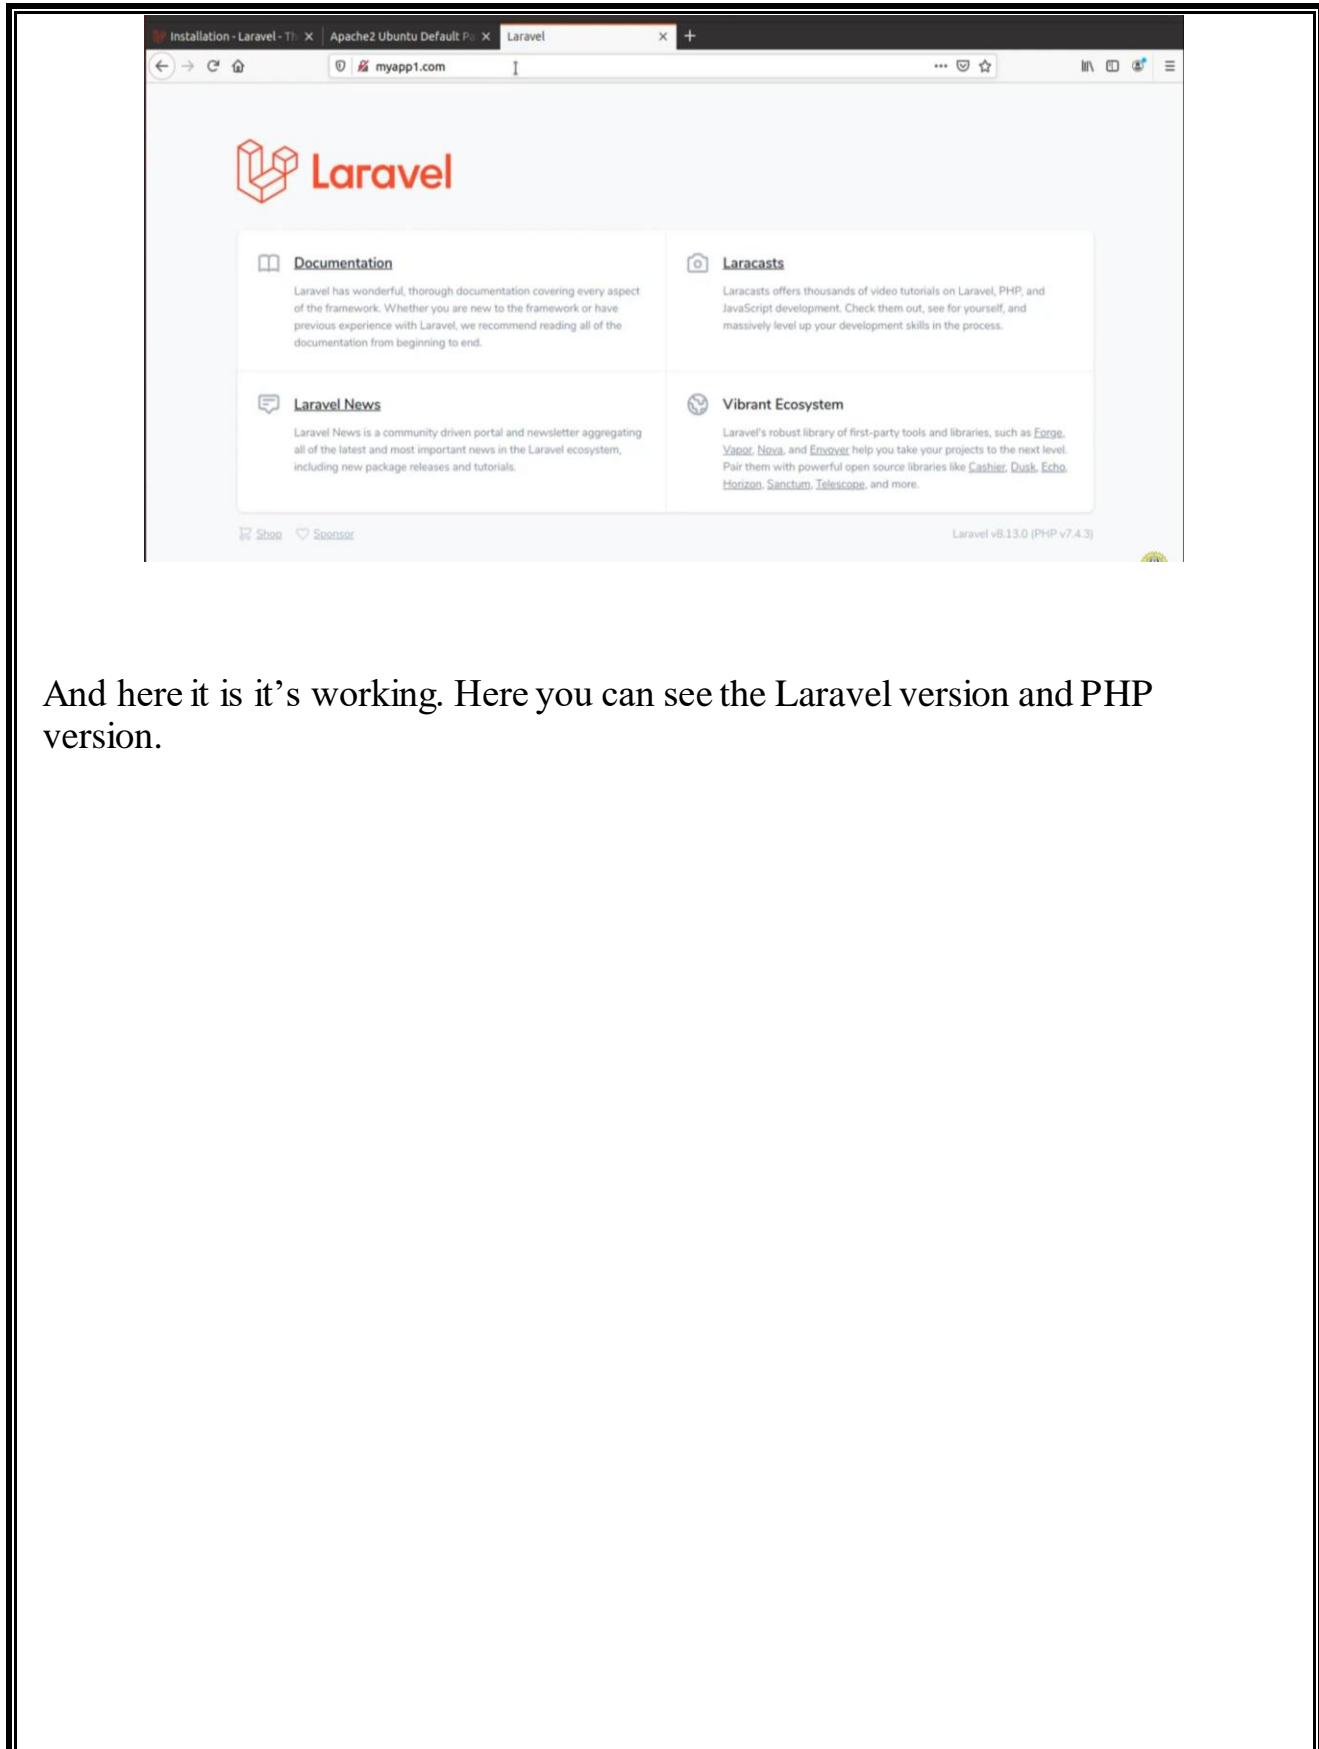

And here it is it's working. Here you can see the Laravel version and PHP version.


EXPERIMENT-7

NETWORKING COMMANDS

PING COMMAND

PING (Packet Internet Groper) command is used to check the network connectivity between host and server/host. This command takes as input the IP address or the URL and sends a data packet to the specified address with the message “PING” and get a response from the server/host this time is recorded which is called latency. Fast ping low latency means faster connection. Ping uses ICMP(Internet Control Message Protocol) to send an ICMP echo message to the specified host if that host is available then it sends ICMP reply message. Ping is generally measured in millisecond every modern operating system has this ping pre-installed.

Syntax: **ping [OPTIONS] DESTINATION**

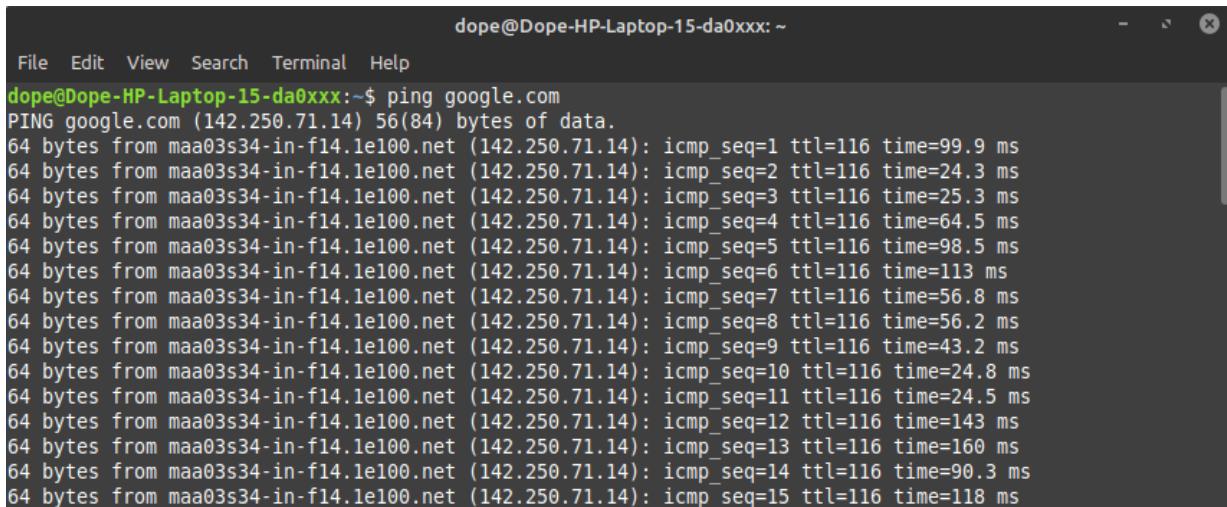


```
dope@Dope-HP-Laptop-15-da0xxx: ~
File Edit View Search Terminal Help
dope@Dope-HP-Laptop-15-da0xxx:~$ ping google.com
PING google.com (142.250.71.14) 56(84) bytes of data.
64 bytes from maa03s34-in-f14.1e100.net (142.250.71.14): icmp_seq=1 ttl=116 time=99.9 ms
64 bytes from maa03s34-in-f14.1e100.net (142.250.71.14): icmp_seq=2 ttl=116 time=24.3 ms
64 bytes from maa03s34-in-f14.1e100.net (142.250.71.14): icmp_seq=3 ttl=116 time=25.3 ms
64 bytes from maa03s34-in-f14.1e100.net (142.250.71.14): icmp_seq=4 ttl=116 time=64.5 ms
64 bytes from maa03s34-in-f14.1e100.net (142.250.71.14): icmp_seq=5 ttl=116 time=98.5 ms
64 bytes from maa03s34-in-f14.1e100.net (142.250.71.14): icmp_seq=6 ttl=116 time=113 ms
64 bytes from maa03s34-in-f14.1e100.net (142.250.71.14): icmp_seq=7 ttl=116 time=56.8 ms
64 bytes from maa03s34-in-f14.1e100.net (142.250.71.14): icmp_seq=8 ttl=116 time=56.2 ms
64 bytes from maa03s34-in-f14.1e100.net (142.250.71.14): icmp_seq=9 ttl=116 time=43.2 ms
64 bytes from maa03s34-in-f14.1e100.net (142.250.71.14): icmp_seq=10 ttl=116 time=24.8 ms
64 bytes from maa03s34-in-f14.1e100.net (142.250.71.14): icmp_seq=11 ttl=116 time=24.5 ms
64 bytes from maa03s34-in-f14.1e100.net (142.250.71.14): icmp_seq=12 ttl=116 time=143 ms
64 bytes from maa03s34-in-f14.1e100.net (142.250.71.14): icmp_seq=13 ttl=116 time=160 ms
64 bytes from maa03s34-in-f14.1e100.net (142.250.71.14): icmp_seq=14 ttl=116 time=90.3 ms
64 bytes from maa03s34-in-f14.1e100.net (142.250.71.14): icmp_seq=15 ttl=116 time=118 ms
```

TRACEROUTE COMMAND

Traceroute command in Linux prints the route that a packet takes to reach the host. This command is useful when you want to know about the route and about all the hops that a packet takes. Below image depicts how traceroute command is used to reach the Google (172.217.26.206) host from the local machine and it also prints detail about all the hops that it visits in between.

Syntax: **traceroute [options] host_Address [pathlength]**

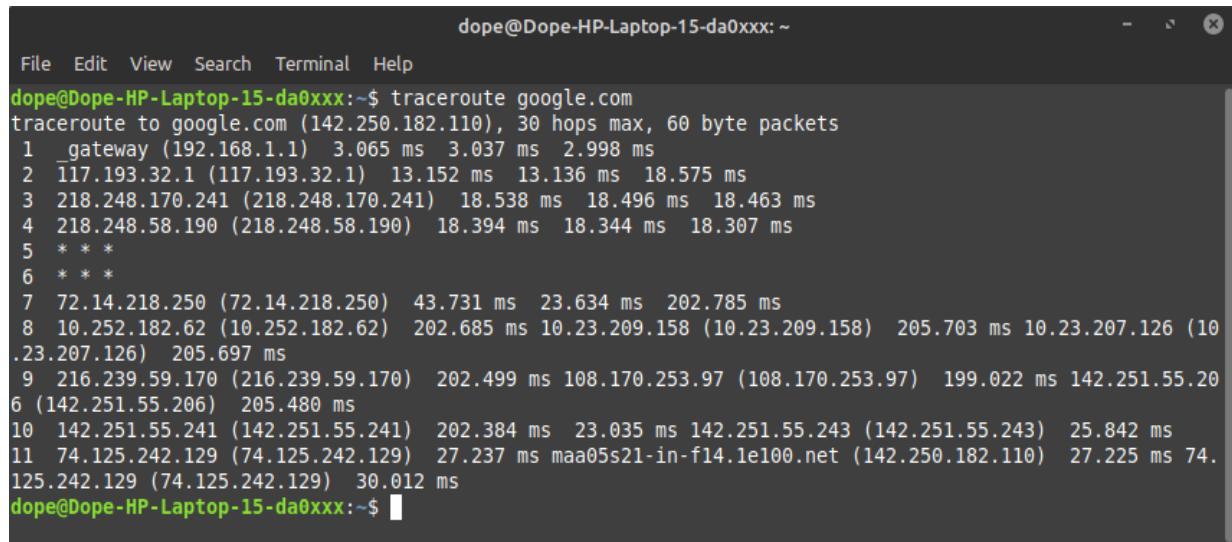

```
dope@Dope-HP-Laptop-15-da0xxx:~
```

```
File Edit View Search Terminal Help
```


```
dope@Dope-HP-Laptop-15-da0xxx:~$ traceroute google.com
traceroute to google.com (142.250.182.110), 30 hops max, 60 byte packets
 1 _gateway (192.168.1.1)  3.065 ms  3.037 ms  2.998 ms
 2 117.193.32.1 (117.193.32.1)  13.152 ms  13.136 ms  18.575 ms
 3 218.248.170.241 (218.248.170.241)  18.538 ms  18.496 ms  18.463 ms
 4 218.248.58.190 (218.248.58.190)  18.394 ms  18.344 ms  18.307 ms
 5 * * *
 6 * * *
 7 72.14.218.250 (72.14.218.250)  43.731 ms  23.634 ms  202.785 ms
 8 10.252.182.62 (10.252.182.62)  202.685 ms  10.23.209.158 (10.23.209.158)  205.703 ms  10.23.207.126 (10.
.23.207.126)  205.697 ms
 9 216.239.59.170 (216.239.59.170)  202.499 ms  108.170.253.97 (108.170.253.97)  199.022 ms  142.251.55.20
 6 (142.251.55.206)  205.480 ms
10 142.251.55.241 (142.251.55.241)  202.384 ms  23.035 ms  142.251.55.243 (142.251.55.243)  25.842 ms
11 74.125.242.129 (74.125.242.129)  27.237 ms maa05s21-in-f14.1e100.net (142.250.182.110)  27.225 ms  74.
125.242.129 (74.125.242.129)  30.012 ms
```

```
dope@Dope-HP-Laptop-15-da0xxx:~$
```

ROUTE COMMAND

route command in Linux is used when you want to work with the IP/kernel routing table. It is mainly used to set up static routes to specific hosts or networks via an interface. It is used for showing or update the IP/kernel routing table.

Syntax: **route**

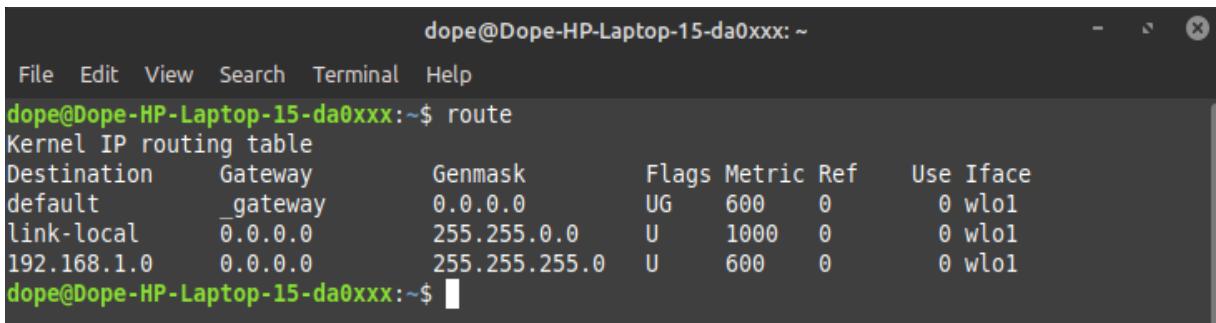


The screenshot shows a terminal window titled "dope@Dope-HP-Laptop-15-da0xxx: ~". The window contains the following text:

```
File Edit View Search Terminal Help
dope@Dope-HP-Laptop-15-da0xxx:~$ route
Kernel IP routing table
Destination     Gateway         Genmask        Flags Metric Ref    Use Iface
default         _gateway       0.0.0.0        UG    600    0        0 wlo1
link-local      0.0.0.0        255.255.0.0   U     1000   0        0 wlo1
192.168.1.0    0.0.0.0        255.255.255.0 U     600    0        0 wlo1
dope@Dope-HP-Laptop-15-da0xxx:~$
```

NSLOOKUP COMMAND

nslookup (stands for “Name Server Lookup”) is a useful command for getting information from DNS server. It is a network administration tool for querying the Domain Name System (DNS) to obtain domain name or IP address mapping or any other specific DNS record. It is also used to troubleshoot DNS related problems.

Syntax: **nslookup [option]**

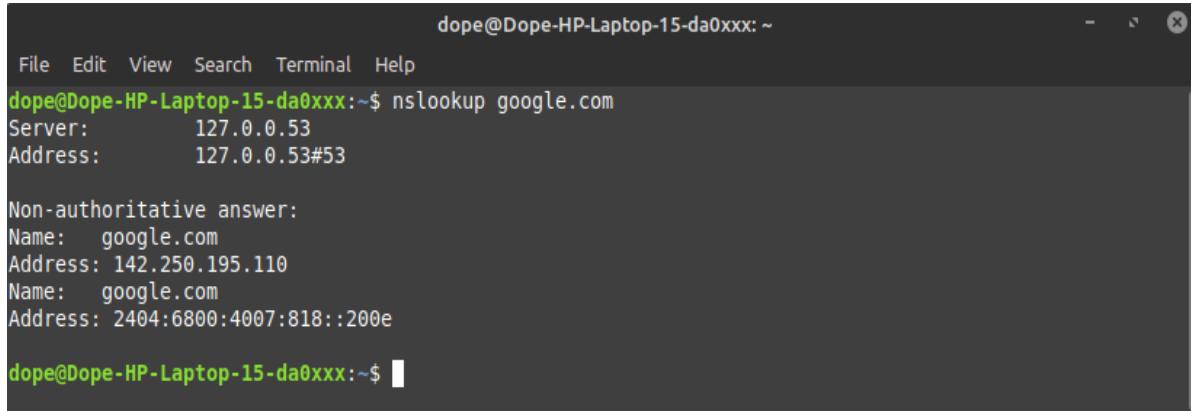

The screenshot shows a terminal window titled "dope@Dope-HP-Laptop-15-da0xxx: ~". The window has a menu bar with File, Edit, View, Search, Terminal, and Help. Below the menu is a command prompt: "dope@Dope-HP-Laptop-15-da0xxx:~\$ nslookup google.com". The output of the command is displayed:
Server: 127.0.0.53
Address: 127.0.0.53#53


Non-authoritative answer:
Name: google.com
Address: 142.250.195.110
Name: google.com
Address: 2404:6800:4007:818::200e

The command prompt "dope@Dope-HP-Laptop-15-da0xxx:~\$" is visible at the bottom.

IFCONFIG COMMAND

ifconfig(interface configuration) command is used to configure the kernel-resident network interfaces. It is used at the boot time to set up the interfaces as necessary. After that, it is usually used when needed during debugging or when you need system tuning. Also, this command is used to assign the IP address and netmask to an interface or to enable or disable a given interface.

Syntax: **ifconfig [...OPTIONS] [INTERFACE]**

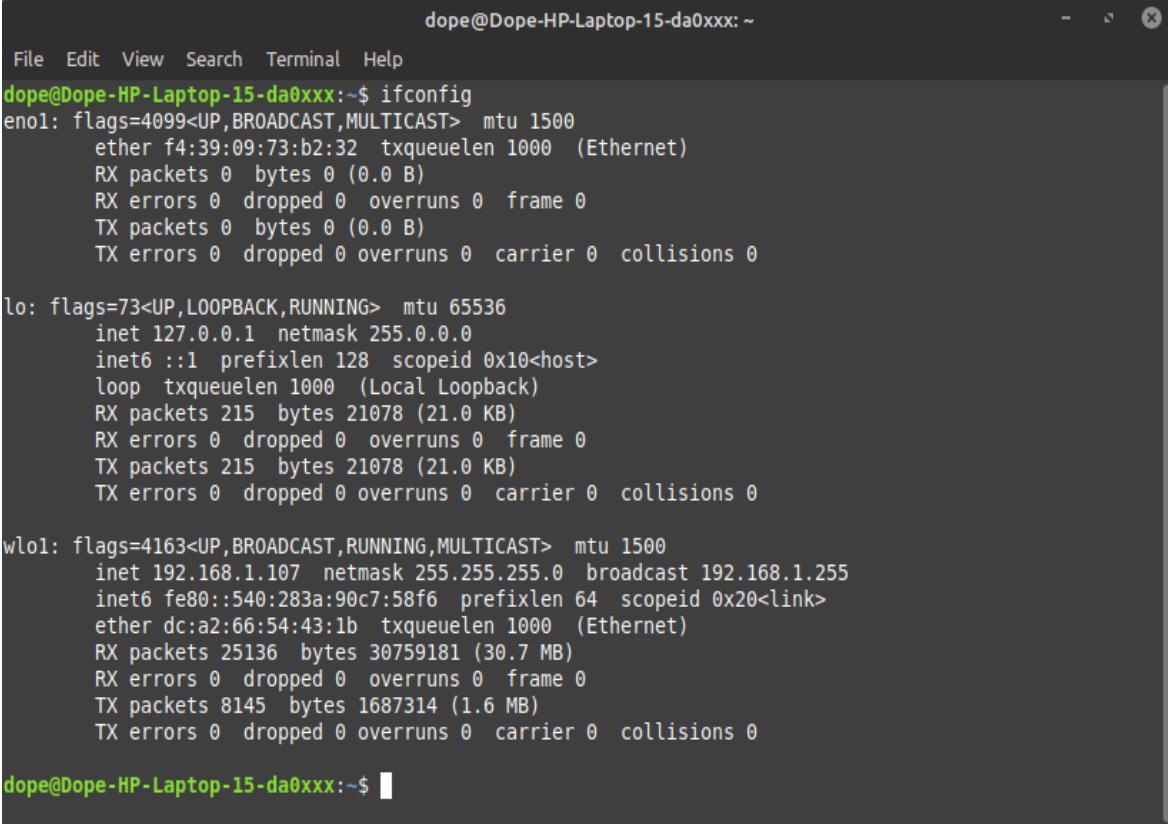

The screenshot shows a terminal window titled "dope@Dope-HP-Laptop-15-da0xxx: ~". The window contains the output of the "ifconfig" command. The output details three network interfaces: en0, lo, and wlo1. The en0 interface is an Ethernet connection with flags indicating it is up, broadcast, and multicasted. It has an MTU of 1500 bytes and an ether address of f4:39:09:73:b2:32. The lo interface is a loopback connection with flags indicating it is up, loopback, and running. It has an MTU of 65536 bytes and an ether address of 00:00:00:00:00:00. The wlo1 interface is a wireless connection with flags indicating it is up, broadcast, and multicasted. It has an MTU of 1500 bytes and an ether address of dc:a2:66:54:43:1b. The output also includes information about IP addresses, netmasks, broadcast addresses, and various statistics for each interface.

```
dope@Dope-HP-Laptop-15-da0xxx:~$ ifconfig
en0: flags=4099<UP,BROADCAST,MULTICAST> mtu 1500
      ether f4:39:09:73:b2:32 txqueuelen 1000  (Ethernet)
      RX packets 0  bytes 0 (0.0 B)
      RX errors 0  dropped 0  overruns 0  frame 0
      TX packets 0  bytes 0 (0.0 B)
      TX errors 0  dropped 0  overruns 0  carrier 0  collisions 0

lo: flags=73<UP,LOOPBACK,RUNNING> mtu 65536
      inet 127.0.0.1 netmask 255.0.0.0
      inet6 ::1 prefixlen 128 scopeid 0x10<host>
          loop txqueuelen 1000  (Local Loopback)
          RX packets 215  bytes 21078 (21.0 KB)
          RX errors 0  dropped 0  overruns 0  frame 0
          TX packets 215  bytes 21078 (21.0 KB)
          TX errors 0  dropped 0  overruns 0  carrier 0  collisions 0

wlo1: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1500
      inet 192.168.1.107 netmask 255.255.255.0 broadcast 192.168.1.255
      inet6 fe80::540:283a:90c7:58f6 prefixlen 64 scopeid 0x20<link>
          ether dc:a2:66:54:43:1b txqueuelen 1000  (Ethernet)
          RX packets 25136  bytes 30759181 (30.7 MB)
          RX errors 0  dropped 0  overruns 0  frame 0
          TX packets 8145  bytes 1687314 (1.6 MB)
          TX errors 0  dropped 0  overruns 0  carrier 0  collisions 0

dope@Dope-HP-Laptop-15-da0xxx:~$
```

EXPERIMENT-8

WIRESHARK


INTRODUCTION TO WIRESHARK


- Wireshark is an open-source packet analyser, which is used for education, analysis, software development, communication protocol development, and network troubleshooting.
- It is used to track the packets so that each one is filtered to meet our specific needs. It is commonly called as a sniffer, network protocol analyser, and network analyser.
- It is also used by network security engineers to examine security problems.

FEATURES OF WIRESHARK

- Available for UNIX and Windows.
- Capture live packet data from a network interface.
- Display packets with very detailed protocol information.
- Save packet data captured.
- Filter packet data on our criteria.
- Colorize packet data on our criteria.

- Export some or all packet data in a number of capture file formats.

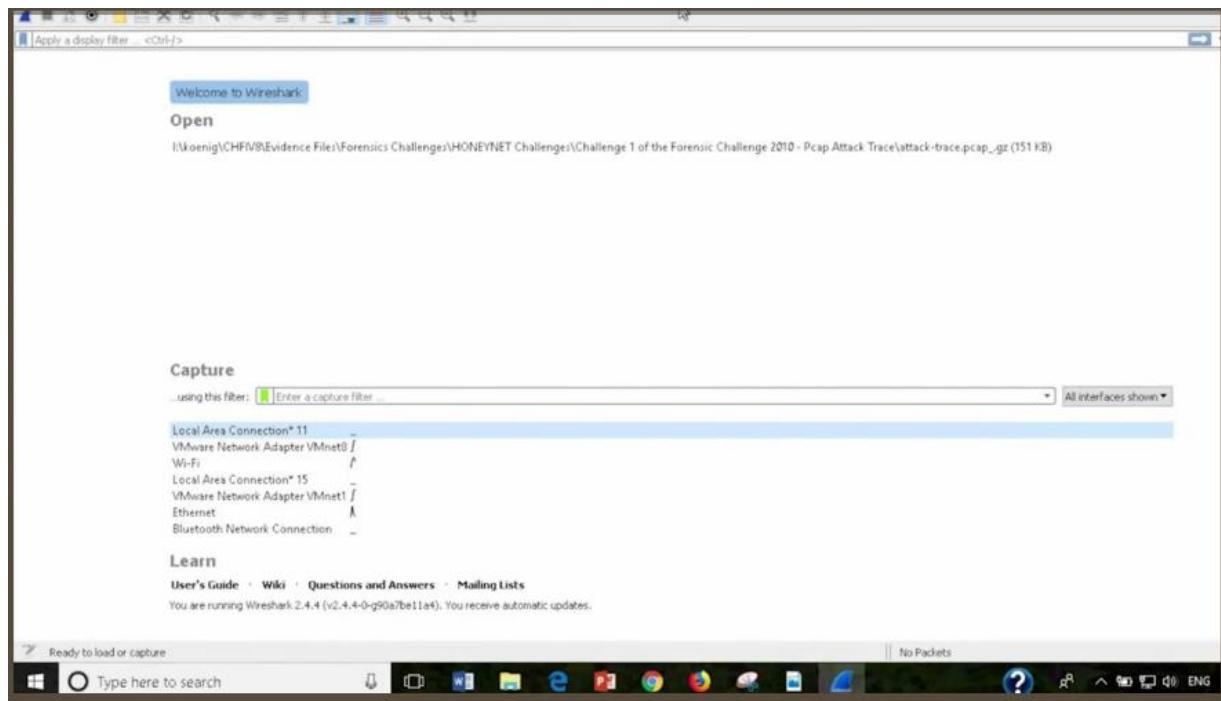

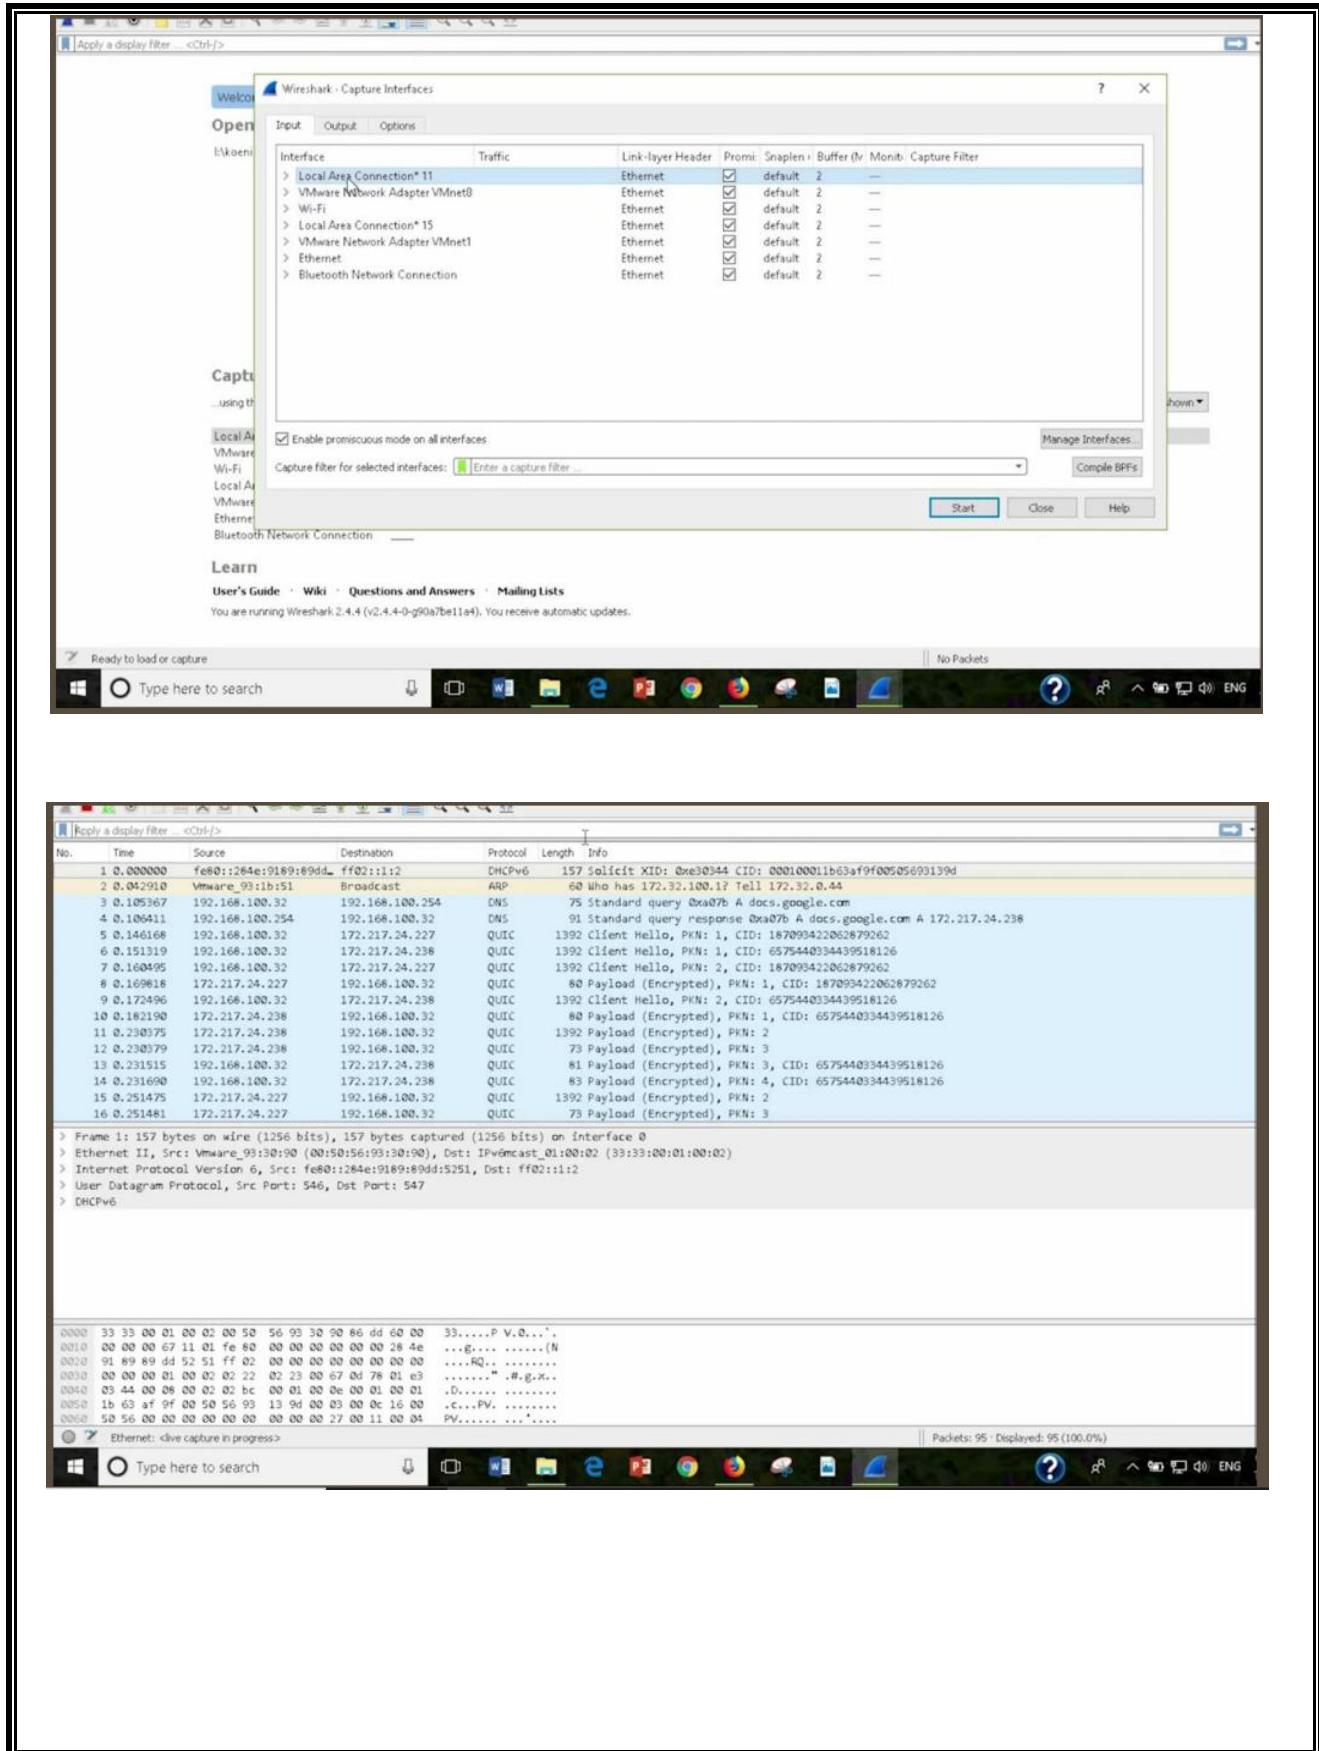

No.	Time	Source	Destination	Protocol	Length	Info
279	51.697359	192.168.100.32	23.57.74.56	TCP	54	51735 + 80 [FIN, ACK] Seq=1 Ack=1 Win=256 Len=0
280	51.697997	23.57.74.56	192.168.100.32	TCP	60	80 + 51735 [ACK] Seq=1 Ack=2 Win=513 Len=0
281	51.697999	23.57.74.56	192.168.100.32	TCP	60	80 + 51735 [FIN, ACK] Seq=1 Ack=2 Win=513 Len=0
282	51.698095	192.168.100.32	23.57.74.56	TCP	54	51735 + 80 [ACK] Seq=2 Ack=2 Win=256 Len=0
283	51.746656	192.168.100.32	192.168.100.254	DNS	83	Standard query 0x0a61 A ctdl.windowsupdate.com
284	51.752418	192.168.100.32	192.168.100.32	DNS	235	Standard query response 0x0a61 A ctdl.windowsupdate.com CNANE ctdl.windowsupdate.nsatc.net CNANE
285	51.759463	192.168.100.32	23.57.74.56	TCP	66	51736 + 80 [SYN] Seq=0 Win=64240 Len=0 NS=1460 WS=256 SACK_PERW=1
286	51.760153	23.57.74.56	192.168.100.32	TCP	66	80 + 51736 [SYN, ACK] Seq=1 Ack=1 Win=65228 Len=0 NS=1460 WS=128 SACK_PERW=1
287	51.760283	192.168.100.32	23.57.74.56	TCP	54	51736 + 80 [ACK] Seq=1 Ack=1 Win=525568 Len=0
288	51.760517	192.168.100.32	23.57.74.56	HTTP	256	GET /msdownload/update/v3/static/trustedr/en/disallowedcertstl.cab?26e82ab439df9343 HTTP/1.1
289	51.761158	23.57.74.56	192.168.100.32	TCP	60	80 + 51736 [ACK] Seq=1 Ack=203 Win=65408 Len=0
290	51.763771	23.57.74.56	192.168.100.32	TCP	1514	80 + 51736 [ACK] Seq=1 Ack=203 Win=65664 Len=1460 [TCP segment of a reassembled PDU]
291	51.764088	23.57.74.56	192.168.100.32	TCP	1514	80 + 51736 [ACK] Seq=1461 Ack=203 Win=65664 Len=1460 [TCP segment of a reassembled PDU]
292	51.764091	23.57.74.56	192.168.100.32	HTTP	1197	HTTP/1.1 403 Forbidden (text/html)
293	51.764171	192.168.100.32	23.57.74.56	TCP	54	51736 + 80 [ACK] Seq=203 Ack=4064 Win=525568 Len=0
294	51.764525	192.168.100.32	23.57.74.56	TCP	54	51736 + 80 [RST, ACK] Seq=203 Ack=4064 Win=0 Len=0

> Frame 286: 66 bytes on wire (528 bits), 66 bytes captured (528 bits) on interface 0
> Ethernet II, Src: VMware_93:fe:86 (00:50:56:93:fe:86), Dst: HewlettP_27:28:15 (a0:48:1c:27:28:15)
> Internet Protocol Version 4, Src: 23.57.74.56, Dst: 192.168.100.32
> Transmission Control Protocol, Src Port: 80, Dst Port: 51736, Seq: 0, Ack: 1, Len: 0
Source Port: 80
Destination Port: 51736
[Stream index: 4]
[TCP Segment Len: 0]
Sequence number: 0 (relative sequence number)
Acknowledgment number: 1 (relative ack number)
1000 ... + Header Length: 32 bytes (8)
> Flags: PSH,URG (SYN, ACK)
0000 a0 48 1c 27 28 15 00 50 56 93 f6 86 08 00 45 00 .H.('.,P V.....E.
0010 00 34 46 3c 40 00 40 06 6e 4e 17 39 4a 38 c0 a8 .4F@.B. nN.938..
0020 64 20 00 50 ca 18 e5 ad 47 1a b4 7b 5d 6b 80 12 d.P.... G..(]k..
0030 fe cc e1 e3 00 00 02 04 05 b4 01 03 03 07 04 02
0040 00 00 ..

Ethernet: alive capture in progress>

Packets: 372 · Displayed: 372 (100.0%)

Type here to search

Windows Taskbar icons

Question mark icon

Wireshark window title: Apply a display filter <Ctrl+>

Start button

Ctrl+E

Protocol, Length, Info

No. Time Ctrl+E

Start

Stop

Restart

Capture Filters...

Refresh Interface

0.56

100.32

100.32

.56

54 51735 + 80 [FIN, ACK] Seq=1 Ack=1 Win=256 Len=0

60 80 + 51735 [ACK] Seq=1 Ack=2 Win=513 Len=0

60 80 + 51735 [FIN, ACK] Seq=1 Ack=2 Win=513 Len=0

54 51735 + 80 [ACK] Seq=2 Ack=2 Win=256 Len=0

83 Standard query 0x0a61 A ctdl.windowsupdate.com

235 Standard query response 0x0a61 A ctdl.windowsupdate.nsatc.net CNANE

66 51736 + 80 [SYN] Seq=0 Win=64240 Len=0 NS=1460 WS=256 SACK_PERW=1

66 80 + 51736 [SYN, ACK] Seq=1 Ack=1 Win=65228 Len=0 NS=1460 WS=128 SACK_PERW=1

54 51736 + 80 [ACK] Seq=1 Ack=1 Win=525568 Len=0

256 GET /msdownload/update/v3/static/trustedr/en/disallowedcertstl.cab?26e82ab439df9343 HTTP/1.1

60 80 + 51736 [ACK] Seq=1 Ack=203 Win=65408 Len=0

1514 80 + 51736 [ACK] Seq=1 Ack=203 Win=65664 Len=1460 [TCP segment of a reassembled PDU]

1514 80 + 51736 [ACK] Seq=1461 Ack=203 Win=65664 Len=1460 [TCP segment of a reassembled PDU]

1197 HTTP/1.1 403 Forbidden (text/html)

54 51736 + 80 [ACK] Seq=203 Ack=4064 Win=525568 Len=0

54 51736 + 80 [RST, ACK] Seq=203 Ack=4064 Win=0 Len=0

> Frame 286: 66 bytes on wire (528 bits), 66 bytes captured (528 bits) on interface 0
> Ethernet II, Src: VMware_93:fe:86 (00:50:56:93:fe:86), Dst: HewlettP_27:28:15 (a0:48:1c:27:28:15)
> Internet Protocol Version 4, Src: 23.57.74.56, Dst: 192.168.100.32
> Transmission Control Protocol, Src Port: 80, Dst Port: 51736, Seq: 0, Ack: 1, Len: 0
0000 a0 48 1c 27 28 15 00 50 56 93 f6 86 08 00 45 00 .H.('.,P V.....E.
0010 00 34 46 3c 40 00 40 06 6e 4e 17 39 4a 38 c0 a8 .4F@.B. nN.938..
0020 64 20 00 50 ca 18 e5 ad 47 1a b4 7b 5d 6b 80 12 d.P.... G..(]k..
0030 fe cc e1 e3 00 00 02 04 05 b4 01 03 03 07 04 02
0040 00 00 ..

wireshark_5AB6DF2-0780-4A47-936A-1196F65306AF_20180212162138_a03564

Packets: 591 · Displayed: 591 (100.0%)

Type here to search


Windows Taskbar icons


Question mark icon

HOW TO RETRIEVE WEB PAGES USING HTTP AND WIRESHARK TO CAPTURE THE PACKETS?

1. Start up your web browser.
2. Start up the Wireshark packet sniffer (but don't yet begin packet capture).
 - Enter "http" (just the letters, not the quotation marks) in the display-filterspecification window, so that only captured HTTP messages will be displayed later in the packet-listing window.
3. Wait a bit more than one minute (we'll see why shortly), and then begin Wireshark packet capture.
4. Enter the following to your browser
TCP OR IP.ADDER == 192.168.100.32 .
Your browser should display the webpage.
5. Stop Wireshark packet capture.

YOUR WIRESHARK WINDOW SHOULD LOOK SIMILAR TO THE WINDOW SHOWN IN BELOW FIGURE

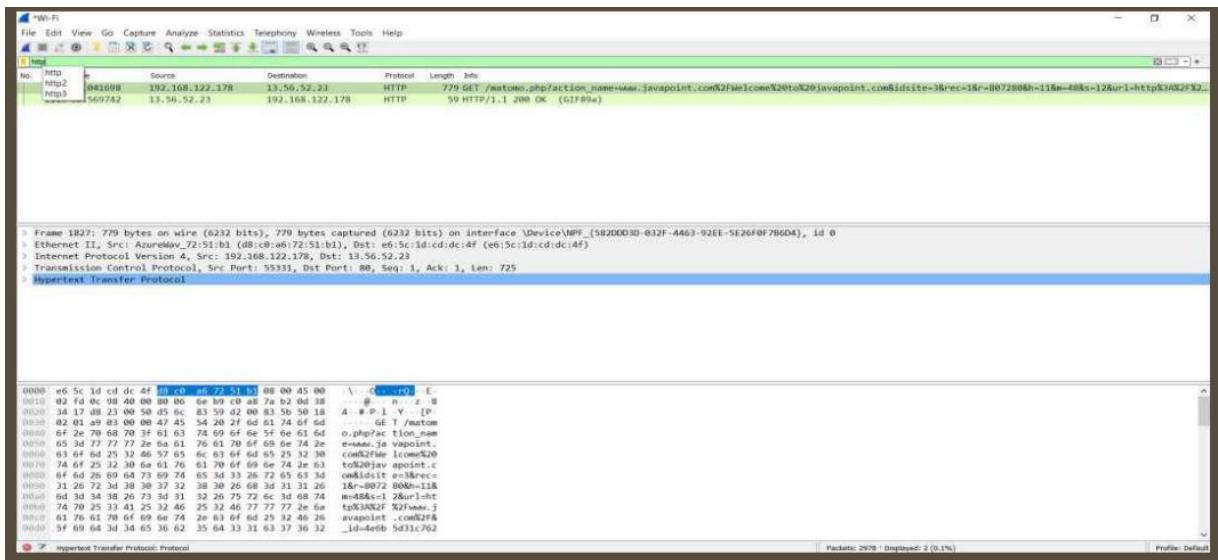

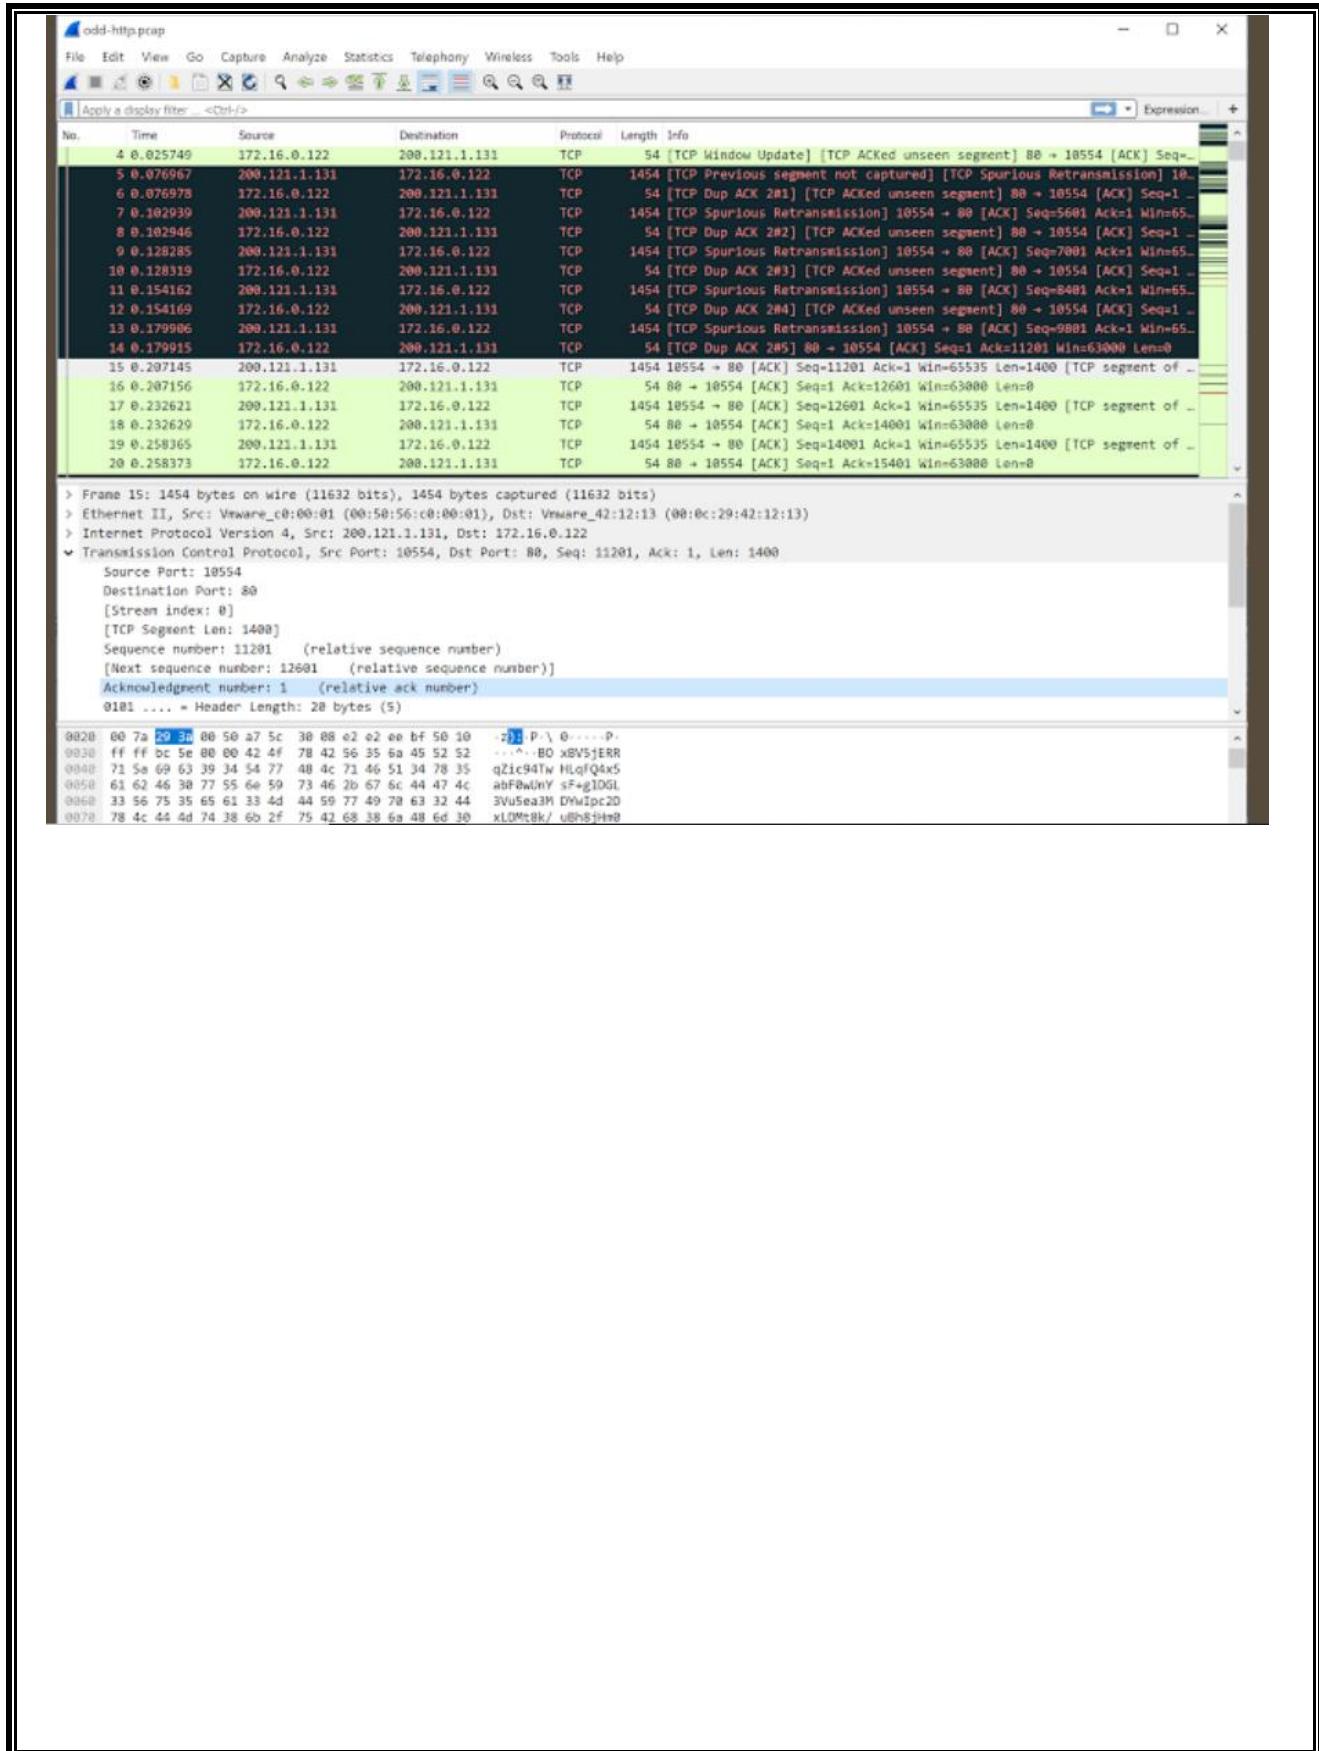

EXPERIMENT-9

Introduction to Virtual Machines

Creating a Virtual Machine


1 Install VirtualBox .

If you don't already have VirtualBox installed on your Windows or Mac computer, you'll need to install it before proceeding.

Following are the steps required to install VirtualBox(Oracle VM VirtualBox):


You can download the latest version of VirtualBox from the Virtual Box website: <https://www.virtualbox.org/wiki/Downloads> according to the version of your operating system Windows, Mac or Linux.

1.1. Click Next

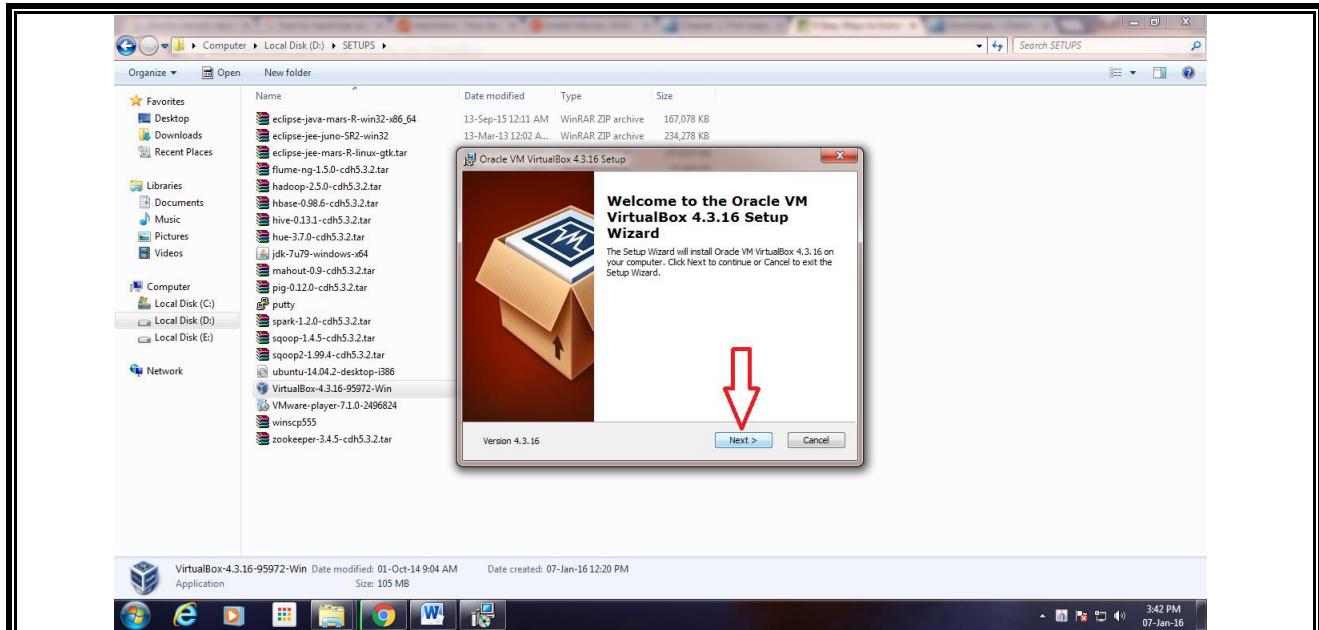


To Install VirtualBox – Setup Wizard

1.2. Click Next

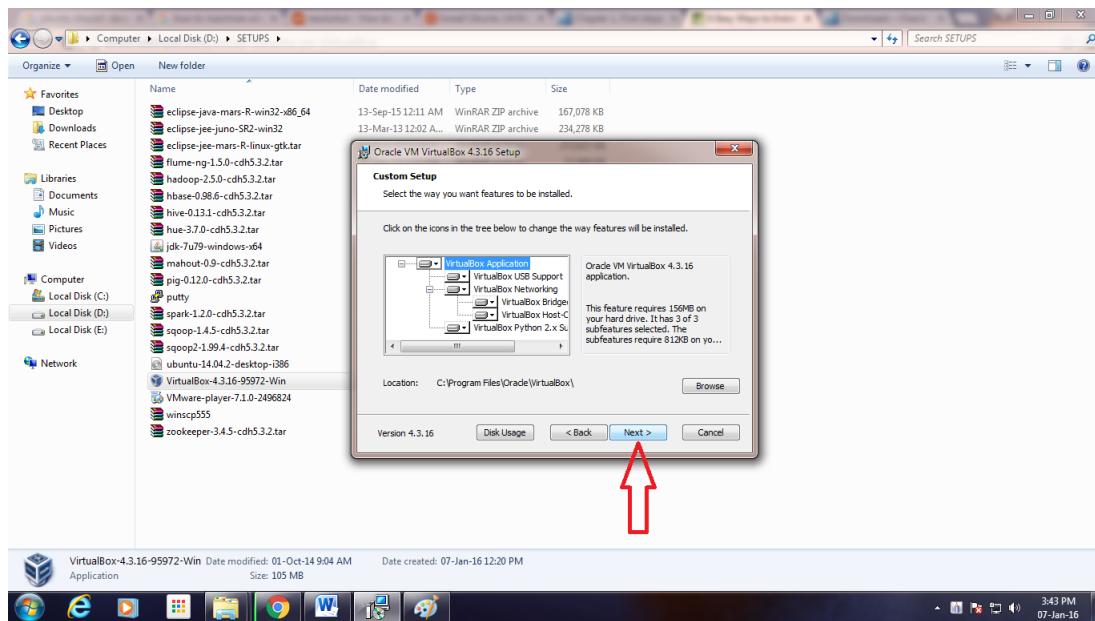


To Install VirtualBox – Custom Setup

1.3. Uncheck “Create a shortcut in the Quick Launch Bar” and click “Next”

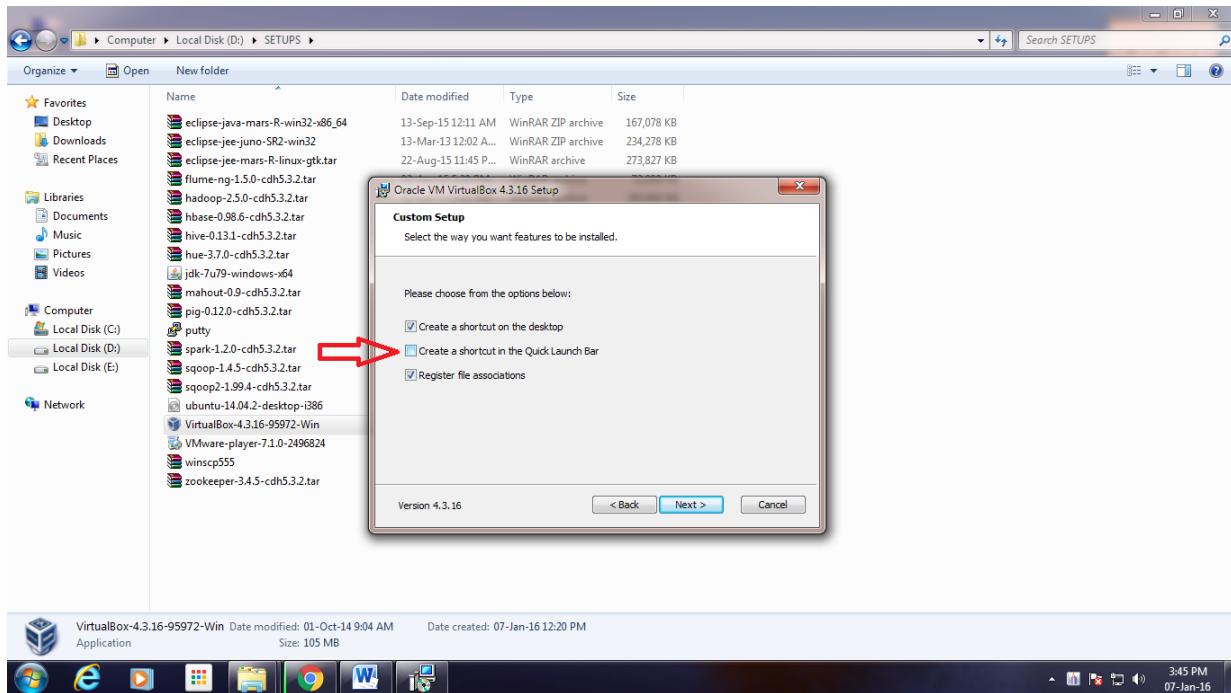


To Install VirtualBox – Features Selection

1.4 click “Yes”

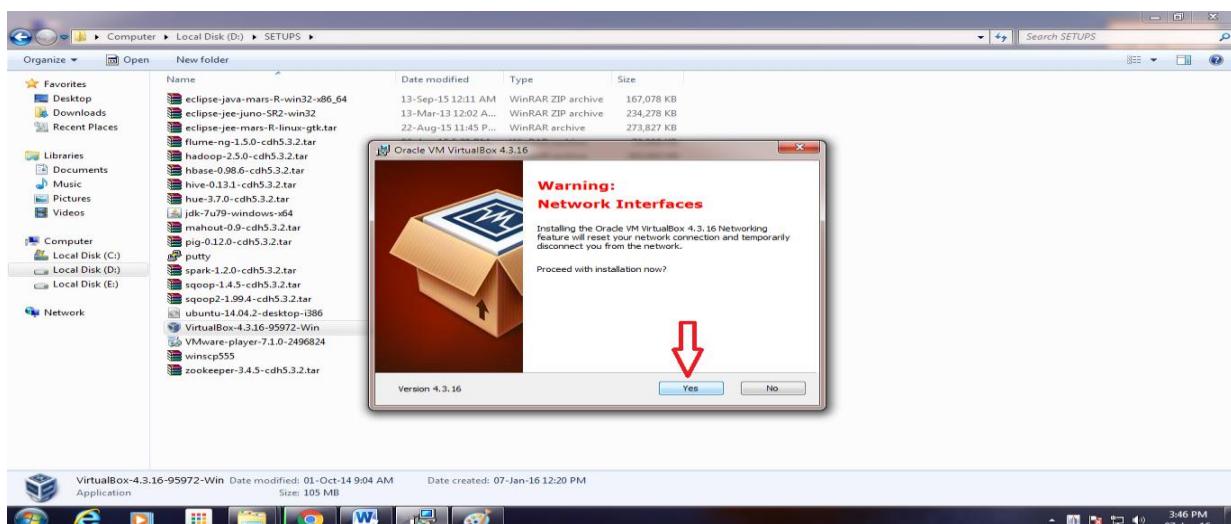


To Install VirtualBox – Network Interfaces Warning

1.5. Click “Install”

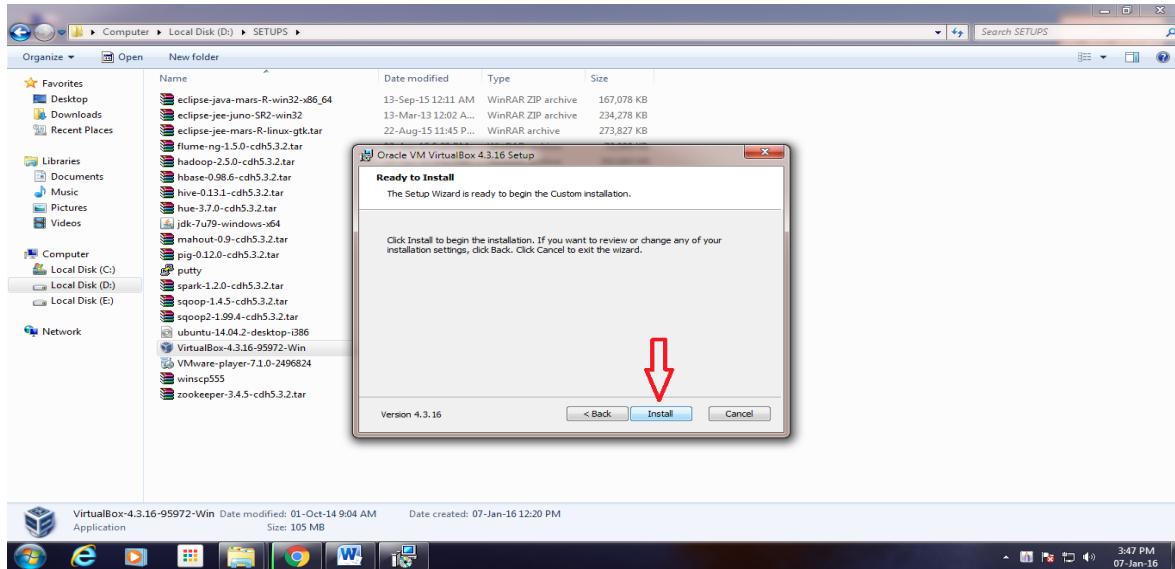


Installation of Oracle VM VirtualBox – Ready to Install

1.6. Click “Install”

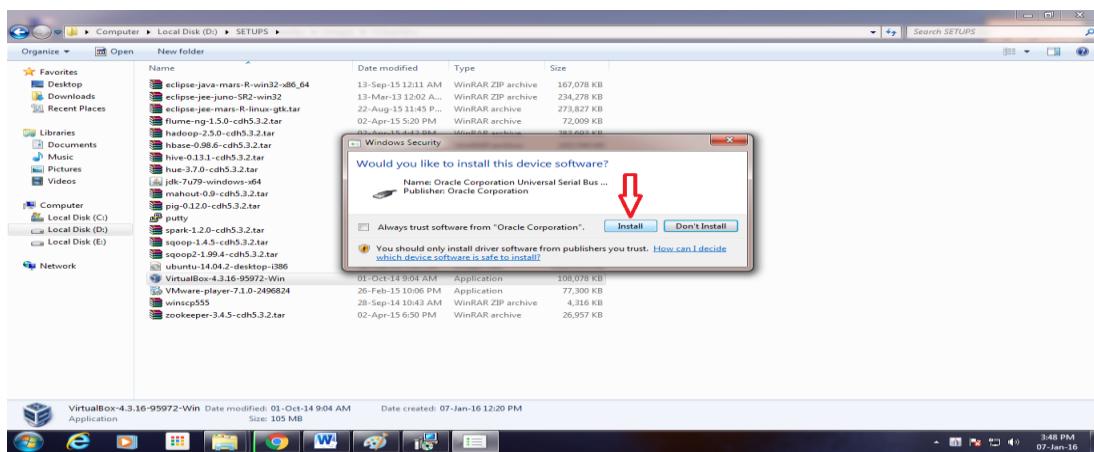


Installation of Oracle VM VirtualBox- Serial Bus Software Installation

1.7 Click “Install”

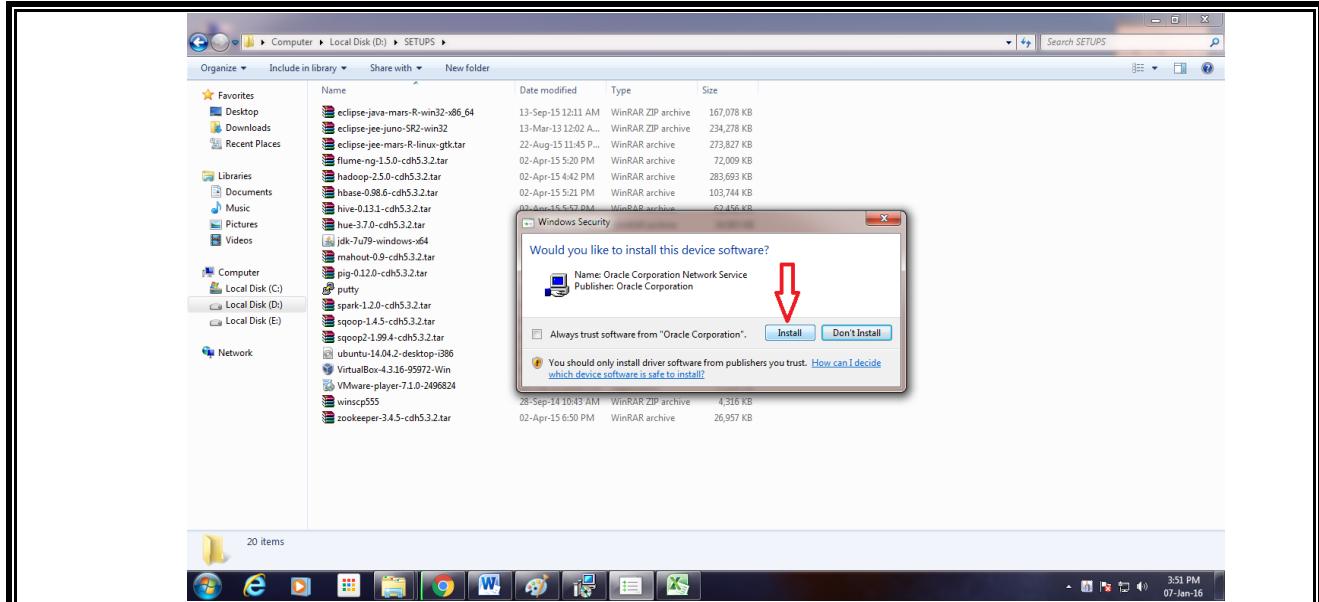


Installation of Oracle VM VirtualBox – Network Service Installation

1.8 Click “Install”

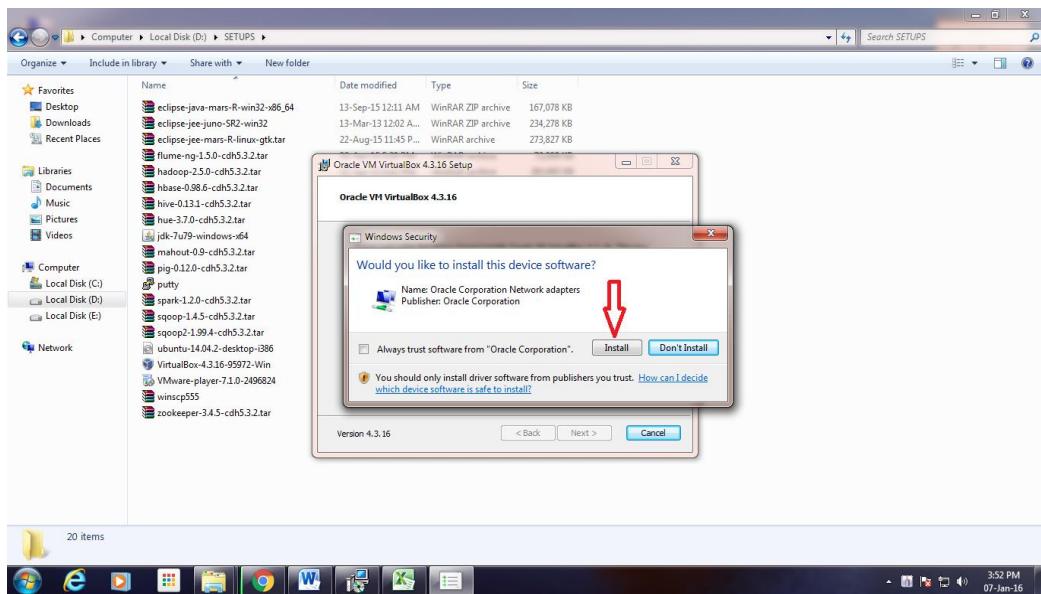


Installation of Oracle VM VirtualBox – Network Adapters Installation

1.9 Click “Finish”

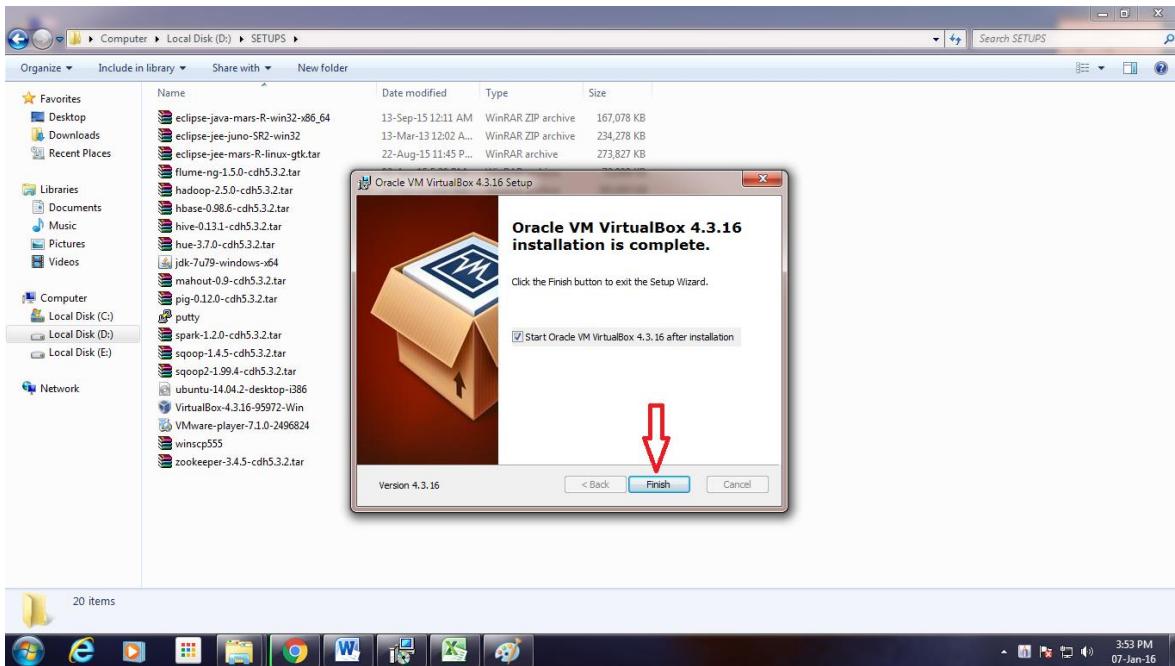

2 Open VirtualBox. Double-click (or click once on a Mac) the VirtualBox app icon.

3

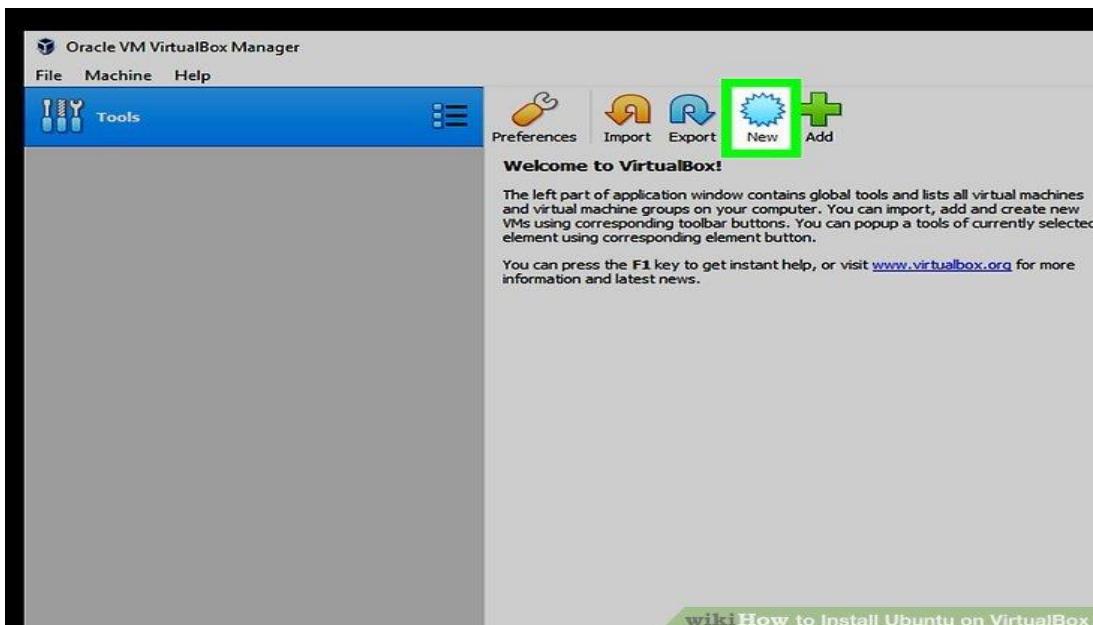

Click New. It's a blue badge in the upper-left corner of the VirtualBox window.


Doing so opens a pop-up menu.

4



Enter a name for your virtual machine. Type whatever you want to name your virtual machine (e.g., Ubuntu) into the "Name" text field that's near the top of the pop-up menu.

5

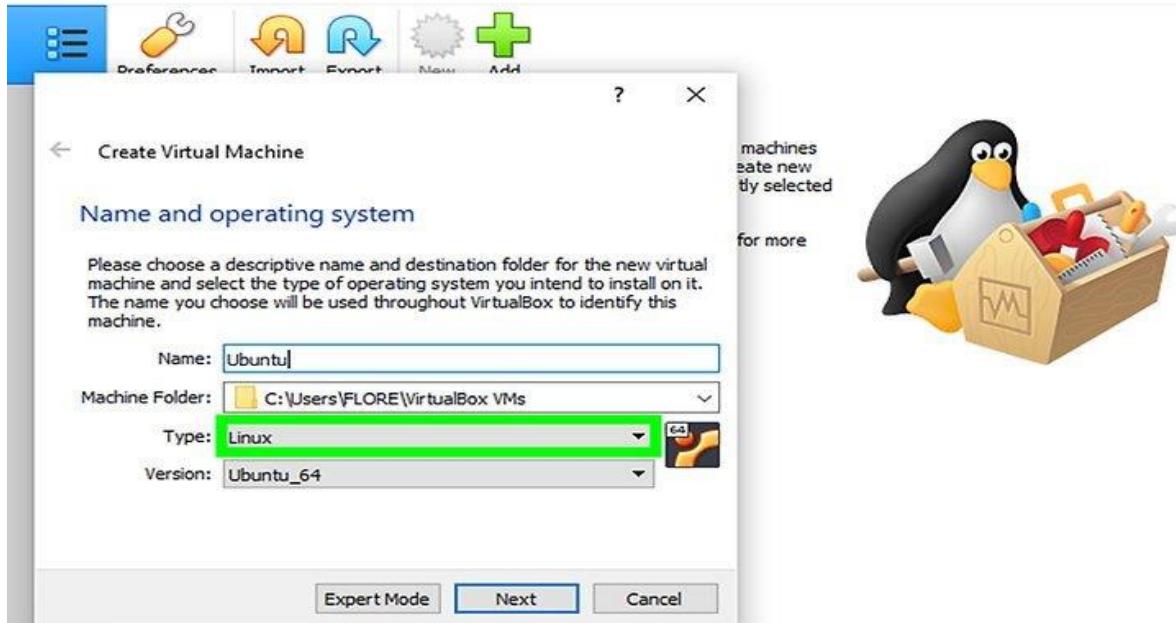


For **Operating System Type**, select the OS that you want to install.

6

[wiki How to Install Ubuntu on VirtualBox](#)


Select the **version** of the operating system.

7

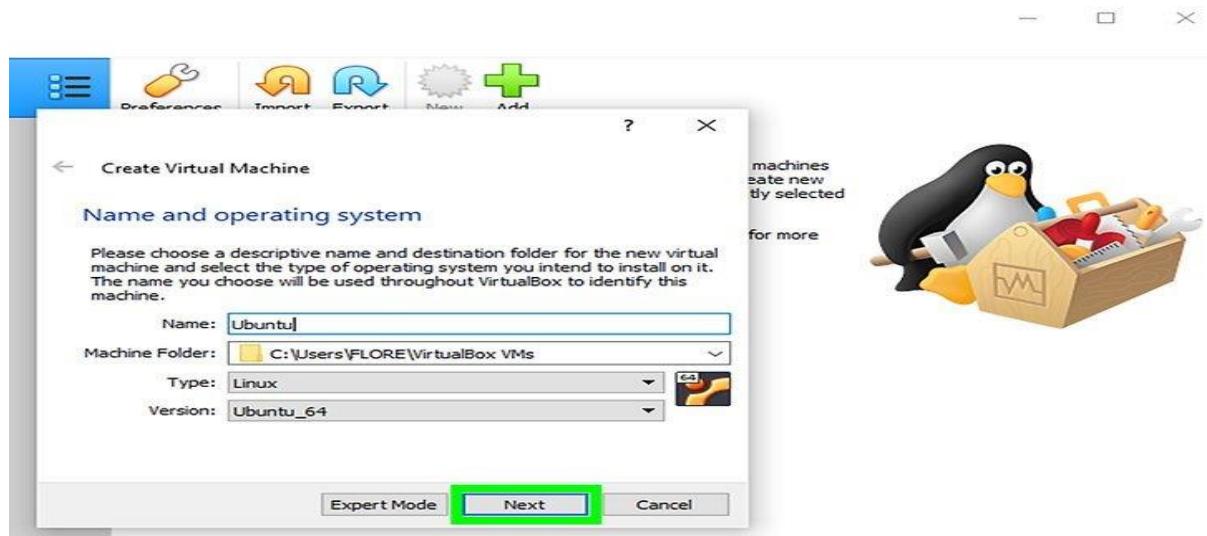

Click Next. It's at the bottom of the menu.

8

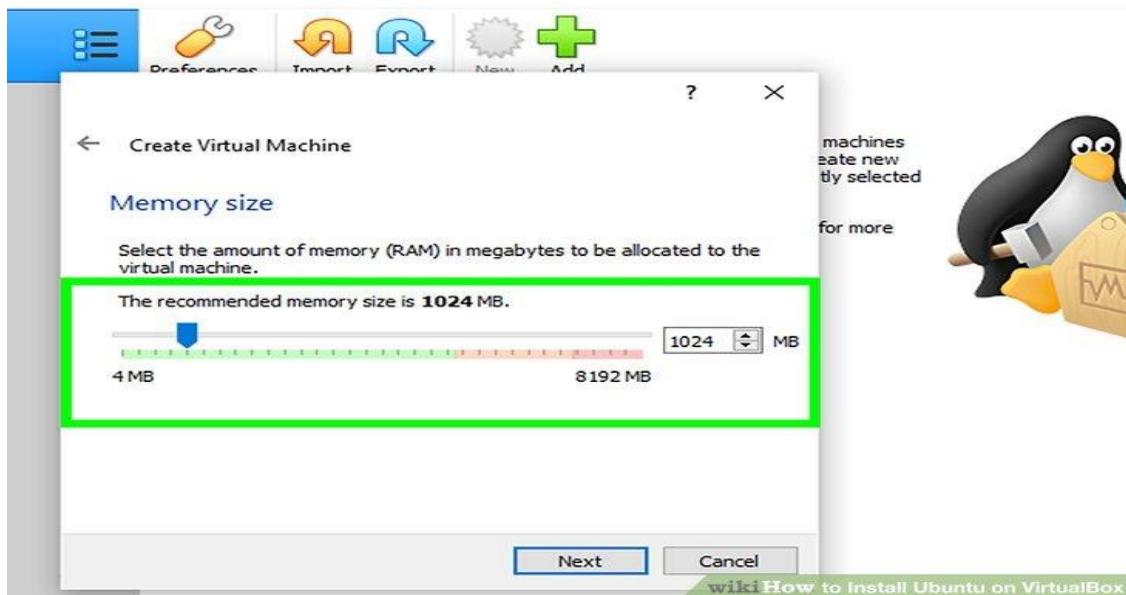


Select an amount of RAM to use. Click and drag the slider left or right to decrease or increase the amount of RAM that VirtualBox will have available for your virtual machine.

The ideal amount of RAM will automatically be selected when you get to this page.

Make sure not to increase the RAM into the red section of the slider; try to keep the slider in the green.

9

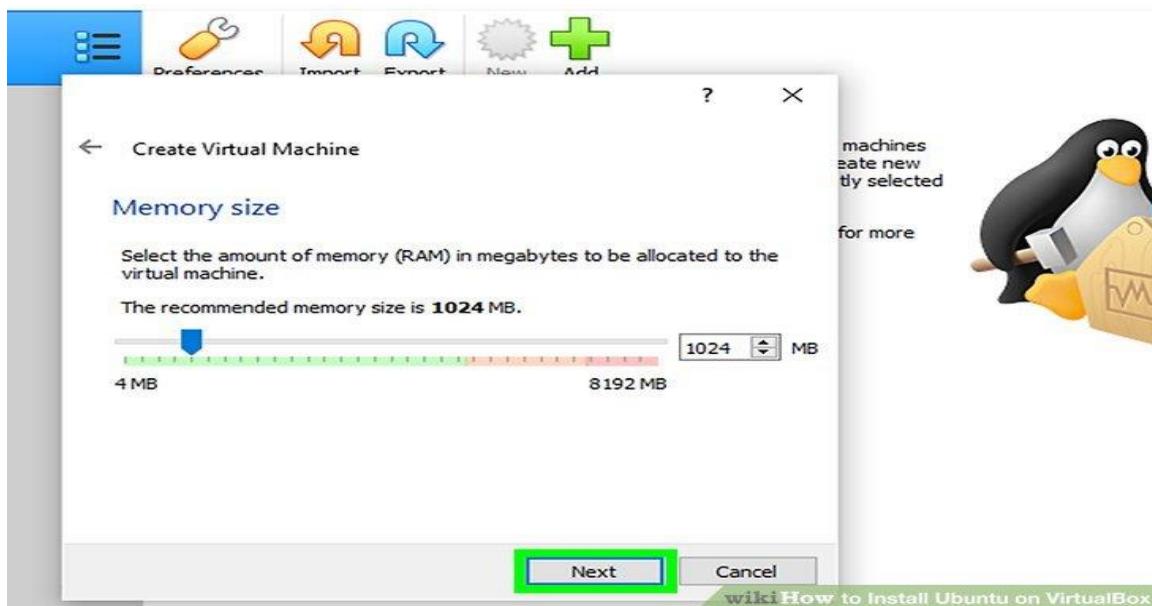


Click **Next**. It's at the bottom of the menu.

10.




Create your virtual machine's virtual hard drive. The virtual hard drive is a section of your computer's hard drive space which will be used to store your virtual machine's files and programs:

11

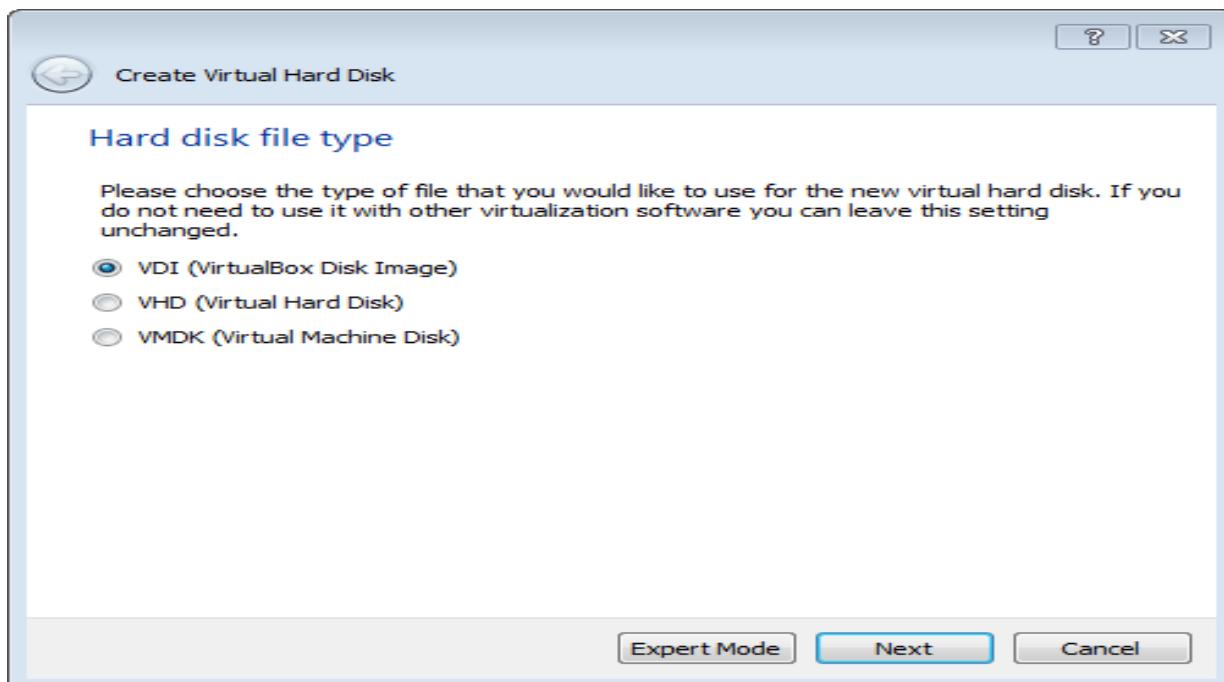

Use “VDI” to create a virtual hard


12

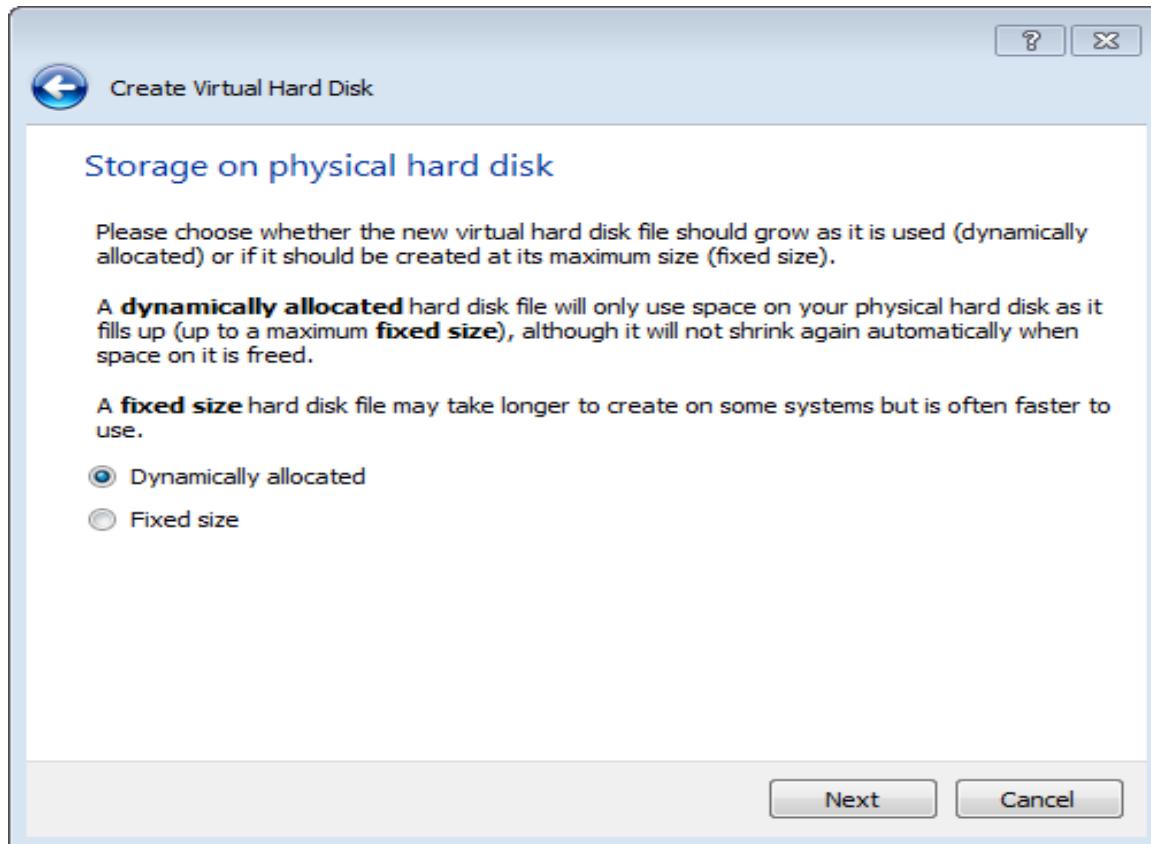

Choose “Dynamically allocated”

Allocate at Minimum 8 GB (recommended 10 or more).

13

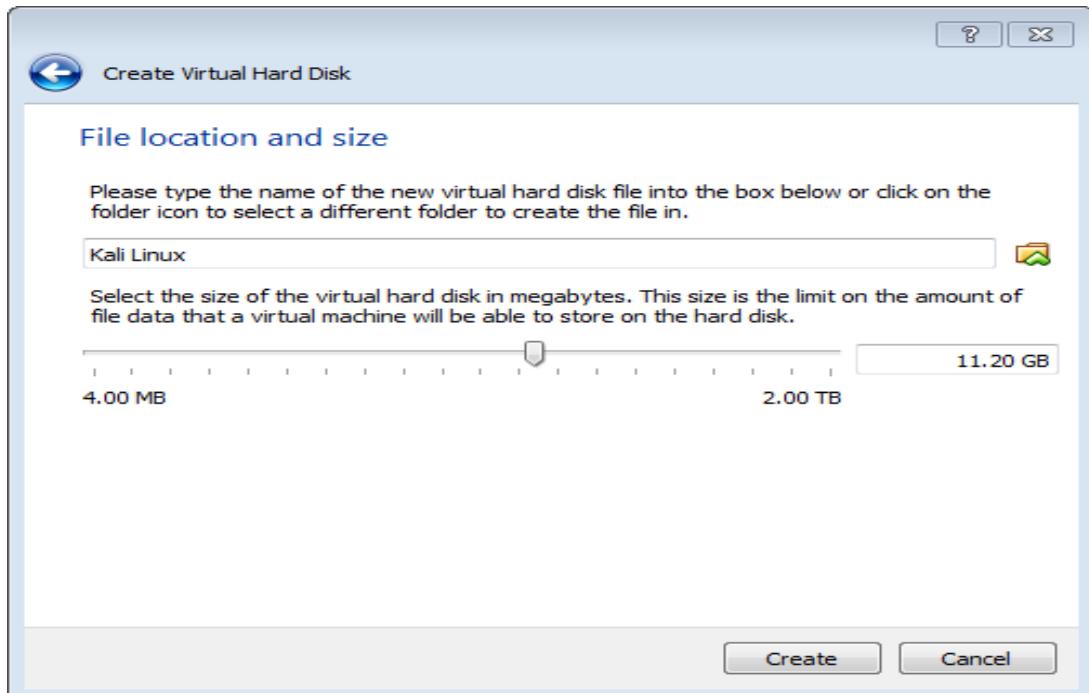

Click **Create**, to create your new virtual machine. The virtual machine is displayed in the list on the left side of the VirtualBox Manager window, with the name that you entered initially.

VMs can run multiple operating system environments on a single physical computer, saving physical space, time and management costs.

