



Evidencia clase SQS, SNS y SES - 07/04/2026

Arquitectura:


1. Creamos cola de SQS estándar

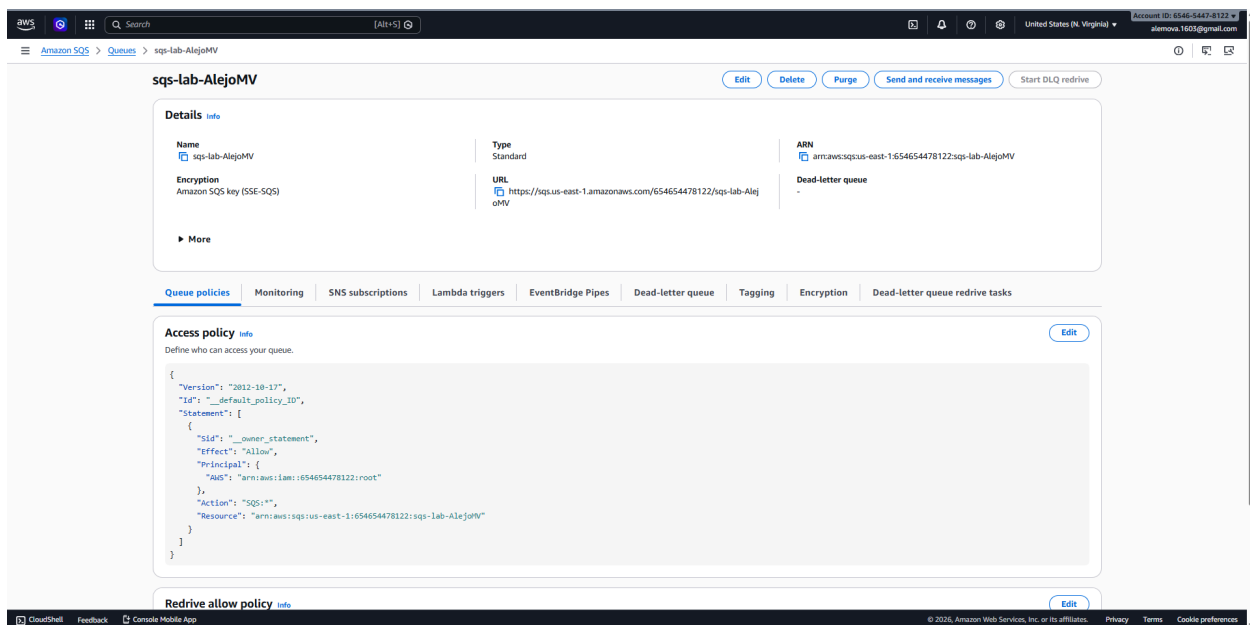

2. Creamos bucket de S3

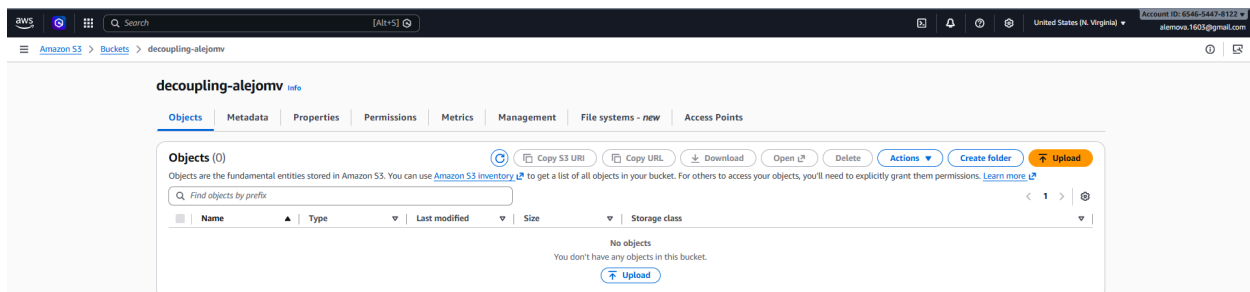

3. Configurar SNS

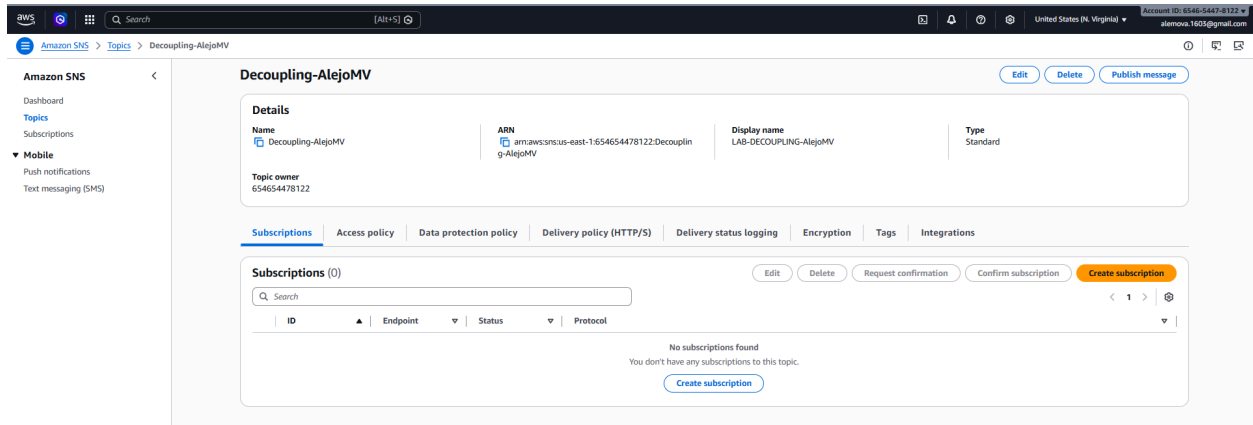

Crear suscripción al topic

aws [Search] [Alt+S] United States (N. Virginia) Account ID: 6546-5447-8122 alemova.1603@gmail.com

Amazon SNS > Subscriptions > Create subscription

Create subscription

Details

Topic ARN

arn:aws:sns:us-east-1:654654478122:Decoupling-AlejoMV

Protocol
The type of endpoint to subscribe

Email

Endpoint
An email address that can receive notifications from Amazon SNS.

alemova.1603@gmail.com

After your subscription is created, you must confirm it. [Info](#)

Subscription filter policy - optional [Info](#)
This policy filters the messages that a subscriber receives.

Redrive policy (dead-letter queue) - optional [Info](#)
Send undeliverable messages to a dead-letter queue.

[Cancel](#) [Create subscription](#)

5. Creamos la lambda

Le damos permiso de acceso al bucket de S3 y a SQS.

aws [Search] [Alt+S] Global Account ID: 6546-5447-8122 alemova.1603@gmail.com

IAM > Roles > AlejoMV-SQS-role-ekgwx22x

AlejoMV-SQS-role-ekgwx22x

[Delete](#) [Edit](#)

Summary

Creation date
April 07, 2026, 20:21 (UTC-05:00)

Last activity
-

ARN
arn:aws:iam::654654478122:role/service-role/AlejoMV-SQS-role-ekgwx22x

Maximum session duration
1 hour

[Permissions](#) [Trust relationships](#) [Tags](#) [Last Accessed](#) [Revoke sessions](#)

Permissions policies (3) [Info](#) [Simulate](#) [Remove](#) [Add permissions](#)

You can attach up to 10 managed policies.

Filter by Type
All types

Policy name	Type	Attached entities
AmazonS3FullAcc...	AWS managed	8
AWSLambdaBasicEec...	Customer managed	1
AWSLambdaSQSQ...	AWS managed	3

```

import json
import boto3
import uuid
import os

# Inicializar los clientes
s3 = boto3.client('s3')
sns = boto3.client('sns')

# Variables de entorno
BUCKET_NAME = os.environ['BUCKET_NAME']
SNS_TOPIC_ARN = os.environ['SNS_TOPIC_ARN']

def lambda_handler(event, context):
    for record in event['Records']:
        message = json.loads(record['body'])

        # Guardar el mensaje en S3
        file_name = f"{uuid.uuid4()}.json"
        s3.put_object(
            Bucket=BUCKET_NAME,
            Key=file_name,
            Body=json.dumps(message)
        )

        # Enviar notificación SNS
        sns.publish(
            TopicArn=SNS_TOPIC_ARN,
            Message=f"Processed message: {message['content']}"
        )

    return {
        'statusCode': 200,

```

```
}  
'body': 'Message processed'
```

Añadimos trigger a la lambda

Add trigger

Trigger configuration [info](#)

SQS aws event-source-mapping polling queue

SQS queue
Choose or enter the ARN of an SQS queue.
arnawsqsus-east-1-654654478122sqs-lab-AlejoMV

Event poller configuration

☒ **Activate trigger**
Select to activate the trigger now. Keep unchecked to create the trigger in a deactivated state for testing (recommended).

Provisioned mode [info](#)
Select to configure provisioned mode for your event source mapping, which allows you to optimize the throughput of your event-driven applications.

☐ **Configure**

☐ **Enable EventCount metrics**
Track the number of events polled, filtered, invoked, and dropped by your event source mapping. CloudWatch charges apply.

Batch size - optional
The maximum number of records in each batch to send to the function.

10

Mensaje de prueba

Send and receive messages
Use this page to send, retrieve and view messages, helping you experiment with various queue features.

Send message [info](#)

Message body
Enter the message to send to the queue.
{
 "content": "Este es un mensaje de prueba para AlejoMV"
}

Message group ID - optional, new [info](#)
A group identifier for the message to allow fair processing across message groups in a standard queue.


Delivery delay [info](#)
The duration (in seconds) that SQS will postpone the initial delivery of the message. During this delay period, the message is not visible to consumers, allowing you to create a wait time before the message becomes available for processing.
Should be between 0 seconds and 15 minutes.

0 Seconds


Message attributes - optional [info](#)

[Clear content](#) [Send message](#)

Vemos que se ejecutó

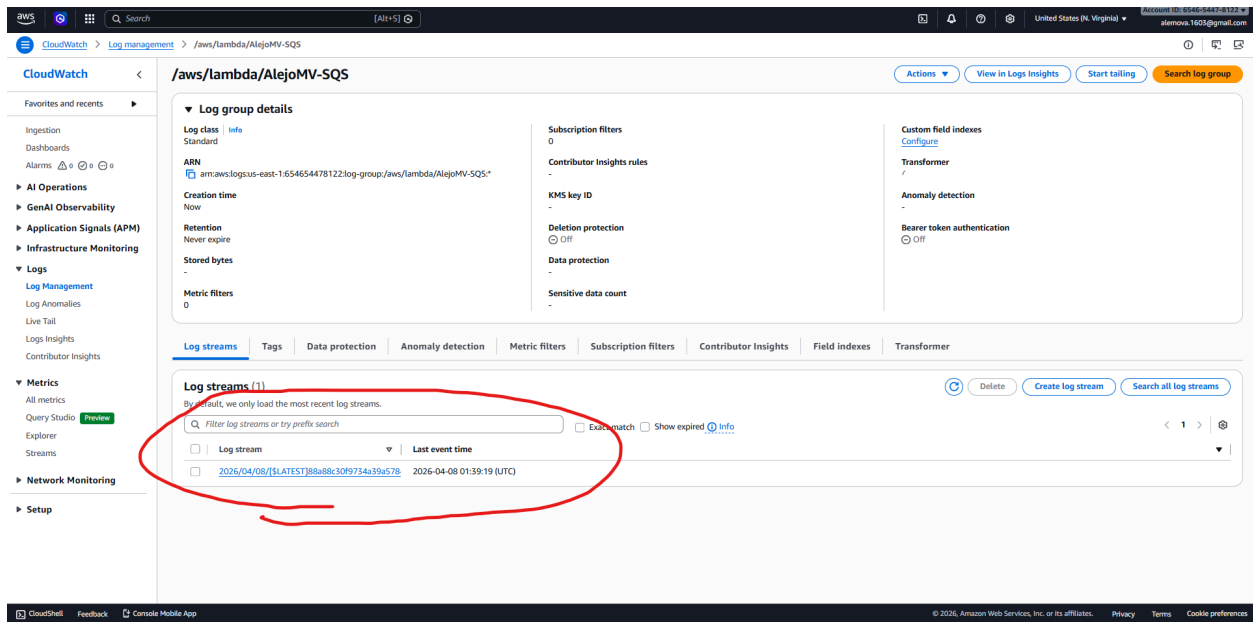

Vemos que se han guardado en el S3

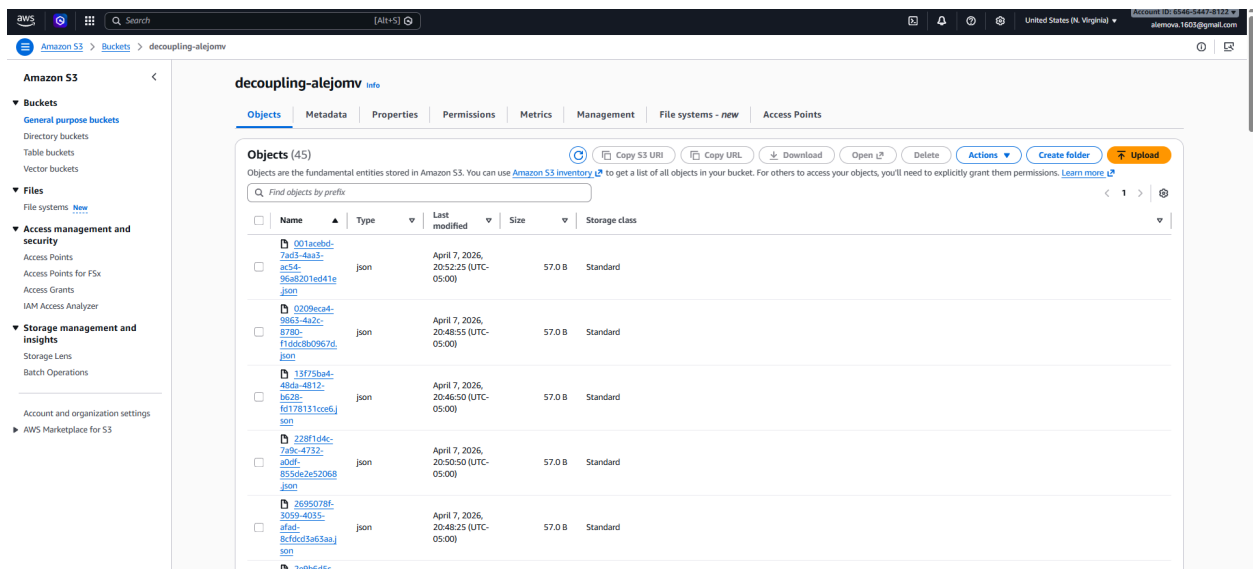

Vemos que han llegado al correo a través de SNS

