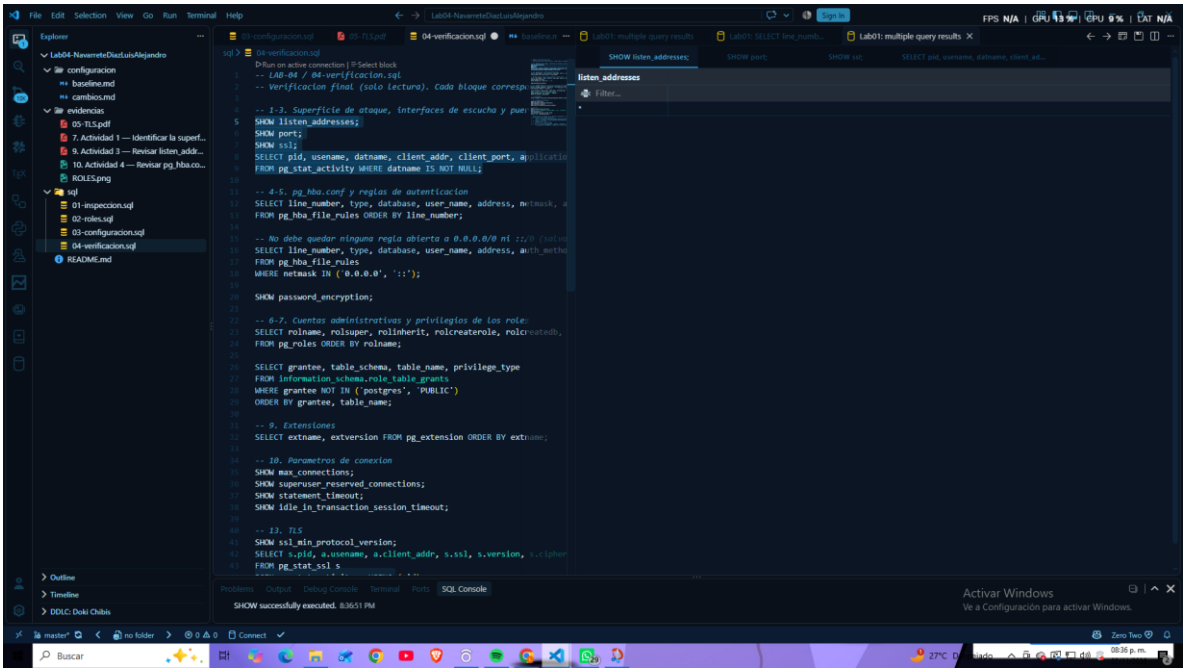
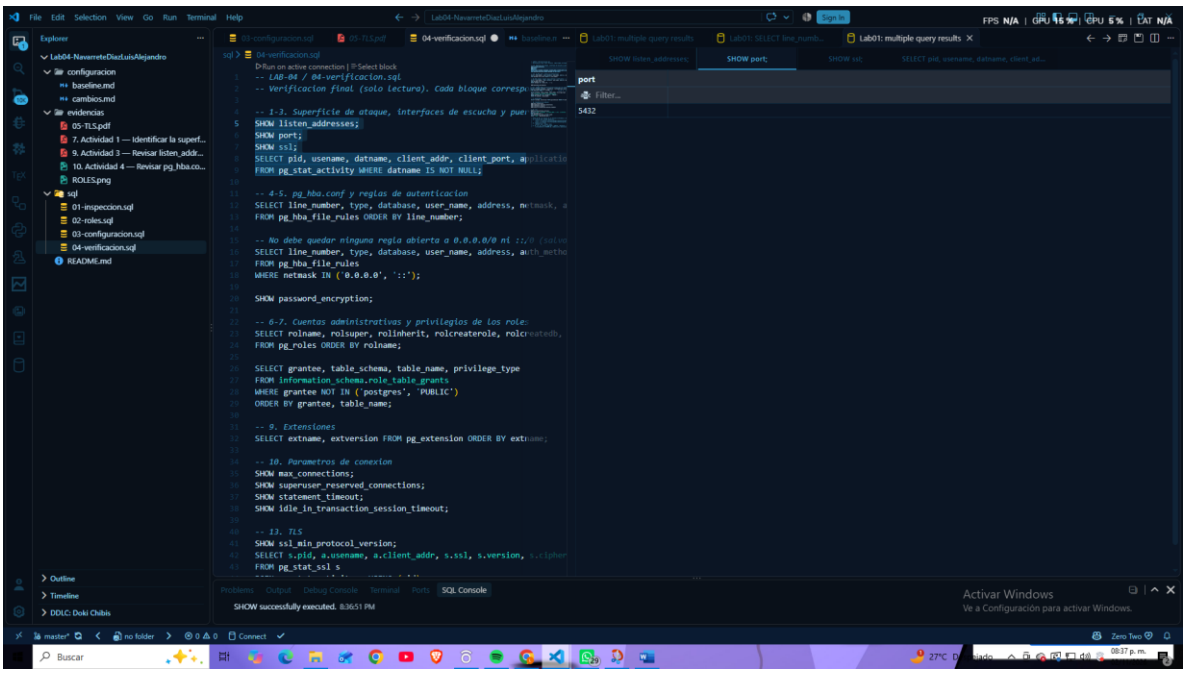
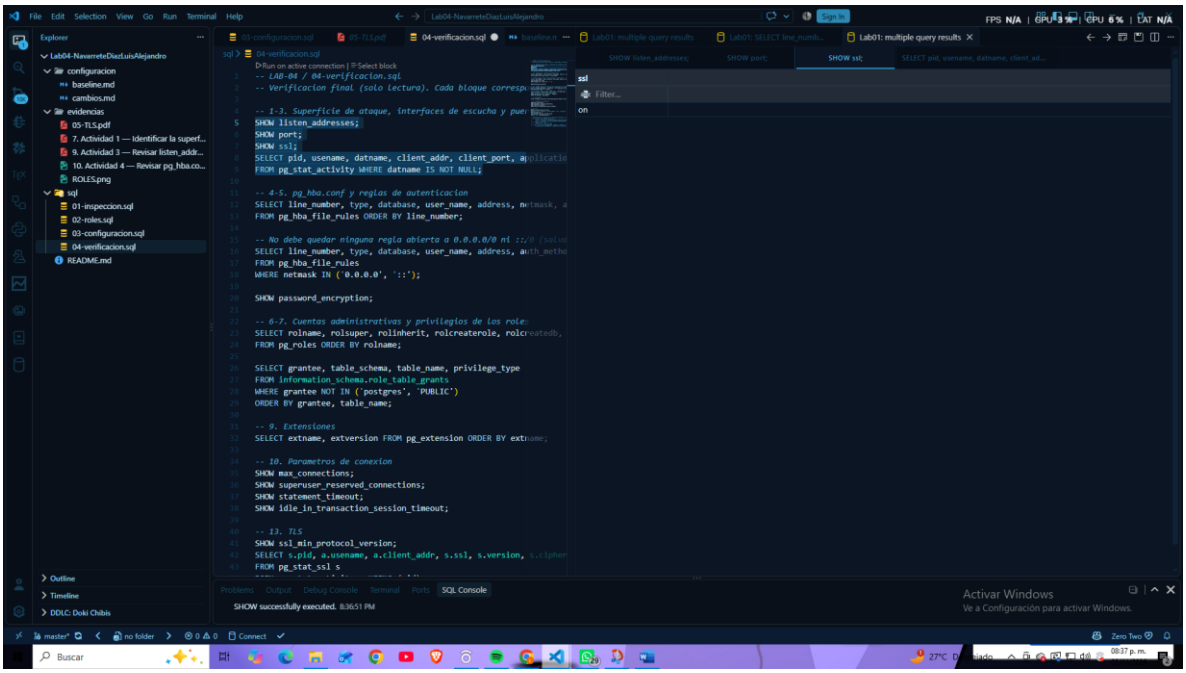
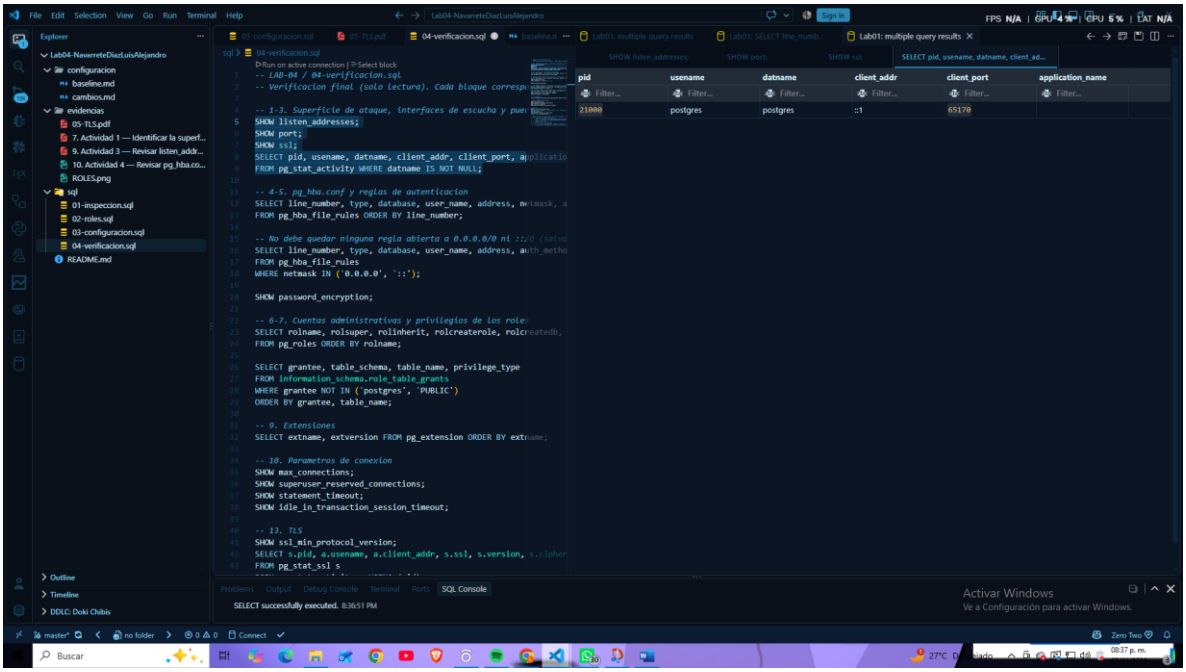
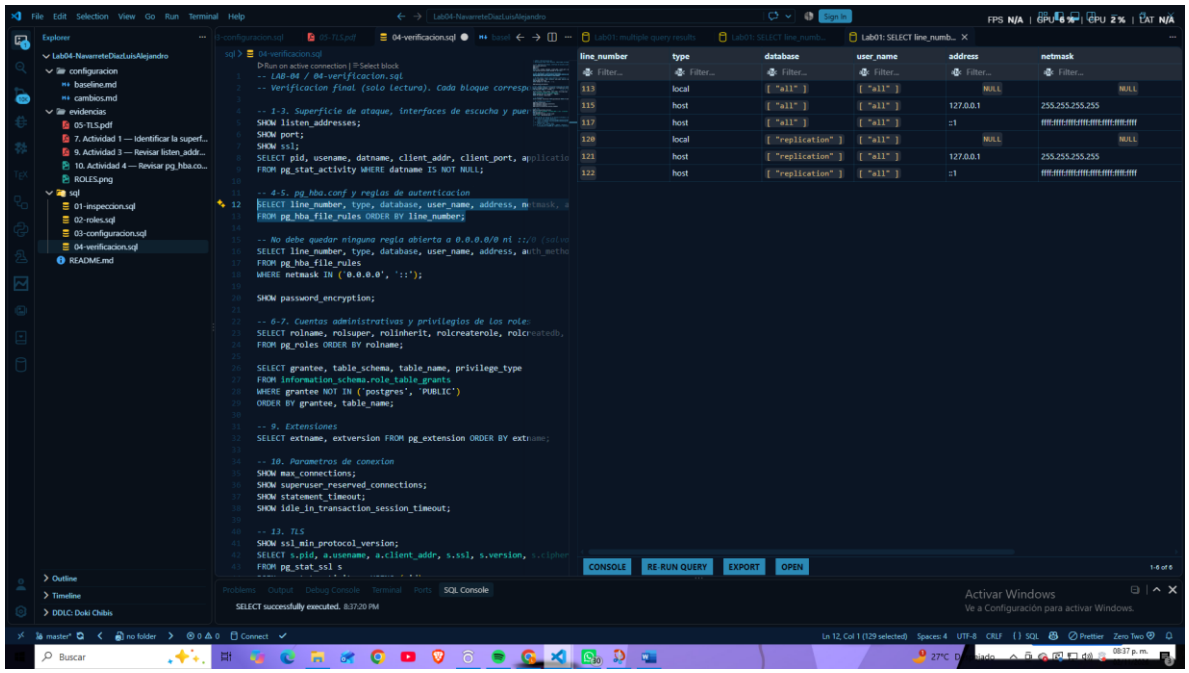
VERIFICACIÓN.

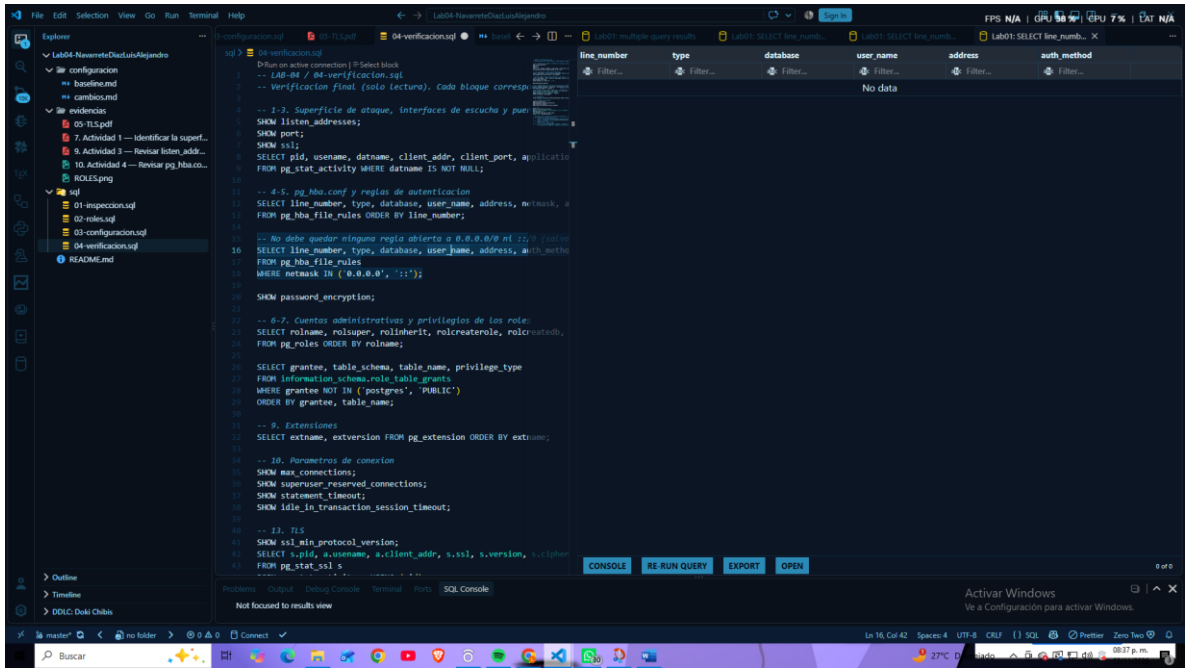


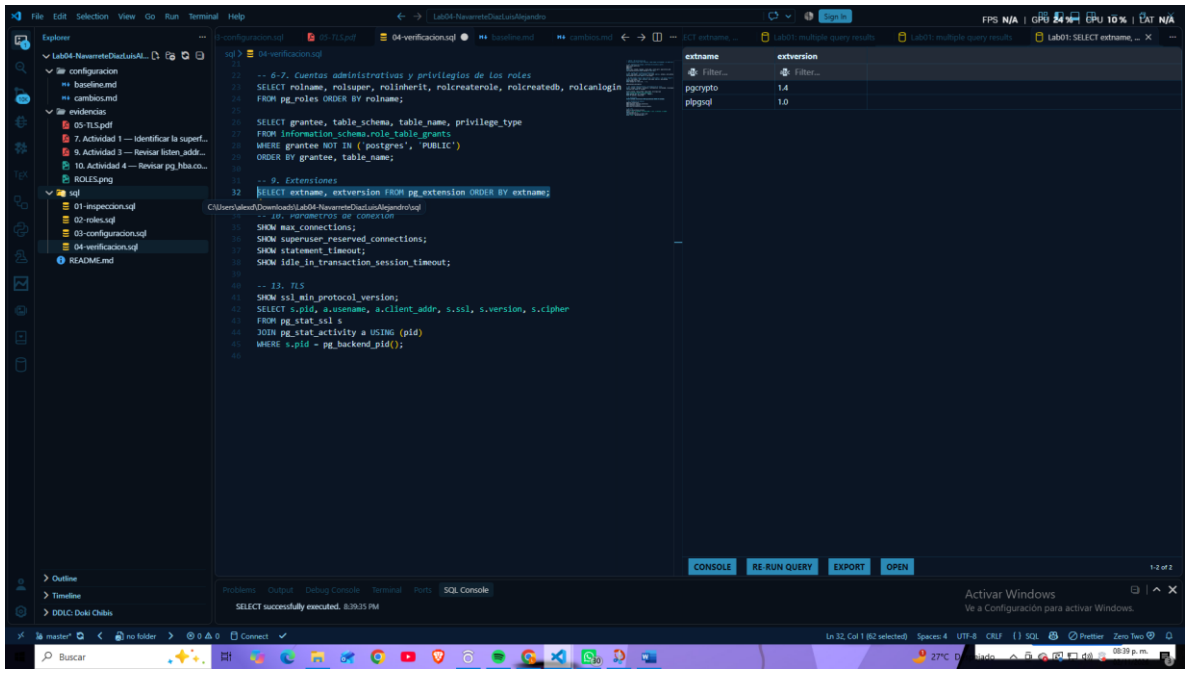


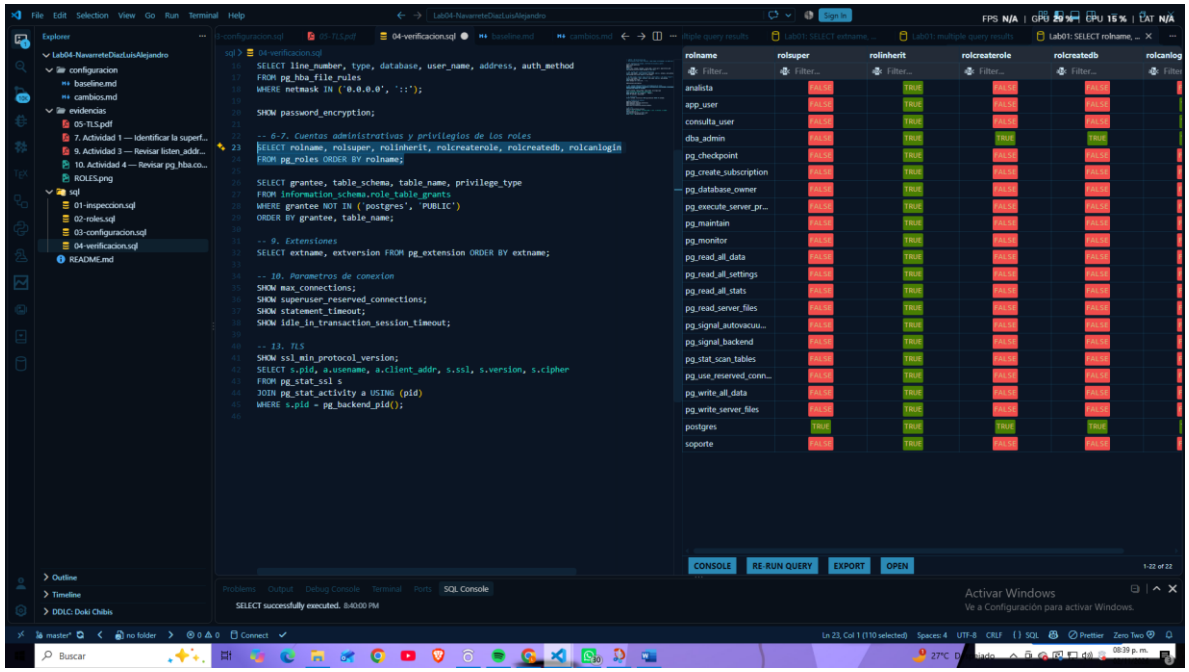

-- LAB-04 / 04-verificacion.sql
-- Verificacion final (solo Lectura). Cada bloque corresponde a una seccion del informe.
-- 1-3. Superficie de ataque, interfaces de escucha y puertos
SHOW listen_addresses;
SHOW port;
SHOW ssl;
SELECT pid, usename, datname, client_addr, client_port, application_name
FROM pg_stat_activity WHERE datname IS NOT NULL;
-- 4-5. pg_hba.conf y reglas de autenticacion
SELECT line_number, type, database, user_name, address, netmask, auth_method
FROM pg_hba_file_rules ORDER BY line_number;
-- No debe quedar ninguna regla abierta a 0.0.0.0/0 ni ::/0 (salvo justificada)
SELECT line_number, type, database, user_name, address, auth_method
FROM pg_hba_file_rules
WHERE netmask IN ('0.0.0.0', '::');
SHOW password_encryption;
-- 6-7. Cuentas administrativas y privilegios de los roles
SELECT rolname, rolsuper, rolinherit, rolcreaterole, rolcreatedb,
FROM pg_roles ORDER BY rolname;
SELECT grantee, table_schema, table_name, privilege_type
FROM information_schema.role_table_grants
WHERE grantee NOT IN ('postgres', 'PUBLIC')
ORDER BY grantee, table_name;
-- 9. Extensiones
SELECT extname, extversion FROM pg_extension ORDER BY extname;
-- 10. Parametros de conexion
SHOW max_connections;
SHOW superuser_reserved_connections;
SHOW statement_timeout;
SHOW idle_in_transaction_session_timeout;
-- 13. TLS
SHOW ssl_min_protocol_version;
SELECT s.pid, a.usename, a.client_addr, s.ssl, s.version,
FROM pg_stat_ssl s
ssl
on
SHOW successfully executed. 8:36:51 PM
Activar Windows
Ve a Configuración para activar Windows.

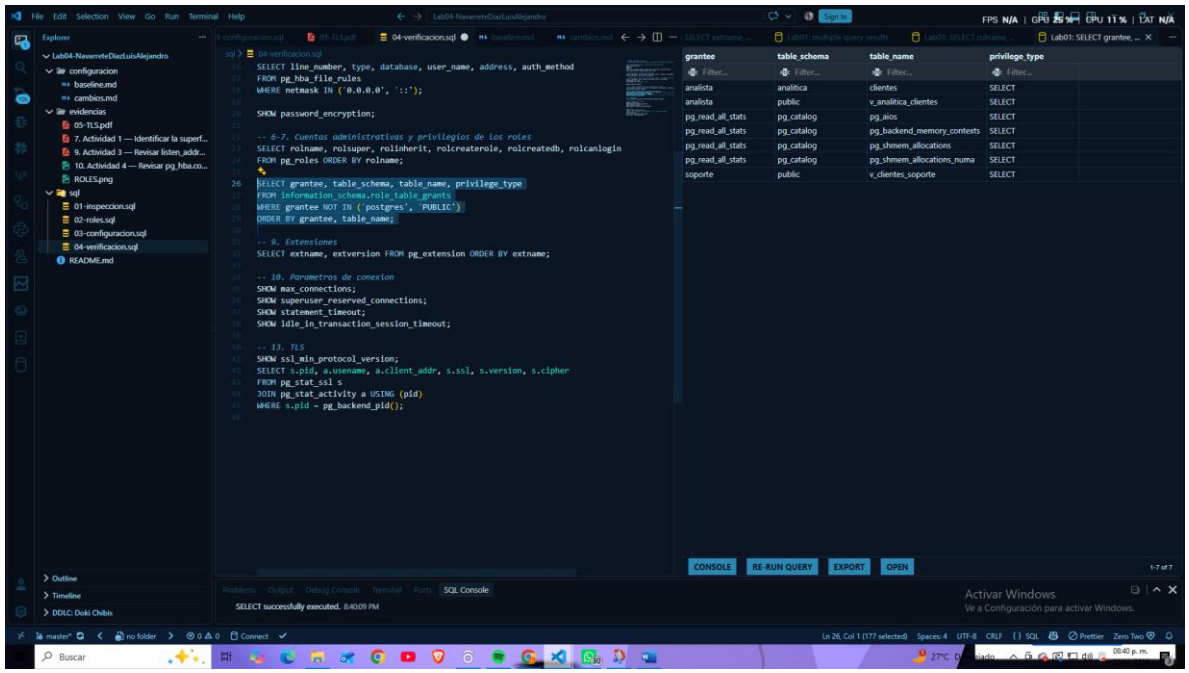

-- LAB-04 / 04-verificacion.sql
-- Verificacion final (solo Lectura). Cada bloque corresponde a una seccion del informe.
-- 1-3. Superficie de ataque, interfaces de escucha y puertos
SHOW listen_addresses;
SHOW port;
SHOW ssl;
SELECT pid, usename, datname, client_addr, client_port, application_name
FROM pg_stat_activity WHERE datname IS NOT NULL;
-- 4-5. pg_hba.conf y reglas de autenticacion
SELECT line_number, type, database, user_name, address, netmask, auth_method
FROM pg_hba_file_rules ORDER BY line_number;
-- No debe quedar ninguna regla abierta a 0.0.0.0/0 ni ::/0 (salvo justificada)
SELECT line_number, type, database, user_name, address, auth_method
FROM pg_hba_file_rules
WHERE netmask IN ('0.0.0.0', '::');
SHOW password_encryption;
-- 6-7. Cuentas administrativas y privilegios de los roles
SELECT rolname, rolsuper, rolinherit, rolcreaterole, rolcreatedb,
FROM pg_roles ORDER BY rolname;
SELECT grantee, table_schema, table_name, privilege_type
FROM information_schema.role_table_grants
WHERE grantee NOT IN ('postgres', 'PUBLIC')
ORDER BY grantee, table_name;
-- 9. Extensiones
SELECT extname, extversion FROM pg_extension ORDER BY extname;
-- 10. Parametros de conexion
SHOW max_connections;
SHOW superuser_reserved_connections;
SHOW statement_timeout;
SHOW idle_in_transaction_session_timeout;
-- 13. TLS
SHOW ssl_min_protocol_version;
SELECT s.pid, a.usename, a.client_addr, s.ssl, s.version,
FROM pg_stat_ssl s
pid
usename
datname
client_addr
client_port
application_name
21000
postgres
postgres
::1
65170
SELECT successfully executed. 8:36:51 PM
Activar Windows
Ve a Configuración para activar Windows.

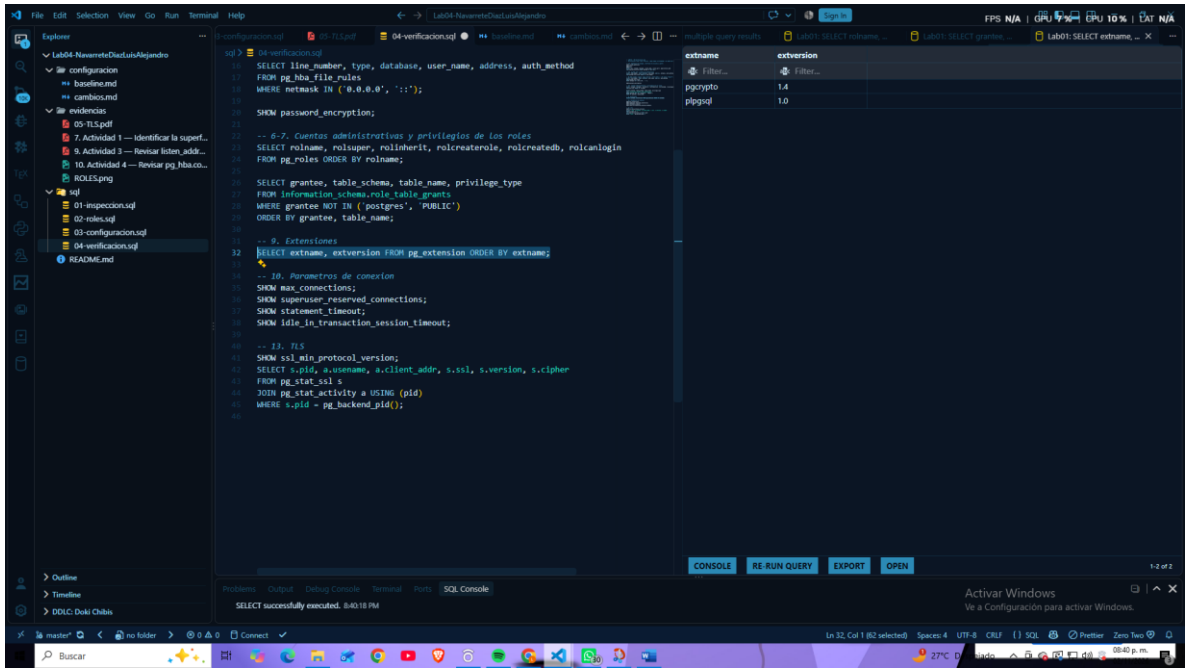

-- LAB-04 / 04-verificacion.sql
-- Verificacion final (solo Lectura). Cada bloque corresponde a una actividad.
-- 1-2. Superficie de ataque, interfaces de escucha y puertos
SHOW listen_addresses;
SHOW port;
SHOW ssl;
SELECT pid, usename, datname, client_addr, client_port, application_name, state
FROM pg_stat_activity WHERE datname IS NOT NULL;
-- 4-5. pg_hba.conf y reglas de autenticacion
SELECT line_number, type, database, user_name, address, netmask, auth_method
FROM pg_hba_file_rules ORDER BY line_number;
-- No debe quedar ninguna regla abierta a 0.0.0.0/0 ni ::/0 (salvo replication)
SELECT line_number, type, database, user_name, address, auth_method
FROM pg_hba_file_rules
WHERE netmask IN ('0.0.0.0', '::');
SHOW password_encryption;
-- 6-7. Cuentas administrativas y privilegios de los roles
SELECT rolname, rolsuper, rolinherit, rolcreaterole, rolcreatedb, rolcanlogin
FROM pg_roles ORDER BY rolname;
SELECT grantee, table_schema, table_name, privilege_type
FROM information_schema.role_table_grants
WHERE grantee NOT IN ('postgres', 'PUBLIC')
ORDER BY grantee, table_name;
-- 9. Extensiones
SELECT extname, extversion FROM pg_extension ORDER BY extname;
-- 10. Parametros de conexion
SHOW max_connections;
SHOW superuser_reserved_connections;
SHOW statement_timeout;
SHOW idle_in_transaction_session_timeout;
-- 13. TLS
SHOW ssl_min_protocol_version;
SELECT s.pid, a.usename, a.client_addr, s.ssl, s.version, s.cipher
FROM pg_stat_ssl s
line_number
type
database
user_name
address
netmask
113 local ["all"] ["all"] NULL NULL
115 host ["all"] ["all"] 127.0.0.1 255.255.255.255
117 host ["all"] ["all"] ::1 ffff:ffff:ffff:ffff:ffff:ffff:ffff:ffff
120 local ["replication"] ["all"] NULL NULL
121 host ["replication"] ["all"] 127.0.0.1 255.255.255.255
122 host ["replication"] ["all"] ::1 ffff:ffff:ffff:ffff:ffff:ffff:ffff:ffff
CONSOLE
RE-RUN QUERY
EXPORT
OPEN
SELECT successfully executed.
Activar Windows

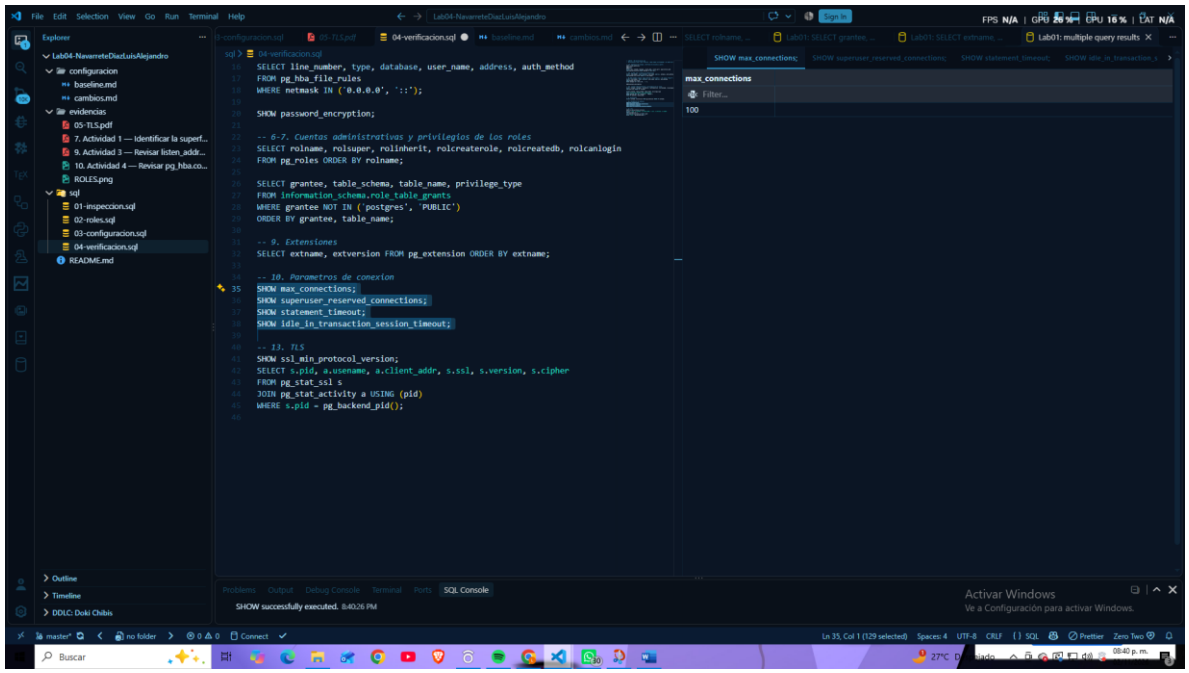

-- LAB-04 / 04-verificacion.sql
-- Verificacion final (solo Lectura). Cada bloque corresponde a una actividad.
-- 1-2. Superficie de ataque, interfaces de escucha y puertos
SHOW listen_addresses;
SHOW port;
SHOW ssl;
SELECT pid, usename, datname, client_addr, client_port, application_name, state
FROM pg_stat_activity WHERE datname IS NOT NULL;
-- 4-5. pg_hba.conf y reglas de autenticacion
SELECT line_number, type, database, user_name, address, netmask, auth_method
FROM pg_hba_file_rules ORDER BY line_number;
-- No debe quedar ninguna regla abierta a 0.0.0.0/0 ni ::/0 (salvo replication)
SELECT line_number, type, database, user_name, address, auth_method
FROM pg_hba_file_rules
WHERE netmask IN ('0.0.0.0', '::');
SHOW password_encryption;
-- 6-7. Cuentas administrativas y privilegios de los roles
SELECT rolname, rolsuper, rolinherit, rolcreaterole, rolcreatedb, rolcanlogin
FROM pg_roles ORDER BY rolname;
SELECT grantee, table_schema, table_name, privilege_type
FROM information_schema.role_table_grants
WHERE grantee NOT IN ('postgres', 'PUBLIC')
ORDER BY grantee, table_name;
-- 9. Extensiones
SELECT extname, extversion FROM pg_extension ORDER BY extname;
-- 10. Parametros de conexion
SHOW max_connections;
SHOW superuser_reserved_connections;
SHOW statement_timeout;
SHOW idle_in_transaction_session_timeout;
-- 13. TLS
SHOW ssl_min_protocol_version;
SELECT s.pid, a.usename, a.client_addr, s.ssl, s.version, s.cipher
FROM pg_stat_ssl s
line_number
type
database
user_name
address
auth_method
No data
CONSOLE
RE-RUN QUERY
EXPORT
OPEN
Not focused to results view
Activar Windows

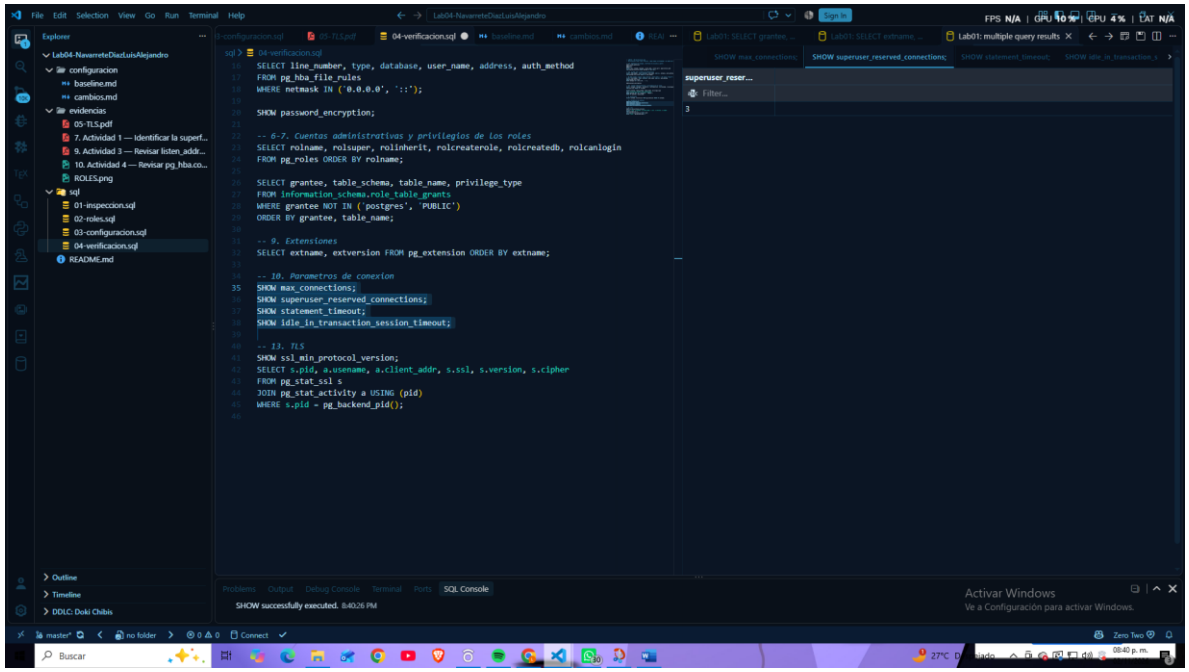

-- 6-7. Cuentas administrativas y privilegios de los roles
SELECT rolname, rolsuper, rolinherit, rolcreaterole, rolcreatedb, rolcanlogin
FROM pg_roles ORDER BY rolname;
SELECT grantee, table_schema, table_name, privilege_type
FROM information_schema.role_table_grants
WHERE grantee NOT IN ('postgres', 'PUBLIC')
ORDER BY grantee, table_name;
-- 9. Extensiones
SELECT extname, extversion FROM pg_extension ORDER BY extname;
-- 10. Parametros de conexion
SHOW max_connections;
SHOW superuser_reserved_connections;
SHOW statement_timeout;
SHOW idle_in_transaction_session_timeout;
-- 13. TLS
SHOW ssl_min_protocol_version;
SELECT s.pid, a.usename, a.client_addr, s.ssl, s.version, s.cipher
FROM pg_stat_ssl s
JOIN pg_stat_activity a USING (pid)
WHERE s.pid = pg_backend_pid();
extname
extversion
pgcrypto
1.4
plpgsql
1.0
CONSOLE
RE-RUN QUERY
EXPORT
OPEN
SELECT successfully executed.
Activar Windows

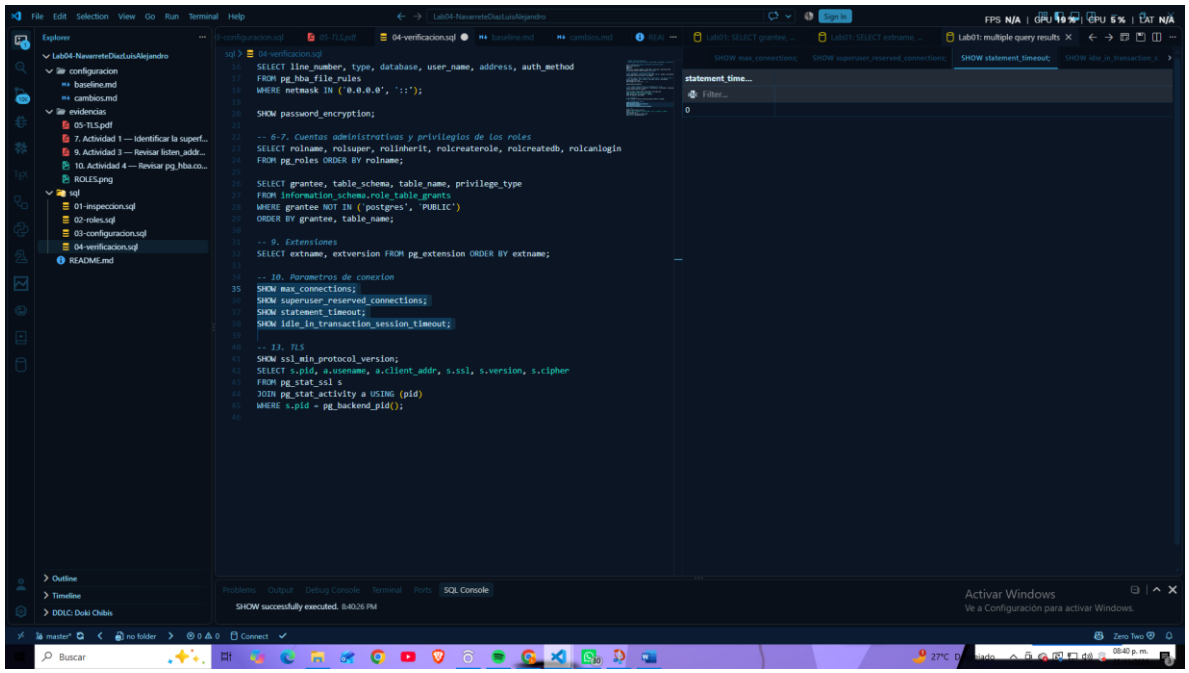

SELECT line_number, type, database, user_name, address, auth_method
FROM pg_hba_file_rules
WHERE netmask IN ('0.0.0.0', '::');
SHOW password_encryption;
rolname
rolsuper
rolinherit
rolcreaterole
rolcreatedb
rolcanlog
analista
app_user
consulta_user
dba_admin
pg_checkpoint
pg_create_subscription
pg_database_owner
pg_execute_server_pr...
pg_maintain
pg_monitor
pg_read_all_data
pg_read_all_settings
pg_read_all_stats
pg_read_server_files
pg_signal_autovacuu...
pg_signal_backend
pg_stat_scan_tables
pg_use_reserved_conn...
pg_write_all_data
pg_write_server_files
postgres
soporte
CONSOLE
RE-RUN QUERY
EXPORT
OPEN
SELECT successfully executed.
Activar Windows

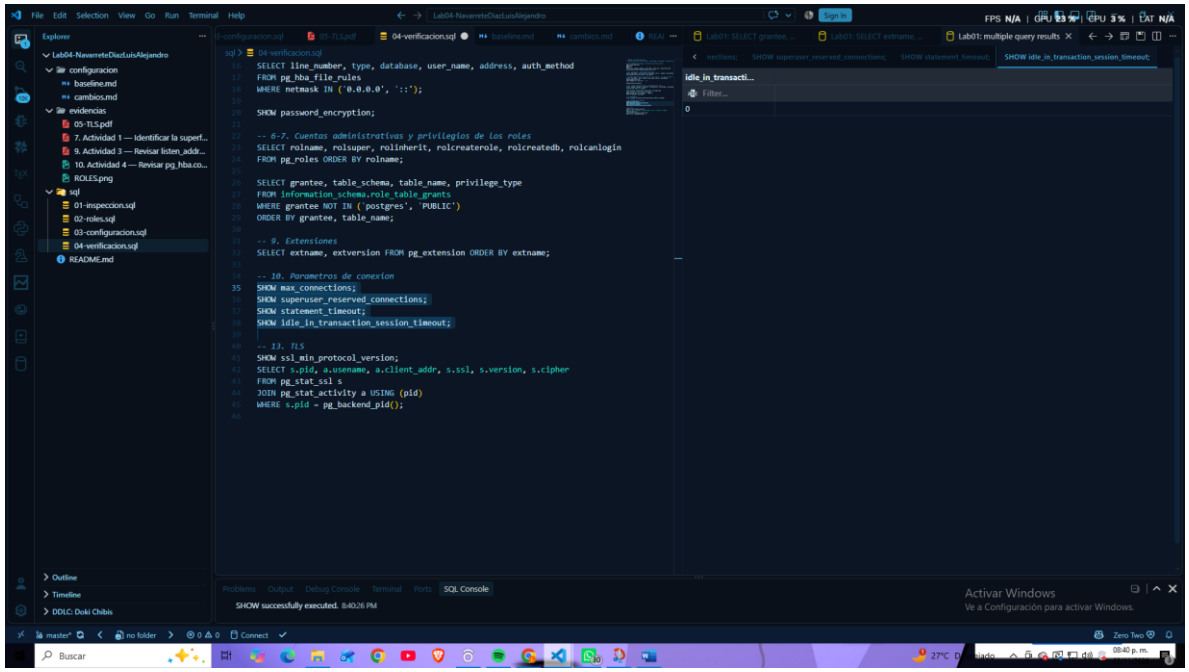

-- 6-7. Cuentas administrativas y privilegios de los roles
SELECT rolname, rolsuper, rolinherit, rolcreaterole, rolcreatedb, rolcanlogin
FROM pg_roles ORDER BY rolname;
SELECT grantee, table_schema, table_name, privilege_type
FROM information_schema.role_table_grants
WHERE grantee NOT IN ('postgres', 'PUBLIC')
ORDER BY grantee, table_name;
-- 9. Extensiones
SELECT extname, extversion FROM pg_extension ORDER BY extname;
-- 10. Parametros de conexion
SHOW max_connections;
SHOW superuser_reserved_connections;
SHOW statement_timeout;
SHOW idle_in_transaction_session_timeout;
-- 13. TLS
SHOW ssl_min_protocol_version;
SELECT s.pid, a.usename, a.client_addr, s.ssl, s.version, s.cipher
FROM pg_stat_ssl s
JOIN pg_stat_activity a USING (pid)
WHERE s.pid = pg_backend_pid();
grantee
table_schema
table_name
privilege_type
analista
analitica
clientes
SELECT
analista
public
v_analitica_clientes
SELECT
pg_read_all_stats
pg_catalog
pg_aios
SELECT
pg_read_all_stats
pg_catalog
pg_backend_memory_contexts
SELECT
pg_read_all_stats
pg_catalog
pg_shmem_allocations
SELECT
pg_read_all_stats
pg_catalog
pg_shmem_allocations_numa
SELECT
soporte
public
v_clientes_soporte
SELECT
CONSOLE
RE-RUN QUERY
EXPORT
OPEN
1-7 of 7
SELECT successfully executed. 8:40:09 PM
Activar Windows

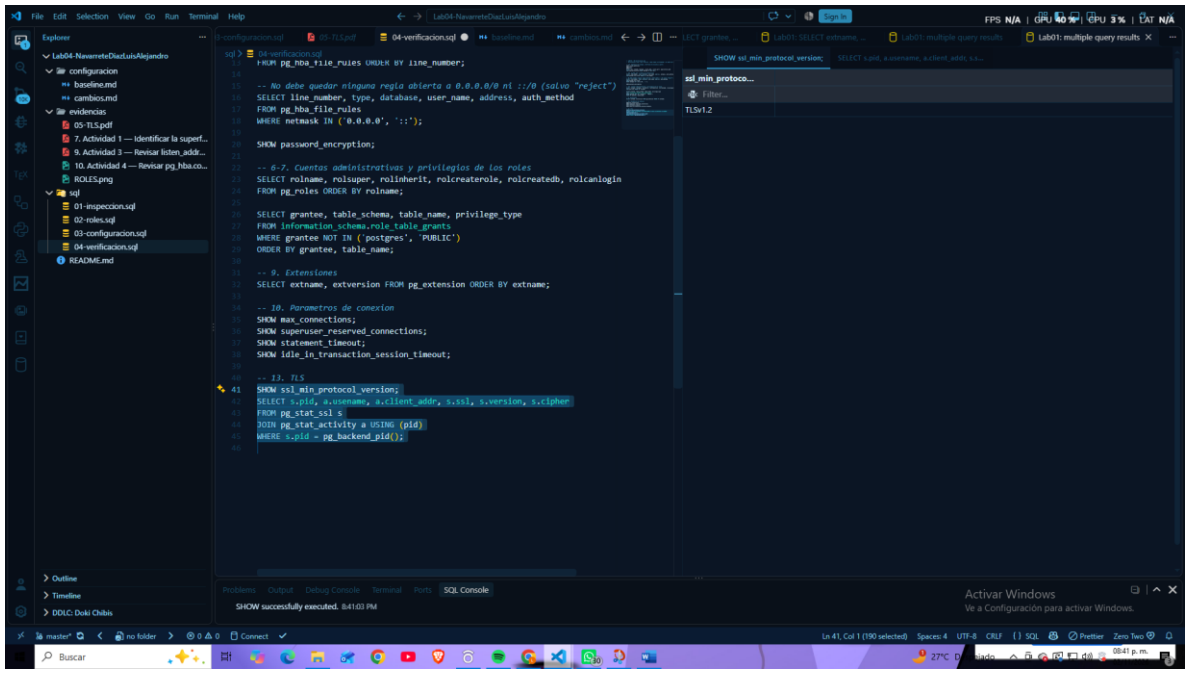

-- 6-7. Cuentas administrativas y privilegios de los roles
SELECT rolname, rolsuper, rolinherit, rolcreaterole, rolcreatedb, rolcanlogin
FROM pg_roles ORDER BY rolname;
SELECT grantee, table_schema, table_name, privilege_type
FROM information_schema.role_table_grants
WHERE grantee NOT IN ('postgres', 'PUBLIC')
ORDER BY grantee, table_name;
-- 9. Extensiones
SELECT extname, extversion FROM pg_extension ORDER BY extname;
-- 10. Parametros de conexion
SHOW max_connections;
SHOW superuser_reserved_connections;
SHOW statement_timeout;
SHOW idle_in_transaction_session_timeout;
-- 13. TLS
SHOW ssl_min_protocol_version;
SELECT s.pid, a.usename, a.client_addr, s.ssl, s.version, s.cipher
FROM pg_stat_ssl s
JOIN pg_stat_activity a USING (pid)
WHERE s.pid = pg_backend_pid();
extname
extversion
pgcrypto
1.4
plpgsql
1.0
CONSOLE
RE-RUN QUERY
EXPORT
OPEN
1-2 of 2
SELECT successfully executed. 8:40:18 PM
Activar Windows

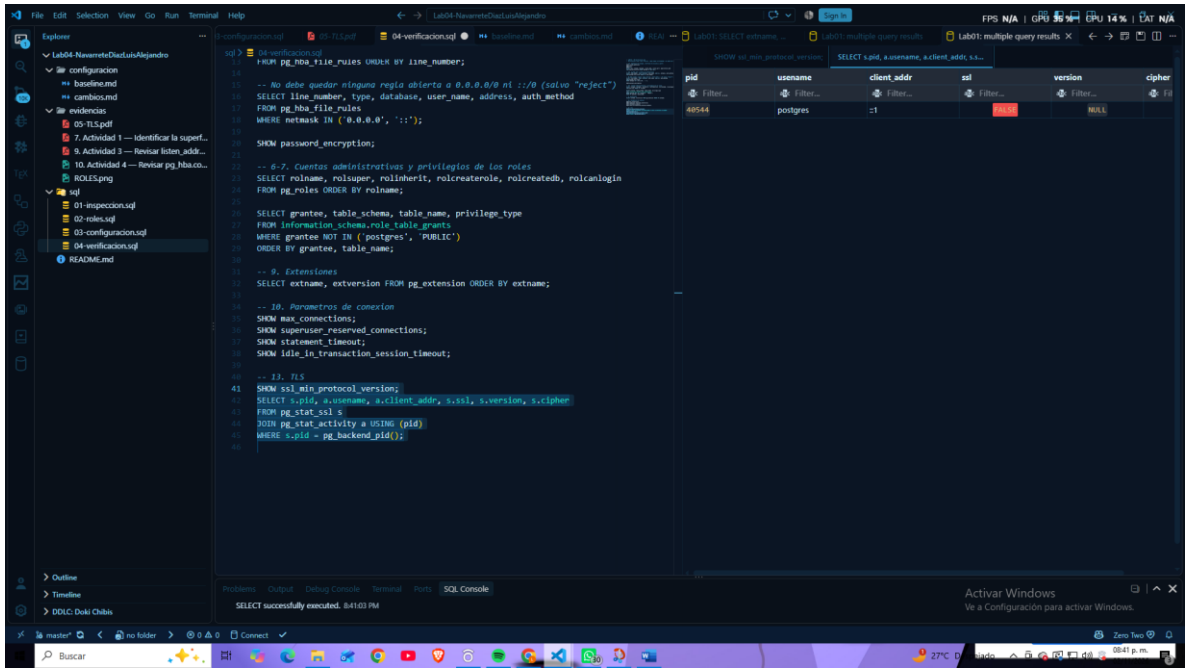

SELECT line_number, type, database, user_name, address, auth_method
FROM pg_hba_file_rules
WHERE netmask IN ('0.0.0.0', '::');
SHOW password_encryption;
-- 6-7. Cuentas administrativas y privilegios de los roles
SELECT rolname, rolsuper, rolinherit, rolcreaterole, rolcreatedb, rolcanlogin
FROM pg_roles ORDER BY rolname;
SELECT grantee, table_schema, table_name, privilege_type
FROM information_schema.role_table_grants
WHERE grantee NOT IN ('postgres', 'PUBLIC')
ORDER BY grantee, table_name;
-- 9. Extensiones
SELECT extname, extversion FROM pg_extension ORDER BY extname;
-- 10. Parametros de conexion
SHOW max_connections;
SHOW superuser_reserved_connections;
SHOW statement_timeout;
SHOW idle_in_transaction_session_timeout;
-- 13. TLS
SHOW ssl_min_protocol_version;
SELECT s.pid, a.usename, a.client_addr, s.ssl, s.version, s.cipher
FROM pg_stat_ssl s
JOIN pg_stat_activity a USING (pid)
WHERE s.pid = pg_backend_pid();
max_connections
100
SHOW successfully executed. 8:40:26 PM
Activar Windows


SELECT line_number, type, database, user_name, address, auth_method
FROM pg_hba_file_rules
WHERE netmask IN ('0.0.0.0', '::');
SHOW password_encryption;
-- 6-7. Cuentas administrativas y privilegios de los roles
SELECT rolname, rolsuper, rolinherit, rolcreaterole, rolcreatedb, rolcanlogin
FROM pg_roles ORDER BY rolname;
SELECT grantee, table_schema, table_name, privilege_type
FROM information_schema.role_table_grants
WHERE grantee NOT IN ('postgres', 'PUBLIC')
ORDER BY grantee, table_name;
-- 9. Extensiones
SELECT extname, extversion FROM pg_extension ORDER BY extname;
-- 10. Parametros de conexion
SHOW max_connections;
SHOW superuser_reserved_connections;
SHOW statement_timeout;
SHOW idle_in_transaction_session_timeout;
-- 13. TLS
SHOW ssl_min_protocol_version;
SELECT s.pid, a.usename, a.client_addr, s.ssl, s.version, s.cipher
FROM pg_stat_ssl s
JOIN pg_stat_activity a USING (pid)
WHERE s.pid = pg_backend_pid();
superuser_reser...
3
SHOW successfully executed. 8:40:26 PM
Activar Windows


SELECT line_number, type, database, user_name, address, auth_method
FROM pg_hba_file_rules
WHERE netmask IN ('0.0.0.0', '::');
SHOW password_encryption;
-- 6-7. Cuentas administrativas y privilegios de los roles
SELECT rolname, rolsuper, rolinherit, rolcreaterole, rolcreatedb, rolcanlogin
FROM pg_roles ORDER BY rolname;
SELECT grantee, table_schema, table_name, privilege_type
FROM information_schema.role_table_grants
WHERE grantee NOT IN ('postgres', 'PUBLIC')
ORDER BY grantee, table_name;
-- 9. Extensiones
SELECT extname, extversion FROM pg_extension ORDER BY extname;
-- 10. Parametros de conexion
SHOW max_connections;
SHOW superuser_reserved_connections;
SHOW statement_timeout;
SHOW idle_in_transaction_session_timeout;
-- 13. TLS
SHOW ssl_min_protocol_version;
SELECT s.pid, a.usename, a.client_addr, s.ssl, s.version, s.cipher
FROM pg_stat_ssl s
JOIN pg_stat_activity a USING (pid)
WHERE s.pid = pg_backend_pid();
SHOW successfully executed.
Activar Windows


SELECT line_number, type, database, user_name, address, auth_method
FROM pg_hba_file_rules
WHERE netmask IN ('0.0.0.0', '::');
SHOW password_encryption;
-- 6-7. Cuentas administrativas y privilegios de los roles
SELECT rolname, rolsuper, rolinherit, rolcreaterole, rolcreatedb, rolcanlogin
FROM pg_roles ORDER BY rolname;
SELECT grantee, table_schema, table_name, privilege_type
FROM information_schema.role_table_grants
WHERE grantee NOT IN ('postgres', 'PUBLIC')
ORDER BY grantee, table_name;
-- 9. Extensiones
SELECT extname, extversion FROM pg_extension ORDER BY extname;
-- 10. Parametros de conexion
SHOW max_connections;
SHOW superuser_reserved_connections;
SHOW statement_timeout;
SHOW idle_in_transaction_session_timeout;
-- 13. TLS
SHOW ssl_min_protocol_version;
SELECT s.pid, a.usename, a.client_addr, s.ssl, s.version, s.cipher
FROM pg_stat_ssl s
JOIN pg_stat_activity a USING (pid)
WHERE s.pid = pg_backend_pid();
SHOW successfully executed.
Activar Windows


Lab04-NavarreteDiazLuisAlejandro
configuracion
baseline.md
cambios.md
evidencias
05-TLS.pdf
7. Actividad 1 — Identificar la superf...
9. Actividad 3 — Revisar listen_addr...
10. Actividad 4 — Revisar pg_hba.co...
ROLES.png
sql
01-inspeccion.sql
02-roles.sql
03-configuracion.sql
04-verificacion.sql
README.md
-- No debe quedar ninguna regla abierta a 0.0.0.0/0 ni ::/0 (salvo "reject")
SELECT line_number, type, database, user_name, address, auth_method
FROM pg_hba_file_rules
WHERE netmask IN ('0.0.0.0', '::');
SHOW password_encryption;
-- 6-7. Cuentas administrativas y privilegios de los roles
SELECT rolname, rolsuper, rolinherit, rolcreaterole, rolcreatedb, rolcanlogin
FROM pg_roles ORDER BY rolname;
SELECT grantee, table_schema, table_name, privilege_type
FROM information_schema.role_table_grants
WHERE grantee NOT IN ('postgres', 'PUBLIC')
ORDER BY grantee, table_name;
-- 9. Extensiones
SELECT extname, extversion FROM pg_extension ORDER BY extname;
-- 10. Parametros de conexion
SHOW max_connections;
SHOW superuser_reserved_connections;
SHOW statement_timeout;
SHOW idle_in_transaction_session_timeout;
-- 13. TLS
SHOW ssl_min_protocol_version;
SELECT s.pid, a.usename, a.client_addr, s.ssl, s.version, s.cipher
FROM pg_stat_ssl s
JOIN pg_stat_activity a USING (pid)
WHERE s.pid = pg_backend_pid();
ssl_min_protocol...
TLSv1.2
SHOW successfully executed. 8:41:03 PM
Activar Windows


Lab04-NavarreteDiazLuisAlejandro
configuracion
baseline.md
cambios.md
evidencias
05-TLS.pdf
7. Actividad 1 — Identificar la superf...
9. Actividad 3 — Revisar listen_addr...
10. Actividad 4 — Revisar pg_hba.co...
ROLES.png
sql
01-inspeccion.sql
02-roles.sql
03-configuracion.sql
04-verificacion.sql
README.md
-- No debe quedar ninguna regla abierta a 0.0.0.0/0 ni ::/0 (salvo "reject")
SELECT line_number, type, database, user_name, address, auth_method
FROM pg_hba_file_rules
WHERE netmask IN ('0.0.0.0', '::');
SHOW password_encryption;
-- 6-7. Cuentas administrativas y privilegios de los roles
SELECT rolname, rolsuper, rolinherit, rolcreaterole, rolcreatedb, rolcanlogin
FROM pg_roles ORDER BY rolname;
SELECT grantee, table_schema, table_name, privilege_type
FROM information_schema.role_table_grants
WHERE grantee NOT IN ('postgres', 'PUBLIC')
ORDER BY grantee, table_name;
-- 9. Extensiones
SELECT extname, extversion FROM pg_extension ORDER BY extname;
-- 10. Parametros de conexion
SHOW max_connections;
SHOW superuser_reserved_connections;
SHOW statement_timeout;
SHOW idle_in_transaction_session_timeout;
-- 13. TLS
SHOW ssl_min_protocol_version;
SELECT s.pid, a.usename, a.client_addr, s.ssl, s.version, s.cipher
FROM pg_stat_ssl s
JOIN pg_stat_activity a USING (pid)
WHERE s.pid = pg_backend_pid();
pid
usename
client_addr
ssl
version
cipher
40544
postgres
::1
FALSE
NULL
SELECT successfully executed. 8:41:03 PM
Activar Windows