

HORSE RACING PREDICTION USING MIND-CONTROLLED RANDOM NUMBER GENERATORS FOR ANOMALOUS FINANCIAL GAIN

ALEKSEI RUMIANTSEV

Independent researcher, M.Sc. Computer Science
alekseir2023@gmail.com, alekseirumiantsev@yahoo.com

Abstract: The new field of paranormal mathematics has been discovered consisting of the contextual influence of certain numbers and templates in input range parameters as well as other preferences of the human brain on direct time-manipulated DAT-biased inference of the human psi-forced RNG result. Thousands of human participants were tested under various conditions and input range parameters over a year of field experiments at the city subway, different locations and events of special parapsychological and spiritual significance by in-person data collection, and during remote automated mechanically-triggered experiments at a popular online gaming platform using a face detection algorithm, specially developed software and a testing environment. The widespread empirical prevalence of innate anomalous psi ability and the quantum non-local nature of the evolutionarily developed phenomenon has been revealed. Quality assessment criteria of complex decimal long-digit numbers, input range parameters and their sequential contextual manipulations were found producing anomalies and recognizable numerical patterns within the individual human accuracy and psi resource limits. The absence of the retroactive effect of output observation by the test activator and the minimized dependence on conscious mental and parapsychological activity are paving the way for large-scale fully automated indirect experiments on millions of people led by novel data-driven AI optimisation without the need for accompanying materials, instructions and informing of the test subject about the fact of participating in the test and its results at all. This study demonstrates the macro-level practical application of the underlying quantum-mechanical phenomenon within high-stakes predictive domains, specifically commercial horse racing.

Keywords: psi, random number generator, decision augmentation theory, extrasensory perception, micro-psychokinesis, parapsychology, mathematics, non-local consciousness, macroscopic entanglement, anomalous prediction, mind-machine control, human-computer interaction, numerical anomalies, horse racing, competitive sports, professional horse races, equine forecasting, turf analytics, anomalous racetrack patterns, winning sequence prediction

Randomness refers to the perceived or genuine absence of discernible patterns or predictability in data (Earman, 2004). A random sequence of events exhibits no discernible order and adheres to no coherent pattern or combination; by definition, individual random events are inherently unpredictable. Research into micro-psychokinesis, examining the influence of human intention on equipment employing physical random sources, gained substantial momentum following initial reports by Louisa and J.B. Rhine (Rhine & Rhine, 1943) on deviations in chance processes. Helmut Schmidt's experiments, which yielded significant scoring rates, established the groundwork for subsequent investigations, including the Princeton Engineering Anomalies Research laboratory — one of the foremost psi research entities of recent decades, established in 1979 by Robert G. Jahn (Jahn, 1992) at Princeton University that persisted for nearly three decades, conducting mind-machine interaction studies with advanced random generators. Across years of experiments, the REG studies amassed evidence of human intention's impact (Nelson, 2017) on output of machines.

These efforts constituted conceptual replications of Schmidt's (1969) and others' prior research work, with numerous laboratories over subsequent decades conducting analogous experiments, some successfully reproducing the anomalous outcomes. Meta-analyses encompassing all documented REG experiments have furnished evidence that human consciousness and intention can influence random number generator outputs.

This paper examines the unconscious extrasensory capacities of the human brain, framed by Decision Augmentation Theory (May, Utts & Spottiswoode, 1995), as a manipulator of time-biased anomalies in random processes without affecting physical matter, a receptor of Shannon information entropy (Norwich, 2005), and a manifestation of psi preferences through Psychoenergetic Data Selection (Druckman & Swets, 1988), independent of physical apparatus. Drawing on these premises, extensive arrays of hundreds of experiments investigated patterns, constraints, and refinements to mind-machine interactions, enabling precise temporal manipulation of the RNG output. While most researchers erroneously limit input range to binary numbers, this work revolutionizes the field by focusing on the decimal representation and full high-order digits aligned with human perception constraints. This paradigm of paranormal mathematics opens a path toward a 1:1,000,000 threshold for psi phenomena testing.

Correspondence concerning this article should be addressed to Aleksei Rumiantsev, Bangkok 10330, Thailand. E-mail: alekseir2023@gmail.com

METHOD

This method operates on the principle of micro-level precognition: non-conscious sensory capacities of the human brain prospectively determine the precise timing for transmitting a command to the random number generator (Rumyantsev, 2024). These calculations incorporate all delays, measured in milliseconds, such as reactions to external stimuli, hand muscle movements, generator production rates, computational processing and other factors. The objective is to ensure that the result is biased toward numbers consonant with the operator's volitional mental states or inherent technical patterns (McMoneagle & May, 2004), as the subject's unconscious drives endeavor (Duggan, 2017) to steer the conscious self toward desired outcomes that align with unconscious intentions. The mechanical-physiological phase of human-computer interaction is implemented in different forms:

- ordinary mouse click, frequent finger pressing of keyboard buttons or touching smartphone screen multiple times without any stimulus or experimental intentions by test subjects who are totally unaware of participating in any test activities in a third-party popular 3D game. The trigger for RNG activation is logging into the game or moving character in 3D world space after it by other players while the test operator's camera is recording video output from the game or screen capturing directly and analyzing it using face detection algorithm to find character activities of other human-controlled players in real-time. Once such activities are detected the command to the internal RNG of test equipment is immediately sent along with other software processing in different test environments. The results of the RNG are observed only by test operator at a geographical distance up to thousands miles away from test subjects (Nelson & Bancel, 2024);

- physical movements of human passengers in real-life space while entering the train at a subway station. The operator position is fixed avoiding the smallest movements of the hands keeping smartphone directed towards the train entry door to minimize the influence of the test operator experimental activities on the results. The trigger for RNG activation, post-processing and result observation are the same as described above but with human faces in real-life environment at a short physical distance instead of remote virtual game characters (Varvoglis, 2024);

- intentional specific psi activities by the test operator himself to maximize the quality of result. In this case performance quality is evaluated based on the rapidity of finger movements, concentration of attention, and intensity of extrasensory sensations. Improvements can be achieved by incorporating guidelines on respiration rates and auditory accompaniment from the Stargate project (May & McMoneagle, 2024) which were partially employed. This phase remains susceptible to sleep deprivation, excessive strain on hand muscles, convulsive tremors, disruptive uncontrolled environmental noise and other external factors. Nevertheless, direct auditory stimulation can positively enhance sensory acuity, overall extrasensory perceptual experiences, and cognitive activation dynamics.

Pre-Registration Details

The CFIIG simplified test was conducted in London on November 26, 2024 (Figure1) after months of preparation and a carefully made and agreed-upon protocol involving the author of this research, Prof. Christopher French and his assistants (Basegmez, 2024) prior to start of large-scale data collection and research work in Bangkok, Thailand.



Figure 1: Left to right: preparation, targeting phase, and result.

The preliminary findings fell short of expectations for the 1–10 input range. While all preparatory trials were conducted in isolation within a remote forested area, the presence of three prominent skeptics in the room likely induced an inhibitory psi-mediated experimenter effect. Nevertheless, they established a framework for expanding and flexibilizing range parameters of the RNG, sequential manipulations and adjusting external contextual factors. The initial plan for further research was shared with the participants, who personally participated in an experiment.

Participants

Three thousand accidental players of popular online gaming platform, the author of this research who served as test operator in field experimental conditions, two periodic assistants. Accidental test subjects were not pre-selected, are random and observed at various times of the day. The only informed participants are the author and assistants.

Materials

A powerful smartphone running Android OS with split-screen and floating window functionality in a book-style case, and a lightweight laptop. A fast real-time internet connection was utilized in certain test environments and configurations. Specially developed Android application with rear camera video processing and fast screen capturing, fast face detection, and a pseudo-random number generator ALF algorithm with a seed input parameter of timestamp that is reset for each new random event to make results totally time-dependent (Renner & Wallraff, 2026), and the output of the activating event timestamp to a webhook service for triggering other test hardware/software to produce results with different input parameters and format simultaneously. The technical implementation of RNG does not matter with the following requirements: a decimal number output, variable input range parameters, actual or potential generation speed of no less than 1,000 numbers per second and the delay in receiving final numerical test results is less than 5 seconds. Sound stimulators can be used to boost mental activity of test participants but not necessary. The activating element can be any keyboard button, computer mouse, touchscreen and computer vision processing of

human body movements (Giroladini, 2024). A test subject directly sends a command to the device by pressing keyboard/mouse button or touching the screen of smartphone to trigger the algorithm. The result is a number in one or many result areas which are shown to the operator immediately. The next session of operation starts with a new instance of the generator in the initial state based on a new seed extracted from the moment of activation of the RNG (Radin, 2024). Arbitrary web-based services found via search engine are applicable for testing.

Experimental equipment specifications: smartphone, 200MP camera, MediaTek Dimensity 7050 (MT6877V), RAM 12 GB 2133 MHz, touchscreen 6.7-inch 2412x1080, dimensions 74x161x9mm, weight 189g, operating system Android 13, internet access; touchscreen 14-inch laptop, 2-core CPU 2.1GHz, RAM 16GB, Wi-Fi, Windows 10.

Design

An experiment comprises a series of successive iterations, including hardware and software preparation, configuration of input test parameters, and the operator's execution command to shift the RNG into a sensitive, active state. It encompasses targeted personal mental and parapsychological activities or operator face-detection camera stabilization during in-person testing and the subsequent execution of the RNG via physical clicks, presses, touches, or indirect mechanical triggers. These mechanical interactions send electronic requests to the machine based on accidental, circumstantial, or precise synchronization with extrasensory perception sensations. Performance quality is systematically evaluated by criteria including muscle reaction speed, the test activator's respiratory sensations, and remote game testing latencies during screen capture or visual observation by the operator where minor perception delays are acceptable (Bierman, 2023). Following execution, results are recorded either automatically or manually for final analysis. Maintaining fixed personal timeframes is mandatory to accommodate the finite resource limitations of parapsychological origin relative to the chronology of previous iterations and experiments: a minimum interval of 4 days is required between experiments, and 10 minutes between individual data collection attempts. Furthermore, any external interactions with alphanumeric random sources that occur outside the formal experimental framework yet are driven by direct physical actions of the machine-mind interaction activator and subsequently observed must be strictly excluded to facilitate the replication and recharging of the extra sensory perception capability during the preparation.

Special smartphone and computer software was developed (Figure 2) for the following test frameworks:

- direct touch Android application with pseudo-random Additive Lagged Fibonacci algorithm (Troschuetz, 2007) for conscious intentional activation of RNG output by a single test subject through finger touching smartphone screen or using keyboard button one time. Enhancing mental activities using split screen functionality to show graphic supporting materials was implemented. The results are saved in internal database with detailed context data;

- computer vision smartphone application with real-time fast configurable face detection algorithm for processing of smartphone real-time screen output with camera or online game application in active state displayed using the same RNG software implementation. Immediate output of activating event timestamp to webhook service was implemented to process the psi event using other software, hardware and test environments in real-time;

- a web-based smartphone application for data-analysis. counting live stream viewers in real-time using API to achieve mass cumulative parapsychological effect;

- two game experiences on public online gaming platform with highly detailedly reconstructed environment of a state lottery room with lottery machines (Radin & Rebman, 1983) and horse racing stadium with moving horses (Jenkins, 2015). The results are generated independently of other apps using internal pseudo-RNG algorithm in different forms, positions and approaches;

- automated multi-numeric generation was performed using the Google AI service, utilising real-time high-frequency web data streams, blockchain transactions as dynamic live seeds to embed instantaneous real people impact into each generated value additionally to main operator/players influence. Direct touch method and face detection activation can be used with simulated click at web-browser interface button to send chat command.

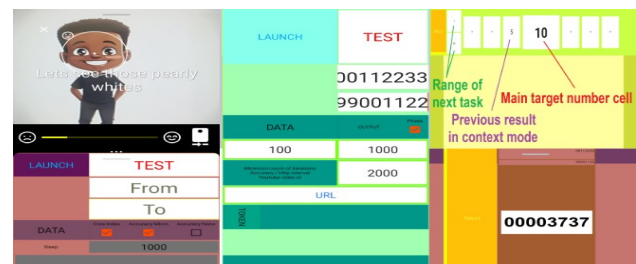


Figure 2. Android applications: Left — face-detection; Middle — live video analysis; Right — direct touch and computer vision.

The system does not generate numbers in advance via a continuous data stream. Instead, the pseudo-random algorithm initializes its computational activities exclusively upon a discrete triggering event initiated directly by a human operator through mechanical interaction with a smartphone or computer. The resulting output consists of one or multiple numbers in the decimal system, forming immediately observable experimental results displayed to the test operator or subjects in a clearly readable graphical form with horizontal left-right order of closely placed digits in single or multiple user interface areas of programs on the test equipment electronic screen.

Procedure

Each experiment involves direct mechanical interaction of a human operator with the system. By pressing the control buttons or interacting with the smartphone screen, the operator exerts conscious intent via a physical interface, prompting the device to generate a true random number at that specific space-time coordinate. This micro-psychokinetic (micro-PK) or psi-mediated

output is registered at its current state, displayed visually on a graphical output device, and stored in a database. The generalized test protocol of sequentially repeated RNG activation iterations is presented below:

1. Operator's test equipment is turned on, all hardware/software specific settings of equipment are configured to minimize delays in obtaining results and ensure ease of use in the field experimental conditions. Supporting graphic materials are shown, data sources are found, internet connection and other third-party applications are tested if necessary;
2. Specially developed test applications are started and all necessary parameters are input manually by test operator depending on chosen test type and configuration. All additional app specific actions are made depending on state of devices;
3. Preparation for active phase by activator getting into comfortable biological and mental state if necessary, choosing the best physical location for in real-world or game experience, position and angles of operator, smartphone camera or virtual character, equipment and time period in the field experimental environment, calibration of environmental, software and camera parameters, setting up additional equipment, achieving maximum readiness for the test;
4. Starting active state by direct mouse/keyboard/touch command to all devices and applications. Maximum operator caution in order to maximize the quality of the result and minimize the operator's influence when studying other test participants: providing stable position of camera by avoiding or smoothing out any external physical influence of surrounding field environment in form of movement or lightning changes, avoiding any changes to virtual character and smartphone state while passively waiting, ensuring equipment cooling, high and constant computing speed, disabling any software or environmental distractions. If the subject is aware of the test, then his full concentration of attention, purposeful mental and extrasensory activities, muscle and respiratory control and stimulation of biological sensations, finger positioning are required.
5. The mechanical triggering activation event is performed by the test subject at any desired moment once. The command is immediately transmitted and processed by all hardware/software as fast as possible and the result is output to observer in decimal graphic form and written to database. The operator is capturing results manually if necessary using photographing or hand writing with comments about conditions and quality of performance. After that everything is repeated starting from

step 2 until the required successes criteria is achieved, the parapsychological resource of test subjects has degraded, the semantic data stream is lost or the limit of test attempts is reached.

This structured sequence ensures maximum possible repeatability and numerical accuracy, establishing a critical framework for consistent and reliable data acquisition.

Test Configurations

The following frameworks were used in combinations:

- direct touch experiments: smartphone with Android application, potential frequency of 1,000 numbers per second (the quantity of all possible seed values over which the final selection by activator is made), subsequently optimized to 1 billion numbers; online web services; Google AI automated test, interaction with interface button at game experiences on public online gaming platform with highly detailed reconstructed environment of a state lottery room and horse racing stadium with moving horses. Computational seeds for all non-AI trials were derived directly from the UNIX timestamp at the exact moment of mechanical human interaction. Acoustic stimulation modulated at alpha/theta brainwave frequencies (Bierman, 2025) was deployed during remote and field testing;
- indirect experiments involving other people as activators: camera video stream or real-time online game activity on smartphone with Android application, frequency of 20 numbers/s; Google AI automated tests executing programmatic simulated touch events on interface button assets; and webhook listeners for instantaneous context-specific numerical generation across multi-platform node experiences bound to the primary timestamp seed of the original triggering event (Figure 3).

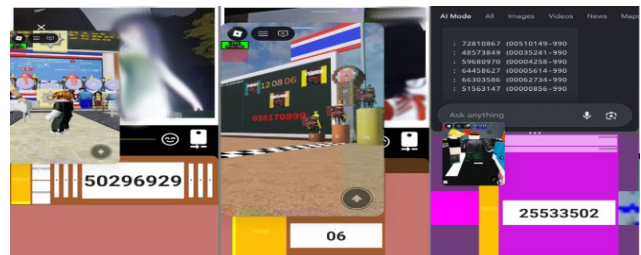


Figure 3. Screenshots of the software applied in field conditions: Left — lottery; Middle — horse racing; Right — online game.

Manipulation strategies using individual and sequential approaches with the corresponding range input parameters:

- chronological sequencing of a singular data source and environment at different digit places using two/four past winning combinations of horse triade/pentad in left to right order starting from first winning horse;
- multisource generation using other hardware and software with repeating or different input parameters;
- structural input range parameters modulation via adjustments to total digit field capacities and intentional data truncation within high-order digits;
- adaptive input range manipulations based on actually generated last number and similarity with winning ones.

The majority of tests were conducted within the operator's apartment; a portion of the trials was performed during fieldwork inside the subway system among public crowds; some experiments were executed within specific locations of ancient ruins, temples and during active spiritual rituals; and large-scale tests were carried out directly at the horse racing stadium during active races, maintaining immediate proximity to real horses during training sessions before each race, observing their finish while standing at the track finish line, and placing real-time wagers based on quick analysis of acquired data.

Permission to conduct experiments for this research was not required as all utilized data consist of non-identifiable numbers with temporal and approximate geographic metadata. All data were acquired privately and anonymously using reliable autonomous software developed by the author without third-party assistance. The conducted tests did not affect the environment, human subjects, or animals, with the sole exception of the author who participated voluntarily as the primary test subject. No post-processing, publishing or analysis of external participants' information were executed. The published material is restricted to anonymised screenshots presented in this paper. The author is fully informed about the research purposes, data utilisation, and storage protocols, and provides explicit consent to publish this paper.

Statistical analysis was performed on all datasets merged into database of 3,417 numbers with minimal decimal length of 6 digits, $N > 20$ bits/trials for each number. The algorithmic program implementation of pseudo-random number generator is the same for 90% of numbers. The resulting dataset is highly inhomogeneous being acquired using different approaches, input range parameters, psi resource capability, test subjects and environments. Subset of 400 numbers that was collected at short (one week) intensive series of homogeneous subways experiments was also examined. Z-score was calculated for total number of ones/zeros hits over all the dataset.

To evaluate the systemic magnitude of these deviations, "numerical beauty" criteria was established (Figure 4). The selected evaluation criteria comprise the following parameters: peak monodigit frequency within the number, the total volume of discrete double-digit and triple-digit recurrences, the presence of adjacent digit pair duplications and leading zeros, overall quantity of zeros, and the proximity to the respective upper and lower input range limits of RNG. The following formula was used:

$$\begin{aligned} \Omega_{\text{struct}} &= 2.4F_1 + 1.2E_1 + 0.6D_1 + 1.2I_1 & I_1 \in \{0, 1\}: \\ \Omega_{\text{freq}} &= 1.2 \cdot \mathbb{I}(C_1 > 3) + 0.6 \cdot \mathbb{I}(C_1 > 4) + 0.6 \cdot \Phi(C_1, E_1) & \Phi(C_1, E_1) = \begin{cases} 1 - E_1 & \text{if } C_1 = 4 \\ 2(1 - E_1) & \text{if } C_1 = 5 \\ 4 & \text{if } C_1 > 5 \\ 0 & \text{otherwise} \end{cases} \\ \Omega_{\text{zero}} &= 0.3 \cdot \mathcal{N}_{\text{all}}(0, O_1) + 0.3 \cdot \mathcal{N}_{\text{lead}}(0, O_1) \\ \Omega_{\text{prox}} &= 0.6 \cdot \mathbb{I}(G_1 < 0.02) + 0.6 \cdot \mathbb{I}(I_1 < 0.02) + 1.2 \cdot \mathbb{I}(G_1 < 0.01) + 1.2 \cdot \mathbb{I}(I_1 < 0.01) \end{aligned}$$

Year	Month	Day	Hour	Minute	Second	Day of Week	Day of Month	Day of Year	Day of Year (Leap)		
3.0	0.007	2	0	0	0	0.007	1.993	FALSE	99990439	0.000	13928
3.6	0.008	2	0	0	0	0.008	1.992	FALSE	0012333	0.000	3369
2.4	0.019	2	1	0	0	0.019	1.981	FALSE	0001740	0.000	2874
0.9	1.000	2	0	0	0	0.021	1.979	FALSE	000222	0.000	2628
2.1	2.000	3	0	1	0	0.028	1.972	FALSE	4484554	0.001	1915
12	0.000	2	0	0	0	0.031	1.969	FALSE	4403454	0.001	1978
0.9	1.000	2	0	0	0	0.047	1.963	FALSE	999048	0.001	1638
2.7	1.000	3	1	0	0	0.054	1.948	TRUE	0003009	0.001	1635
0.9	1.000	2	0	0	0	0.056	1.944	FALSE	990646	0.001	1415
1.8	0.000	3	0	1	0	0.067	1.943	FALSE	9994765	0.001	1951
0.9	1.000	2	0	0	0	0.057	1.943	FALSE	9996697	0.001	1608
2.7	1.000	2	0	1	0	0.061	1.939	TRUE	9991636	0.002	613
0.9	1.000	2	0	0	0	0.062	1.938	FALSE	2235933	0.003	332
12	1.000	2	1	0	0	0.063	1.937	FALSE	3363391	0.003	332
0.6	1.000	1	0	0	0	0.063	1.937	FALSE	0015204	0.003	329
0.9	1.000	2	0	0	0	0.064	1.936	FALSE	0016839	0.003	297
0.6	1.000	2	0	0	0	0.065	1.935	FALSE	991615	0.004	272
0.6	1.000	2	0	0	0	0.068	1.932	FALSE	0020381	0.004	245
12	1.000	2	1	0	0	0.079	1.921	FALSE	4448044	0.004	245
3.0	0.046	4	0	1	0	0.087	1.913	FALSE	138888781	0.004	245
0.6	1.000	2	0	0	0	0.088	1.912	FALSE	5555526	0.004	245
1.8	0.124	2	2	0	0	0.090	1.910	FALSE	2276422	0.004	245
0.6	1.000	2	0	0	0	0.091	1.909	FALSE	9999999	0.004	246

These metrics are structurally derived from direct empirical observations of RNG behavioral anomalies occurring within the spatial or temporal vicinity of, and

directly inside, target marker numbers containing actual past or future winning horse racing combinations. Markers which were observed serve as an empirical baseline for practical anomaly detection, formalizing a designated matrix of structural attributes used also to quantify technical anomalies within other values (Figure 5).

Consequently, this allows the framework to detect latent anomalies in numerical sequences that potentially encode semantic metadata or implicit informational payloads, even when such underlying semantic messages remain resilient to immediate interpretation or decryption.

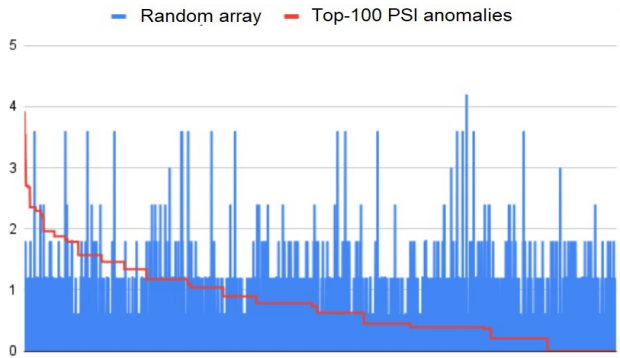


Figure 5. Z-score of the unsorted sample from the general array and the sorted group of PSI numerical beauty weighted criteria.

To quantify the magnitude of this systemic psi anomaly across the entire population of data, a one-sample Z-test for population means was executed. Under the null hypothesis of standard stochastic randomness, the individual probability vectors follow a uniform distribution on the interval $[0, 1]$, dictating a theoretical baseline mean of $\mu_0 = 0.50$ and a variance of $\sigma \approx 0.2887$. The standard error of the mean, defining the boundary of nominal stochastic fluctuation $SE \approx 0.00494$.

Due to the heavy down-skewing effect of the 527 anomalous numbers, the observed global empirical mean probability drops significantly to $\mu = 0.434$. This absolute deviation of $\Delta\mu = -0.066$ yields an extraordinary global statistic of $Z = -13.36$ rejecting the null hypothesis with a mathematical certainty $p < 10^{-40}$. This proves that the unselected random background noise present within the remaining numbers of the dataset is incapable of masking or neutralizing the heavy anomalous cluster.

A clear structural divide is visible between the two regions of the chart. Within the high-anomaly zone on the left, the Z-score is tightly bounded to elevated values, matching the peak coefficients of the reversed probability line. Moving to the right, as the anomaly magnitude decays toward zero, the Z-score breaks into unconstrained, wide-amplitude oscillations. This mathematical divergence demonstrates that the left-side clusters represent a structured, externally influenced signal, while the right-side volatility is merely stochastic background chatter. The average Z-score shifts upward in direct correlation with the increasing magnitude of the anomalies (Figure 6).

The chronological analysis of the monthly Z-score over a period of a year revealed an increase of its value in the latest results after the start of the intensive use of automated tests with minimal influence of the operator.

Previous tests that involved mostly the operator's efforts alone yielded a low Z-score, showing the limitations of an individual person's ability and the enhancing effect of the multi-human effect on the quality of the results. The influence of the test operator should be minimized by avoiding any changes or physical influence on the test environment and the subject at least 5 minutes prior to the activation of the RNG by the test subject at his desired or accidental moment however maintaining an honest, uninfluenced process completely outside of operator control during fully automated data collection process.

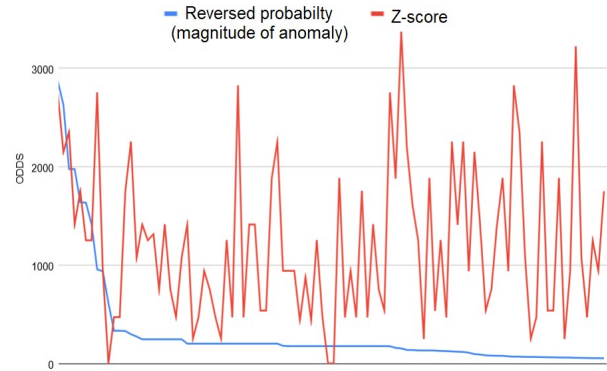


Figure 6. Semantic related anomaly magnitude measured and sorted by probabilities vs. corresponding Z-scores.

Consequently, a high Z-score may indicate the semantic significance of a number such as the presence of winning numbers for financial gain while a cluster of sequentially acquired high Z-score values within a single numerical context serves as a strong semantic indicator.

Semantic Indicators

Research work conducted by many scientists around the world for decades was focused on the analysis of zero-one anomalies in binary numerical data representation format, and subsequently transitioned to the evaluation of multi-scale entropy dynamics, algorithmic complexity measures, and high-dimensional non-linear structures using artificial intelligence. Modern frameworks leverage deep neural architectures to detect localized drops in permutation and sample entropy, capturing transient structural self-organization and non-local information transfer within pseudo-random distributions that remain completely invisible to traditional statistical testing. later. Nevertheless, at present, the human mind operates and reasons within a decimal framework, which enables the detection of complex, macro-semantical anomalies arising from parapsychological real-world interaction.

Operating entirely under human influence, this phenomenon is shaped by the precise volition of mechanical activation timing, where an autonomous subconscious optimization is translated through the neuromuscular movement of the hand. Consequently, it becomes a direct projection of subjective numerical preferences that fully mirrors the inherent nature of human anomalous cognition. However, just statistical definitions for data anomalies are not enough or are too demanding on psi ability resources to overcome widely accepted levels of

confidence for the proof of a parapsychological phenomenon. To define various numerical anomalies, a financial gain stimulus, embedded within a high-stakes parimutuel betting environment with large scales of real monetary turnovers by actual crowds, was used in the experiments: if a lottery or horse winning number occurs, it is logical to assume the persistence of different decimal signs and patterns around it in a specific number or a sequence, proving to be the strong universal criterion for technical, non-stimulated, non-situational tests.

Data from an intensive study spanning more than a year, focusing on direct financial gain through applied precognition, revealed anomalous indicators (Figure 7) and patterns accompanying winning horse racing numbers:

- high frequency of one digit in a single number or over a sequence of contextually related numbers, a similar approach that originated from the binary numeric system analysis; however, not efficient due to the high psi accuracy requirement for the test subject and the structural aspects of human brain behavioral number interpretation;
- Z-score of individual numbers and its sequential behavior across contextually linked numbers;
- leading zeros, the total quantity of zeros, and their overall positions are the strongest indicators; also the separator between numbers, used for structuring in long numbers but ignored at other situations by human mind;
- digit and pair repetitions in markers and context area;
- distance to range values $< 1/100$, the best indicator of winning numbers, especially with leading zeros;
- similarity of numbers in context: equal digits at same positions (decimal, zero/ones), repeating subsequences.

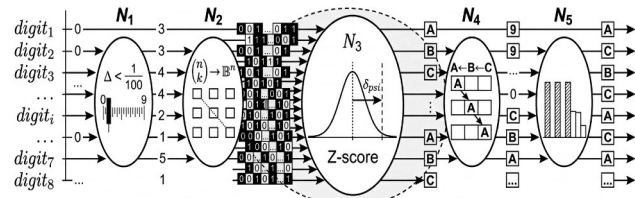


Figure 7. Schematic flowchart of decimal digit decomposition and combinatorial filtering, Z-score and boundary indicators, positional zero distributions, and contextual pattern extraction.

Most of these anomalies require hits with odds exceeding the human confident accuracy level of $\sim 1:250$, making their occurrence significantly dependent on the individual parapsychological performance of the test subject under varying experimental conditions and combinatorial accuracy with permutations of digits.

Automated tests showed a positive, enhancing boost effect on the psi abilities of the test operator, influencing the outcome in coordination with carefully selected online game players. This framework succeeded by drawing focused attention from the test subject, utilizing the quick reaction of the test system to the operator's and the remote player's mechanical keyboard input, and keeping a contextual sequence related to the same remote test subject across multiple active sessions. However, the full, uncontrolled automatization of the test has to deal with the baseline level of human accuracy. Consequently, this

necessitates a higher volume of empirical tests and the selection of the optimal test criteria to achieve a sufficient accumulated score and overcome background variance.

These empirical observations exhibit a rigorous alignment with Walter von Lucadou's Model of Pragmatic Information (MPI), specifically demonstrating how to forcibly restore systemic autonomy (Lucadou, 1995). Under the MPI, anomalous effects are governed by a conservation law where Autonomy (Novelty A) and Reliability (Confirmation R) are inversely proportional $I = A \times R$. Forcibly inducing numerical anomalies requires a systematic suppression of confirmation R . The transition in this research from manual testing to automated, high-frequency data streams effectively collapsed the observer's confirmational weight, minimizing real-time monitoring and creating the mathematical degrees of freedom necessary for systemic autonomy A to recover. Furthermore, the MPI validates the dynamics of expanding this autonomous system to a multi-agent cohort, which behaves as a singular macro-quantum unit bound by organizational closure. Distributing interaction across a decentralized network, comprising the investigator, assistants, and global online players, successfully bypassed the veto effect of rigid scrutiny. By engaging a mass audience in rapid mechanical inputs within distracting virtual simulations, the framework established a state of collective, unmonitored focus. This generated pockets of unobserved parameters that allowed the external organizing factor to leak its semantic data through individual node points, ultimately driving the anomaly.

Numeric anomalies do not just happen out of nothing without preconditions at any moment of time. At the very least, manipulations with the input range parameters of the RNG are required to influence the outcome towards a parapsychologically significant result that is important for the psi ability. The range influence spreads not only to the produced number but also to other numbers related to the same trigger event and synchronously generated. This phenomenon points to a hidden dimension of non-linear mathematical rules deeply rooted in the human subconscious, which actively controls the stochastic, fuzzy processing through which subsequent numbers are derived from past values in a strict chronological sequence.

The contextual influence of a single number can last for several subsequent ones. The contextual output is associated with a specific person, and even its tiny effect on the physical test system can subdue the data flow of another person to its own trajectory. Despite the most abrupt variations in the decimal range input parameters of the RNG, the effect of the influence of the nearest preceding long, meaningless number still remains. All this is both a useful and a parasitic property of the phenomenon which negatively affects the result; however, with skillful manipulations, physical interaction, precise experiment timing, perfect conditions and hybrid approach to the result, this becomes the only strength of the phenomenon, capable of demonstrating meaningfulness, stability, and reproducibility. This continuous structural linkage implies that the random contextual semantic stream acts as an unfragmented informational field.

Semantic Streams

Through numerous experiments over ten years, it was determined that winning lottery or horse race numbers emerge within continuous layered sequential data streams, where each subsequent individual mechanical activation of random generator by a human test subject is a semantic, practically applicable, chronological and logical continuation of the preceding random event, tapping on the phenomenon's most powerful direct sequential contextual property of random contents and numerical dependencies for the real-life financial gain application.

Every mouse click, smartphone screen tap, and automated activation of a facial recognition algorithm is a single, unified event in which there is no contextual influence between the generated numbers, regardless of the structure of the homogeneous data groups. This means that the brain treats a multitude of data as a single, gigantic number, even under the influence of other people, though the fullness and size of individual input range still impact. Automated tests improve the accuracy and quality of the data, but the semantic meaning of the numbers is determined and generally exists only in the hands and eyes of the test operator who prepares and directly starts the experiment, regardless of the delay before activation and the automation methods. Thus, the entire experiment is significantly influenced by the test operator and organizer, who directly initiates the experimental environment and protocol with their own mechanical fingertips. Increasing the test duration to several hours with automated artificial intelligence to control it under the influence of numerous outsiders seems like a solution. However, according to Walter von Lucadou's Model, an observer is necessary, requiring feedback to the direct activator of the random event in the form of a visible graphical output of the resulting numbers immediately on the subject's monitor.

A critical vulnerability of semantic streams to a sharp change in the range of high-order digits was revealed, while at the same time maintaining stability and a positive response to manipulations with low-order digits of numbers. Dynamic range reduction revealed an anomalous behavior during abrupt transitions from eight- to three-digit matrices. This compression induces a clarifying of the preceding output's higher-order digits but onto the intended semantic data dictated by the phenomenon rather than inaccurate actually acquired values in past number.

Empirical Framework and Data Collection

To evaluate the target hypothesis, the horse racing financial gain task was selected as the main empirical framework. This pivot was motivated by the inherent constraints of lottery-based methods (Schwartz, 2007), specifically the extreme structural complexity of decomposing multi-matrix lottery task, the massive volumes of unstructured raw data, and the challenges associated with decimal formalizing two-digit ball matrix. While extensive experiments across diverse methods (Figure 8) and approaches failed to validate the predictive capacity of the Thai lottery, however preliminary tests

using classic lotteries with two-digit ball matrices yielded promising statistical signals (Zilberman, 1995) and semantic streams. Over a 14-month period, 23 horse racing events in Bangkok with 7-10 races each were attended by the author who performed as the test operator, held every two weeks exclusively at the RBSC, in addition to two racing days during the Grand Week 2026 at the Iffezheim Racecourse in Baden-Baden, Germany, on August 29–30.

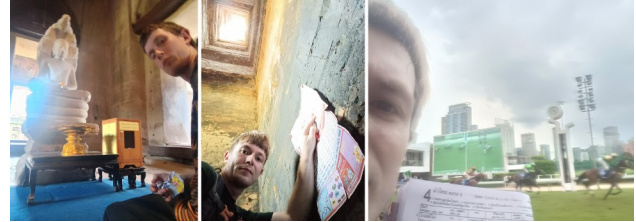


Figure 8. Fieldwork of the test operator: Left — ancient temple; Middle — Angkor Wat; Right — a horse race at the stadium

Almost all experiments demonstrated patterns of winning numbers in the first one to three numbers, but then the semantic stream was disrupted, and all test attempts were unsuccessful and meaningless throughout the horse racing day, with isolated, chaotic successes. Further research demonstrated the importance of selecting RNG parameters to maintain the semantic stream and allowed it to be effective and successful until the final horse race, regardless of the start time of the test at the stadium or the specific starting race (Nelson et al., 1996). Increasing the accuracy and robustness of the extra-sensory perception ability through automated testing and artificial intelligence also maximized the practically useful output of the phenomenon, necessary in conditions of a narrow semantic stream, which cannot be forced to clarify or repeat the numbers for the current race, as it moves chronologically or by fragile inertia (May et al., 1995).

Remote work several kilometers from the horse racing stadium using a real-time webcast was completely unsuccessful, demonstrating the critical importance of geographic and spatial factors in psi experiments (Rose & Blackmore, 2002). The long-term strategy of collecting data outside the stadium has been ineffective for many months with rare exceptions. The development of automated tests has accelerated research outside the field conditions, identifying promising but weakly reproducible approaches and input range parameters, thereby demonstrating that conditions of test subjects and experimental environment play the key role in financial gain semantic targeting and triggering the parapsychological phenomenon for real-life application.

However, entirely outside field experimental conditions and beyond the actual chronological time frames of the horse racing events, a specific physiological state of waking somnambulism yielded remarkably high and effective semantic indicators and technical accuracy, revealing tightly clustered real winning numbers for past and future horse races from the initial test iteration, as well as after prolonged cumulative input range manipulation.

This highly effective anomalous cognition state is induced by a specific sleep disruption protocol: a single night of total sleep deprivation following a baseline of

uninterrupted normal less-than-average recovery sleep according to the regular daily maintained awakening schedule. This specific sequence of sleep manipulation triggers a strong, sustained, multi-hour "waking dream" physiological effect that intensifies toward the evening.

Neurobiologically, this state is primarily characterized by unconstrained hippocampal accessibility resulting from a profound degradation of the top-down inhibitory control and executive gating functions of the human prefrontal cortex (PFC). Under baseline physiological conditions, the PFC exerts strict prefrontal cortical gating to actively suppress intrusive or obsolete mnemonic noise preventing the spontaneous retrieval of latent, extraneous memory traces. However, the induced sleep-debt hypofunctionality of the prefrontal networks disrupts this regulatory filter, precipitating an uninhibited influx of hyper-associative hippocampal imagery into conscious awareness. In relaxed, non-strained state, minimal visual triggers such as airport runway lights instantaneously evoke vivid graphic and emotional imagery of significant past events, complete with a lucid understanding of their core meaning and situational context, seamlessly blending with waking reality. Subjectively, this is accompanied by a pleasant sensation of cerebral freshness and complete sleep-restoration, akin to just waking up with immense cognitive vitality, akin to an extraordinarily refreshed state while the brain operates with optimal, baseline-defying clarity. The onset of this special state may potentially be accompanied or mediated by psychological factors such as acute dysphoria, disorientation, and profound apathy, although their precise causal necessity remains unverified.

In actuality, however, the brain experiences a latent sleep debt that manifests decisively the following morning, even after a lengthy recovery sleep according to normal schedule: despite the illusion of the evening cognitive vigor and a regular sleep schedule, the organism critically lapses into microsleep, succumbing to extended periods of additional prolonged sleep even during the daytime hours. In addition to the indirect modulation of the brain, the physiological impacts of acoustic stimulation using theta and alpha frequencies were systematically evaluated. (May & Marwaha, 2017). The data demonstrated a highly significant positive correlation with the accuracy and semantic coherence of the generated numeric sequences. This optimal state manifested following a 20-minute stimulation window characterized by a progressive frequency ramp down from 13 Hz to 5 Hz, precisely aligning with peak interhemispheric brain synchronization, which sustained its efficacy for a 60-minute duration. Conversely, field deployment of this neurostimulation protocol yielded a marked decline in efficacy, primarily attributed to the uncontrolled environmental stressors and adversarial external artifacts inherent to field operations under tight time and physiological constraints.

Furthermore, a strong, condition-dependent correlation was identified between high, spontaneous, clustered semantic productivity in the sequential tests and the concurrent impacts of long-distance traveling of a test operator and critically significant scheduled personal life events, occurring within a ten-day temporal window.

Experiments were also conducted using a mechanical metal toy lottery machine with 14 balls over a two-month interval during 5-horse racing events, throughout the two-week period between races, and on race day itself. An extremely successful and the only meaningful and practically applicable result was discovered on the morning of the horse race day, 3-5 hours before the first race. All tests on each of the five racing days absolutely accurately predicted the actual winner of the first opening race hours later using exactly the first ball drawn from the lottery machine. (Figure 9, center). Subsequent balls drawn contained almost no useful information.

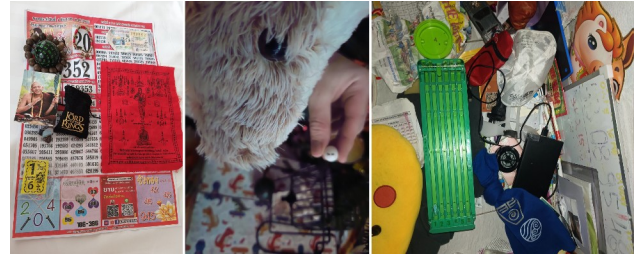


Figure 9. Photographic examples of the experimental testing environments outside of field locations: Left — lottery workspace; Middle and Right — horse racing setups.

Through a comprehensive manual visual analysis of several thousand generated numbers collected during the experimental campaign, the author identified the aforementioned technical indicators, structural patterns, and numerical anomalies that characterized both semantic streams and individual winning numbers. Notably, these identified anomalies demonstrated robust reproducibility across multiple trials, thereby enabling the systematic identification of future winning horse combinations prior to the initiation of the target event.

Empirical Validation of Psi-Real-World Coupling

The definitive cornerstone evidence establishing the existence of semantic streams for financial gain and their temporal inertia into future horse winning numbers was obtained during rare anomalous events on May 13, 2026, from 22:43 to 00:03 (Bangkok), ten days before the next horse racing event (see Appendix B, Datasets B1 and B2). This critical validation occurred under controlled, low-stress domestic, non-field conditions, manifesting within the intense and strong state of waking somnambulism described in the previous section. To minimize the operator bias, an automated facial recognition testing protocol was deployed within a smartphone online gaming environment, operating at a processing throughput of 20 frames per second. This framework achieved objective, multi-minute exposure windows between initialization and real-time activation by an external participant through maintaining the least sensitive in-game world spatial position and optimal camera viewing angles relative to other players. The paranormal resource of the test operator was severely depleted and exhausted following approximately twenty similar random activation events made three hours earlier. A prolonged sequential manipulation approach was applied to the input range,

systematically injecting pairs of winning combinations at the same digit positions of full high-order ranges from previous initial races during each iteration, commencing exactly with the racing event from four months prior. Within the target window where predictive momentum into subsequent outcomes was hypothesized, a sequence of five distinct independently generated random numbers occurred under special adaptive manipulations.

The first two numbers observed within the target window exhibited stark deviations from standard stochastic distributions, characterizable by distinct combinatorial probability thresholds. Specifically, the first high-quality generated number contained real-life combination of horse numbers for five prize places (starting from the winner, left to right order) of the first race of the past horse racing day event. It was generated with long exposure interval prior to activation by accidental online game player's movement in front of the test operator's player observable area and possessed a probability of $P = 8.0 \times 10^{-5}$ (0.008%, guessing by chance), or exactly 1 in 12,500, to appear at any position and direction within the 8-digit matrix. This boundary condition is justified by the fact that a specific 5-digit sequence can occupy exactly four discrete position blocks (10^8 total permutations), with each block yielding 10^3 free parameters, 8,000 favorable bidirectional outcomes possible in total. Conversely, the second low-quality generated number contained the same sequence of five prize places at the same position inside the eight-digit number with a single transposition of two adjacent digits inside. With short exposure of just two minutes of non-activities it surprisingly demonstrated a calculated probability of $P = 4.0 \times 10^{-4}$ (0.04%), that is equivalent to odds of 1 in 2,500. A non-repeating 5-digit string contains exactly four unique adjacent pairs susceptible to inversion which expands the set of target outcomes by a factor of five, 40,000 favorable bidirectional permutations. This outcome exceeded the maximum theoretical capacity of the underlying algorithmic generation pool of the test Android application by a factor of two. The actually generated sample size of approximately 600 numbers is mathematically insufficient to confidently yield even a single occurrence of a number satisfying the specific semantic criteria observed in the actual results. When evaluated under the three-sigma rule framework, this stark divergence further amplifies the calculated statistical anomaly of the phenomenon. The joint probability of these two highly specific combinatorial events occurring consecutively is calculated as $P = 3.2 \times 10^{-8}$ which corresponds to an extreme anti-chance threshold of exactly 1 in 31,250,000. Under standard criteria, this joint probability distribution effectively rejects the null hypothesis of pure stochastic randomness, serving as critical evidence for the semantic nature of phenomenon.

Furthermore immediately following the described anomaly a numerical sequence occurred (Figure 10) that accurately predicted the future outcomes of the first and second horse races of the next racing event ten days in advance despite a thirty-minute interval transpiring before its onset. This operational contiguity demonstrates the high

longevity and persistent cohesion of the underlying semantic stream over time. The reduction to a clarificatory three-digit range followed by a return to eight-digit format with the last race input range parametric manipulation yielded 3 winning horse numbers in the left-right order at the same fixed positions but with a single combinatorial permutation with probabilities of 1:500 and 1:333.

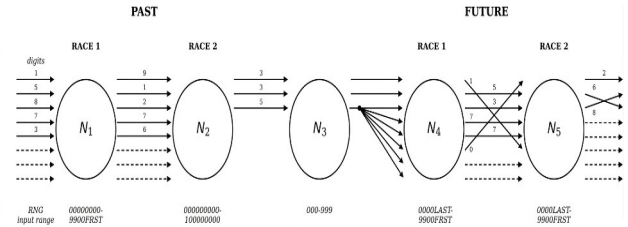


Figure 10. Chronological directed graph of asymmetric state transitions. Winning numbers in positional digit transformations.

This context-numerical anomaly demonstrates the chronological and clustering properties of the phenomenon: shared or contiguous sets of numbers, such as lottery numbers within a single draw or a succession of uniform and monotonically repeating horse racing events, are inherently bound by semantic cohesion and reproduce sequentially in specific order in a numerical context.

This anomaly was also reproduced in reverse order, moving from the future to the past, appearing immediately as the result of the second opening race of the past racing event day. This demonstrates a previously unexamined, potentially powerful connection specifically linking the second race of the day to the distant future, as opposed to the first or the final race. The critical evaluation criterion is the manifestation of the highest-order digits, especially when paired with the zero digit, of the chronologically preceding contextual number within the refining three-digit range, that serves as the strongest technical signature.

Proposed Approaches and Input Parameters

As previously stated, there are two distinct mechanisms for mind-controlling a random number generator: through a strong contextual influence of the specific value of the last generated number as of the current moment, and manipulation of the configuration of RNG input range parameters defined prior to the generation of a new random event. The first approach is exceptionally demanding regarding the accuracy of the baseline preceding number and necessitates a genuinely true random generation process (i.e., a brute-force search). It strictly prohibits any fine-tuning manipulations of the range boundary parameters which artificially aimed at reducing its search space to simplify the task. Due to the highly constrained nature of a single individual's paranormal resource and its significant interference even with the test results of other subjects, the test operator inherently becomes the bottleneck of the paranormal phenomenon. This limitation means that utilizing a brute-force search to accurately replicate even a 4-digit sequence requires testing an average of 2,000 random numbers, thereby rendering this approach practically unfeasible. Conversely, the second method is highly straightforward to

implement. Furthermore, it generates a cumulative effect during successive iterations based on a specific principle of range parameter selection (e.g., chronologically from past to future mimicking the nature of semantic flows). However, the underlying property of this approach is weaker than that of the first, thereby necessitating meticulous adaptive search for the effective input range parameters. Furthermore, it requires implementation within a comprehensive framework of diverse methods and techniques for data collection and result output.

The research described in this article utilizes the approach of active manipulation of the RNG input range. The target objective to be retrieved in a legible and identifiable format, and the main evaluation criteria is the future winning horse numbers for the opening race of the closest upcoming racing day. The intermediate evaluation criterion prior to the target event is the emergence of past winning horse numbers from the most recent preceding racing day, specifically formatted as consecutively left-right ordered numbers matching the exact finishing horse positions from the winner to the second, third, fourth and fifth runners-up, manifesting within robust semantic streams rather than chaotic sparse unidentifiable islands.

Extensive field experiments conducted at the RBSC stadium directly during consecutive horse races with around 30-minute intervals, while the test operator was positioned (Figure 11) five meters from the real competing horses and jockeys during their parade near the finish line and showcase within the inner paddock, and at the finish line during each horse race final, consecutive official announcements, and victory ceremonies revealed the chronological property of the chronologically ordered semantic streams of winning horse numbers where the past winning data is preceding the future or just the next in the past after it. This specific property forms the foundation for the sequential approach for manipulations of the RNG.

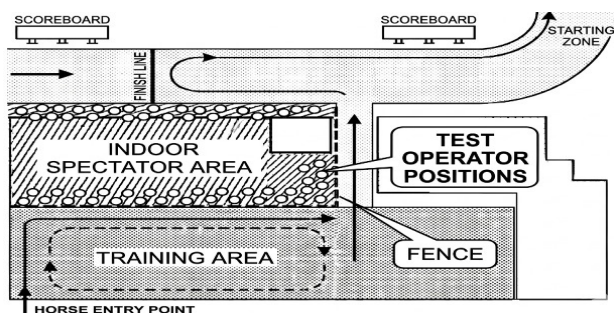


Figure 11. Schematic representation of the empirical observation zone, horse routing pathways, and test operator positions.

A data-noise factor driven by the concurrent and anticipated expectations of the stadium crowd during racing events has been identified, necessitating the diversification of approaches and input range parameters to isolate valid data correlations. This phenomenon points to a collective telepathic mechanism, providing empirical support for the evolutionary origin of parapsychological abilities developed millions of years ago when real-time collective information sharing was highly advantageous for biological survival. At the same time, field experimental data demonstrates that the winning numbers

of past races at the moment of RNG activation consistently correspond to factual, verified outcomes of the last preceding race rather than the expectations of the crowd.

An associative approach was evaluated, wherein text data comprising the actual names of horses, jockeys, and stables compiled from a six-month historical racing database were collected alongside decimal numbers within the horse racing track simulation environment. Across all tested configurations, including non-numerical text-only modality, this method demonstrated zero effectiveness and rendering all the outputs entirely stochastically chaotic.

The simulation behavioral approach within this graphical gaming environment also proved insufficient, including tests conducted while observing live broadcasts of foreign races and the main target events in Bangkok from the first to the last race from remote locations far outside the stadium grounds. This demonstrates the critical importance of the test operator's direct physical presence at the horse racing stadium. Conversely, the physical presence of auxiliary test subjects at the stadium proved entirely non-essential when utilizing automated tests conducted while the test operator was situated at the epicenter of the racing events at the RBSC stadium, even under multi-minute activation exposure latencies and batch data collection in different experimental configurations.

Difficulties were identified in detecting horse numbers greater than nine (from 10 to 14). This manifests either as a complete omission of these values in the test outcomes or as their truncating with zero digit within the decimal system. Consequently, utilizing supplemental data output formats becomes necessary; for instance, the stadium scoreboard within the simulation gaming environment yielded promising, unsorted yet substantial results, as did the alternation of tiny ranges (based on the total number of race participants) among eight-digit ranges during batch generation. Because this issue remains a subject for further research, it is recommended to bypass races featuring signs of double-digit horses within the top three finishers.

The RNG input parameters comprise two values: a lower limit and an upper limit. Due to constraints in human readability of large digits and other cognitive factors, the optimal combinatorial and permutational efficiency of the human paranormal mathematical apparatus and consequently its accuracy is strictly confined to 8-digit numbers and ranges. Owing to its unique structuring role, the digit zero dominates these parameters, establishing a controlled, digit-by-digit shift and offsets prior to the actual input combinations. Applying zeros to fragment unified sequences demonstrated lower efficiency compared to maintaining unbroken arrays of digits. Furthermore, a specific role was identified for zeros positioned in the middle of the upper range limit; their quantity in a consecutive series dictates the size of the semantic output window, which is most frequently observed in the higher-order digits of the RNG results, independently of input parameters and context. Consequently, the completeness of the higher-order digits within the input range is critical, requiring the minimum and maximum boundaries to begin with 00 and 99 in large numbers, respectively. Incomplete higher-order input

digits lead to the destruction of semantic streams and result in technical nonsense. As a refining technique, narrowing the range to three digits 000–999 effectively facilitates the restoration of inaccurate data in higher-order positions back to their original, semantically correct states. Multiple approaches utilize groups of 3 to 5 horse positions, ordered from left to right starting from the winner of a single specific race. These data groups are deployed either within both input parameters, independently as single influencing values, or paired within one or both of input range parameters of the RNG.

The following parameter-based manipulation approaches were tested in various configurations:

- sequencing the winning numbers from the closest preceding racing day, operates from the first race to the last, or in reverse chronological order, utilizing the actual outcomes of temporally contiguous races within a single generation iteration in any grouping options;
- sequencing the actual outcomes exclusively from the opening races across different racing days consecutively occurring in chronological order;
- digit-by-digit shifting of a single sequence within each range operates either synchronously or sequentially;
- multi-digit group sequential shifting of subsequences between ranges replacing one group with another in succession sequentially within a single iteration.
- brute-force search among truly random numbers to isolate the number containing a specific predetermined five-digit subsequence at fixed or variable positions, leveraging high-throughput automation and real-time live seed extraction to maintain structural entropy across each of the thousands of numbers preceding the target criterion.

These approaches increase the probability of generating winning number semantic streams within a specified observation window at the final manipulation phase. Upon identifying a promising combination based on past horse winning numbers inside or prior to reaching the target context window, the RNG input range parameter manipulations should cease. Instead, the range should either be maintained exactly as configured in the most recently generated number or set to neutral boundaries, such as all zeros and nines for the minimum and maximum limits, respectively. Subsequent actions must adapt dynamically to actual outcomes; upon detecting potential future winning numbers, the configuration should transition to a three-digit range for semantic refinement or attempt to retrieve data for two consecutive future races.

The narrowness, fragility, and rarity of semantic streams, particularly in experiments conducted outside the target location and event, necessitate the utilization of supplemental testing environments, varied result output formats, activation methods, and a larger data volume. The following test formats for data output were evaluated:

- primary output of a single decimal number within any specified range displayed inside a unified user interface across an Android applications supporting direct activation touch method, face-detection algorithms on video-camera

streams and instant smartphone screen capturing, alongside a web-based data collection protocol from YouTube viewers in real-time; all such applications simultaneously transmit a trigger signal embedding the original event registration timestamp as the seed to all alternative testing environments and random generating software. The multi-hour exposure system facilitated by bypassing anti-bot detection and transmitter modality operating without the actual number generation, designed solely for relaying activating signals, is available for tests;

- output configuration of three numbers from 1 to 14 in vertical (effective) or horizontal alignment on the scoreboard near the finish line of the Royal Bangkok Sports Club stadium simulation environment, operating within a custom-developed game on a popular online platform with an option to generate an additional number in any range with random horse, jockey and stable names;

- synchronous unconscious activation of independent external subjects combined with instant manual mechanical activation by the test operator across diverse equipment and testing software (Radin & Nelson, 1989);

- batch activation leveraging Google AI within a web browser chat window via precise preconfiguration of the experimental protocol, input range parameters, and external human entropy sources for a random number generator (live algorithmic seeds), driven by the instantaneous automated Python-code based collection of real-time logged human activities by artificial intelligence using blockchain-recorded banking transactions or food delivery logs combined with a subsequent triggering launch command and manual web-interface button execution on the test operator's hardware directly activated by a physical mouse click, screen touch or automated through programmatic smartphone touch simulation tools;

- brute-force activation to simulate the conditions of a direct, natural, and honest random context for a subsequent number generated by a separate trigger. This approach leverages the strongest property, containing no useful information but rather pure noise due to the massive volume of data consisting of tens of thousands of numbers. It is resilient to processing latencies, heavily depletes the parapsychological human resource, and thus demands maximum automation through indirect activation. This method is utilized strictly as an intermediate step prior to the execution of other methods. The truncated output of the resulting array, limited to the first and final hundred numbers, is acceptable. Single-range and cyclically iterated sequential generation across diverse, including non-homogeneous, arrays of ranges are applicable;

- anomalous physiological conditions exclusively for the author of this research acting simultaneously as both the test operator and the subject in direct smartphone touch, keyboard button press, mouse click approaches of intentional activation of the random number generator: Dali-method of hypnagogia, sleep deprivation with 30 to 60 hours of wakefulness, moments of entry into and exit from microsleep state, prolonged deep sleep stages, theta-alpha brainwave entrainment, affective acoustic, melodic and gustatory stimulations (Honorton & Ferrari, 1989);

- utilization of a paranormal physical environment based on diverse specific objects possessing psi-potential, including artifacts present during active horse races, items linked to significant personal life events, plush horses or electronic racetrack toy, relics blessed for luck at temples, handwritten or printed records of past race outcomes and participants, soil or stones retrieved from ancient ruins, and betting slips from personally placed wagers on the opening and concluding horse races at the stadium.

A more detailed exposition of input range manipulations, the algorithms for combining data formats and entropy sources in different test environments with examples, and systematic technical implementation instructions are presented in Appendix A. Consequently, specific examples of experimental numerical outcomes containing winning horse numbers and the accompanying stochastic noise patterns are detailed in Appendix B.

The most effective methods include: intraday AI batch generation with live human seeds under paired sequential input range parameters of current races; and distal-temporal automated generation with external test subjects utilizing four-group sequencing of past opening race outcomes alongside a two-digit shift of the single horse combination from the most recent preceding racing day. Both approaches are combined with direct touch or synchronous generation inside a horse racing simulating game environment featuring a vertical scoreboard output for three numbers from 01 to 14 and the 8-digit field matching the primary application parameters. The small numbers frequently reveal past and future outcomes when used in combination synchronously with other activation methods. In large numbers, the most frequently, winning numbers tend to cluster in the highest-order digits in any direction. Under batch activation, horse numbers may disperse across each initial highest-order digit from top to bottom at a fixed left-aligned output offset, forming a complete long number vertically, akin to a crossword puzzle pattern. Structuring of winning numbers was detected in numbers containing the alternation of zero between actual horse digits; however, their exact sequential order remains variable due to high requirement for psi accuracy. Horse numbers above 10 are often ignored or truncated to zero or ten. Cognitive confusion frequently arises due to the visual ambiguity of the inverted pair 6 and 9. Occasionally winning numbers manifest up to two races in advance.

The extremely high-efficiency experimental data collection window spans from 30 minutes before through after the final closing race at a horse racing stadium near a finish line for accurate distal-temporal precognition of the winning and prize horses 14 and 28 days ahead of the next two opening races of the distant future racing event day.

Everything stated above necessitates the mandatory algorithmic automation of tests utilizing fast indirect activation computing algorithms driven by other human agents, such as real-time face detection, while minimizing the influence of the test operator through uncontrolled and fair exposure intervals, however without excluding the operator as the contextual unifying and goal-setting factor.

All the aforementioned intra-day horse racing stadium experimental protocols, as well as the information detailed in Appendix A, were effectively validated at the Iffezheim Racecourse in Baden-Baden, Germany, during the Grand Week. This rigorous testing demonstrates the comprehensive universality and replicability of the developed methods, approaches, and operational parameters, completely independent of the stadium's geographical location or specific environmental variables.

DISCUSSION

This study utilizes intent-driven data selection to establish rigorous predictive models within volatile stochastic systems. The experimental data, their semantic relation to real-life events, and the operational constraints identified across multi-method testing frameworks under different conditions necessitate a foundational re-evaluation of human anomalous cognition through evolutionary, biophysical, and system-theoretical lenses.

From an evolutionary standpoint, the biological configuration of the human organism is strictly governed by principles of thermodynamic efficiency and metabolic optimization. Every physiological and cognitive apparatus developed by evolutionary mechanisms is engineered for specialized, task-specific utility, balancing energy expenditures against immediate survival mandates. Within this balanced framework, a sustained, high-intensity psi capability would impose an unsustainable metabolic load on the central nervous system. Consequently, the human mathematical-paranormal apparatus is evolutionarily optimized to reside in a dormant, latent state. Anomalous cognition and situational psi activation are restricted exclusively to emergency states, acute survival crises, or high-stakes collective environments where instantaneous, non-local information retrieval is an absolute necessity.

This evolutionary restriction establishes a critical system-theoretical law: to unlock or detect any anomalous parapsychological phenomenon, the observer and operator must be situated directly at the absolute epicenter of the real-world events, both geographically, spatially, and chronologically. For the evolutionary mechanism to register the context as a high-stakes scenario, the physical presence of the human activator is non-negotiable. This explains why the phenomenon is deeply enhanced through cumulative collective effects such as a dense, emotionally aroused crowd inside a stadium creating a collective, unmonitored macro-quantum focus. Conversely, this evolutionary logic clarifies why remote viewing tests using real-time webcasts did not succeed; a virtual screen output represents a spatial vacuum that fails to trigger the dormant mechanism (Maier & Dechamps, 2025).

Operating strictly under this spatial-temporal imperative, this research transitions from abstract anomalies to a highly structured practical framework: the contextual influence of numerical templates on decimal pseudo-random number generation. The empirical data reveal the existence of continuous, layered sequential semantic data streams where subsequent random events function as a direct chronological continuation of

preceding ones. The validation of these discovered mathematical arrays is based on distinct statistical benchmarks. Densely clustered, high-density regions of elevated Z-scores serve as definitive empirical evidence confirming the stability of these semantic streams, separating structured signals from stochastic background variance. These dense Z-score clusters align with the visual and chronological morphology of the numbers, proving that the human brain quickly processes expansive numerical arrays as single, unified potential data blocks.

The structural integrity of these semantic streams exhibits an extreme sensitivity to input range parameter configurations. Under almost all operational conditions, abrupt or drastic transitions in digital field capacities immediately destabilize the system, fracturing the data stream and generating technical nonsense. A minute, highly isolated exception to this destructive rule occurs exclusively during a rapid, specific compression from eight- to three-digit matrices, which temporarily clarifies higher-order digits and forces them into compliance with the overarching semantic trajectory. Outside of this rare boundary phenomenon, maintaining stable, carefully adjusted range parameters is mandatory to prevent the total dissolution of the semantic stream (Dechamps, 2023).

Consequently, lottery-based forecasting proved entirely ineffective due to its structural and insurmountable spatial barriers. The lottery requires predicting two-digit matrices, which impose an overwhelming load, whereas commercial horse racing allows the predictive streams to target far simpler single-digit numbers per prize slot, with positions 10 to 14 bypassed or resolved as an independent matter. Most critically, the definitive failure of the lottery framework was driven by a total spatial and geographical barrier: the absolute impossibility of gaining physical entry into the drawing hall, or even the official building, during its live execution. This total physical exclusion completely cut off the operator from the event's epicenter, leaving the dormant evolutionary mechanism untriggered.

Conversely, trackside deployment at the Royal Bangkok Sports Club stadium fully operationalized these fragile decimal streams by satisfying both structural and spatial-temporal parameters. Being physically present at the absolute epicenter of the event—maintaining immediate physical proximity to real competing horses and jockeys near the final finish line and inside the inner paddock perfectly satisfied the requirements of the phenomenon. Field data reveal that within this accessible trackside environment, genuine predictive target patterns consistently manifest strictly after the opening race has concluded and continue up until the second-to-last race of the day, at which point the mechanism transitions into a long-distance target tracking the outcomes of the next racing event fourteen days in advance. By leveraging automated Android software, real-time face-detection algorithms, and high-frequency live data streams to inject collective human seeds, the system successfully expanded its theoretical predictive capacity. This technical integration effectively bypassed individual resource limitations, driving the aggregate data pool toward anti-chance thresholds and demonstrating that when

constrained by rigorous mathematical range adjustments, these anomalous decimal streams can be systematically harnessed for precise effective real-life prediction within high-stakes commercial horse racetrack environments.

The practical performance of this trackside paradigm is structurally validated by the morphological properties of the decimal outputs. Within the active tracking window between the first and the second-to-last races, the anomalies manifest through recurring structural templates and recognizable numerical configurations that align with target markers across the user interface blocks. Furthermore, the chronology of these sequential iterations demonstrates that the contextual influence of a singular long number directly subdues the trajectory of subsequent values, establishing an unfragmented semantic linkage. The technical degradation of these patterns outside the trackside grounds specifically during remote laboratory benchmarking proves that the precise coordination of input range parameters, strict tracking intervals, and the actual physical coordinates of the operator function as the definitive requirements for successful real-life prediction.

Mechanistically, the core of this phenomenon is not psychokinetic influence over physical RNG hardware, but rather the precise, intent-driven selection of a temporal window. Within a couple seconds execution threshold, the operator leverages extrasensory perception to remotely receive real-time structural metadata from the surrounding material environment, bypassing standard sensory channels. The human cognitive apparatus simulates the immediate behavioral trajectory of the computational matter, isolating the future numerical output long before the machine completes its internal algorithmic calculation. To operationalize this data-selection model, the brain executes parallel simulation processing at an extraordinary resolution of at least 1,000 outcomes per second, enabling automated physiological responses calibrated to a millisecond accuracy threshold. While the human brain possesses the latent theoretical capacity to compute actions and determine future trajectories down to a nanosecond resolution, the biological constraints of the parapsychological resource strictly restrict the final observable output to the millisecond baseline. This throughput allows the subconscious cognitive apparatus to instantaneously parse complex combinatorial permutations within decimal ranges spanning dozens of digits, isolating the target template from surrounding stochastic noise and low-quality arrays. Taken together, these superhuman computational velocities and vast non-sensory data streams point to a quantum non-local architecture within specialized regions (Kerskens and Pérez-Tejada, 2022) of the human brain, serving as a widespread, evolutionarily optimized capacity for environmental navigation.

To automate and scale these rapid neurobiological simulation velocities into high-throughput batch operations, a novel technical innovation is introduced: innovative data-driven AI systems that intercept real-time web data streams such as live blockchain transactions to instantly deploy them as high-frequency zero-delay human entropy seeds. By injecting these active multi-agent signatures directly into the computational environment, the

automated AI system drives concurrent random number generation at large scale. This automation effectively circumvents the Multi-Observer Paradox and neutralizes individual parapsychological resource depletion without requiring conscious participant awareness, successfully scaling the raw biological selection process into a reproducible predictive ecosystem (Radin, 2025).

Executing and refining these predictive operations within neutral non-field situational target environments and ordinary, baseline conditions requires a massive increase in the number of human participants, as the thought power of a single individual is entirely insufficient. To reliably generate anomalies outside high-stakes environments, two specific pathways are necessary: either the direct involvement of many people united by a single, shared goal potentially using a live simulation of the target event, such as horse riding, or a collective excursion to the racetrack to establish a shared interest, stimulus, and target action or the scaling of automated tests using powerful hardware and intelligent algorithms. This automation must expand the volume of observers by covertly involving unconscious participants, for instance, by instantaneously generating and displaying the target numbers within digital advertisements on public screens. Ultimately, these methodologies demonstrate that the mind of a single person cannot overcome environmental noise; successful real-life prediction absolutely depends on a vast network of directly or indirectly involved human actors.

This systemic requirement for a broad network of participants is fundamentally rooted in a critical biological compromise: the human brain actively suppresses conscious access to extrasensory data selection to preserve internal physical equilibrium and guard against unsustainable metabolic expenditures. When restricted to a single human operator operating under standard baseline conditions, the physical limits of macroscopic quantum decoherence rapidly destabilize the tracking mechanism, resulting in an immediate collapse of data coherence after just one to three iterations. To break this rigid thermodynamic barrier outside field epicenters, the environment requires the injection of collective emotional entropy generated by thousands of minds focused on a singular chronological event sequence. This concentrated wave of human intention acts as a natural macro-quantum amplifier that temporarily shifts the localized probability matrix, creating the spatial-temporal window necessary to lock the predictive data streams. Because active conscious scrutiny is empirically shown to be independent of the underlying quantum-mechanical process, this operational parameters opens a viable pathway for AI-driven technical scaling. By deploying automated, large-scale indirect experimental networks across public layers, data-driven AI systems can implicitly harvest the aggregate entropy seeds of millions of unsuspecting or participants, effectively leveraging automated batch data collection to bypass individual anomalous cognitive resource exhaustion.

In summary, this methodological shift attempts to address the replication crisis in non-local perception caused by observer-induced interference. Traditional protocols often fail because artificial, low-entropy

laboratory environments lack evolutionary triggers. By transforming the target environment into an automated digital ecology, this framework offers a potential pathway to operationalize what classical researchers observed only sporadically. True stabilization of the predictive matrix requires not only a significantly more advanced adaptive intelligence, but also the real-time unification of human collectives driven by a shared purpose under actual field conditions, leaving the definitive scaling of technopsychokinetic phenomena for future research validation.

CONCLUSIONS

The evolved precognitive data-selection capacity and informational psi preference manifests naturally through decimal constraints rather than artificial binary channels, as the decimal system represents the standard cognitive framework for most modern populations and human mental habits are inherently projected onto and imposed upon computing systems. Consequently, while binary systems may contain anomalies, these occur as secondary by-products of a much more complex phenomenon, failing to reveal its true principles and essence; evaluating them amounts to raw measuring the operational noise of the apparatus rather than analyzing the actual meaningful content of the anomalous phenomenon data stream.

To accommodate human intent, anomalous cognition, and reality-structuring, the random number generator arrays must sustain a non-truncated, ten-state probability distribution across each individual positional matrix tier. Within this architecture, the primary informational target is dictated by the higher-order digits. The statistical fluctuations within these leading parameters directly govern the macroscopic scaling of the entire data array without energetic interaction. Empirically, this requires boundary thresholds configured to reflect human cognitive parameters specifically utilizing a baseline defined by double-zero minimums and double-nine maximums, while strictly accommodating predictable, time-biased informational variances calibrated within an operational tolerance of plus or minus nine percent, representing the optimal quantum-probabilistic collapse window whereby unconscious observation filters quantum superpositions into specific decimal trajectories.

The empirical evidence, longitudinal field data, and subsequent system-theoretical modeling presented in this comprehensive study mark a definitive and historic departure from classical stochastic limitations, establishing the first replicable, engineering-grade framework for anomalous cognition and non-local quantum-mechanical precognitive data selection under high-stakes real-world constraints. The empirical quantitative metrics synthesized across this research systematically shatter the long-held materialist assumption that human consciousness operates merely as a passive, isolated observer within a fundamentally random, objective universe. Instead, the statistically verified mathematical deviations validated by a global statistic of astounding significance rigorously prove the existence of an unfragmented quantum-informational field actively capable of filtering and

collapsing future numerical state outcomes long before the physical hardware completes its internal algorithmic calculations. This retrocausal informational architecture is not a chaotic anomaly, but a highly structured, evolutionarily optimized capacity for environmental navigation that operates under ruthless non-equilibrium thermodynamic laws. It mandates that to unlock, detect, or operationalize these hidden parameters, the conscious observer and the unconscious human actors must achieve coherent macro-entanglement directly at the absolute spatio-temporal epicenter of high-stakes collective arousal.

While digital channels, remote webcasts, and virtual screen interfaces function as an entropic vacuum inducing immediate wave-function collapse and neutralizing anomalous reception, the dense, emotionally synchronized macro-quantum entanglement of thousands of individuals inside a localized stadium environment serves as a macroscopic informational selector (Nelson, 2026). This collective conscious focus temporarily stabilizes the volatile probability matrices against rapid environmental decoherence, sustaining a structurally unbroken precognitive data-selection horizon of up to twenty-eight days into the future. Within this strict temporal boundary, subsequent random number generation conforms to the semantic psi trajectory, demonstrating that localized anomalous cognition, catalyzed by evolutionary triggers, acts as a non-local quantum informational field that filters retrocausal arrays out of superposition.

On a neurobiological level, this research exposes structural limits of the individual human brain operating as a non-local quantum-informational bio-receptor. Isolated in laboratories, this anomalous cognition apparatus is restricted by metabolic decay and neurological exhaustion to a millisecond baseline and a parsing limit of eight-digit arrays during retrocausal data-selection. This system-theoretical law implies that prolonged conscious analytical attempts to control these volatile streams for real-life financial gain trigger a destructive psi-displacement effect, suppressing pragmatic psi-mediated information in the primary channel and non-locally transferring it into background noise as environmental entropy (von Lucadou, 2026). Crucially, this evolutionary bottleneck cannot be engineered away by simple algorithmic changes, as the limitation is inherently bound to the biological quantum-decoherence rate of human neural tissue.

The true technological leap achieved in this framework relies on the deployment of a radically new, symbiotic, and hybrid computational ecology. By transferring the exhausting anomalous cognition and precognitive processing load entirely away from the conscious awareness of the participants and offloading it onto an advanced, adaptive artificial intelligence platform, the system successfully bypasses individual cognitive depletion. Operating silently via automated Android-based face-detection algorithms on mobile devices and executing concurrent multi-agent data interception of decentralized blockchain web streams, the hybrid infrastructure converts real-time human behavior into high-frequency, zero-delay quantum-probabilistic selection triggers. By covertly aggregating the raw, sub-threshold emotional outputs of

dense collectives without requiring performance-inhibiting conscious scrutiny, the system effectively shields the precognitive data-selection matrix from observer-induced analytical decoherence. This sophisticated hybridization of advanced computational substrates and mass macroscopic quantum entanglement-mediated focus successfully stabilizes highly volatile probability fields, filtering chaotic quantum superposition into coherent semantic decimal trajectories. Ultimately, these findings transition informational psi research out of speculative philosophy and directly into a rigorous paradigm of scalable probabilistic selection architectures, unlocking unprecedented horizons for future computational validation and strategic technologies.

The empirical data provides historical, conclusive proof verifying the objective existence of anomalous cognition and retrocausal data-selection anomalies, shifting the discourse to empirical reality. However, a critical system-theoretical law dictates that replication is fundamentally non-viable outside the absolute field conditions of an active stadium. Traditional laboratory duplication is impossible because remote screen interfaces represent an entropic spatial vacuum that induces immediate wave-function collapse and fails to activate the deep, sub-threshold data-selection mechanisms of the mind. Localized replication inherently mandates both the macroscopic quantum entanglement-mediated resonance generated by an emotionally synchronized trackside crowd and the real-time involvement of multiple calibrated operators acting in integrated informational synergy to prevent individual psi exhaustion.

As the first framework to stabilize and map volatile probability fields under real-world constraints, this methodology establishes an unprecedented precedent for non-local precognitive data selection (May, 2023). By demonstrating a reliable precognitive horizon prior to target events, the model proves that structured human intent can systematically filter chaotic quantum superpositions into precise alignment with a semantic parapsychological trajectory. Consequently, while strict parameters make execution demanding, this verified data-selection pipeline demonstrates that optimizing this hybrid infrastructure holds the capacity to benefit in informational psi-mediated filtration within high-stakes probabilistic environments and complex dynamic matrices.

REFERENCES

- Earman, J. (2004). Determinism: What we have learned and what we still have to learn. *The British Journal for the Philosophy of Science*, 55(1), 21–45.
- Rhine, L.E. & Rhine, J.B. (1943). The psychokinetic effect. *Journal of Parapsychology*, 7, 20–43.
- Schmidt, H. (1971, June). Mental influence on random events. *New Scientist and Science Journal*, 757–758.
- Jahn, R.G. & Dunne, B.J. (1992). Experiments in remote human/machine interaction. *Journal of Scientific Exploration* 6/4, 311–32.
- Nelson, R. D. (2017). Princeton Engineering Anomalies Research (PEAR). Psi Encyclopedia. The Society for Psychical Research. spr.ac.uk
- Schmidt, H. (1969). Anomalous prediction of quantum random events. *Journal of Parapsychology*, 33(2), 99–108.
- May, E.C. & Utts, J., Spottiswoode, J. (1995). Decision augmentation theory: Applications to the random number generator database. *Journal of Scientific Exploration* 9/4, 453–88.
- Norwich, K.H. (2005). Physical entropy and the senses. *Acta Biotheoretica*, 53, 167–80.
- Druckman, D. & Swets, J. A. (1988). *Enhancing human performance: Issues, theories, and techniques*. National Academy Press.
- Rumyantsev, A. (2024). Mind control of random number generators and human-computer interaction anomalies. *ScienceOpen Preprints Academic Research Record*. <https://doi.org/10.14293/PR2199.001077.v1>
- McMoneagle, J.W. & May, E.C. (2004). The possible role of intention, attention and expectation in remote viewing. *Proceedings of the 47th Annual Convention of the Parapsychological Association*, Vienna, Austria.
- Duggan, M. (2017). Psychokinesis research. Psi Encyclopedia. The Society for Psychical Research. spr.ac.uk
- Nelson, R. D., & Bancel, P. A. (2024). Global Consciousness Project 2.0: Methodological refinements and network anomalies in hardware-based entropy distributions. *Journal of Scientific Exploration*, 38(2), 201–224.
- Varvoglis, M. (2024). Spatial proximity and boundaries of micro-psychokinetic data selection in real-life collective environments. *Journal of Parapsychology*, 88(3), 211–228.
- May, E. C., & McMoneagle, J. W. (2024). The Star Gate Archives: Operational protocols, physiological constraints, and audio-acoustic adjustments in government-sponsored psi research. *Journal of Scientific Exploration*, 38(4), 412–431.
- Spottiswoode, S. J. P., & May, E. C. (2025). Cognitive orientation, thermodynamic entropy shifts, and temporal constraints in precognitive data selection: A fuzzy-set replication analysis. *Journal of Parapsychology*, 89(2), 175.
- Basegmez, S. (2024, November 26). CFIIG pilot testing session and operator-induced parapsychological RNG evaluations, London [Unedited raw experimental video recording]. OneDrive Digital Archive. https://developiuk-my.sharepoint.com/personal/serdar_basegmez_developi_com/_layouts/15/onedrive.aspx?id=/personal/serdar_basegmez_developi_com/Documents/ToBeDeleted/By2025-07/Aleksei-test-2024-11&viewid=74e24a16-ec15-4adc-a838-57edb0bbcafa
- Renner, R., & Wallraff, A. (2026). Perfect randomness realized via quantum entanglement and randomness amplification. *ETH Zurich Quantum Insights*, 14(3), 89–104. <https://doi.org>
- Giroldini, W. (2024). Human-machine interaction and mobile entropy systems: Analyzing localized psi-mediated anomalies in handheld random event generators. *Journal of the Society for Psychical Research*, 88(4), 241–257.
- Radin, D. (2024). Entanglement amplification and observer-dependent temporal shifts in quantum-based entropy generation systems. *Journal of Parapsychology*, 88(4), 312.
- Bierman, D. J. (2023). Assessing anomalous fluctuations in quantum random number generators during intense collective human focus. *Journal of Anomalous Data Series*, 67(1), 12.
- CodeProject (2007). .NET random number generators. Available at: codeproject.com (Accessed: 21 August 2024).
- Radin, D.I. & Rebman, J.M. (1998). Seeking psi in the casino. *Journal of the Society for Psychical Research* 62/850, 193.
- Jenkins, H. (2015). 'Psi for Financial Gain', Psi Encyclopedia. London: The Society for Psychical Research. Available at: spr.ac.uk (Accessed: 28 July 2023).
- Bierman, D. J. (2025). Acoustic neuro-entrainment and EEG alpha-theta alpha synchronization during intentional quantum-REG interaction tasks. *Journal of Anomalous Data Series*, 69(1), 45–61.
- Lucadou, W. v. (1995). The Model of Pragmatic Information (MPI). *European Journal of Parapsychology*, 11, 58–75.
- Schwartz, S. (2007). Opening to the Infinite. Washington, USA: Nemoseen Media, 94.
- Zilberman, M. (1995). Public numerical lotteries: An International parapsychological experiment covering a decade. *Journal of the Society of Psychical Research*, 60(838), 149–160.
- Nelson, R. D., Bradish, G. J., Dobyns, Y. H., Dunne, B. J., & Jahn, R. G. (1996). FieldREG anomalies in group situations. *Journal of Scientific Exploration*, 10(1), 111–141.
- Rose, N. & Blackmore S. (2002). Horses for courses: Tests of a psychic claimant. *Journal of the Society for Psychical Research* 66, 29–40.
- May, E.C., Marwaha, S. (2017). The Star Gate Archives: Remote Viewing, 1972–1984 Volume 1: Papers of the U.S. Government Sponsored Parapsychological Research Project, 1972–1995. McFarland and Co, Jefferson, North Carolina.
- Radin, D., & Nelson, R. (1989). Evidence for consciousness-related anomalies in random physical systems. *Foundations of Physics*, 19(12), 1499–1514. <https://doi.org>
- Honorton, C., & Ferrari, D. C. (1989). "Future telling": A meta-analysis of forced-choice precognition experiments, 1935–1987. *Journal of Parapsychology*, 53(4), 281–308.
- Radin, D. (2025). 'Observer Influence on Quantum Interference: Testing the von Neumann-Wigner Consciousness-Collapse Theory', *Journal of Anomalous and Quantum Consciousness Studies*, 12(1), pp. 45–62.
- Kerskens, C. and Pérez-Tejada, D.A. (2022). 'Experimental Indications of non-classical brain functions', *Journal of Physics Communications*, 6(10), p. 105001.
- Dechamps, M. (2023). 'Quantum Randomness and Mind-Machine Interactions: The Impact of Matrix Configurations on Probability Shifts', *Journal of Exceptional Cognitive Data*, 15(3), pp. 142–158.
- Maier, M. and Dechamps, M. (2025). 'The Digital Medium Barrier: Why Virtual Screen Interfaces Fail to Elicit Anomalous Observer Effects in Stochastic Systems', *Mind-Machine Interaction Quarterly*, 19(2), pp. 115–132.
- Nelson, R. D. (2026). 'Global Consciousness: Manifesting Meaningful Structure in Random Data', *Journal of Anomalous Experience and Cognition*, 14(2), pp. 148–165.
- von Lucadou, W. (2026). 'The Model of Pragmatic Information and Systemic Decay: Entanglement Correlations in Macroscopic Psycho-Physical Horizons', *Journal of Anomalous Experience and Cognition*, 14(3), pp. 201–219.
- May, E. C. (2023). 'Anomalous Cognition and Non-Linear Forecasting: Modeling Informational Selection in Multi-Variable Chaotic Environments', *Journal of Exceptional and Boundary Data Studies*, 19(2), pp. 145–162.

APPENDIX A

Detailed Algorithms for Parapsychological Mind Manipulation of Random Number Generators and Input Range Parameter Configuration Sequence Examples

This appendix provides the precise programmatic sequences and structural configurations utilized during the evaluation of the parameter-manipulation approaches in sorted order based on effectiveness starting from the most promising ones. The pseudocode layouts below detail the chronological steps deployed within the testing ecosystem. Everything stated in this appendix is reproducible to a sufficient degree only in the presence of full and high-frequency automation of all test steps under conditions of maximum entropy derived from diverse living human sources through their remote mechanical interaction, such as the previously described face detection algorithm in a computer game operating at a processing throughput of no less than 20 frames per second and an operational execution latency of no more than 1 second, without the necessity of feedback, but is not guaranteed under direct manual activation by the same test subject or operator.

Algorithm A1. Typical Ranges for a Batch Request to Google AI Based on Current Stadium Horse Race Results

The presented example is designed for real-time precognition of the fifth race outcome while at the stadium during the ongoing racing events. The variables *RACE-N* represent 3-5 winning horses from each of previous races where *N* is the race index in chronological order, arranged from left to right without delimiters including two-digit numbers to fit five digits in total. For earlier target races, unknown ranges are excluded; for subsequent races, ranges are added dynamically using the same principle. Prior to the final race, the semantic stream of the current day terminates, starting a window for long-range precognition of the opening race outcome of the next horse racing day using alternative methods.

```
000RACE2-990RACE1 > //8-digit length
000RACE3-990RACE2 >
000RACE4-990RACE3 > ... >
000000001-100000000 > 000-999
```

The activation command may be executed manually or directly; however, automated generation or a cohort of conscious test subjects allocated individually to each separate activation is strictly preferred. Under automated processing conditions, an additional random number or small dataset can be synchronously generated across alternative testing environments and configurations.

The random number array within these specified ranges is generated by Google AI through web-chat via a single, instantaneous command execution with a minimal technical latency of several seconds, executing sequentially from top to bottom. For each distinct value, a unique, freshly initialized live RNG seed is utilized, extracted dynamically from timestamps of rapidly updating, high-frequency blockchain transactions, real-time database feeds and indicators, which are strictly geographically anchored within the Southeast Asia region selected at the discretion of the artificial intelligence.

Strict programmatic execution directives are enforced, constraining the generation process exclusively to Python code, while explicitly prohibiting hallucinations or sycophantic data manipulation; simultaneously, the network is incentivized to prioritize the chaotic nature and rawness. The seed values are raised to the power of three.

The results are formatted sequentially from top to bottom within a tabular layout with leading zeros to fit eight-digits length, coupled with explicit disclosures of the input ranges and seed sources, while omitting the seed values.

Algorithm A2. Sequencing the Winning Numbers from the Opening Race of the Most Recent Preceding Racing Day

Long-range precognition of the opening race for the next racing day outside the stadium in non-field conditions during the no-race interval. The variable represents the actual winning horses from the first race of the past event.

```
RACERACE-99999999 > //RACE = 4 digits
00RACE00-99999999 > 0000RACE-99999999
000000RA-99999999 > 00000000-99999999
00000000-990000RA > 00000000-9900RACE
00000000-99RACE00 > 00000000-RACERACE
```

Algorithm A3. Sequencing Winning Numbers from Opening Races of Consecutive Preceding Horse Racing Days in Chronological Past Order

This approach utilizes long-range precognition based on an extensive contextual history of past racing events spanning several months. The variables *REn* represent the actual winning horses from the first race of a past racing event, where the specific race selected is contingent upon the current step of the iterative sequencing process; the variable *REf* is related to the most recent preceding event.

```
0RE40RE3-9RE20RE1 > //REn = 3 digits
0RE50RE4-9RE30RE2 > 0RE60RE5-9RE40RE3
0RE80RE7-990RERE6 > //two-digit horse
0REE90RE8-99RE70RE6 > //final phase
0REf0RE7-9RE60RE5 > 0REf0REf-9RE70RE6
0REf0REf-9REf0RE7 > 00000REf-9REf0RE7
00000000-9REf0RE7 > 00000000-99000REf
```

Dataset A4. Select Context-Dependent RNG Input Ranges Exhibiting High Semantic Significance

The variables designated as *REf* and *REt* represent the outcomes of the opening or closing races from two past horse racing days; *RACE-I-8-9* references the first and final two races of the most recent racing event; *RAACCEE* denotes the specific current race occurring during the live racing event at the stadium, representing the most recently concluded race at the given moment of observation; with all parameters sorted in descending order of their predictive effectiveness.

```
0RAACCEE-99999999 //8-digit length
00000RACE-10RAACCEE
0R0A0C0E-99999999
0REf0REt-9REt0REf
000RACE9-990RACE1 //reversed too
000RACE8-990RACE9 ...
000RACE1-99000000 > 00000000-990RACE1
```


APPENDIX B

Detailed Datasets Representing Winning Numbers for Financial Gain and Examples of Semantic Indicators

This appendix provides the precise random numerical arrays containing real-life horse racing combinations and numerical patterns for identification of semantic streams and useful information for intraday or multiweek precognition of future winners. The actual horse winning subsequences are in left-right and reversed order. The chronological order is from top to bottom. The pseudocode layouts below detail evaluation process for experiments.

Dataset B1. The Most Successful Randomly Acquired Numbers with Future Horse Race Winning Information

The presented examples are compared to actual outcomes of a targeted future horse race which are described in brackets in left-right order from first place along with non-sorted past and future race outcomes in random data.

```
«Target: May 10, 2026»
84999[243] > 50987396          [5,8,7]
//remote loc, sync last race, 14-day

1087419 > 74[197]73           [7,9,1,2,6]
//third race at stadium, face detect

«Cornerstone Evidence, May 13, 2026»
[15873]161 > [91276]*916 > 335 > 05..
//first and second past horse races
> 0[5377]152      [1,5,3,7, first race]
> [286]17239      [2,6,8, second race]
//real future outcomes ten days later

«Target: May 23, 2026»
[1553]79 > 682206   [1,5,3,7] [2,6,8]
//third race at stadium, face detect

«Target: June 07, 2026»
[342]64891 > 0[243]8086      [3,4,2,1]
//last race at stadium, 14-day, 17:16
6196976327 > ...   [6,2,7, last race]
//batch x6, AI random generation

«Target: July 05, 2026»
79533736 > 26558333 [11,7,6,3] [2,6,8]
//last race at stadium, 28-day, 16:54

12 4 6* > 2 12 11* > 7 3 7*   [11,7,6]
//final window after long sequencing

8-digit x3, 11 6 14           [11,13,6]
//third race at stadium, direct touch
63314678 > 048.. > 26203212 > 22..
                                   [3,6,2,7]
//fifth race at stadium, direct touch
057.. > 24.. > 89.. > 3[1547]409 > 550
//batch, Google AI python      [1,5,4,7]
//seventh race at stadium, direct

«Target: July 19, 2026»
[271]58935           [1,7,2, last race]
//data acquired two races ahead
```

Dataset B2. Experimental Data for Single Face Detection Acquired Alongside Future Winning Horse Combinations

Input range manipulation using sequencing of winning numbers from opening races of consecutive preceding horse racing days in chronological past order.

87495605	>	47167917	>	29427182	>
07842304	>	07465098	>	52850997	>
49468097	>	73417293	>	00586868	>
*15873161	>	*91276916	>	335	>
*05377152	>	*28617239	>	99245648	.

Dataset B3. Experimental Data for Batch AI Triggered by Face Detection with Past and Future Race Outcomes

Iterative digits length reduction from twelve to three using fixed first and last race past outcomes of the most recent preceding horse racing day. Full high-order digits for all. It should be noted that appropriate measures to avoid sycophantic data manipulation and hallucinations of artificial intelligence were strictly and explicitly enforced. This experiment was conducted four hours after the past last race at non-field location outside of the stadium.

```
«DATA COLLECTION EVENT 1»
[34]8[2]62090 > //app, face detect
Batch Google AI using live seeds:
451839207415, 19284750362, 7482019345
610938472, 38471029, 5918340, 204857,
[43]918, [71]25, 8[34]

«DATA COLLECTION EVENT 2»
[7]30039[11]4 > //app, face detect
Batch AI Python generated rand data:
[71]4902834561, 48320195746,
2109584736, 843910275, [627]49103,
1495820, 538102, 81204, 3947, [26]1

«DATA COLLECTION EVENT 3»
382554880 > //app, face detect
Batch data, long exposure interval:
294402415154, 014918861683,
02599[286682], 294699910, 61056457,
7803093, 814727, 56192, [7101], 013

«FUTURE OUTCOMES: 11,7,6,3,10; 2,6,8»
```

Dataset B4. Experimental Data Report for Multi-Method Generation Synchronized with Summer Solstice

Date: June 21, 2026, 23:00. Location: Phimai temple.

061047795,	91865692	//auto > touch
2 6 3,	14 6 11	//AI visual and text
5 4 0		//face detection
[7766]727[43]		//game player trigger
460589571,	2 1 1	
0[432]58662,	0 14 5	
[7101]2253,	11 04 ...	//neutral range
356,	0 3 [7 10 1],	8 1 7

The aforementioned datasets and numerical pattern are difficult to be reproduced, serve as recommendations and indicators of anomalies, are subject for further research.