



Basic Linux Commands with their functions

- 1) **ls** command: used to list all files and subdirectories in the current directory.

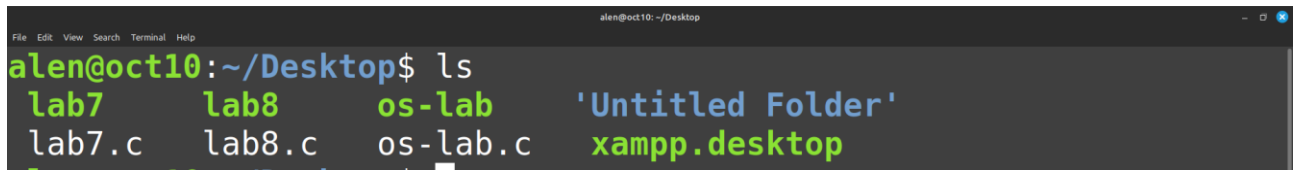

```
aleno@oct10: ~/Desktop$ ls
lab7      lab8      os-lab    'Untitled Folder'
lab7.c    lab8.c    os-lab.c  xampp.desktop
```

- 2) **mkdir** command: used to create a directory (make directory) inside the current directory.

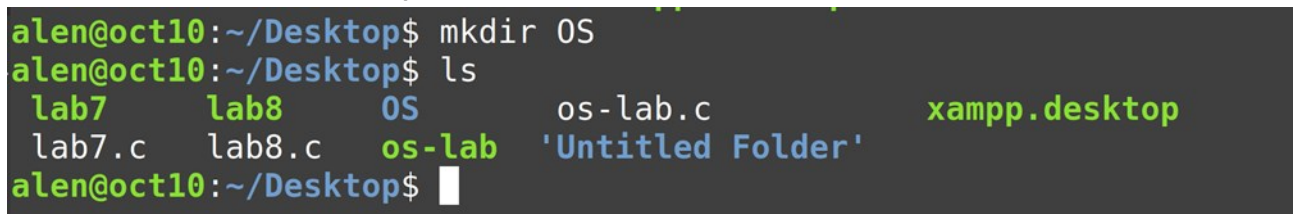


```
aleno@oct10: ~/Desktop$ mkdir OS
aleno@oct10: ~/Desktop$ ls
lab7      lab8      OS        os-lab.c    xampp.desktop
lab7.c    lab8.c    os-lab    'Untitled Folder'
```

- 3) **echo** command: used to display (print) text content in the terminal.




```
aleno@oct10: ~/Desktop$ echo hello world
hello world
```

- 4) **touch** command: used to create an empty file.
5) **echo** "<<content>>" > filename : used to write content in existing file.
6) **cat** <<filename>> : used to display content of file.

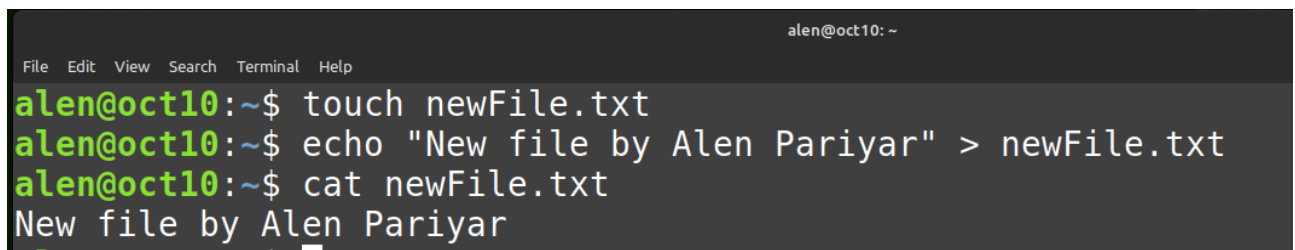


```
aleno@oct10: ~$ touch newFile.txt
aleno@oct10: ~$ echo "New file by Alen Pariyar" > newFile.txt
aleno@oct10: ~$ cat newFile.txt
New file by Alen Pariyar
```

- 7) **rm** <<filename>> : used to remove file and directory.

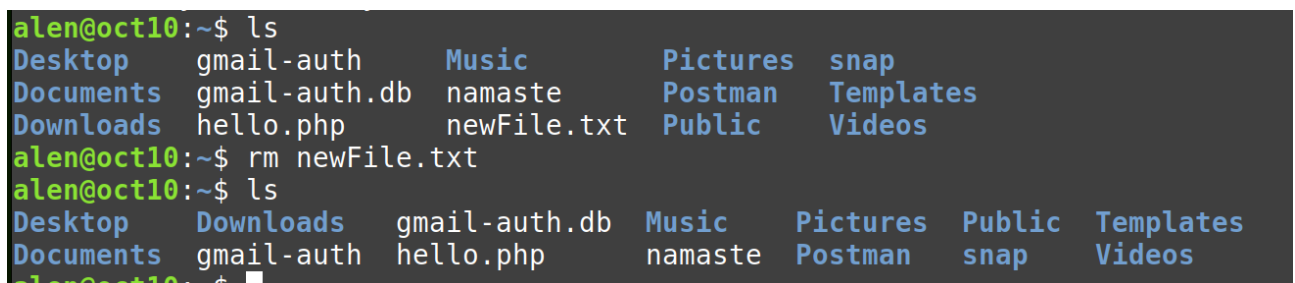

```
aleno@oct10: ~$ ls
Desktop  gmail-auth  Music      Pictures  snap
Documents  gmail-auth.db  namaste    Postman   Templates
Downloads  hello.php    newFile.txt  Public    Videos
aleno@oct10: ~$ rm newFile.txt
aleno@oct10: ~$ ls
Desktop  Downloads  gmail-auth.db  Music  Pictures  Public  Templates
Documents  gmail-auth  hello.php    namaste  Postman  snap    Videos
```

- 8) **clear**: used to clear the content of the terminal.

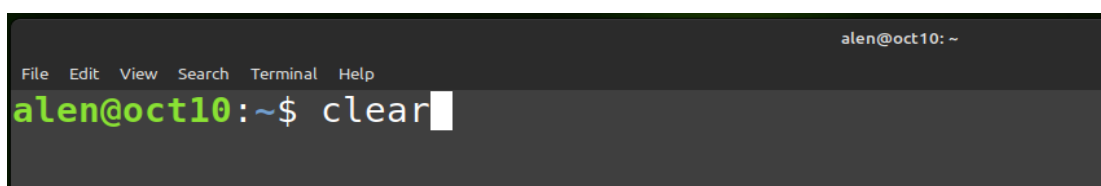

```
aleno@oct10: ~$ clear
```

Steps to install gcc in Linux

Step 1 : Open Terminal,


Step 2 : Update existing packages -> `sudo apt update`

Step 3 : Install gcc -> `sudo apt install gcc`

Step 4 : Verify GCC installation -> `gcc --version`

Create, Compile and Run a C Program in Linux Environment

1) Create and open a C Program File:

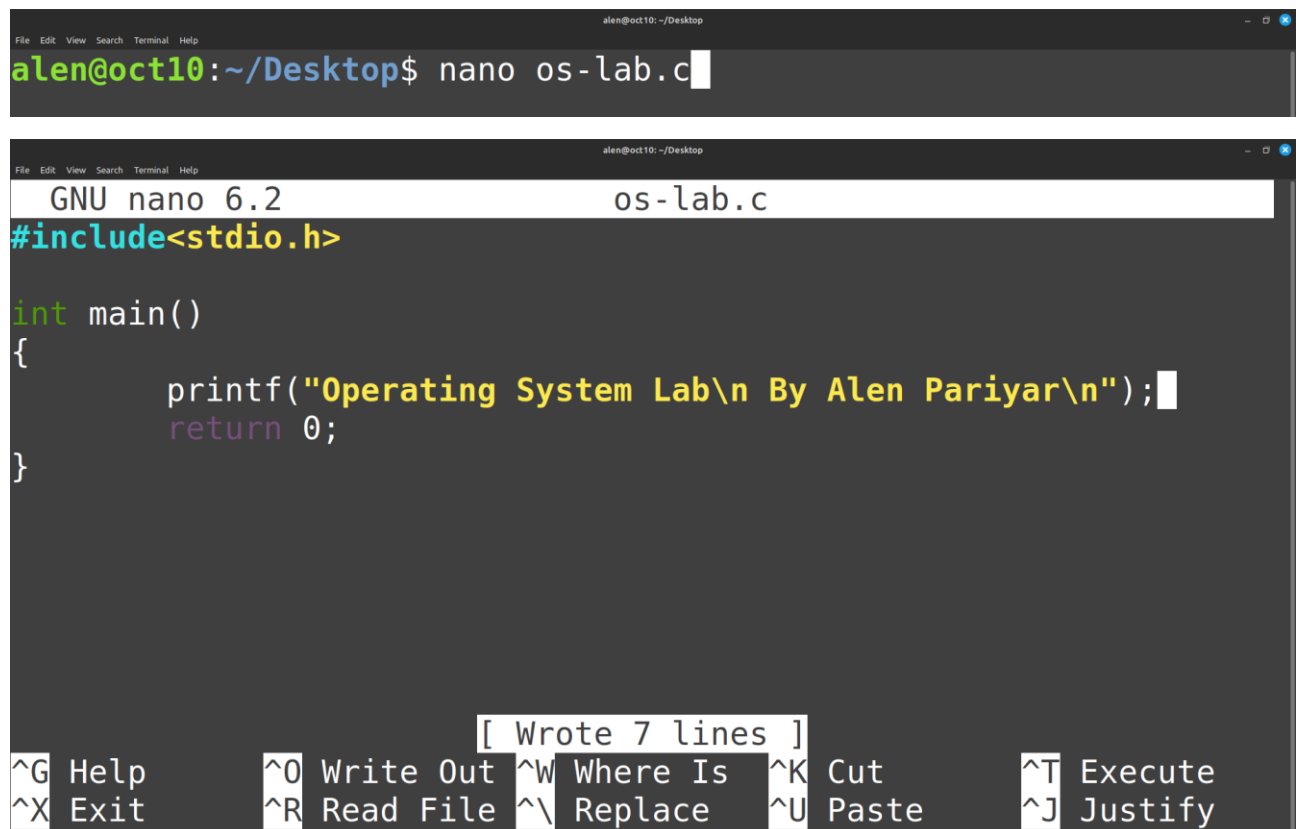

```
aleno@oct10:~/Desktop$ nano os-lab.c
```

```
GNU nano 6.2 os-lab.c
#include<stdio.h>

int main()
{
    printf("Operating System Lab\n By Alen Pariyar\n");
    return 0;
}
```

[Wrote 7 lines]

^G Help ^O Write Out ^W Where Is ^K Cut ^T Execute
^X Exit ^R Read File ^\ Replace ^U Paste ^J Justify

CTRL+O to Write File, **CTRL+X** to Exit

2) Compile C Program File

```
aleno@oct10:~/Desktop$ gcc os-lab.c -o os-lab
```

3) Run the compiled program file

```
aleno@oct10:~/Desktop$ ./os-lab
Operating System Lab
By Alen Pariyar
aleno@oct10:~/Desktop$
```