


Program to print the process ID

```
#include<stdio.h>
#include<unistd.h>
// Operating System [Lab 3] :: Alen Pariyar
int main()
{
    pid_t process_id, parent_process_id;

    process_id = getpid();
    parent_process_id = getppid();

    printf("Process ID : %d", process_id);
    printf("\nParent Process ID : %d\n", parent_process_id);
    return 0;
}
```

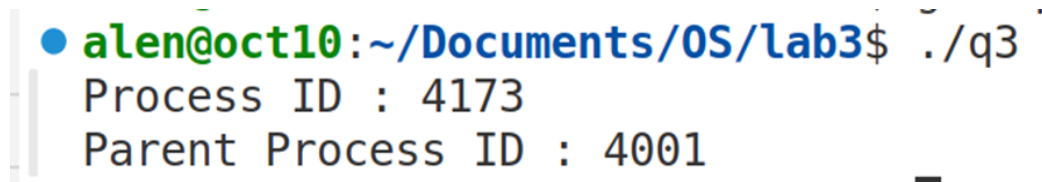

```
● alen@oct10:~/Documents/OS/lab3$ ./q3
Process ID : 4173
Parent Process ID : 4001
```

Program to create Child Process using fork()

```
#include <stdio.h>
#include <unistd.h>
// Operating System [Lab 3] :: Alen Pariyar

int main()
{
    int pid;
    printf("The main program process ID is %d \n", (int) getpid());
    pid = fork();
    if (pid != 0)
    {
        printf("This is the parent process, with id %d \n", (int) getpid());
        printf("The child process ID is %d \n", pid);
    }else
    {
        printf("This is the child process, with id %d\n", (int) getpid());
    }
    return 0;
}
```

- **alen@oct10:~/Documents/OS/lab3**\$ gcc q4.c -o q4
- **alen@oct10:~/Documents/OS/lab3**\$./q4
The main program process ID is 4468
This is the parent process, with id 4468
The child process ID is 4469
This is the child process, with id 4469