總覽
StorageGRID

NetApp
May 17, 2022

This PDF was generated from https://docs.netapp.com/zh-tw/storagegrid-116/sg5700/controllers-in-storagegrid-appliance.html on May 17, 2022. Always check docs.netapp.com for the latest.

目錄

總覽 1
控制器StorageGRID 1

總覽

控制器StorageGRID

12個磁碟機的SG5712和SG5712X、以及60個磁碟機的SG5760和SG5760X機型StorageGRID 、均包含E5700SG運算控制器和E系列E2800儲存控制器。

- SG5712和SG5760使用E2800A控制器。
- SG5712X和SG5760X使用E2800B控制器。

```
The E2800A and E2800B controllers are identical in specification and
function except for the location of the interconnect ports.
```

您應該檢閱圖表、瞭解控制器之間的差異。

E5700SG控制器

- 做為應用裝置的運算伺服器。
- 包含StorageGRID 《不再使用的應用程式安裝程式」。

> 應用裝置上未預先安裝此軟體。StorageGRID當您部署應用裝置時、可從管理節點存取此軟體。

- 可連線至所有三StorageGRID 個資訊網路、包括Grid Network、管理網路和用戶端網路。
- 連接至E2800控制器、並以啟動器的形式運作。

此圖顯示E5700SG控制器背面的連接器。

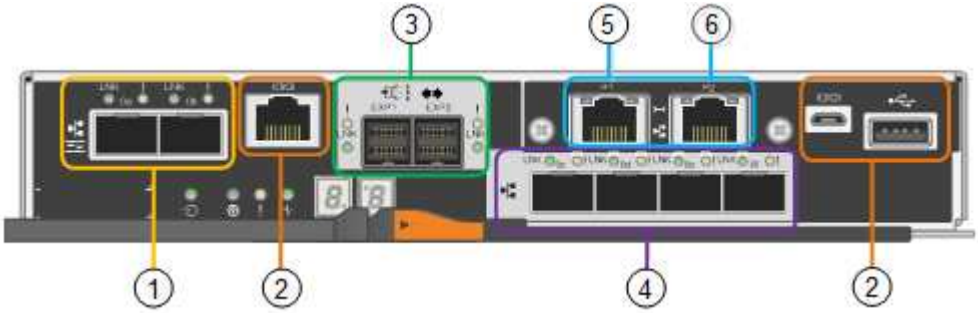

	連接埠	類型	使用
1.	互連連接埠1和2	16GB/s光纖通道（FC）、光纖SFPa	將E5700SG控制器連接至E2800控制器。

	連接埠	類型	使用
2.	診斷與支援連接埠	• RJ-45序列連接埠 • Micro USB序列連接埠 • USB連接埠	保留以供技術支援使用。
3.	磁碟機擴充連接埠	12Gb/s SAS	未使用。不支援擴充磁碟機櫃的產 品。StorageGRID
4.	網路連接埠1-4	10-GbE或25-GbE、取決於SFP收發器類型、交換器速度及設定的連結速度	連線到Grid Network和Client Network for StorageGRID the
5.	管理連接埠1	1-GB（RJ-45）乙太網路	連線至管理網路StorageGRID 以供使用。
6.	管理連接埠2.	1-GB（RJ-45）乙太網路	選項： • 與管理連接埠1連結、以建立與管理網路StorageGRID 的備援連線、以利執行支援。 • 保留無線連線、可用於暫時的本機存取（IP 169.254.0.1）。 • 安裝期間、如果無法使用DHCP指派的IP位址、請使用連接埠2進行IP組態。

E2800系列儲存控制器

SG5700設備使用兩種版本的E2800儲存控制器：E2800A和E2800B。E2800A沒有HIC、E2800B則有四埠HIC。除了互連連接埠的位置之外、兩個控制器版本的規格和功能完全相同。

E2800系列儲存控制器規格如下：

- 作為應用裝置的儲存控制器運作。
- 管理磁碟機上的資料儲存。
- 在單工模式下、可作為標準E系列控制器使用。
- 包含SANtricity 作業系統軟體（控制器韌體）。
- 包含SANtricity 可監控應用裝置硬體、以及管理警示、AutoSupport 功能及磁碟機安全功能的《系統管理程式》。

- 連接至E5700SG控制器、並以目標方式運作。

下圖顯示E2800A和E2800B控制器背面的連接器。

- E2800A*背面的連接器

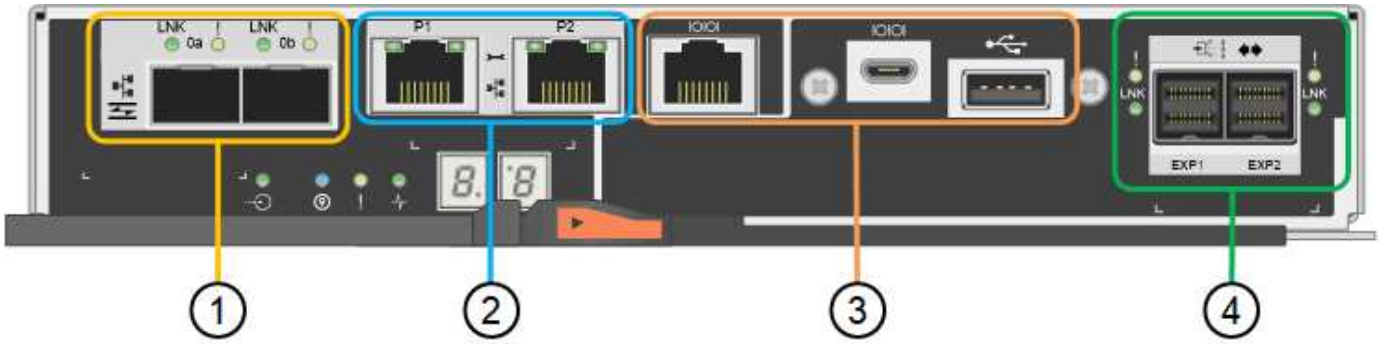

- E2800B*背面的連接器

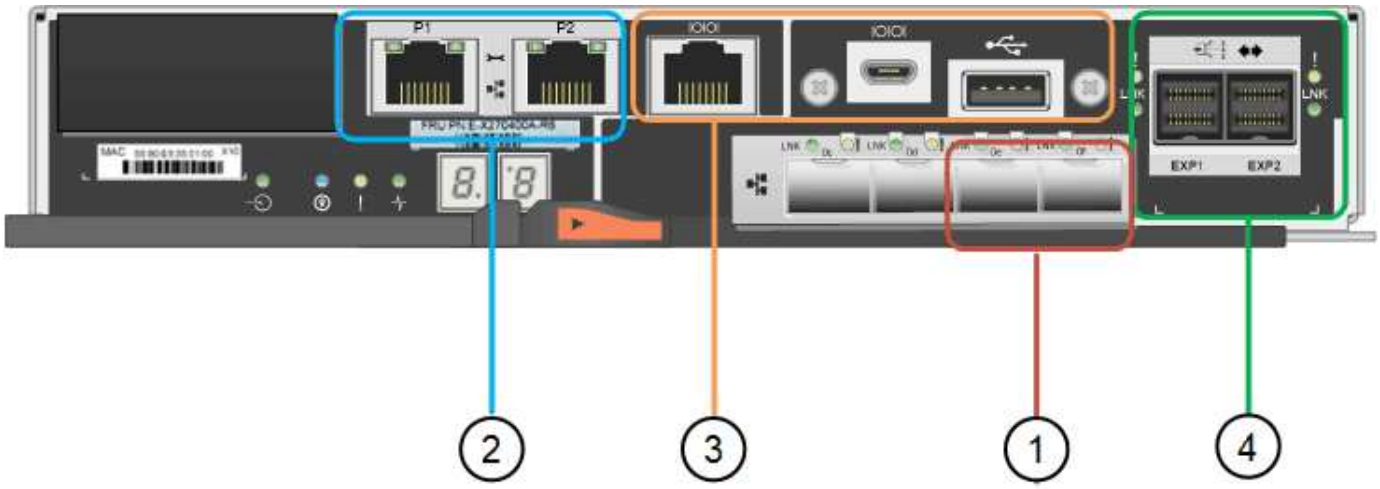

	連接埠	類型	使用
1.	互連連接埠1和2	16GB/s FC光纖SFPa	將E2800控制器連接至E5700SG控制器。

	連接埠	類型	使用
2.	管理連接埠1和2	1-GB（RJ-45）乙太網路	• 連接埠1選項： ◦ 連線至管理網路、即可直接從TCP/IP存取SANtricity到「支援系統管理程式」 ◦ 保留無線以儲存交換器連接埠和IP位址。使用Grid Manager或Storage Grid Appliance Installer UI存取SANtricity《系統管理程式》。 附註：當SANtricity 您選擇不有線連接連接埠1時、某些選用功能（例如NTP同步以取得準確的記錄時間戳記）無法使用。 附註：StorageGRID若SANtricity 您離開連接埠1時、需要使用支援支援支援支援功能才能使用支援功能的支援功能。 • 連接埠2保留供技術支援使用。
3.	診斷與支援連接埠	• RJ-45序列連接埠 • Micro USB序列連接埠 • USB連接埠	保留以供技術支援使用。
4.	磁碟機擴充連接埠。	12Gb/s SAS	未使用。

Copyright Information

Copyright © 2022 NetApp, Inc. All rights reserved. Printed in the U.S. No part of this document covered by copyright may be reproduced in any form or by any means-graphic, electronic, or mechanical, including photocopying, recording, taping, or storage in an electronic retrieval system- without prior written permission of the copyright owner.

Software derived from copyrighted NetApp material is subject to the following license and disclaimer:

THIS SOFTWARE IS PROVIDED BY NETAPP “AS IS” AND WITHOUT ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, WHICH ARE HEREBY DISCLAIMED. IN NO EVENT SHALL NETAPP BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

NetApp reserves the right to change any products described herein at any time, and without notice. NetApp assumes no responsibility or liability arising from the use of products described herein, except as expressly agreed to in writing by NetApp. The use or purchase of this product does not convey a license under any patent rights, trademark rights, or any other intellectual property rights of NetApp.

The product described in this manual may be protected by one or more U.S. patents, foreign patents, or pending applications.

RESTRICTED RIGHTS LEGEND: Use, duplication, or disclosure by the government is subject to restrictions as set forth in subparagraph (c)(1)(ii) of the Rights in Technical Data and Computer Software clause at DFARS 252.277-7103 (October 1988) and FAR 52-227-19 (June 1987).

Trademark Information

NETAPP, the NETAPP logo, and the marks listed at http://www.netapp.com/TM are trademarks of NetApp, Inc. Other company and product names may be trademarks of their respective owners.