檢視SG5600控制器的開機狀態並檢閱錯誤代碼

StorageGRID

NetApp
May 17, 2022

This PDF was generated from https://docs.netapp.com/zh-tw/storagegrid-116/sg5600/e5600sg-controller-seven-segment-display-codes.html on May 17, 2022. Always check docs.netapp.com for the latest.

目錄

檢視SG5600控制器的開機狀態並檢閱錯誤代碼 1
E5600SG控制器七段顯示代碼 1

檢視SG5600控制器的開機狀態並檢閱錯誤代碼

每個控制器上的七區段顯示會在設備開機、硬體初始化、硬體故障且必須從初始化中恢復時、顯示狀態和錯誤代碼。如果您正在監控進度或疑難排解、則應查看代碼出現的順序。

E5600SG控制器的狀態和錯誤代碼與E2700控制器的狀態和錯誤代碼不同。

步驟

1. 開機期間、請檢視七段顯示器上顯示的代碼、以監控進度。
2. 若要檢閱E5600SG控制器的錯誤代碼、請參閱七段顯示狀態和錯誤代碼資訊。
3. 若要檢閱E2700控制器的錯誤代碼、請參閱Support網站上的E2700控制器說明文件。

E5600SG控制器七段顯示代碼

"NetApp文件：E2700系列"

E5600SG控制器七段顯示代碼

E5600SG控制器上的七區段顯示會在裝置開機時、以及在硬體初始化時顯示狀態和錯誤代碼。您可以使用這些代碼來判斷狀態並疑難排解錯誤。

檢閱E5600SG控制器上的狀態和錯誤代碼時、您應該查看下列代碼類型：

- 一般開機代碼

  代表標準開機事件。

- 正常開機代碼

  代表應用裝置中發生的正常開機事件。

- 錯誤代碼

  指出開機事件期間發生的問題。

僅在E5600SG控制器上控制下列LED、且只有在啟動了《SESSE應用程式安裝程式：StorageGRID StorageGRID

- 允許服務動作LED
- 所需服務行動LED
- 七區段顯示

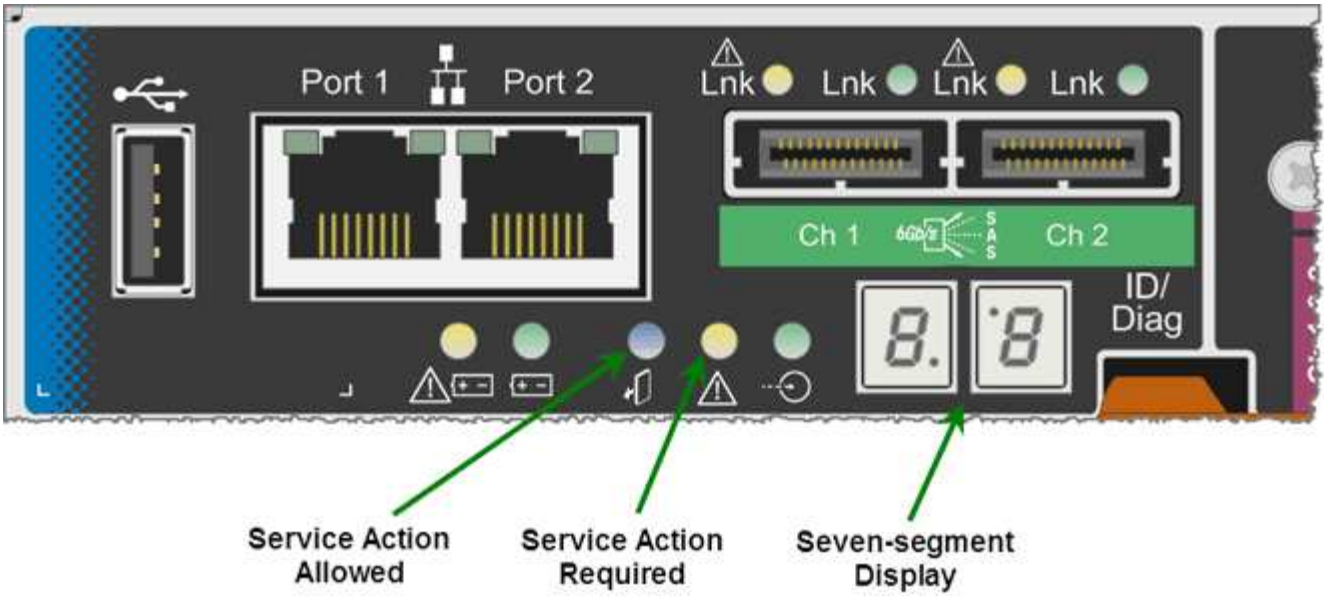

本產品不使用七段顯示器上的小數位數StorageGRID ：

- 最小有效位數旁的上十進位點是平台診斷LED。

  這會在重設和初始硬體組態期間開啟。否則、它會關閉。

- 最重要數字旁邊的較低小十進位點會關閉。

若要診斷其他問題、您可能需要查看下列資源：

- 若要查看所有其他硬體和環境診斷資訊、請參閱E系列作業系統硬體診斷。

  這包括尋找電力、溫度和磁碟機等硬體問題。應用裝置仰賴E系列作業系統來監控所有平台環境狀態。

- 若要判斷韌體和驅動程式問題、請查看SAS和網路連接埠上的連結指示燈。

  如需詳細資料、請參閱E系列E5600文件。

一般開機代碼

在開機期間或硬體硬體重設之後、硬體初始化時、「允許的服務動作」和「需要的服務動作」LED會亮起。七區段顯示器會顯示E系列硬體的相同代碼順序、而非E5600SG控制器特有的代碼順序。

在開機期間、現場可程式化閘陣列（FPGA）會控制硬體的功能和初始化。

程式碼	指示
19	FPGA初始化：
68	FPGA初始化：
…	FPGA初始化。這是快速的一連串程式碼。

程式碼	指示
機管局	平台BIOS開機：
FF	BIOS開機完成。這是E5600SG控制器初始化及管理LED以指出狀態之前的中間狀態。

顯示AA和FF代碼後、可能會出現正常開機代碼或顯示錯誤代碼。此外、「允許的服務行動」和「需要的服務行動」LED燈也會關閉。

正常開機代碼

這些代碼代表設備中發生的正常開機事件、依時間順序排列。

程式碼	指示
嗨	主開機指令碼已啟動。
PP	平台FPGA韌體正在檢查更新。
HP	主機介面卡（HIC）正在檢查更新。
經常預算	韌體更新之後、系統會在必要時重新開機。
FP	韌體更新檢查已完成。啟動與E2700控制器通訊及管理的程序（utmagent)。此程序有助於設備資源配置。
他	系統正在與E系列作業系統同步。
硬拷貝	正在檢查此安裝。StorageGRID
好	安裝管理和主動式介面正在進行。
HA	Linux作業系統和StorageGRID 功能不再是問題。

E5600SG控制器錯誤代碼

這些代碼代表當設備開機時、E5600SG控制器上可能會顯示的錯誤狀況。如果發生特定的低層硬體錯誤、則會顯示其他兩位數的十六進位代碼。如果上述任一代碼持續超過一或兩秒鐘、或您無法依照其中一項規定的疑難排解程序來解決錯誤、請聯絡技術支援部門。

程式碼	指示
22	在任何開機裝置上找不到主要開機記錄。

程式碼	指示
23	未安裝SATA磁碟機。
2A、2B	匯流排卡住、無法讀取DIMM SPD資料。
40	無效的DIMM。
41.	無效的DIMM。
42.	記憶體測試失敗。
51.	SPD讀取失敗。
92至96	PCI匯流排初始化。
從A0到A3.	SATA磁碟機初始化。
AB	替代開機代碼。
AE	開機作業系統：
企業	DDR3訓練失敗。
E8.	未安裝記憶體。
歐盟	找不到安裝指令碼。
EP	「ManageSGA」代碼表示與E2700控制器的預先網格通訊失敗。

疑難排解硬體安裝（SG5600）

"NetApp支援"

Copyright Information

Copyright © 2022 NetApp, Inc. All rights reserved. Printed in the U.S. No part of this document covered by copyright may be reproduced in any form or by any means-graphic, electronic, or mechanical, including photocopying, recording, taping, or storage in an electronic retrieval system- without prior written permission of the copyright owner.

Software derived from copyrighted NetApp material is subject to the following license and disclaimer:

THIS SOFTWARE IS PROVIDED BY NETAPP “AS IS” AND WITHOUT ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, WHICH ARE HEREBY DISCLAIMED. IN NO EVENT SHALL NETAPP BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

NetApp reserves the right to change any products described herein at any time, and without notice. NetApp assumes no responsibility or liability arising from the use of products described herein, except as expressly agreed to in writing by NetApp. The use or purchase of this product does not convey a license under any patent rights, trademark rights, or any other intellectual property rights of NetApp.

The product described in this manual may be protected by one or more U.S. patents, foreign patents, or pending applications.

RESTRICTED RIGHTS LEGEND: Use, duplication, or disclosure by the government is subject to restrictions as set forth in subparagraph (c)(1)(ii) of the Rights in Technical Data and Computer Software clause at DFARS 252.277-7103 (October 1988) and FAR 52-227-19 (June 1987).

Trademark Information

NETAPP, the NETAPP logo, and the marks listed at http://www.netapp.com/TM are trademarks of NetApp, Inc. Other company and product names may be trademarks of their respective owners.