

Ancilla-Efficient QSAMPLE Preparation for Reversible Markov Chains

Nicholas Zhao

Department of Electrical and Electronic Engineering
Imperial College London
London, United Kingdom
nz422@ic.ac.uk

Abstract—Preparing quantum samples (QSAMPLES)—coherent encodings of stationary distributions of reversible Markov chains—is a fundamental primitive in quantum sampling, particularly for quantum simulated annealing. A central limitation of existing phase-estimation-based frameworks is the ancilla qubit overhead. In this work, we present a new end-to-end framework requiring only one ancilla qubit in the working register. The key technical ingredient is a selective phase compiler circuit using one ancilla qubit, built from a generalized quantum signal processing (GQSP)-based projector onto the 1-eigenspace of the qubitized Szegedy walk. Embedding these selective phase compilers into the fixed-point amplitude amplification (FPAA) procedure and iterating yields a quantum algorithm that, given an initial state, oracle access, lower bounds on the overlaps between adjacent states, and lower bounds on the phase gaps, outputs a QSAMPLE within any desired trace distance (and thus total variation distance). The query complexity scales inversely with the square roots of both the minimum overlap and the minimum spectral gap of the Markov chains across the cooling schedule, up to polylogarithmic factors. We also perform simulations to verify how our qubit and query complexity evolve with the trace distance, and how this work compares to the previous framework. These results establish two improvements over the previous framework by Wocjan and Abeyesinghe. First, the working-register ancilla cost is reduced to one. Second, by inserting our GQSP-based selective phase compiler into the FPAA procedure, we improve the QSAMPLE transport overlap dependence from $1/p_{\min}$ to $1/\sqrt{p_{\min}}$, relative to their Grover’s- $\pi/3$ -fixed-point. Finally, as a direct application we run the quantum algorithm to prepare a Gibbs QSAMPLE and obtain a rigorous complexity analysis.

Index Terms—QSAMPLE, Markov chains, Quantum simulated annealing, Quantum walk, Fixed-point amplitude amplification, Generalized quantum signal processing

I. INTRODUCTION

Many quantum sampling and estimation algorithms use quantum encodings of the probability distributions as input states. This is due to the amount of rich information encoded across the superposition of the coherent quantum sample, which quantum algorithms composed of unitaries can perform useful manipulations on. Let π be a probability distribution on Ω , then a QSAMPLE is a quantum state whose amplitudes are square roots of the target distribution

$$|\pi\rangle = \sum_{x \in \Omega} \sqrt{\pi(x)} |x\rangle. \quad (1)$$

Measuring $|\pi\rangle$ in the computational basis $\hat{\Pi}_x := |x\rangle\langle x|$ outputs a classical sample from $\pi(x)$, while an undisturbed fully

coherent quantum state $|\pi\rangle$ allows the probability distributions to be used inside quantum procedures such as amplitude amplification [1], amplitude estimation [2], and mean estimation [3]. Notably, Wocjan et al. [4] proposed a quantum sampling framework which is based on an iteration over the framework put forward by Somma et al. [5] termed Quantum Simulated Annealing (QSA). The framework constructs the Szegedy quantum walk operator [6] associated with a reversible Markov chain on two registers $\mathbb{C}^{|\Omega|} \otimes \mathbb{C}^{|\Omega|}$, and uses quantum phase estimation (QPE) to implement a reflection across the quantum stationary state $|\pi\rangle$ (also in [7]). Since this operation is governed by the phase gap $\Delta = \Omega(\sqrt{\delta(\mathcal{P})})$, where $\delta(\mathcal{P})$ is the spectral gap of the underlying Markov chain, thus the reflection cost scales as $\tilde{\mathcal{O}}(1/\sqrt{\delta(\mathcal{P})})$. These reflections are then used to anneal through a sequence of Markov chains $\mathcal{P}_0, \dots, \mathcal{P}_\ell$ until preparing the target QSAMPLE $|\pi_\ell\rangle$ within trace distance ε . Even though a general quantum speedup for Markov chain Monte Carlo (MCMC) methods has been conjectured to be computationally infeasible due to $\text{SZK} \subseteq \text{BQP}$ [19], [20]. Despite this the framework of [4] still enjoyed much success and wide adoption, particularly in research relating to partition function estimation [2], [8]–[10], Gibbs state preparation [11], and Bayesian inference [12]. However, this framework suffers from two shortcomings. Firstly, the number of ancilla qubits required for a QPE-based reflection scales as $\mathcal{O}(\log(1/\sqrt{\delta(\mathcal{P})}) \log(\ell/\varepsilon))$. Secondly, the Grover- $\pi/3$ fixed-point search incurs a quadratically larger overlap dependence $1/p_i$ whereas the Grover optimum $1/\sqrt{p_i}$ [13] can be achieved by using fixed-point amplitude amplification (FPAA) [14]. Recent developments in generalized quantum signal processing (GQSP) [15] and eigenspace-reflection algorithms [16] also provided us with tools for implementing polynomial transformation on our desired unitaries with reduced ancilla qubit overhead.

In this work, we seek to address these shortcomings by proposing a more ancilla-efficient QSAMPLE preparation scheme using the aforementioned tools.

Contributions: We present a new end-to-end framework for preparing the QSAMPLE, replacing the traditional QPE-based reflection procedure with a selective phase quantum circuit, built from a generalized quantum signal processing (GQSP)-based method using only one ancilla qubit in the working register [15], [16]. Next, we construct the selective

phase compilers and bound the operator norm of their deviation from the ideal selective phase operator, and then rigorously bound the trace distance when fed into each stage of the FPAA subroutine. We then assemble our new end-to-end quantum algorithm, which produces a QSAMPLE within any prescribed trace distance using

$$\tilde{O}\left(\frac{\ell}{\sqrt{p_{\min}}\Delta_{\min}}\right) \quad (2)$$

queries to the oracle $O_{\mathcal{P}}$ and analyse the qubit complexity. We then conduct a comprehensive resource-analysis simulation showing how our query and qubit complexity evolve with the trace distance, compared with [4]. Finally, we apply our framework to prepare a QSAMPLE of the Gibbs state, and by combining it with the schedule-length bound from [10], we obtain an ancilla efficient preparation scheme for the Gibbs QSAMPLE.

II. PRELIMINARIES

Let $\mathcal{P}$ be a reversible ergodic Markov chain on a finite state space Ω , with transition matrix P , stationary distribution π , and spectral gap $\delta(\mathcal{P}) := 1 - \lambda_2(P)$, where $\lambda_2(P)$ is the second-largest eigenvalue. We define the quantum sample as

$$|\pi\rangle := \sum_{x \in \Omega} \sqrt{\pi(x)} |x\rangle \in \mathcal{H}_{\pi}, \quad (3)$$

where $\mathcal{H}_{\pi} := \text{span}\{|x\rangle : x \in \Omega\} \cong \mathbb{C}^{|\Omega|}$, and denote the adjacent squared overlaps as $p_i := |\langle \pi_i | \pi_{i+1} \rangle|^2$. Let us define a partial isometry $\mathcal{V}$ and the Projected Unitary Encoding (PUE):

Definition II.1 (Partial isometry). *Given Hilbert spaces $\mathcal{H}_1 \cong \mathbb{C}^{n_1}$ and $\mathcal{H}_2 \cong \mathbb{C}^{n_2}$ with different dimensions, where $n_1 < n_2$ and $n_1, n_2 \in \mathbb{N}$, then a partial isometry is a mapping*

$$\mathcal{V} : \mathcal{H}_1 \rightarrow \mathcal{H}_2, \quad (4)$$

such that $\mathcal{V}^\dagger \mathcal{V}$ is the projection onto the support of $\mathcal{V}$.

Definition II.2 (Projected Unitary Encodings). *Let U be unitary and let $\mathcal{V}_L, \mathcal{V}_R$ be partial isometries, then $(U, \mathcal{V}_L, \mathcal{V}_R)$ is a projected unitary encoding (PUE) of $A := \mathcal{V}_L^\dagger U \mathcal{V}_R$. If $\mathcal{V}_L = \mathcal{V}_R = \mathcal{V}$ and $U = U^\dagger$, then $(U, \mathcal{V})$ is a symmetric projected unitary encoding (SPUE) of $A := \mathcal{V}^\dagger U \mathcal{V}$.*

Let $|P(x, \cdot)\rangle := \sum_{y \in \Omega} \sqrt{P(x, y)} |y\rangle$ denote the superposition of all the possible transitions, let the quantum step isometry be a mapping $\mathcal{T} : |x\rangle \mapsto |x\rangle |P(x, \cdot)\rangle$ and the swap operator $S : \mathcal{H}_X \otimes \mathcal{H}_Y \rightarrow \mathcal{H}_Y \otimes \mathcal{H}_X$ is defined as $S|x\rangle|y\rangle = |y\rangle|x\rangle$, then we can define the quantum walk in the qubitization formalism following [17]:

Definition II.3 (Qubitized Szegedy walk). *The qubitized Szegedy walk associated with $\mathcal{P}$ is*

$$\mathcal{W} := (2\mathcal{T}\mathcal{T}^\dagger - \mathbb{I})S. \quad (5)$$

The quantum sample in the lifted Szegedy quantum walk space is denoted

$$|\psi\rangle := \mathcal{T}|\pi\rangle = \sum_{x, y \in \Omega} \sqrt{\pi(x)P(x, y)} |x, y\rangle \quad (6)$$

This lives in the space $\mathcal{H}_{\mathcal{W}} \cong \mathbb{C}^{|\Omega|} \otimes \mathbb{C}^{|\Omega|}$. Let us define the quantum oracle as

Definition II.4 (Quantum Oracle). *Let $O_{\mathcal{P}}$ be a unitary oracle satisfying*

$$O_{\mathcal{P}} : |x\rangle|0\rangle \mapsto \sum_{y \in \Omega} \sqrt{P(x, y)} |x\rangle|y\rangle. \quad (7)$$

A query denotes a use of $O_{\mathcal{P}}$ or $O_{\mathcal{P}}^\dagger$.

If we define $(O_{\mathcal{P}}, 1, |0\rangle)$ as a PUE of the quantum step isometry $\mathcal{T}$, then we can define (5) in terms of the implemented unitary

$$\mathcal{W} = (2\mathcal{T}\mathcal{T}^\dagger - \mathbb{I})S = \left[O_{\mathcal{P}}(\mathbb{I} \otimes (2|0\rangle\langle 0| - \mathbb{I}))O_{\mathcal{P}}^\dagger \right] S, \quad (8)$$

this elucidates that one application of $\mathcal{W}$ uses one query to $O_{\mathcal{P}}$, one query to $O_{\mathcal{P}}^\dagger$, and one swap operator S .

Definition II.5 (Phase gap). *Let $\mathcal{W}$ be the qubitized Szegedy walk associated with $\mathcal{P}$. Its phase gap is*

$$\Delta_{\mathcal{W}} := \min\{|\theta| : \theta \neq 0, e^{i\theta} \in \text{spec}(\mathcal{W})\}. \quad (9)$$

It follows that

$$\Delta_{\mathcal{W}} = \cos^{-1}(\lambda_2(P)) \in \Omega\left(\sqrt{\delta(\mathcal{P})}\right). \quad (10)$$

Let Π_0 denote the orthogonal projector onto the 1-eigenspace of $\mathcal{W}$, i.e. $\text{Im}(\Pi_0) = \ker(\mathcal{W} - \mathbb{I})$. Hence, we can write the spectral decomposition of $\mathcal{W}$ as

$$\mathcal{W} = \Pi_0 + \sum_{j \geq 1} e^{i\theta_j} \Pi_j, \quad |\theta_j| \geq \Delta_{\mathcal{W}},$$

where Π_0 is the projector associated with eigenvalue 1. Throughout the paper we denote the projectors as $\Pi_{\pi} := |\pi\rangle\langle\pi|$. The lifted stationary state is (5), where $\text{span}\{|\psi\rangle\} \in \Pi_0$. We therefore use Π_0 for the spectral projector onto the full 1-eigenspace of $\mathcal{W}$, where $\Pi_0 \mathcal{T} = \mathcal{T} \Pi_{\pi}$. We denote trace distance for pure states as

$$D_{\text{tr}}(|\alpha\rangle, |\beta\rangle) := D_{\text{tr}}(|\alpha\rangle\langle\alpha|, |\beta\rangle\langle\beta|) = \sqrt{1 - |\langle\alpha|\beta\rangle|^2}, \quad (11)$$

and the total variation distance (TVD) of the probability distributions α, β on Ω is defined as

$$d_{\text{TV}}(\alpha, \beta) := \frac{1}{2} \sum_{x \in \Omega} |\alpha(x) - \beta(x)|. \quad (12)$$

It can be shown that $d_{\text{TV}}(\alpha, \beta) \leq D_{\text{tr}}(|\alpha\rangle, |\beta\rangle)$. Throughout we also denote $\|\cdot\|$ as the operator norm.

III. SELECTIVE PHASE COMPILER

This is the central ingredient of our framework, where we construct a quantum circuit that implements an approximate selective phase rotation about the target eigenspace of a unitary. In our case, this is the unique stationary eigenstate $|\psi\rangle$ of $\mathcal{W}$. We intentionally use the selective phase operator, which is the generalization of a reflection operator (with reflection recovered at $\phi = \pi$), because the additional degree of freedom in phase

allows us to run FPAA with optimal query complexity [14], unlike the restrictive π -reflections. We begin by defining the selective phase operator.

Definition III.1 (Selective phase operator). *Let $\mathcal{H}$ be a Hilbert space, and let Π be an orthogonal projector onto a target subspace of $\mathcal{H}$. Then for any phase $\phi \in \mathbb{R}$, the selective phase operator associated with Π is*

$$\mathcal{S}_\phi(\Pi) := \mathbb{I} + (e^{i\phi} - 1)\Pi. \quad (13)$$

Remark III.2. For the special value $\phi = 0$, the operator reduces to the identity, $\mathcal{S}_0(\Pi) = \mathbb{I}$. For $\phi = \pi$, it reduces to a reflection, $\mathcal{S}_\pi(\Pi) = \mathbb{I} - 2\Pi$.

This operator applies $e^{i\phi}$ on the target subspace and acts as the identity on its orthogonal complement. However, in general $\mathcal{S}_\phi(\Pi)$ is not given to us directly because the projector is generally hard to compute. We instead build an efficient selective phase compiler to do this, which we build in three steps. First, we use the GQSP framework [15], [16] to construct a unitary $C_{\Delta,\varepsilon}(\mathcal{W})$ whose PUE implements $\Upsilon(\mathcal{W})$, which approximates the zero-eigenphase projector Π_0 using only one ancilla qubit. Second, with respect to an error bound $\varepsilon^\mathcal{W}$, we construct a selective phase quantum circuit utilising the conjugation structure to achieve the desired effect:

$$\tilde{\mathcal{S}}_\phi(\Pi_0) := C_{\Delta,\varepsilon}(\mathcal{W})^\dagger (P_\phi \otimes \mathbb{I}) C_{\Delta,\varepsilon}(\mathcal{W}). \quad (14)$$

where $P_\phi = e^{i\phi} |0\rangle\langle 0| + |1\rangle\langle 1|$ applies a phase to the ancilla- $|0\rangle$ branch. Finally, we transport this implementation back to our original space where the stationary distribution lives, using the following relation:

$$\mathcal{S}_\phi(\Pi_0)\mathcal{T} = \mathcal{T}\mathcal{S}_\phi(\Pi_\pi). \quad (15)$$

We now instantiate the GQSP/eigenspace-reflection construction from [15], [16] to $\mathcal{W}$ to obtain the following result:

Corollary III.3 (GQSP-Projector for $\mathcal{W}$). *Given the qubitized Szegedy walk $\mathcal{W}$ with phase gap $\Delta_\mathcal{W}$, let Π_0 be the orthogonal projector onto the 1-eigenspace of $\mathcal{W}$, and let $\Upsilon, \Phi \in \mathbb{C}[x]$ each be a polynomial of degree d . Then, for any $\varepsilon^\mathcal{W} \in (0, 1)$, there exists a unitary $C_{\Delta,\varepsilon}(\mathcal{W})$ such that $(C_{\Delta,\varepsilon}(\mathcal{W}), |0\rangle, |1\rangle)$ is a PUE of $(\Upsilon(\mathcal{W}), \Phi(\mathcal{W}))^\top$, with $\|\Upsilon(\mathcal{W}) - \Pi_0\| \leq \varepsilon^\mathcal{W}$ and $\Upsilon(\mathcal{W})^\dagger \Upsilon(\mathcal{W}) + \Phi(\mathcal{W})^\dagger \Phi(\mathcal{W}) = \mathbb{I}$, using*

$$\mathcal{O}\left(\frac{1}{\Delta_\mathcal{W}} \log \frac{1}{\varepsilon^\mathcal{W}}\right) \quad (16)$$

controlled- $\mathcal{W}$ operators, single-qubit gates, and one ancilla qubit.

Proof. Given that $\mathcal{W}$ admits a spectral decomposition

$$\mathcal{W} = e^{i\theta_0}\Pi_0 + \sum_{j \geq 1} e^{i\theta_j}\Pi_j, \quad (17)$$

then using the polynomial constructed from [16] gives a d -degree polynomial $\Upsilon \in \mathbb{C}[x]$ which satisfies $\Upsilon(1) = 1$ and

$|\Upsilon(e^{i\theta_j})| \leq \varepsilon^\mathcal{W}$ for all $j \geq 1$ with $|\theta_j| \geq \Delta_\mathcal{W}$. Thus applying Υ onto $\mathcal{W}$ results in

$$\begin{aligned} \Upsilon(\mathcal{W}) &= \Upsilon(1)\Pi_0 + \sum_{j \geq 1} \Upsilon(e^{i\theta_j})\Pi_j \\ \implies \Upsilon(\mathcal{W}) - \Pi_0 &= \sum_{j \geq 1} \Upsilon(e^{i\theta_j})\Pi_j, \end{aligned} \quad (18)$$

After rearranging, taking the spectral norm gives us

$$\|\Upsilon(\mathcal{W}) - \Pi_0\| = \max_{j \geq 1} |\Upsilon(e^{i\theta_j})| \leq \varepsilon^\mathcal{W}, \quad (19)$$

suppressing all non-principal eigenvalues of $\mathcal{W}$ to magnitude at most $\varepsilon^\mathcal{W}$ for $|\theta_j| \geq \Delta_\mathcal{W}$. Moreover, given that $(C_{\Delta,\varepsilon}(\mathcal{W}), |0\rangle, |1\rangle)$ is a PUE of $(\Upsilon(\mathcal{W}), \Phi(\mathcal{W}))^\top$, that is

$$C_{\Delta,\varepsilon}(\mathcal{W})(|0\rangle \otimes \mathbb{I}) = |0\rangle \otimes \Upsilon(\mathcal{W}) + |1\rangle \otimes \Phi(\mathcal{W}), \quad (20)$$

since $C_{\Delta,\varepsilon}(\mathcal{W})$ is unitary, there exists a complementary polynomial Φ such that $\Upsilon(\mathcal{W})^\dagger \Upsilon(\mathcal{W}) + \Phi(\mathcal{W})^\dagger \Phi(\mathcal{W}) = \mathbb{I}$. $\square$

Using these results, we construct a selective phase operating on the 1-eigenspace of $\mathcal{W}$.

Proposition III.4 (Selective phase gadget). *Let $\tilde{\mathcal{S}}_\phi(\Pi_0)$ be defined as above. Then*

$$\left\| \tilde{\mathcal{S}}_\phi(\Pi_0)(|0\rangle \otimes \mathbb{I})\mathcal{T} - (|0\rangle \otimes \mathbb{I})\mathcal{T}\mathcal{S}_\phi(\Pi_\pi) \right\| \leq 2\varepsilon^\mathcal{W}. \quad (21)$$

The compiler uses

$$\mathcal{O}\left(\frac{1}{\Delta_\mathcal{W}} \log \frac{1}{\varepsilon^\mathcal{W}}\right) \quad (22)$$

controlled- $\mathcal{W}$ queries and one ancilla qubit, where each controlled- $\mathcal{W}$ uses one call to $O_\mathcal{P}$ and $O_\mathcal{P}^\dagger$.

Proof. For readability whenever $|0\rangle$, $|1\rangle$, $\langle 0|$, or $\langle 1|$ appears next to an operator, the identity on this Hilbert space is implicit i.e. $|0\rangle$ denotes $|0\rangle \otimes \mathbb{I}$, $\langle 1|$ denotes $\langle 1| \otimes \mathbb{I}$. Given $C_{\Delta,\varepsilon}(\mathcal{W})$ from Corollary III.3

$$C_{\Delta,\varepsilon}(\mathcal{W})(|0\rangle \otimes \mathbb{I}) = |0\rangle \otimes \Upsilon(\mathcal{W}) + |1\rangle \otimes \Phi(\mathcal{W}).$$

Let $\mathcal{Q} := \Upsilon(\mathcal{W})^\dagger \Upsilon(\mathcal{W})$ and $\mathcal{F} := \Phi(\mathcal{W})^\dagger \Phi(\mathcal{W})$. Since $C_{\Delta,\varepsilon}(\mathcal{W})$ is unitary, this block column is an isometry, so

$$\mathcal{Q} + \mathcal{F} = \mathbb{I}.$$

We show that the selective phase on Π_0 as PUE $(\tilde{\mathcal{S}}_\phi(\Pi_0), |0\rangle, |0\rangle)$ of $\mathcal{A}$ as

$$\begin{aligned} \mathcal{A} &= \langle 0| \tilde{\mathcal{S}}_\phi(\Pi_0) |0\rangle \\ &= e^{i\phi} \Upsilon(\mathcal{W})^\dagger \Upsilon(\mathcal{W}) + \Phi(\mathcal{W})^\dagger \Phi(\mathcal{W}) \\ &= \mathbb{I} + (e^{i\phi} - 1)\mathcal{Q}. \end{aligned} \quad (23)$$

It follows that

$$\mathcal{Q} = \Pi_0 + \sum_{j \geq 1} |\Upsilon(e^{i\theta_j})|^2 \Pi_j,$$

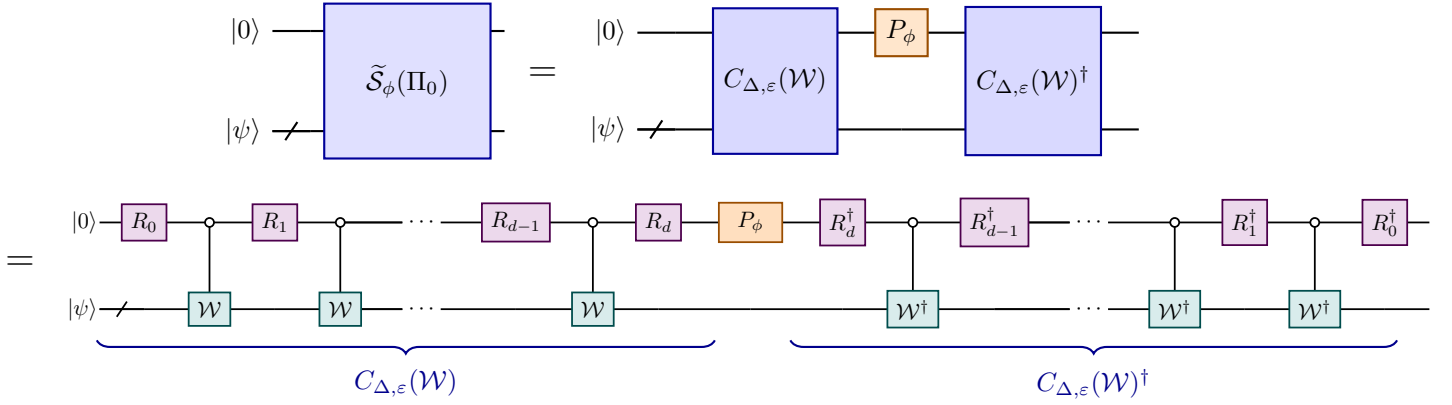


Fig. 1. Structure of the GQSP-based selective-phase compiler $\tilde{\mathcal{S}}_\phi(\Pi_0)$. **Top:** the block-level gadget (left) equals the circuit $C_{\Delta,\varepsilon}(\mathcal{W})^\dagger(P_\phi \otimes \mathbb{I})C_{\Delta,\varepsilon}(\mathcal{W})$. **Bottom:** gate-level decomposition, consists of d controlled $\mathcal{W}$ gates interleaved with single qubit gates $R_0, \dots, R_d$, which are parametrized by three parameters for higher generality [15]. The second half is the adjoint circuit $C_{\Delta,\varepsilon}(\mathcal{W})^\dagger$ with reversed sequence $R_d^\dagger, \dots, R_0^\dagger$ and controlled $\mathcal{W}^\dagger$ gates. Here $d = \mathcal{O}(\Delta_{\mathcal{W}}^{-1} \log(1/\varepsilon^{\mathcal{W}}))$.

where $\mathcal{Q}\Pi_0 = \Pi_0\mathcal{Q} = \Pi_0$. Let $\mathcal{B} := \langle 1 | \tilde{\mathcal{S}}_\phi(\Pi_0) | 0 \rangle$. Since $\tilde{\mathcal{S}}_\phi(\Pi_0)$ is unitary, its first block column is an isometry, so

$$\begin{aligned} \mathcal{B}^\dagger \mathcal{B} &= \mathbb{I} - \mathcal{A}^\dagger \mathcal{A} \\ &= \mathbb{I} - (\mathbb{I} + (e^{-i\phi} - 1)\mathcal{Q})(\mathbb{I} + (e^{i\phi} - 1)\mathcal{Q}) \\ &= -(e^{i\phi} + e^{-i\phi} - 2)\mathcal{Q} - |e^{i\phi} - 1|^2 \mathcal{Q}^2 \\ &= |e^{i\phi} - 1|^2 (\mathcal{Q} - \mathcal{Q}^2). \end{aligned} \quad (24)$$

where the last equality uses $e^{i\phi} + e^{-i\phi} - 2 = -|e^{i\phi} - 1|^2$. We next denote the error where we bring back $|0\rangle \otimes \mathbb{I}$:

$$\mathcal{E}_\phi := \tilde{\mathcal{S}}_\phi(\Pi_0)(|0\rangle \otimes \mathbb{I}) - (|0\rangle \otimes \mathbb{I})\mathcal{S}_\phi(\Pi_0).$$

Using the block formulation above,

$$\mathcal{E}_\phi = (e^{i\phi} - 1)|0\rangle \otimes (\mathcal{Q} - \Pi_0) + |1\rangle \otimes \mathcal{B}.$$

The two states are orthogonal, so multiplying by its own conjugate removes the cross terms and simplifies to

$$\begin{aligned} \mathcal{E}_\phi^\dagger \mathcal{E}_\phi &= |e^{i\phi} - 1|^2 (\mathcal{Q} - \Pi_0)^2 + \mathcal{B}^\dagger \mathcal{B} \\ &= |e^{i\phi} - 1|^2 [(\mathcal{Q} - \Pi_0)^2 + \mathcal{Q} - \mathcal{Q}^2]. \end{aligned}$$

Because $\mathcal{Q}\Pi_0 = \Pi_0\mathcal{Q} = \Pi_0$,

$$(\mathcal{Q} - \Pi_0)^2 = \mathcal{Q}^2 - \Pi_0,$$

where

$$0 \leq \mathcal{Q} - \Pi_0 = \sum_{j \geq 1} |\Upsilon(e^{i\theta_j})|^2 \Pi_j \leq (\varepsilon^{\mathcal{W}})^2 (\mathbb{I} - \Pi_0),$$

we get $\mathcal{E}_\phi^\dagger \mathcal{E}_\phi = |e^{i\phi} - 1|^2 (\mathcal{Q} - \Pi_0)$. Taking operator norm on both sides yield

$$\|\mathcal{E}_\phi\|^2 = |e^{i\phi} - 1|^2 \|\mathcal{Q} - \Pi_0\| \leq |e^{i\phi} - 1|^2 (\varepsilon^{\mathcal{W}})^2,$$

where $\|\mathcal{E}_\phi\| \leq |e^{i\phi} - 1| \varepsilon^{\mathcal{W}}$. Finally, let $|\psi\rangle = \mathcal{T}|\pi\rangle$, and $\mathcal{T}^\dagger \mathcal{T} = \mathbb{I}_\pi$. Then

$$\langle \psi | \mathcal{T} = \langle \pi | \mathcal{T}^\dagger \mathcal{T} = \langle \pi |,$$

and hence

$$\Pi_0 \mathcal{T} = |\psi\rangle \langle \psi | \mathcal{T} = \mathcal{T} |\pi\rangle \langle \pi | = \mathcal{T} \Pi_\pi.$$

Consequently,

$$\begin{aligned} \mathcal{S}_\phi(\Pi_0) \mathcal{T} &= (\mathbb{I} + (e^{i\phi} - 1)\Pi_0) \mathcal{T} \\ &= \mathcal{T} + (e^{i\phi} - 1)\Pi_0 \mathcal{T} \\ &= \mathcal{T} + (e^{i\phi} - 1)\mathcal{T} \Pi_\pi \\ &= \mathcal{T} (\mathbb{I}_\pi + (e^{i\phi} - 1)\Pi_\pi) \\ &= \mathcal{T} \mathcal{S}_\phi(\Pi_\pi). \end{aligned}$$

Multiplying from the right by the isometry $\mathcal{T}$ gives

$$\begin{aligned} \|\tilde{\mathcal{S}}_\phi(\Pi_0)(|0\rangle \otimes \mathbb{I})\mathcal{T} - (|0\rangle \otimes \mathbb{I})\mathcal{S}_\phi(\Pi_0)\mathcal{T}\| \\ \leq |e^{i\phi} - 1| \varepsilon^{\mathcal{W}}. \end{aligned}$$

Both terms are maps $\mathcal{H}_\pi \rightarrow \mathbb{C}^2 \otimes \mathcal{H}_{\mathcal{W}}$. Using $\mathcal{S}_\phi(\Pi_0)\mathcal{T} = \mathcal{T}\mathcal{S}_\phi(\Pi_\pi)$ and $|e^{i\phi} - 1| = 2|\sin(\phi/2)| \leq 2$, we obtain

$$\|\tilde{\mathcal{S}}_\phi(\Pi_0)(|0\rangle \otimes \mathbb{I})\mathcal{T} - (|0\rangle \otimes \mathbb{I})\mathcal{T}\mathcal{S}_\phi(\Pi_\pi)\| \leq 2\varepsilon^{\mathcal{W}}.$$

□

For use inside FPAA, we regard the compiled selective phase as an operation on the original state space by implemented by the oracle

$$\hat{\mathcal{S}}_{j,\phi} := (\mathbb{I}_a \otimes O_{P_j}^\dagger) \tilde{\mathcal{S}}_\phi(\Pi_{0,j}) (\mathbb{I}_a \otimes O_{P_j}). \quad (25)$$

Thus, on clean oracle workspace, $\hat{\mathcal{S}}_{j,\phi}$ implements the selective phase about $|\pi_j\rangle$ up to the same error as Proposition III.4, with only a constant-factor increase in oracle calls.

IV. FIXED-POINT AMPLITUDE AMPLIFICATION

With the selective phase circuit constructed in Section III, we can now run FPAA [14], an amplitude amplification scheme that rotates the state from $|\pi_i\rangle$ to $|\pi_{i+1}\rangle$ given only a lower bound on the overlap p between the two states. Unlike Grover's

algorithm or vanilla amplitude amplification, which require the exact overlap, FPAA avoids the notorious *soufflé problem*: over- or under-rotation both degrade the final overlap. Furthermore, FPAA retains the quadratic improvement $\mathcal{O}(1/\sqrt{p})$, unlike the $\pi/3$ -amplitude amplification scheme used in [4], where the rigidly imposed phase $\pi/3$ worsens the complexity from $1/\sqrt{p}$ to $1/p$. We restate the theorem as follows:

Theorem IV.1 (FPAA [14], restated). *Let $|\pi_i\rangle, |\pi_{i+1}\rangle$ be unit vectors with overlap lower bound $|\langle\pi_i|\pi_{i+1}\rangle|^2 \geq p_i > 0$. Then, for any $\varepsilon_i^{\text{FP}} \in (0, 1)$, there exists an odd integer*

$$L_i = \mathcal{O}\left(\frac{1}{\sqrt{p_i}} \log \frac{1}{\varepsilon_i^{\text{FP}}}\right) \quad (26)$$

and a sequence of phase angles $\{\alpha_j, \beta_j\}_{j=1}^{(L_i-1)/2}$ such that the unitary

$$U_i^{\text{FP}} := \prod_{j=1}^{(L_i-1)/2} \mathcal{S}_{\beta_j}(\Pi_{\pi_{i+1}}) \mathcal{S}_{\alpha_j}(\Pi_{\pi_i}) \quad (27)$$

satisfies $D_{\text{tr}}(U_i^{\text{FP}} |\pi_i\rangle, |\pi_{i+1}\rangle) \leq \varepsilon_i^{\text{FP}}$.

Corollary IV.2 (GQSP-based FPAA). *Let U_i^{FP} be the ideal unitary from Theorem IV.1 and let $\tilde{U}_i^{\text{FP}}$ be the GQSP-based FPAA. Then for any odd FPAA sequence length L_i and errors $\varepsilon_i^{\text{FP}}, \varepsilon_i^{\text{W}} \in (0, 1)$, operating on $|\pi_i\rangle$, it satisfies the trace-distance bound*

$$D_{\text{tr}}(\tilde{U}_i^{\text{FP}} |\pi_i\rangle, |\pi_{i+1}\rangle) \leq 2(L_i - 1)\varepsilon_i^{\text{W}} + \varepsilon_i^{\text{FP}}. \quad (28)$$

Proof. By Theorem IV.1, the ideal FPAA word has the form

$$U_i^{\text{FP}} = \prod_{j=1}^{(L_i-1)/2} \mathcal{S}_{\beta_j}(\Pi_{\pi_{i+1}}) \mathcal{S}_{\alpha_j}(\Pi_{\pi_i}). \quad (29)$$

The compiled word is

$$\tilde{U}_i^{\text{FP}} = \prod_{j=1}^{(L_i-1)/2} \tilde{\mathcal{S}}_{\beta_j}(\Pi_{0,i+1}) \tilde{\mathcal{S}}_{\alpha_j}(\Pi_{0,i}). \quad (30)$$

Applying proposition III.4 onto the normalized input state $|\pi_i\rangle$, combined with using sub-multiplicativity and the telescoping identity outputs

$$\begin{aligned} & \|\tilde{U}_i^{\text{FP}} |\pi_i\rangle - U_i^{\text{FP}} |\pi_i\rangle\| \\ & \leq \sum_{j=1}^{(L_i-1)/2} \|\tilde{\mathcal{S}}_{\beta_j}(\Pi_{0,i+1}) \tilde{\mathcal{S}}_{\alpha_j}(\Pi_{0,i}) \\ & \quad - \mathcal{S}_{\beta_j}(\Pi_{\pi_{i+1}}) \mathcal{S}_{\alpha_j}(\Pi_{\pi_i})\| \\ & \leq \sum_{j=1}^{(L_i-1)/2} \left[\|\tilde{\mathcal{S}}_{\beta_j}(\Pi_{0,i+1}) (\tilde{\mathcal{S}}_{\alpha_j}(\Pi_{0,i}) - \mathcal{S}_{\alpha_j}(\Pi_{\pi_i}))\| \right. \\ & \quad \left. + \|(\tilde{\mathcal{S}}_{\beta_j}(\Pi_{0,i+1}) - \mathcal{S}_{\beta_j}(\Pi_{\pi_{i+1}})) \mathcal{S}_{\alpha_j}(\Pi_{\pi_i})\| \right] \\ & \stackrel{(i)}{\leq} \sum_{j=1}^{(L_i-1)/2} (2\varepsilon_i^{\text{W}} + 2\varepsilon_i^{\text{W}}) \\ & = 2(L_i - 1)\varepsilon_i^{\text{W}}, \end{aligned} \quad (31)$$

Algorithm 1: QSAMPLE Preparation

Input: $\{\mathcal{P}_i, \pi_i, \mathcal{W}_i, \Delta_{\mathcal{W}_i}\}_{i=0}^\ell$ on Ω ; cooling schedule ℓ , overlap lower bounds $|\langle\pi_i|\pi_{i+1}\rangle|^2 \geq p_i$; initial state $|\pi_0\rangle$; error ε .

Output: QSAMPLE $|\tilde{\pi}_\ell\rangle$ with $D_{\text{tr}}(|\tilde{\pi}_\ell\rangle, |\pi_\ell\rangle) \leq \varepsilon$.

```

1 Set per-stage error so that  $\varepsilon_i^{\text{FP}} + 2(L_i - 1)\varepsilon_i^{\text{W}} \leq \varepsilon/\ell$ ;
2 Initialize the system register in  $|\pi_0\rangle \otimes |0\rangle$ ;
3 for  $i \leftarrow 0$  to  $\ell - 1$  do
4   for  $j \in \{i, i+1\}$  do
5      $\tilde{\mathcal{S}}_\phi(\Pi_{0,j}) \leftarrow \text{SelectivePhase}(\text{Prop III.4})$ ;
6    $|\tilde{\pi}_{i+1}\rangle \leftarrow \text{FPAA}(\text{Corollary IV.2})$ ;
7 return  $|\tilde{\pi}_\ell\rangle$ ;
```

where (i) uses the unitarity of $\tilde{\mathcal{S}}_{\alpha_j}, \tilde{\mathcal{S}}_{\beta_j}, \mathcal{S}_{\alpha_j}, \mathcal{S}_{\beta_j}$ (each has operator norm 1). Since they are pure states, the trace distance can be bounded as

$$D_{\text{tr}}(\tilde{U}_i^{\text{FP}} |\pi_i\rangle, U_i^{\text{FP}} |\pi_i\rangle) \leq 2(L_i - 1)\varepsilon_i^{\text{W}}. \quad (32)$$

Finally, applying the triangle inequality we get

$$\begin{aligned} D_{\text{tr}}(\tilde{U}_i^{\text{FP}} |\pi_i\rangle, |\pi_{i+1}\rangle) & \leq D_{\text{tr}}(\tilde{U}_i^{\text{FP}} |\pi_i\rangle, U_i^{\text{FP}} |\pi_i\rangle) + \\ & \quad D_{\text{tr}}(U_i^{\text{FP}} |\pi_i\rangle, |\pi_{i+1}\rangle) \\ & \leq 2(L_i - 1)\varepsilon_i^{\text{W}} + \varepsilon_i^{\text{FP}}. \end{aligned} \quad (33)$$

□

V. END-TO-END QSAMPLE PREPARATION FRAMEWORK

We now assemble the above ingredients into an end-to-end quantum-sampling framework, presented in Algorithm 1. The procedure is as follows. Begin with the initial state $|\pi_0\rangle$ and iterate ℓ times: synthesize the projector Π_0 using GQSP (Corollary III.3); construct, from this projector, the sequence of compiled selective-phase circuits $\{\tilde{\mathcal{S}}_{\alpha_j}(\Pi_{0,i}), \tilde{\mathcal{S}}_{\beta_j}(\Pi_{0,i+1})\}_{j=1}^{(L_i-1)/2}$ (Proposition III.4); and assemble FPAA as their product

$$\tilde{U}_i^{\text{FP}} = \prod_{j=1}^{(L_i-1)/2} \tilde{\mathcal{S}}_{\beta_j}(\Pi_{0,i+1}) \tilde{\mathcal{S}}_{\alpha_j}(\Pi_{0,i})$$

(Corollary IV.2). When all stages are completed, the algorithm returns a quantum state $|\tilde{\pi}_\ell\rangle$ within the prescribed trace-distance error. We present our main theorem below, followed by an instantiation in terms of spectral gap and total variation distance, which is relevant for analysis through the classical-sampling lens. A comparison of our query and space complexity against the prior QSAMPLE framework is given in Table I, with a fixed-benchmark numerical simulation shown in Fig. 3. The full architecture of the algorithm is visualized in Fig. 2.

Theorem V.1 (End-to-end constant-ancilla QSAMPLE preparation). *Let $\{\mathcal{P}_i\}_{i=0}^\ell$ be a sequence of slowly varying reversible ergodic Markov chains on a finite state space Ω , with stationary distributions $\{\pi_i\}_{i=0}^\ell$, spectral gaps $\{\delta(\mathcal{P}_i)\}_{i=0}^\ell$, and overlap lower bounds $|\langle\pi_i|\pi_{i+1}\rangle|^2 \geq p_i > 0$ for all $i \in \{0, \dots, \ell-1\}$.*

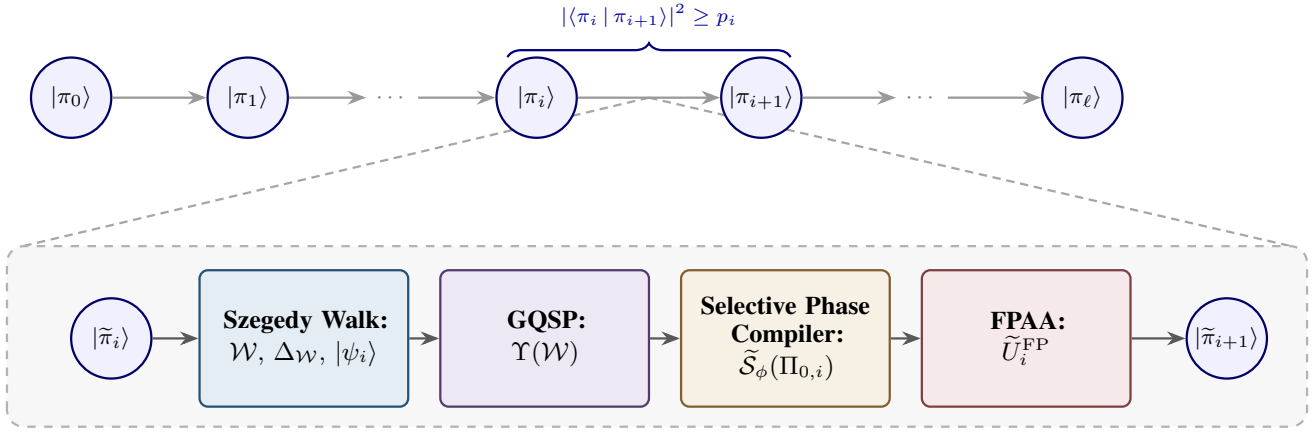


Fig. 2. Architecture of the constant-ancilla QSAMPLE preparation algorithm. **Top row:** the cooling schedule advances through ℓ stages of stationary states $|\pi_0\rangle \rightarrow \dots \rightarrow |\pi_\ell\rangle$. **Bottom row:** each transition $|\pi_i\rangle \rightarrow |\pi_{i+1}\rangle$ uses the qubitized Szegedy walk, to build a GQSP-based selective-phase compiler, to then use FPAA subroutine to transport the state.

Denote $p_{\min} := \min_{0 \leq i \leq \ell-1} p_i$ and $\Delta_{\min} := \min_{0 \leq i \leq \ell} \Delta_{\mathcal{W}_i}$. Assume $|\pi_0\rangle$ can be prepared exactly and that we have access to oracles $O_{\mathcal{P}_i}$. Then, for any $\varepsilon \in (0, 1)$, Algorithm 1 outputs a QSAMPLE $|\tilde{\pi}_\ell\rangle$ with $D_{\text{tr}}(|\tilde{\pi}_\ell\rangle, |\pi_\ell\rangle) \leq \varepsilon$ using

$$\mathcal{O}\left(\frac{\ell}{\sqrt{p_{\min}} \Delta_{\min}} \log \frac{\ell}{\varepsilon} \log\left(\frac{\ell}{\varepsilon \sqrt{p_{\min}}} \log \frac{\ell}{\varepsilon}\right)\right) \quad (34)$$

queries to $\{O_{\mathcal{P}_i}, O_{\mathcal{P}_i}^\dagger\}_{i=0}^\ell$, and one additional qubit in the working register.

Proof. Denote the joint clean state by $|\pi_i\rangle := |\pi_i\rangle |0\rangle$. For each stage $i \in \{0, \dots, \ell-1\}$ choose an error tolerance with $\sum_{i=0}^{\ell-1} \varepsilon_i \leq \varepsilon$, and set $\varepsilon_i^{\text{FP}} := \varepsilon_i/2$ and $\varepsilon_i^{\mathcal{W}} := \varepsilon_i/(4(L_i - 1))$. Then from Corollary IV.2,

$$D_{\text{tr}}\left(\tilde{U}_i^{\text{FP}} |\pi_i\rangle, |\pi_{i+1}\rangle\right) \leq 2(L_i - 1)\varepsilon_i^{\mathcal{W}} + \varepsilon_i^{\text{FP}} \leq \varepsilon_i. \quad (35)$$

We now derive the query complexity. Given the overlap $|\langle \pi_i | \pi_{i+1} \rangle|^2 \geq p_i$, FPAA at each stage uses

$$\begin{aligned} L_i &= \mathcal{O}\left(\frac{1}{\sqrt{p_i}} \log \frac{1}{\varepsilon_i^{\text{FP}}}\right) \\ &= \mathcal{O}\left(\frac{1}{\sqrt{p_i}} \log \frac{1}{\varepsilon_i}\right) \end{aligned} \quad (36)$$

number of selective phase compilers, each of which costs

$$\mathcal{O}\left(\frac{1}{\min\{\Delta_{\mathcal{W}_i}, \Delta_{\mathcal{W}_{i+1}}\}} \log \frac{1}{\varepsilon_i^{\mathcal{W}}}\right) \quad (37)$$

controlled- $\mathcal{W}$ operators. Since $\varepsilon_i^{\mathcal{W}} = \varepsilon_i/(4(L_i - 1))$, we have

$$\frac{1}{\varepsilon_i^{\mathcal{W}}} = \frac{4(L_i - 1)}{\varepsilon_i}, \quad (38)$$

which gives

$$\frac{1}{\varepsilon_i^{\mathcal{W}}} = \mathcal{O}\left(\frac{1}{\varepsilon_i \sqrt{p_i}} \log \frac{1}{\varepsilon_i}\right). \quad (39)$$

Moreover, using $p_i \geq p_{\min}$,

$$\log \frac{1}{\varepsilon_i^{\mathcal{W}}} = \mathcal{O}\left(\log\left(\frac{1}{\varepsilon_i \sqrt{p_{\min}}} \log \frac{1}{\varepsilon_i}\right)\right), \quad (40)$$

thus the query cost at each stage i is

$$\mathcal{O}\left(\frac{1}{\sqrt{p_i} \min\{\Delta_{\mathcal{W}_i}, \Delta_{\mathcal{W}_{i+1}}\}} \log \frac{1}{\varepsilon_i} \log\left(\frac{1}{\varepsilon_i \sqrt{p_{\min}}} \log \frac{1}{\varepsilon_i}\right)\right). \quad (41)$$

Given that $\varepsilon_i = \varepsilon/\ell$, using $p_i \geq p_{\min}$ and $\Delta_{\mathcal{W}_i}, \Delta_{\mathcal{W}_{i+1}} \geq \Delta_{\min}$, summing over all $i = 0, \dots, \ell-1$ requires

$$\mathcal{O}\left(\frac{\ell}{\sqrt{p_{\min}} \Delta_{\min}} \log \frac{\ell}{\varepsilon} \log\left(\frac{\ell}{\varepsilon \sqrt{p_{\min}}} \log \frac{\ell}{\varepsilon}\right)\right) \quad (42)$$

queries to the set of oracles $\{O_{\mathcal{P}_i}, O_{\mathcal{P}_i}^\dagger\}_{i=0}^\ell$. This implementation uses $2\lceil \log_2 |\Omega| \rceil + 1$ qubits, made up of two Ω -registers and one additional qubit.

Finally, with $|\tilde{\pi}_{i+1}\rangle := \tilde{U}_i^{\text{FP}} |\tilde{\pi}_i\rangle$, the triangle inequality, unitary invariance of D_{tr} , and the per-stage bound from Corollary IV.2 yield the recursive identity

$$\begin{aligned} D_{\text{tr}}(|\tilde{\pi}_{i+1}\rangle, |\pi_{i+1}\rangle) &\leq D_{\text{tr}}\left(\tilde{U}_i^{\text{FP}} |\tilde{\pi}_i\rangle, \tilde{U}_i^{\text{FP}} |\pi_i\rangle\right) \\ &\quad + D_{\text{tr}}\left(\tilde{U}_i^{\text{FP}} |\pi_i\rangle, |\pi_{i+1}\rangle\right) \\ &\leq D_{\text{tr}}(|\tilde{\pi}_i\rangle, |\pi_i\rangle) + \varepsilon_i. \end{aligned} \quad (43)$$

Since $|\tilde{\pi}_0\rangle = |\pi_0\rangle$, the initial trace distance is zero, so by induction over $i = 0, \dots, \ell-1$, the final trace distance of QSAMPLE is

$$D_{\text{tr}}(|\tilde{\pi}_\ell\rangle, |\pi_\ell\rangle) \leq \sum_{i=0}^{\ell-1} \varepsilon_i = \varepsilon. \quad (44)$$

□

Consequently, measuring the QSAMPLE in the computational basis outputs a classical sample $x \leftarrow \tilde{\pi}_\ell$ that is ε -close to the classical target distribution in total variation,

$$d_{\text{TV}}(\tilde{\pi}_\ell, \pi_\ell) \leq D_{\text{tr}}(|\tilde{\pi}_\ell\rangle, |\pi_\ell\rangle) \leq \varepsilon, \quad (45)$$

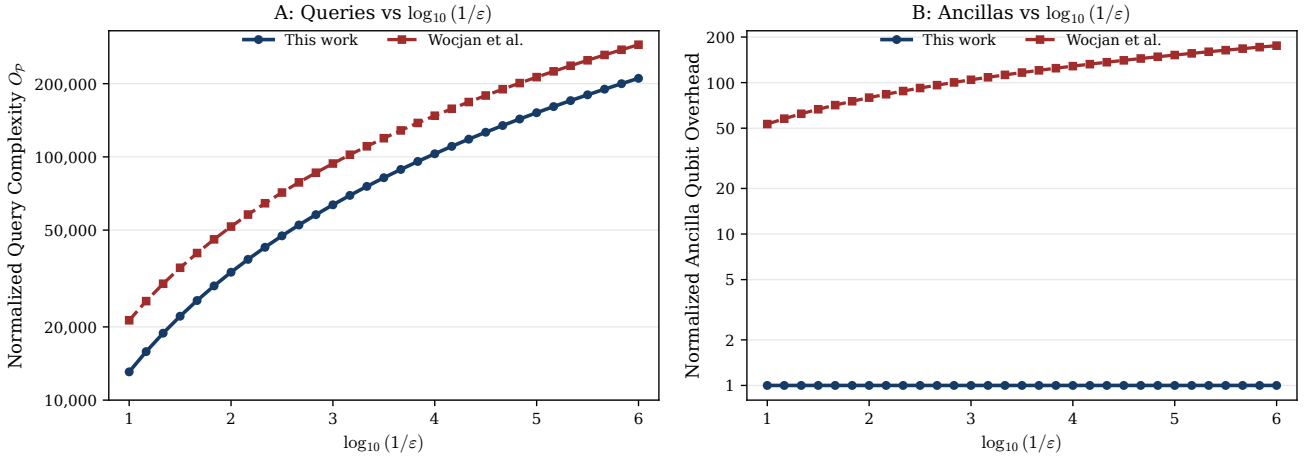


Fig. 3. Fixed-benchmark comparison of the resource cost of our QSAMPLE framework against Wocjan et al. [4]. The benchmark is using an open-boundary ferromagnetic 2×4 Ising ladder under random-scan single-site heat-bath Glauber dynamics, with lazified Markov chain $P_{\beta_i} = (\mathbb{I} + G_{\beta_i})/2$, where Gibbs states are annealed through inverse temperatures $\beta_i \in \{0.0, 0.3, 0.6, 0.9, 1.2\}$ ($\ell = 4$ transitions). The horizontal axis is $\log_{10}(1/\varepsilon)$, where ε is the trace distance error. Panel A shows our algorithm (blue) achieves lower asymptotic query complexity than [4] (red). Panel B shows the ancilla qubit on our working register remains constant, whilst [4] increases polylogarithmically.

TABLE I
COMPARISON OF QUERY COMPLEXITY AND ANCILLA OVERHEAD WITH THE PRIOR FRAMEWORK.

Resource	Wocjan et al. [4]	This work
Query complexity	$\tilde{O}\left(\frac{\ell}{p_{\min} \Delta_{\min}}\right)$	$\tilde{O}\left(\frac{\ell}{\sqrt{p_{\min}} \Delta_{\min}}\right)$
Ancilla overhead	$O\left(\log \frac{1}{\Delta_{\min}} \log \frac{\ell}{\varepsilon p_{\min}}\right)$	1

and the required query complexity is

$$\tilde{O}\left(\frac{\ell}{\sqrt{p_{\min}} \delta(\mathcal{P}_{\min})}\right), \quad (46)$$

where $\delta(\mathcal{P}_{\min})$ is the minimum spectral gap across the cooling schedule.

VI. APPLICATION: GIBBS QSAMPLE

Given a classical Hamiltonian $H : \Omega_{\mu} \rightarrow \mathbb{R}$, the Gibbs distribution is

$$\mu_{\beta}(x) := \frac{e^{-\beta H(x)}}{\mathcal{Z}(\beta)}, \quad (47)$$

where β is the inverse temperature and the partition function is $\mathcal{Z}(\beta) = \sum_{x \in \Omega_{\mu}} e^{-\beta H(x)}$. The Gibbs distribution appears across statistical physics, Bayesian inference [12], machine learning, and combinatorial optimization. Applying Theorem V.1 yields the following.

Corollary VI.1 (Gibbs QSAMPLE preparation). *Let $H : \Omega_{\mu} \rightarrow \{0, \dots, n\}$ be a nonnegative Hamiltonian, with the Gibbs distribution defined in (47). By construction of [10], there exists a cooling schedule $\beta_0 = 0 < \dots < \beta_{\ell}$ of length $\ell = \mathcal{O}(\sqrt{\ln |\Omega_{\mu}| \ln n})$ with overlap $|\langle \mu_{\beta_i} | \mu_{\beta_{i+1}} \rangle|^2 \geq \frac{1}{15}$. Assume for each inverse temperature, there is a reversible Markov chain $\mathcal{P}_{\beta_i}$ and stationary distribution μ_{β_i} , with spectral gap*

$\delta(\mathcal{P}_{\beta_i})$ and associated phase gap $\Delta_{\min} := \min_{0 \leq i \leq \ell} \Delta_{\mathcal{W}_{\beta_i}}$. Then for any $\varepsilon \in (0, 1)$, given oracle access to $\mathcal{O}_{\mathcal{P}_{\beta_i}}$, there exists a quantum algorithm that outputs a Gibbs QSAMPLE $|\tilde{\mu}_{\beta_{\ell}}\rangle$ satisfying $D_{\text{tr}}(|\tilde{\mu}_{\beta_{\ell}}\rangle, |\mu_{\beta_{\ell}}\rangle) \leq \varepsilon$ with query complexity

$$\tilde{O}\left(\frac{\sqrt{\ln |\Omega_{\mu}| \ln n}}{\Delta_{\min}}\right), \quad (48)$$

and uses one additional qubit in the working register.

Proof. Since the Gibbs QSAMPLE is

$$|\mu_{\beta_i}\rangle = \sum_{x \in \Omega_{\mu}} \sqrt{\mu_{\beta_i}(x)} |x\rangle = \frac{1}{\sqrt{\mathcal{Z}(\beta_i)}} \sum_{x \in \Omega_{\mu}} e^{-\beta_i H(x)/2} |x\rangle, \quad (49)$$

and Theorem 3.4 from [10] obtains the overlap bound

$$|\langle \mu_{\beta_i} | \mu_{\beta_{i+1}} \rangle|^2 = \frac{\mathcal{Z}\left(\frac{\beta_i + \beta_{i+1}}{2}\right)^2}{\mathcal{Z}(\beta_i) \mathcal{Z}(\beta_{i+1})} \geq \frac{1}{15}, \quad (50)$$

meaning the overlap is constant $p_{\min} = 1/15$. Next, there exists a cooling schedule for the Gibbs QSAMPLE of length $\ell = \mathcal{O}(\sqrt{\ln |\Omega_{\mu}| \ln n})$ obtained from Theorem 3.4 of [10]. Now inserting both results into Theorem V.1 achieves a query complexity of

$$\begin{aligned} & \mathcal{O}\left(\frac{\sqrt{\ln |\Omega_{\mu}| \ln n}}{\Delta_{\min}} \log \frac{\sqrt{\ln |\Omega_{\mu}| \ln n}}{\varepsilon}\right. \\ & \quad \cdot \log\left(\frac{\sqrt{\ln |\Omega_{\mu}| \ln n}}{\varepsilon} \log \frac{\sqrt{\ln |\Omega_{\mu}| \ln n}}{\varepsilon}\right) \\ & \quad \left. = \tilde{O}\left(\frac{\sqrt{\ln |\Omega_{\mu}| \ln n}}{\Delta_{\min}}\right)\right), \end{aligned} \quad (51)$$

The implementation acts on two Ω_{μ} registers for the original qubitized Szegedy walk, and one additional qubit from GQSP. $\square$

It follows that measuring the Gibbs QSAMPLE in the computational basis produces a sample from the classical Gibbs distribution $x \leftarrow \mu_{\beta_\ell}$ satisfying $d_{\text{TV}}(\tilde{\mu}_{\beta_\ell}, \mu_{\beta_\ell}) \leq D_{\text{tr}}(\tilde{\mu}_{\beta_\ell}, \mu_{\beta_\ell}) \leq \varepsilon$ using

$$\tilde{\mathcal{O}}\left(\frac{\sqrt{\ln |\Omega_\mu| \ln n}}{\sqrt{\delta(\mathcal{P}_{\beta_{\min}})}}\right) \quad (52)$$

query complexity.

VII. DISCUSSION

We have presented an improved algorithmic framework for QSAMPLE preparation of reversible Markov chains, yielding two improvements over the QPE-based framework. First, the working-register ancilla overhead is reduced from $\mathcal{O}(\log(1/\Delta_{\min}) \log(\ell/\varepsilon))$ to one, by replacing the QPE-based reflection subroutine with our GQSP-based selective-phase compiler. Second, the overlap dependence is improved quadratically from $1/p_{\min}$ to $1/\sqrt{p_{\min}}$ by replacing Grover’s $\pi/3$ -fixed-point search with our compiled version of FPAA. We also validated our improvements through numerical simulations comparing our query and qubit complexities with those of [4]. Finally, applying our method to the Gibbs QSAMPLE yields a more qubit-efficient preparation scheme compared to the previous result [4], [11]. This has direct impact on reducing the cost of running quantum algorithms for partition-function estimation, since the working-register ancilla requirement is reduced to one. A natural direction for future work is to determine whether the present framework, a suitable refinement thereof, or a fundamentally different approach can prepare QSAMPLES for the family of non-reversible Markov chains, for which super-quadratic quantum speedups have recently been observed in [18].

REFERENCES

- [1] G. Brassard, P. Høyer, M. Mosca, and A. Tapp, “Quantum amplitude amplification and estimation,” in *Quantum Computation and Information*, AMS, 2002, pp. 53–74. doi: [10.1090/conm/305/05215](https://doi.org/10.1090/conm/305/05215).
- [2] A. Montanaro, “Quantum speedup of Monte Carlo methods,” *Proc. Royal Society A: Math., Phys., Eng. Sci.*, vol. 471, no. 2181, p. 20150301, Sep. 2015. doi: [10.1098/rspa.2015.0301](https://doi.org/10.1098/rspa.2015.0301).
- [3] A. Cornelissen, Y. Hamoudi, and S. Jerbi, “Near-optimal quantum algorithms for multivariate mean estimation,” in *Proc. 54th Annu. ACM SIGACT Symp. Theory of Computing (STOC ’22)*, ACM, Jun. 2022, pp. 33–43. doi: [10.1145/3519935.3520045](https://doi.org/10.1145/3519935.3520045).
- [4] P. Wocjan and A. Abeyesinghe, “Speed-up via quantum sampling,” *Physical Review A*, vol. 78, no. 4, p. 042336, Oct. 2008. doi: [10.1103/PhysRevA.78.042336](https://doi.org/10.1103/PhysRevA.78.042336).
- [5] R. D. Somma, S. Boixo, H. Barnum, and E. Knill, “Quantum simulations of classical annealing processes,” *Physical Review Letters*, vol. 101, no. 13, p. 130504, 2008. doi: [10.1103/PhysRevLett.101.130504](https://doi.org/10.1103/PhysRevLett.101.130504). arXiv:[0804.1571](https://arxiv.org/abs/0804.1571).
- [6] M. Szegedy, “Quantum speed-up of Markov chain based algorithms,” in *Proc. 45th Annu. IEEE Symp. Foundations of Computer Science (FOCS)*, 2004, pp. 32–41. doi: [10.1109/FOCS.2004.53](https://doi.org/10.1109/FOCS.2004.53).
- [7] F. Magniez, A. Nayak, J. Roland, and M. Santha, “Search via quantum walk,” *SIAM Journal on Computing*, vol. 40, no. 1, pp. 142–164, Jan. 2011. doi: [10.1137/090745854](https://doi.org/10.1137/090745854).
- [8] D. Štefanković, S. Vempala, and E. Vigoda, “Adaptive simulated annealing: A near-optimal connection between sampling and counting,” *J. ACM*, vol. 56, no. 3, art. 18, May 2009. doi: [10.1145/1516512.1516520](https://doi.org/10.1145/1516512.1516520).
- [9] A. Cornelissen and Y. Hamoudi, “A sublinear-time quantum algorithm for approximating partition functions,” arXiv:[2207.08643](https://arxiv.org/abs/2207.08643), 2023. doi: [10.1137/1.9781611977554.ch46](https://doi.org/10.1137/1.9781611977554.ch46).
- [10] S. Arunachalam, V. Havlicek, G. Nannicini, K. Temme, and P. Wocjan, “Simpler (classical) and faster (quantum) algorithms for Gibbs partition functions,” *Quantum*, vol. 6, p. 789, Sep. 2022. doi: [10.22331/q-2022-09-01-789](https://doi.org/10.22331/q-2022-09-01-789).
- [11] P. Wocjan, C.-F. Chiang, D. Nagaj, and A. Abeyesinghe, “Quantum algorithm for approximating partition functions,” *Physical Review A*, vol. 80, no. 2, p. 022340, Aug. 2009. doi: [10.1103/PhysRevA.80.022340](https://doi.org/10.1103/PhysRevA.80.022340).
- [12] A. W. Harrow and A. Y. Wei, “Adaptive quantum simulated annealing for Bayesian inference and estimating partition functions,” in *Proc. 14th Annu. ACM-SIAM Symp. Discrete Algorithms*, SIAM, 2020, pp. 193–212. doi: [10.1137/1.9781611975994.12](https://doi.org/10.1137/1.9781611975994.12).
- [13] L. K. Grover, “A fast quantum mechanical algorithm for database search,” arXiv:[quant-ph/9605043](https://arxiv.org/abs/quant-ph/9605043), 1996.
- [14] T. J. Yoder, G. H. Low, and I. L. Chuang, “Fixed-point quantum search with an optimal number of queries,” *Physical Review Letters*, vol. 113, no. 21, p. 210501, Nov. 2014. doi: [10.1103/PhysRevLett.113.210501](https://doi.org/10.1103/PhysRevLett.113.210501).
- [15] D. Motlagh and N. Wiebe, “Generalized quantum signal processing,” *PRX Quantum*, vol. 5, no. 2, p. 020368, 2024. doi: [10.1103/PRXQuantum.5.020368](https://doi.org/10.1103/PRXQuantum.5.020368).
- [16] B. Claudon, “A simple algorithm to reflect through eigenspaces of unitaries,” arXiv:[2412.09320](https://arxiv.org/abs/2412.09320), 2025.
- [17] B. Claudon, P. Rodenas-Ruiz, J.-P. Piquemal, and P. Monmarché, “Quantum circuits for the Metropolis-Hastings algorithm,” arXiv:[2506.11576](https://arxiv.org/abs/2506.11576), 2025.
- [18] B. Claudon, J.-P. Piquemal, and P. Monmarché, “Quantum speedup for nonreversible Markov chains,” *Nature Communications*, vol. 16, no. 1, Nov. 2025. doi: [10.1038/s41467-025-65761-5](https://doi.org/10.1038/s41467-025-65761-5).
- [19] D. Aharonov and A. Ta-Shma, “Adiabatic quantum state generation and statistical zero knowledge,” in *Proc. 35th Annu. ACM Symp. Theory of Computing (STOC ’03)*, ACM, 2003, pp. 20–29.
- [20] S. Aaronson, “Quantum lower bound for the collision problem,” arXiv:[quant-ph/0111102](https://arxiv.org/abs/quant-ph/0111102), 2001.