Notes of Quantum Optics

Wyant College of Optical Sciences
University of Arizona

Nicolás Hernández Alegría

Preface

Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetuer id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Contents

Preface **2**

1 Field quantization **8**

1.1 Electrodinamics review 9

1.2 Quantization of a single-mode field 9

1.3 Coherent states 15

1.4 Quadrature operators 16

1.5 Squeezed states 18

1.6 Thermal fields 22

2 Optical devices **25**

2.1 Beam splitter 26

3 Nonclassical light **30**

3.1 Detection of quadrature states 31

3.2 Generation of squeezed states 32

A Density operator (review from app knight) **36**

A.1 Density operator 36

List of Figures

1.1 One-dimensional cavity problem. Perfect conducting walls. 9
1.1 20

2.1 Description of a beamsplitter (BS). 27

3.1 Balanced homodyne detection. 31
3.1 Nonlinear medium 32
3.2 Energy and momentum conservation. 34

List of Tables

1.1 Summary of the displaced squeezed temporal state $|\xi, \alpha\rangle = \hat{D}(\alpha)\hat{S}(\xi)\,|0\rangle$ with $\xi = r\angle\phi$. . . 22

Listings

This page is blank intentionally

Chapter 1

Field quantization

1.1 Electrodinamics review 9
1.2 Quantization of a single-mode field 9
1.3 Coherent states 15
1.4 Quadrature operators 16
1.5 Squeezed states 18
1.6 Thermal fields 22

1.1 Electrodinamics review

1.1.1 Plane waves and algebra

1.1.2 Helmholtz and potentials

1.1.3 Wave equations

1.2 Quantization of a single-mode field

1.2.1 Fields in a cavity

Lets consider the following one-dimensional problem, where a cavity of length L is oriented along the z-axis.

A linear polarized E-field is assumed, the medium is free space, perfect conducting walls and there is no free charges nor free current. The scheme is shown in figure 1.1.

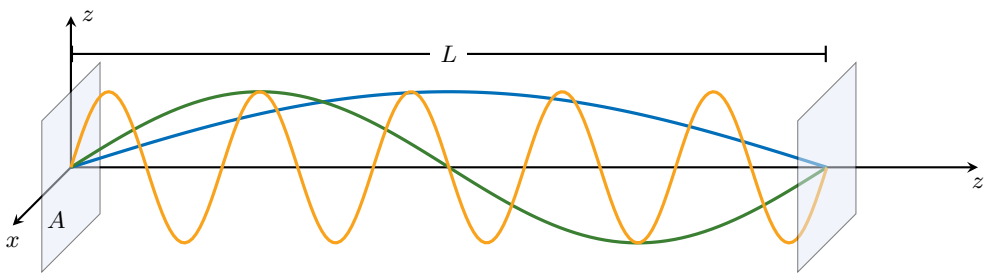

Figure 1.1 One-dimensional cavity problem. Perfect conducting walls.

Our goal is to find the E- and B-field inside the cavity. Maxwell's equations in this case are:

$$\text{Maxwell's equations with free sources} \quad \begin{cases} \nabla \cdot \boldsymbol{E} = 0 \\ \nabla \cdot \boldsymbol{B} = 0 \\ \nabla \times \boldsymbol{E} = -\partial_t \boldsymbol{B} \\ \nabla \times \boldsymbol{B} = \frac{1}{c^2}\partial_t \boldsymbol{E} \end{cases} \tag{1.1}$$

The E-field will be assumed to be $\boldsymbol{E}(z,t) = \boldsymbol{e}E(z,t)$, where $\boldsymbol{e}$ is the polarization vector. Because fields depends only on z, $\nabla = \hat{\boldsymbol{z}}\partial_z$. First Maxwell equation yields:

$$\nabla \cdot \boldsymbol{E} = \partial_z(\hat{\boldsymbol{z}} \cdot \boldsymbol{E}) = \partial_z(\hat{\boldsymbol{z}} \cdot \boldsymbol{e}E) = 0 \Longrightarrow \boldsymbol{e} \cdot \hat{\boldsymbol{z}} = 0.$$

This implies that the polarization vector must be unitary in the transverse plane:

$$\boldsymbol{e} = \cos\phi\hat{\boldsymbol{x}} + \sin\phi\hat{\boldsymbol{y}}.$$

Third Maxwell's equation yields

$$\nabla \times \boldsymbol{E} = (\hat{\boldsymbol{z}}\partial_z) \times (\boldsymbol{e}E) = (\hat{\boldsymbol{z}} \times \boldsymbol{e})\partial_z E = -\partial_t \boldsymbol{B}.$$

Taking the curl of this equation, using Fourth Maxwell's equation and vector identities:

$$\begin{aligned} \nabla \times (\nabla \times \boldsymbol{E}) &= -\partial_t(\nabla \times \boldsymbol{B}) \\ \nabla(\cancel{\nabla \cdot \boldsymbol{E}})^{0} - \nabla^2 \boldsymbol{E} &= -\frac{1}{c^2}\partial_t^2 \boldsymbol{E} \\ -\boldsymbol{e}\partial_z^2 E &= -\boldsymbol{e}\frac{1}{c^2}\partial_t^2 E. \end{aligned}$$

From here, we have the E-field wave equation for this particular problem.

$$\partial_z^2 E - \frac{1}{c^2}\partial_t^2 E = 0. \tag{1.2}$$

Before solving this equation, we need the boundary condition set by the PEC condition. We need to $\hat{n} \times \boldsymbol{E} = 0$ on the surface. Because the normal surface unit vector is $\hat{n} = \pm\hat{\boldsymbol{z}}$, we have

$$\text{Boundary condition} \qquad \hat{n} \times \boldsymbol{E} = \hat{\boldsymbol{z}} \times (\boldsymbol{e}E) = 0 \Longrightarrow E(z=0,t) = E(z=L,t) = 0.$$

In order to solve the PDE, we assum a product form $E(z,t) = Z(z)q(t)$. Then, by replacing in it in (1.2):

$$\begin{aligned}
\partial_z^2[Z(z)q(t)] - \frac{1}{c^2}\partial_t^2[Z(z)q(t)] &= 0 \\
Z''(z)q(t) - \frac{1}{c^2}Z(z)\ddot{q}(t) &= \Big/ [Z(z)q(t)]^{-1} \\
\frac{Z''(z)}{Z(z)} &= \frac{1}{c^2}\frac{\ddot{q}(z)}{q(z)}.
\end{aligned}$$

Left side depends only on z, while the right side only on y. The only way this can be true is if both are a constant, say, $-k^2$. Then,

$$\text{Spatial and temporal differential equations} \qquad \begin{cases} \dfrac{Z''}{Z} = -k^2 \longrightarrow Z'' + k^2 Z = 0 \\ \dfrac{1}{c^2}\dfrac{\ddot{T}}{T} = -k^2 \longrightarrow \ddot{q} + \omega^2 q(t) = 0 \end{cases}.$$

For the spatial ODE, we assume a solution of the form

$$Z(z) = A\sin(kz) + B\cos(kz), \quad Z(0) = Z(L) = 0.$$

Setting the boundaries:

$$\begin{aligned}
Z(0) &= A\sin(0) + B\cos(0) = 0 \Longrightarrow B = 0 \\
Z(L) &= A\sin(kL) = 0 \Longrightarrow k_m = \frac{m\pi}{L}, \quad m \in \mathbb{N}.
\end{aligned}$$

We left the temporal ODE unsolved. Finally, putting all together yields the initial E-field:

$$\boldsymbol{E}_{\boldsymbol{k},\lambda}(z,t) = \boldsymbol{e}_\lambda \sqrt{\frac{2\omega^2}{V\varepsilon_0}} q_{\boldsymbol{k},\lambda}(t)\sin(kz), \quad k_m = \frac{m\pi}{L}, \quad \omega = ck.$$

We have includnig the subscript λ and $\boldsymbol{k}$ to consider multiple mode $\boldsymbol{k}$ varied with m and λ. Also, the coefficient in red is for better results in the future. Using Faraday's law:

$$\boldsymbol{B}_{\boldsymbol{k},\lambda}(z,t) = (\boldsymbol{k} \times \boldsymbol{e}_\lambda)\frac{1}{kc^2}\sqrt{\frac{2\omega^2}{V\varepsilon_0}}\dot{q}_{\boldsymbol{k},\lambda}(t)\sin(kz).$$

The term $\dot{q}(t)$ will play the role of a canonical momentum for a particle of unit mass, $p(t) = \dot{q}(t)$.

1.2.2 Single-mode Hamiltonian

The classical field energy, or Hamiltonian H, of the single-mode field is given by

$$\begin{aligned}
H_{\boldsymbol{k},\lambda} &= \frac{1}{2}\int dV \left[\varepsilon_0 \boldsymbol{E}^2_{\boldsymbol{k},\lambda} + \frac{1}{\mu_0}\boldsymbol{B}^2_{\boldsymbol{k},\lambda}\right] \\
&= \frac{1}{2}A\int_0^L dz \left[\frac{2\omega^2}{V\varepsilon_0} q^2_{\boldsymbol{k},\lambda}(t)\sin^2(kz) + \frac{1}{\mu_0}\frac{1}{k^2c^4}\frac{2\omega^2}{V\varepsilon_0} p^2_{\boldsymbol{k},\lambda}(t)\cos^2(kz)\right] \\
&= \frac{A}{V}\int_0^L dz \left[\omega^2 q^2_{\boldsymbol{k},\lambda}(t)\sin^2(kz) + p^2_{\boldsymbol{k},\lambda}(t)\cos^2(kz)\right] \\
&= \frac{1}{L}\left[\omega^2 q^2_{\boldsymbol{k},\lambda}(t)\frac{L}{2} + p^2_{\boldsymbol{k},\lambda}(t)\frac{L}{2}\right] \\
H_{\boldsymbol{k},\lambda} &= \frac{1}{2}\left[\omega^2 q^2_{\boldsymbol{k},\lambda}(t) + p^2_{\boldsymbol{k},\lambda}(t)\right].
\end{aligned}$$

It is apparent that a single-mode field if formally equivalent to a harmonic quantim oscillator of unit mass, where the E- and B-fields play the roles of canonical position and momentum.

$$H_{\text{harmonic oscillator}} = \frac{1}{2}m\omega^2 x^2 + \frac{p^2}{2m}.$$

To begin the quantization, we make q, p operators $\hat{q}, \hat{p}$, which needs to satisfy the canonical commutation relations

$$[\hat{q}_{\boldsymbol{k},\lambda}, \hat{p}_{\boldsymbol{k},\lambda}] = i\hbar. \tag{1.3}$$

The EM fields with the operators are:

$$\text{Quantized EM fields} \qquad \begin{aligned}
\hat{\boldsymbol{E}}_{\boldsymbol{k},\lambda}(z,t) &= \boldsymbol{e}_{\boldsymbol{k},\lambda}\sqrt{\frac{2\omega^2}{V\varepsilon_0}}\hat{q}(t)\sin(kz) \\
\hat{\boldsymbol{B}}_{\boldsymbol{k},\lambda}(z,t) &= (\boldsymbol{k}\times\boldsymbol{e}_{\boldsymbol{k},\lambda})\frac{1}{kc^2}\sqrt{\frac{2\omega^2}{V\varepsilon_0}}\hat{p}(t)\cos(kz)
\end{aligned}. \tag{1.4}$$

The operators $\hat{q}, \hat{p}$ are Hermitian and therefore correspond to obserable quantites. It is convenient to introduce the ladder operators to simplify the expresison:

$$\text{Ladder operator} \qquad \begin{aligned}
\hat{a}_{\boldsymbol{k},\lambda} &= \sqrt{\tfrac{1}{2\hbar\omega}}(\omega\hat{q}_{\boldsymbol{k},\lambda} + i\hat{p}_{\boldsymbol{k},\lambda}) \\
\hat{a}^\dagger_{\boldsymbol{k},\lambda} &= \sqrt{\tfrac{1}{2\hbar\omega}}(\omega\hat{q}_{\boldsymbol{k},\lambda} - i\hat{p}_{\boldsymbol{k},\lambda})
\end{aligned} \longrightarrow \begin{aligned}
\hat{q}_{\boldsymbol{k},\lambda} &= \sqrt{\tfrac{\hbar}{2\omega}}(\hat{a}_{\boldsymbol{k},\lambda} + \hat{a}^\dagger_{\boldsymbol{k},\lambda}) \\
\hat{p}_{\boldsymbol{k},\lambda} &= -i\sqrt{\tfrac{\hbar\omega}{2}}(\hat{a}_{\boldsymbol{k},\lambda} - \hat{a}^\dagger_{\boldsymbol{k},\lambda})
\end{aligned}.$$

Using these defintion, the Hamiltonian yields:

$$\begin{aligned}
\hat{H}_{\boldsymbol{k},\lambda} &= -\frac{1}{2}\frac{\hbar\omega}{2}(\hat{a}_{\boldsymbol{k},\lambda} - \hat{a}^\dagger_{\boldsymbol{k},\lambda})(\hat{a}_{\boldsymbol{k},\lambda} - \hat{a}^\dagger_{\boldsymbol{k},\lambda}) + \frac{1}{2}\frac{\hbar\omega^2}{2\omega}(\hat{a}_{\boldsymbol{k},\lambda} + \hat{a}^\dagger_{\boldsymbol{k},\lambda})(\hat{a}_{\boldsymbol{k},\lambda} + \hat{a}^\dagger_{\boldsymbol{k},\lambda}) \\
&= \frac{\hbar\omega}{2}[\hat{a}^\dagger_{\boldsymbol{k},\lambda}\hat{a}_{\boldsymbol{k},\lambda} + \hat{a}_{\boldsymbol{k},\lambda}\hat{a}^\dagger_{\boldsymbol{k},\lambda}] = \hbar\omega\left[\hat{a}^\dagger_{\boldsymbol{k},\lambda}\hat{a}_{\boldsymbol{k},\lambda} + \frac{1}{2}\right] = \hbar\omega\left[n_{\boldsymbol{k},\lambda} + \frac{1}{2}\right].
\end{aligned}$$

The time dependence of the ladder operator in Heisenberg equation is:

$$\frac{d\hat{a}_{\boldsymbol{k},\lambda}}{dt} = \frac{i}{\hbar}[\hat{H}_{\boldsymbol{k},\lambda}, \hat{a}_{\boldsymbol{k},\lambda}] = \frac{i}{\hbar}\left[\hbar\omega\left(\hat{a}^\dagger_{\boldsymbol{k},\lambda}\hat{a}_{\boldsymbol{k},\lambda} + \frac{1}{2}\right), \hat{a}_{\boldsymbol{k},\lambda}\right] = -i\omega\hat{a}_{\boldsymbol{k},\lambda} \longrightarrow \begin{aligned}
\hat{a}_{\boldsymbol{k},\lambda}(t) &= \hat{a}_{\boldsymbol{k},\lambda}(0)e^{-i\omega t} \\
\hat{a}^\dagger_{\boldsymbol{k},\lambda}(t) &= \hat{a}^\dagger_{\boldsymbol{k},\lambda}(0)e^{i\omega t}
\end{aligned}.$$

For example, we have the following applications:

$$\hat{a}_{\boldsymbol{k},\lambda}\left|0\right\rangle = \left|1\right\rangle_{\boldsymbol{k},\lambda}, \quad \hat{a}_{\boldsymbol{k},\lambda}\left|n\right\rangle_{\boldsymbol{k},\lambda} = \sqrt{n}\left|n-1\right\rangle_{\boldsymbol{k},\lambda}, \quad \hat{a}^{\dagger}_{\boldsymbol{k},\lambda}\left|n\right\rangle_{\boldsymbol{k}',\lambda'} = \left|n\right\rangle_{\boldsymbol{k},\lambda}\left|1\right\rangle_{\boldsymbol{k}',\lambda'}, \quad \hat{a}_{\boldsymbol{k},\lambda}\left|n\right\rangle_{\boldsymbol{k}',\lambda'}\left|0\right\rangle_{\boldsymbol{k},\omega} = 0.$$

The operator product $\hat{a}^{\dagger}\hat{a}$ has an important significance and is called the number operator $\hat{n}$, whose eigenequation is

$$\hat{n}\left|n\right\rangle = n\left|n\right\rangle.$$

The state $\left|n\right\rangle$ is the energy eigenstte of the single mode field with energy eiganvlaue E_n:

$$\hat{H}\left|n\right\rangle = \hbar\omega(\hat{a}^{\dagger}\hat{a} + \frac{1}{2})\left|n\right\rangle = E_n\left|n\right\rangle$$

The relation between the number state and the raising operator $\hat{a}^{\dagger}$ is:

$$\left|n\right\rangle = \frac{(\hat{a}^{\dagger})^n}{\sqrt{n}}\left|0\right\rangle.$$

1.2.3 Quantizing the multimode field

We now consider all the modes in the optical cavity:

$$\boldsymbol{E}(z,t) = \sum_{m,\lambda}\hat{\boldsymbol{e}}_{\lambda}\sqrt{\frac{2\omega_m^2}{\varepsilon_0 V}}\hat{q}_{m,\lambda}(t)\sin(k_m z) \tag{1.5}$$

$$\boldsymbol{B}(z,t) = \sum_{m,\lambda}(\hat{\boldsymbol{z}}\times\hat{\boldsymbol{e}}_{\lambda})\frac{1}{k_m c^2}\sqrt{\frac{2\omega_m^2}{\varepsilon_0 V}}\dot{\hat{q}}_{m,\lambda}(t)\cos(k_m z). \tag{1.6}$$

where $kL = m\pi$ and $\hat{\boldsymbol{e}}_{\lambda} = \{\hat{\boldsymbol{x}}, \hat{\boldsymbol{y}}\}$. The process is anaglogous; we compute the Hamiltonian:

$$\begin{aligned}
H &= \int dV\left[\frac{1}{2}\varepsilon_0\boldsymbol{E}^2(z,t) + \frac{1}{2\mu_0}\boldsymbol{B}(z,t)\right] \\
&= \int dV\left[\frac{1}{2}\varepsilon_0\left\{\sum_{m,\alpha}\hat{\boldsymbol{e}}_{\alpha}\sqrt{\frac{2\omega_m^2}{\varepsilon_0 V}}q_{m,\alpha}(t)\sin(k_m z)\right\}^2 + \frac{1}{2\mu_0}\varepsilon_0\left\{\sum_{m,\alpha}(\hat{\boldsymbol{z}}\times\hat{\boldsymbol{e}}_{\alpha})\frac{\mu_0}{\varepsilon_0}k_m\sqrt{\frac{2\omega_m^2}{\varepsilon_0 V}}\dot{q}_{m,\alpha}(t)\cos(k_m z)\right\}^2\right] \\
&\vdots \\
H &= \frac{1}{2}\sum_{m,\lambda}(\omega_m^2 q_{m,\lambda}^2 + \dot{q}_{m,\lambda}^2).
\end{aligned}$$

That is,

Each mode of the EM field is an independent harmonic oscillator.

We can quantize the multimode EM field in a similar way as the sige mode field to obtain the Hamiltonian:

$$\text{Hamiltoninan multimode EM field} \qquad \hat{H} = \sum_{m,\lambda}\hbar\omega_m\left[\hat{a}^{\dagger}_{m,\lambda}a_{m,\lambda} + \frac{1}{2}\right] = \sum_{m,\lambda}\hbar\omega_m\left[\hat{n}_{m,\lambda} + \frac{1}{2}\right],$$

where $\hat{n}_{m,\lambda}$ is the number of excitations in mode m,λ.

1.2.4 Quantizing EM field in free space

We define the scalar and vector potential

$$\boldsymbol{B} = \nabla \times \boldsymbol{A} \quad \text{and} \quad \boldsymbol{E} = -\partial_t \boldsymbol{A} - \nabla\phi.$$

Using these automatically satisfy the Gauss magnetic equation and Ampere law. In QO, we assume **Coulomb gauge**: $\nabla \cdot \boldsymbol{A} = 0$. With this, the E-field is

$$\boldsymbol{E} = -\partial_t \boldsymbol{A} - \nabla\phi = \boldsymbol{E}^{\perp} + \boldsymbol{E}^{\parallel}, \quad \text{where} \begin{cases} \nabla \cdot \boldsymbol{E}^{\perp} = 0, & \boldsymbol{A} \text{ corresponds to radiation (all transverse)} \\ \boldsymbol{E}'' = -\nabla\phi, & \boldsymbol{A} \text{ corresponds to the field of sources (all longitudinal)} \end{cases}.$$

In Coulomb gauge, in absence of charge $\phi = 0$ such that the vector potential-wave equation is

$$\nabla^2 \boldsymbol{A} - \frac{1}{2}\partial_t^2 \boldsymbol{A} = 0.$$

It can be solved with the following plane wave

$$\boldsymbol{A}(\boldsymbol{r}, t) = \sum_{\boldsymbol{k},\lambda} \hat{\boldsymbol{e}}_{\boldsymbol{k},\lambda} \left[A_{\boldsymbol{k},\lambda} e^{i(\boldsymbol{k}\cdot\boldsymbol{r} - \omega t)} + A^*_{\boldsymbol{k},\lambda} e^{-i(\boldsymbol{k}\cdot\boldsymbol{r} - \omega t)} \right], \quad \nabla \cdot \boldsymbol{A} = 0 \Longrightarrow \boldsymbol{k} \cdot \hat{\boldsymbol{e}}_{\boldsymbol{k},\lambda} = 0.$$

The vector potential in free space is expressed as a sueprposition of plane waves such that linear dispersion $\omega = |\boldsymbol{k}|c$ is satisfied with $\hat{\boldsymbol{e}}_{\boldsymbol{k},\lambda} \cdot \hat{\boldsymbol{e}}_{\boldsymbol{k},\lambda'} = \delta_{\lambda\lambda'}$.

The quantization volume we quantize the field is considered to have finite volume of V and we impose periodic boundary such that each side is equal.

The E- and B-field are then:

$$\boldsymbol{E}(\boldsymbol{r}, t) = -\partial_t \boldsymbol{A}(\boldsymbol{r}, t) = i \sum_{\boldsymbol{k},\lambda} \hat{\boldsymbol{e}}_{\boldsymbol{k},\lambda} \omega \left[A_{\boldsymbol{k},\lambda} e^{i(\boldsymbol{k}\cdot\boldsymbol{r} - \omega t)} + A^*_{\boldsymbol{k},\lambda} e^{-i(\boldsymbol{k}\cdot\boldsymbol{r} - \omega t)} \right],$$

$$\boldsymbol{B}(\boldsymbol{r}, t) = \nabla \times \boldsymbol{A}(\boldsymbol{r}, t) = i \sum_{\boldsymbol{k},\lambda} \hat{\boldsymbol{e}}_{\boldsymbol{k},\lambda} \left[A_{\boldsymbol{k},\lambda} e^{i(\boldsymbol{k}\cdot\boldsymbol{r} - \omega t)} + A^*_{\boldsymbol{k},\lambda} e^{-i(\boldsymbol{k}\cdot\boldsymbol{r} - \omega t)} \right].$$

The energy (Hamiltonian) associated with the fields is:

$$H = -\int dV \left[\frac{1}{2}\varepsilon_0 \boldsymbol{E}^2(\boldsymbol{r}, t) + \frac{1}{2\mu_0} \boldsymbol{B}(\boldsymbol{r}, t) \right]$$

$$\vdots$$

$$H = 2\varepsilon_0 V \sum_{\boldsymbol{k},\lambda} \omega^2 |A_{\boldsymbol{k},\lambda}|^2.$$

We have used the following relation:

$$\int dV e^{\pm i(\boldsymbol{k} - \boldsymbol{k}')\cdot\boldsymbol{r}} = \delta_{\boldsymbol{k}\boldsymbol{k}'} V.$$

Defining

$$A_{\boldsymbol{k},\lambda} = \frac{1}{2\omega\sqrt{\varepsilon_0 V}} (\omega q_{\boldsymbol{k},\lambda} + i p_{\boldsymbol{k},\lambda}), \quad A^*_{\boldsymbol{k},\lambda} = \frac{1}{2\omega\sqrt{\varepsilon_0 V}} (\omega q_{\boldsymbol{k},\lambda} - i p_{\boldsymbol{k},\lambda}).$$

The Hamiltonian is:

$$H = \frac{1}{2}\sum_{\boldsymbol{k},\lambda}(\omega^2 q_{\boldsymbol{k},\lambda}^2 + p_{\boldsymbol{k},\lambda}^2) \xrightarrow{\text{quantizing}} \hat{H} = \sum_{\boldsymbol{k},\lambda}\hbar\omega\left(\hat{a}_{\boldsymbol{k},\lambda}^\dagger \hat{a}_{\boldsymbol{k},\lambda} + \frac{1}{2}\right),$$

where we have defined the ladder operators:

$$\hat{a} = \frac{1}{\sqrt{2\hbar\omega}}(\omega\hat{q} + i\hat{p}), \quad \hat{a}^\dagger = \frac{1}{\sqrt{2\hbar\omega}}(\omega\hat{q} - i\hat{p}). \tag{1.7}$$

So, the coefficients are expressed in term of the ladder:

$$A_{\boldsymbol{k},\lambda} = \sqrt{\frac{\hbar}{2\omega\varepsilon_0 V}}\hat{a}_{\boldsymbol{k},\lambda}, \quad A_{\boldsymbol{k},\lambda}^* = \sqrt{\frac{\hbar}{2\omega\varepsilon_0 V}}\hat{a}_{\boldsymbol{k},\lambda}^\dagger.$$

Thus the fields are:

$$\begin{aligned}
\boldsymbol{A}(\boldsymbol{r},t) &= \textstyle\sum_{\boldsymbol{k},\lambda}\sqrt{\frac{\hbar}{2\omega\varepsilon_0 V}}\hat{\boldsymbol{e}}_{\boldsymbol{k},\lambda}\left[\hat{a}_{\boldsymbol{k},\lambda}e^{i(\boldsymbol{k}\cdot\boldsymbol{r}-\omega t)} + \hat{a}_{\boldsymbol{k},\lambda}^\dagger e^{-i(\boldsymbol{k}\cdot\boldsymbol{r}-\omega t)}\right],\\
\boldsymbol{E}(\boldsymbol{r},t) &= i\textstyle\sum_{\boldsymbol{k},\lambda}\sqrt{\frac{\hbar\omega}{2\varepsilon_0 V}}\hat{\boldsymbol{e}}_{\boldsymbol{k},\lambda}\left[\hat{a}_{\boldsymbol{k},\lambda}e^{i(\boldsymbol{k}\cdot\boldsymbol{r}-\omega t)} + \hat{a}_{\boldsymbol{k},\lambda}^\dagger e^{-i(\boldsymbol{k}\cdot\boldsymbol{r}-\omega t)}\right],\\
\boldsymbol{B}(\boldsymbol{r},t) &= \tfrac{i}{c}\textstyle\sum_{\boldsymbol{k},\lambda}\sqrt{\frac{\hbar\omega}{2\varepsilon_0 V}}(\boldsymbol{k}\times\hat{\boldsymbol{e}}_{\boldsymbol{k},\lambda})\left[\hat{a}_{\boldsymbol{k},\lambda}e^{i(\boldsymbol{k}\cdot\boldsymbol{r}-\omega t)} + \hat{a}_{\boldsymbol{k},\lambda}^\dagger e^{-i(\boldsymbol{k}\cdot\boldsymbol{r}-\omega t)}\right].
\end{aligned} \tag{1.8}$$

1.2.5 Electric field expectation and uncertainty

Lets conside one mode of the E-field in a number state: $|n\rangle_{\boldsymbol{k},\lambda}$. Lets add the time dependence to the ladder operators:

$$\hat{a}_{\boldsymbol{k},\lambda}e^{-i\omega t} \to \hat{a}_{\boldsymbol{k},\lambda}(t), \quad \hat{a}_{\boldsymbol{k},\lambda}^\dagger e^{i\omega t} \to \hat{a}_{\boldsymbol{k},\lambda}^\dagger(t).$$

The E-field is:

$$\hat{\boldsymbol{E}}(\boldsymbol{r},t) = i\sum_{\boldsymbol{k},\lambda} e_{\boldsymbol{k},\lambda}\sqrt{\frac{\hbar\omega}{2\varepsilon_0 V}}\left[\hat{a}_{\boldsymbol{k},\lambda}(t)e^{i\boldsymbol{k}\cdot\boldsymbol{r}} - \hat{a}_{\boldsymbol{k},\lambda}^\dagger(t)e^{-i\boldsymbol{k}\cdot\boldsymbol{r}}\right].$$

Expectation value of the E-field is:

$$\begin{aligned}
{}_{\boldsymbol{k}_0,\lambda_0}\langle n|\hat{\boldsymbol{E}}(\boldsymbol{r},t)|n\rangle_{\boldsymbol{k}_0,\lambda_0} &= i_{\boldsymbol{k},\lambda}\langle n|\hat{\boldsymbol{e}}_{\boldsymbol{k},\lambda}\sqrt{\frac{\hbar\omega}{2\varepsilon_0 V}}\left[\hat{a}_{\boldsymbol{k},\lambda}(t)e^{i\boldsymbol{k}\cdot\boldsymbol{r}} - \hat{a}_{\boldsymbol{k},\lambda}^\dagger(t)e^{-i\boldsymbol{k}\cdot\boldsymbol{r}}\right]|n\rangle_{\boldsymbol{k}_0,\lambda_0}\\
&= i_{\boldsymbol{k}_0,\lambda_0}\langle n|\,\hat{\boldsymbol{e}}_{\boldsymbol{k}_0,\lambda_0}\sqrt{\frac{\hbar\omega_0}{2\varepsilon_0 V}}\left[\sqrt{n}\,|n-1\rangle_{\boldsymbol{k}_0,\lambda_0}e^{i\boldsymbol{k}_0\cdot\boldsymbol{r}} - \sqrt{n+1}\,|n+1\rangle_{\boldsymbol{k}_0,\lambda_0}e^{-i\boldsymbol{k}_0\cdot\boldsymbol{r}}\right]\\
&= 0.
\end{aligned}$$

Thus, the average E-field is zero.

Lets consider the uncertainty of the E-field:

$$\begin{aligned}
\langle\hat{\boldsymbol{E}}\rangle =& {}_{\boldsymbol{k}_0,\lambda_0}\langle n|\sum_{\boldsymbol{k},\lambda}\sum_{\boldsymbol{k}',\lambda'}\sqrt{\frac{\hbar\omega}{2\varepsilon_0 V}}\sqrt{\frac{\hbar\omega'}{2\varepsilon_0 V}}\hat{\boldsymbol{e}}_{\boldsymbol{k},\lambda}\cdot\hat{\boldsymbol{e}}_{\boldsymbol{k}',\lambda'}\left[\hat{a}_{\boldsymbol{k},\lambda}e^{i\boldsymbol{k}\cdot\boldsymbol{r}} - \hat{a}_{\boldsymbol{k},\lambda}^\dagger e^{-i\boldsymbol{k}\cdot\boldsymbol{r}}\right]\left[\hat{a}_{\boldsymbol{k}',\lambda'}e^{i\boldsymbol{k}'\cdot\boldsymbol{r}} - \hat{a}_{\boldsymbol{k}',\lambda'}^\dagger e^{-i\boldsymbol{k}'\cdot\boldsymbol{r}}\right]|n\rangle_{\boldsymbol{k}_0,\lambda_0}\\
=& \sum_{\boldsymbol{k},\lambda}\sum_{\boldsymbol{k}',\lambda'}\sqrt{\frac{\hbar\omega}{2\varepsilon_0 V}}\sqrt{\frac{\hbar\omega'}{2\varepsilon_V}}{}_{\boldsymbol{k},\lambda}\langle 1|1\rangle_{\boldsymbol{k}',\lambda'}e^{i(\boldsymbol{k}-\boldsymbol{k}')\cdot\boldsymbol{r}} + \frac{\hbar\omega_0}{2\varepsilon_0 V}[{}_{\boldsymbol{k}_0,\lambda_0}\langle n+1|\sqrt{n+1} + {}_{\boldsymbol{k}_0,\lambda_0}\langle n-1|\sqrt{n}][\sqrt{n+1}\,|n+1\rangle_{\boldsymbol{k}_0,\lambda_0} +\\
=& \sum_{\{\boldsymbol{k},\lambda\}\neq\{\boldsymbol{k}_0,\lambda_0\}}\frac{\hbar\omega}{2\varepsilon_0 V} + \frac{\hbar\omega_0}{2\varepsilon_0 V}(2n+1).
\end{aligned}$$

So, the uncertainty is:

E-field uncertainty
$$\langle \Delta E^2 \rangle = \underbrace{\sum_{\{\boldsymbol{k},\lambda\}\neq\{\boldsymbol{k}_0,\lambda_0\}} \frac{\hbar\omega}{2\varepsilon_0 V}}_{\text{All modes in vaccum state}} + \underbrace{\frac{\hbar\omega_0}{2\varepsilon_0 V}(2n+1)}_{\text{Mode } (\boldsymbol{k}_0,\lambda_0)}.$$

1.3 Coherent states

The coherent state is defined as the eigenstate of the annihilator operator:

$$\hat{a}\,|\alpha\rangle = \alpha\,|\alpha\rangle\,, \quad \alpha \in \mathbb{C}.$$

The expected number of photons in the coherent state is:

$$\langle\alpha|\hat{n}|\alpha\rangle = \langle\alpha|\hat{a}^\dagger\hat{a}|\alpha\rangle = |\alpha|^2.$$

Coherent states are the most classical states of the quantized EM field.

It has the following results:

$$\langle\alpha|\hat{a}^2|\alpha\rangle = \alpha^2, \quad \langle\alpha|\hat{a}^{\dagger 2}|\alpha\rangle = \alpha^{*2}, \quad \langle\alpha|\hat{a}^\dagger\hat{a}|\alpha\rangle = |\alpha|^2, \quad \langle\alpha|\hat{a}\hat{a}^\dagger|\alpha\rangle = |\alpha|^2 + 1.$$

For example, computing the expectation of the E-field (1.8) is:

$$\begin{aligned}
\langle \boldsymbol{E}\rangle &= \langle\alpha| i\sum_{\boldsymbol{k},\lambda}\sqrt{\frac{\hbar\omega}{2\varepsilon_0 V}}\hat{\boldsymbol{e}}_{\boldsymbol{k},\lambda}[\hat{a}_{\boldsymbol{k},\lambda}e^{i(\boldsymbol{k}\cdot\boldsymbol{r}-\omega t)} - \hat{a}^\dagger_{\boldsymbol{k},\lambda}e^{-i(\boldsymbol{k}\cdot\boldsymbol{r}-\omega t)}]|\alpha\rangle \\
&= i\sqrt{\frac{\hbar\omega}{2\varepsilon_0 V}}\hat{\boldsymbol{e}}_{\boldsymbol{k},\lambda}[\alpha e^{i(\boldsymbol{k}\cdot\boldsymbol{r}-\omega t)} - \alpha^* e^{-i(\boldsymbol{k}\cdot\boldsymbol{r}-\omega t)}] \\
\langle \boldsymbol{E}\rangle &= \boldsymbol{\mathcal{E}}e^{i(\boldsymbol{k}\cdot\boldsymbol{r}-\omega t)} + \boldsymbol{\mathcal{E}}^* e^{-i(\boldsymbol{k}\cdot\boldsymbol{r}-\omega t)} \longrightarrow \boldsymbol{\mathcal{E}} = i\sqrt{\frac{\hbar\omega}{2\varepsilon_0 V}}\alpha\hat{\boldsymbol{e}}_{\boldsymbol{k},\lambda}.
\end{aligned}$$

The expectation value of the E-field for a coherent state corresponds to a classical E-field.
Let us now consider the uncertainty of the E-field for $|\alpha\rangle$:

$$\begin{aligned}
\langle \Delta E^2\rangle &= \langle \boldsymbol{E}^2\rangle - \langle \boldsymbol{E}\rangle^2 \\
&= \langle\alpha| i\hat{\boldsymbol{e}}_{\boldsymbol{k},\lambda}\sqrt{\frac{\hbar\omega}{2\varepsilon_0 V}}[\hat{a}e^{i(\boldsymbol{k}\cdot\boldsymbol{r}-\omega t)} - \hat{a}^\dagger e^{-i(\boldsymbol{k}\cdot\boldsymbol{r}-\omega t)}]\cdot i\hat{\boldsymbol{e}}_{\boldsymbol{k},\lambda}\sqrt{\frac{\hbar\omega}{2\varepsilon_0 V}}[\hat{a}e^{i(\boldsymbol{k}\cdot\boldsymbol{r}-\omega t)} - \hat{a}^\dagger e^{-i(\boldsymbol{k}\cdot\boldsymbol{r}-\omega t)}]|\alpha\rangle - \langle \boldsymbol{E}\rangle^2 \\
&= -\frac{\hbar\omega}{2\varepsilon_0 V}[\alpha^2 e^{i2(\boldsymbol{k}\cdot\boldsymbol{r}-\omega t)} + \alpha^{*2}e^{-i2(\boldsymbol{k}\cdot\boldsymbol{r}-\omega t)} - |\alpha|^2 - (|\alpha|^2+1)] - \boldsymbol{\mathcal{E}}^2 e^{i2(\boldsymbol{k}\cdot\boldsymbol{r}-\omega t)} - \boldsymbol{\mathcal{E}}^{*2}e^{-i2(\boldsymbol{k}\cdot\boldsymbol{r}-\omega t)} - 2|\boldsymbol{\mathcal{E}}|^2 \\
&= \boldsymbol{\mathcal{E}}^2 e^{i2(\boldsymbol{k}\cdot\boldsymbol{r}-\omega t)} + \boldsymbol{\mathcal{E}}^{*2}e^{-i2(\boldsymbol{k}\cdot\boldsymbol{r}-\omega t)} + 2|\boldsymbol{\mathcal{E}}|^2 + \frac{\hbar\omega}{2\varepsilon_0 V} - \boldsymbol{\mathcal{E}}^2 e^{i2(\boldsymbol{k}\cdot\boldsymbol{r}-\omega t)} - \boldsymbol{\mathcal{E}}^{*2}e^{-2i(\boldsymbol{k}\cdot\boldsymbol{r}-\omega t)} - 2|\boldsymbol{\mathcal{E}}|^2 \\
\langle \Delta E^2\rangle &= \frac{\hbar\omega}{2\varepsilon_0 V}.
\end{aligned}$$

This is the uncertainty in E-field limited by quantum noise.

Also, we know that the eigenstates of $|\alpha\rangle$ do not form an orthonormal basis. However, we know that the number state $|n\rangle$ form an orthonormal basis and we can expand the coherent state in terms of the number states, as follows,

$$|\alpha\rangle = e^{-|\alpha|^2/2} \sum_n \frac{\alpha^n}{\sqrt{n!}} |n\rangle .$$

The probability of finding n photons in a coherent state is:

$$P_n = |\langle n|\alpha\rangle|^2 = \left| \langle n| e^{-|\alpha|^2/2} \sum_m \frac{\alpha^m}{\sqrt{m!}} |m\rangle \right|^2 = \left| e^{-|\alpha|^2/2} \frac{\alpha^n}{\sqrt{n!}} \right|^2 = e^{-|\alpha|^2} \frac{|\alpha|^{2n}}{n!}.$$

Recalling that $\langle \hat{n} \rangle = |\alpha|^2 = \overline{n}$:

Probability of finding n photons in a coherent state $$P_n = \frac{e^{-\overline{n}} \overline{n}^n}{n!}.$$

1.4 Quadrature operators

Recall the E-field operator for a singel mode is:

$$\begin{aligned}
\hat{\boldsymbol{E}}(\boldsymbol{r}, t) &= i\sqrt{\frac{\hbar\omega}{2\varepsilon_0 V}} \hat{\boldsymbol{e}}_{\boldsymbol{k},\lambda} [\hat{a} e^{i(\boldsymbol{k}\cdot\boldsymbol{r} - \omega t)} - \hat{a}^\dagger e^{-i(\boldsymbol{k}\cdot\boldsymbol{r} - \omega t)}] \\
&= i\sqrt{\frac{\hbar\omega}{2\varepsilon_0 V}} \hat{\boldsymbol{e}}_{\boldsymbol{k},\lambda} [\hat{a} e^{-i\omega t} e^{i\boldsymbol{k}\cdot\boldsymbol{r}} - \hat{a}^\dagger e^{i\omega t} e^{-i\boldsymbol{k}\cdot\boldsymbol{r}}] \\
&= i\sqrt{\frac{\hbar\omega}{2\varepsilon_0 V}} \hat{\boldsymbol{e}}_{\boldsymbol{k},\lambda} [\hat{a}(t) e^{i\boldsymbol{k}\cdot\boldsymbol{r}} - \hat{a}^\dagger(t) e^{-i\boldsymbol{k}\cdot\boldsymbol{r}}] \\
\hat{\boldsymbol{E}}(\boldsymbol{r}, t) &= i\sqrt{\frac{\hbar\omega}{2\varepsilon_0 V}} \hat{\boldsymbol{e}}_{\boldsymbol{k},\lambda} [\hat{a}(t)\cos(\boldsymbol{k}\cdot\boldsymbol{r}) + i\hat{a}(t)\sin(\boldsymbol{k}\cdot\boldsymbol{r}) - \hat{a}^\dagger(t)\cos(\boldsymbol{k}\cdot\boldsymbol{r}) + i\hat{a}^\dagger(t)\sin(\boldsymbol{k}\cdot\boldsymbol{r})].
\end{aligned}$$

Lets define the quadrature operators:

Quadrature operators $$\begin{aligned} \hat{X}_1 &= \frac{1}{2}(\hat{a} + \hat{a}^\dagger) \\ \hat{X}_2 &= \frac{1}{2i}(\hat{a} - \hat{a}^\dagger) \end{aligned}, \tag{1.9}$$

where $[\hat{X}_1, \hat{X}_2] = \frac{i}{2}$. In the E-field, if we collect the cosine and sine, we get

$$\hat{\boldsymbol{E}}(\boldsymbol{r}, t) = -\sqrt{\frac{2\hbar\omega}{\varepsilon_0 V}} \hat{\boldsymbol{e}}_{\boldsymbol{k},\lambda} [\hat{X}_1(t)\sin(\boldsymbol{k}\cdot\boldsymbol{r}) + \hat{X}_2(t)\cos(\boldsymbol{k}\cdot\boldsymbol{r})].$$

The expectation value of these operators is:

$$\begin{aligned}
&\langle \hat{X}_1 \rangle = \langle \alpha | \hat{X}_1(0) | \alpha \rangle = \langle \alpha | \frac{\hat{a} + \hat{a}^\dagger}{2} | \alpha \rangle = \mathrm{Re}\,(\alpha)\,, \quad \langle \hat{X}_2 \rangle = \langle \alpha | \hat{X}_2(0) | \alpha \rangle = \langle \alpha | \frac{\hat{a} - \hat{a}^\dagger}{2i} | \alpha \rangle = \mathrm{Im}\,(\alpha)\,, \\
&\langle \Delta \hat{X}_1^2 \rangle = \langle \alpha | \frac{1}{4}(\hat{a} + \hat{a}^\dagger)^2 | \alpha \rangle - \frac{1}{4}(\alpha + \alpha^*)^2 = \frac{1}{4}, \quad \langle \Delta \hat{X}_2^2 \rangle = \frac{1}{4}.
\end{aligned}$$

That is, there is a minimum uncertainty that a state can possible have in the two quadrature $\hat{X}_1, \hat{X}_2$, such a state os refferred as *minimum uncertainty state*. When $\alpha = 0$ we have the vaccum state and therefore $\langle \hat{X}_1(0) \rangle = \langle \hat{X}_2(0) \rangle = 0$, $\langle \hat{X}_1^2(0) \rangle = \langle \hat{X}_2^2(0) \rangle = 1/4$. Coherent states are also refferees to as displaced vaccum states. Specifically,

$$|\alpha\rangle = \hat{D}(\alpha)\,|0\rangle\,, \quad \hat{D}(\alpha) = e^{\alpha\hat{a}^\dagger - \alpha^*\hat{a}}.$$

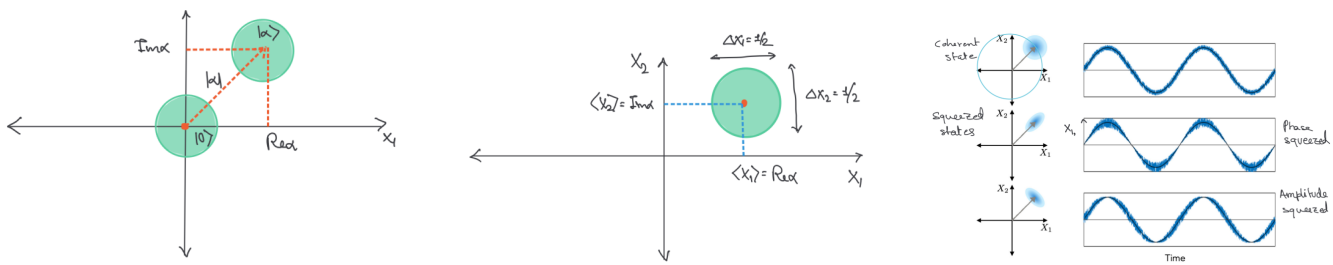

(a) Displacement of vacuum **(b)** Coherent state **(c)** Evolution of coherent state

The phase space representation of states allows one to access information aabout the noise/variance associated with any state when a specific E-field quadrature is measured.

1.4.1 Time dependence of quadrature operators

Using (1.9) and the inclusion of time-dependence yields

Time-dependent Quadrature operators

$$\boxed{\begin{aligned} \hat{X}_1(t) &= \frac{\hat{a}e^{-i\omega t} + \hat{a}^\dagger e^{i\omega t}}{2} \\ \hat{X}_2(t) &= \frac{\hat{a}e^{-i\omega t} - \hat{a}^\dagger e^{i\omega t}}{2i} \end{aligned}} \,. \tag{1.10}$$

We can use them to express them in terms of $\hat{X}_1(0)$ and $\hat{X}_2(0)$.

$$\hat{a} + \hat{a}^\dagger = 2\hat{X}_1(0), \tag{1.11}$$

$$\hat{a} - \hat{a}^\dagger = 2i\hat{X}_2(0). \tag{1.12}$$

$$\begin{aligned} (1.11) + (1.12): \quad & 2\hat{a} = 2[\hat{X}_1(0) + i\hat{X}_2(0)] \longrightarrow \hat{a} = \hat{X}_1(0) + i\hat{X}_2(0) \\ (1.11) - (1.12): \quad & 2\hat{a}^\dagger = 2[\hat{X}_1(0) - i\hat{X}_2(0)] \longrightarrow \hat{a}^\dagger = \hat{X}_1(0) - i\hat{X}_2(0) \end{aligned}$$

Using these in the time-evolved quadrature operators:

$$\begin{aligned} \hat{X}_1(t) &= \frac{\hat{a}e^{-i\omega t} + \hat{a}^\dagger e^{i\omega t}}{2} = \frac{[\hat{X}_1(0) + i\hat{X}_2(0)]e^{-i\omega t} + [\hat{X}_1(0) - i\hat{X}_2(0)]e^{i\omega t}}{2} \\ \hat{X}_1(t) &= \frac{e^{i\omega t} + e^{-i\omega t}}{2}\hat{X}_1(0) + \frac{(e^{i\omega t} - e^{-i\omega t})}{2i}\hat{X}_2(0). \end{aligned}$$

Likewise,

$$\begin{aligned} \hat{X}_2(t) &= \frac{\hat{a}e^{-i\omega t} - \hat{a}^\dagger e^{i\omega t}}{2i} = \frac{[\hat{X}_1(0) + i\hat{X}_2(0)]e^{-i\omega t} - [\hat{X}_1(0) - i\hat{X}_2(0)]e^{i\omega t}}{2i} \\ \hat{X}_2(t) &= -\frac{e^{i\omega t} - e^{-i\omega t}}{2i}\hat{X}_1(0) + i\frac{(e^{i\omega t} + e^{-i\omega t})}{2i}\hat{X}_2(0). \end{aligned}$$

Then, we have

$$\begin{aligned}\hat{X}_1(t) &= \cos(\omega t)\hat{X}_1(0) + \sin(\omega t)\hat{X}_2(0),\\ \hat{X}_2(t) &= -\sin(\omega t)\hat{X}_1(0) + \cos(\omega t)\hat{X}_2(0).\end{aligned} \tag{1.13}$$

1.4.2 Taking the continuum limit

In free space the sum over all $\boldsymbol{k}$ becomes an integral:

$$\sum_{\boldsymbol{k}} \to N \int d^2\boldsymbol{k} = N \int_0^\infty dk k^2 \int_0^\pi d\theta \sin\theta \int_0^{2\pi} d\phi,$$

where N is the normalization equal to volume/mode. We consider a volume of quantization that is the region in free space where we are quantizing the field $V = L_x L_y L_z$. Allowed $\boldsymbol{k}$ vectors are $k_x = (2\pi/L_x)m_x$, $k_y = (2\pi/L_y)m_y$ y $k_z = (2\pi/L_z)m_z$, that is, we ensure that the lenths fit an integer number of wavelengths.

The number of modes in between $\boldsymbol{k}$ and $\boldsymbol{k} + \Delta\boldsymbol{k}$ is:

$$\Delta m_x \Delta m_y \Delta m_z = \frac{L_x L_y L_z}{(2\pi)^2}\Delta\boldsymbol{k}_x\Delta\boldsymbol{k}_y\Delta\boldsymbol{k}_z = \frac{V}{(2\pi)^3}\Delta\boldsymbol{k}_x\Delta\boldsymbol{k}_y\Delta\boldsymbol{k}_z.$$

Using the above normalization:

$$\sum_{\boldsymbol{k},\lambda} \to \sum_{\lambda} \int dk k^2 \int_0^\pi d\theta \sin\theta \int_0^{2\pi} d\phi \frac{V}{8\pi^2}.$$

Thus, any continuum limit involves

$$\text{Continuum limit} \qquad \sum_{\boldsymbol{k}} \to \frac{V}{8\pi^2}\int d^3\boldsymbol{k}.$$

1.5 Squeezed states

Lets define the squeeze operator

$$\text{Squeezing state} \qquad |\xi, 0\rangle = \hat{S}(\xi)\,|0\rangle\,, \quad \text{with} \quad \hat{S}(\xi) = e^{\frac{1}{2}(\xi^*\hat{a}^2 - \xi\hat{a}^{\dagger 2})}, \quad \xi \in \mathbb{C}.$$

Lets use it to compute the expectation value for the quadrature operators.

$$\langle\xi, 0|\hat{X}_1|\xi, 0\rangle = \langle 0|\hat{S}^\dagger(\xi)\left(\frac{\hat{a} + \hat{a}^\dagger}{2}\right)\hat{S}(\xi)|0\rangle = \frac{1}{2}\langle 0|(\hat{S}^\dagger\hat{a}\hat{S} + \hat{S}^\dagger\hat{a}^\dagger\hat{S})|0\rangle.$$

We define displaced ladder operators as

$$\tilde{a} = \hat{S}^\dagger(\xi)\hat{a}\hat{S}(\xi), \quad \xi = re^{i\phi}.$$

Using the BCH formula

$$e^L A e^{-L} = A + [L, A] + \frac{1}{2!}[L, [L, A]] + \cdots$$

and $A = \hat{a}$ with $L = -\frac{1}{2}(\xi^* \hat{a}^2 - \xi \hat{a}^{\dagger 2})$ allow us to express the squeezing ladder operator

Squeezing ladder operators
$$\begin{aligned} \tilde{a} &= \hat{S}^\dagger(\xi)\hat{a}\hat{S}(\xi) = \hat{a}\cosh(r) - \hat{a}^\dagger e^{i\phi}\sinh(r) \\ \tilde{a}^\dagger &= S(\xi)^\dagger \hat{a}^\dagger \hat{S}(\xi) = \hat{a}^\dagger \cosh(r) - \hat{a} e^{i\phi}\sinh(r). \end{aligned} \tag{1.14}$$

We have used several orders. Its derivative wrt r is:

$$\frac{d\hat{a}}{dr} = \hat{a}\sinh(r) - \hat{a}^\dagger e^{i\phi}\cosh(r) = -e^{i\phi}\tilde{a}^\dagger, \quad \frac{d\tilde{a}^\dagger}{dr} = -e^{-i\phi}\tilde{a}.$$

Taking another derivative yields:

$$\frac{d^2\tilde{a}}{dr^2} = \tilde{a}.$$

Now we can continue the expectation of the quadrature:

$$\begin{aligned} \langle \hat{X}_1 \rangle &= \frac{1}{2}\langle 0|(\hat{S}^\dagger \hat{a}\hat{S} + \hat{S}^\dagger \hat{a}^\dagger \hat{S})|0\rangle = \frac{1}{2}\langle 0| \left[\tilde{a} + \tilde{a}^\dagger\right]|0\rangle \\ &= \frac{1}{2}\langle 0|[\hat{a}\cosh(r) - e^{i\phi}\hat{a}^\dagger \sinh(r) + \hat{a}^\dagger \cosh(r) - e^{-i\phi}\sinh(r)]|0\rangle = 0. \\ \langle \hat{X}_2 \rangle &= \text{similarly} = 0. \end{aligned}$$

We can do the same for the operator square:

$$\begin{aligned} \langle \hat{X}_1^2 \rangle &= \frac{1}{4}\langle 0|\hat{S}^\dagger(\xi)[(\hat{a} + \hat{a}^\dagger)(\hat{a} + \hat{a}^\dagger)]\hat{S}(\xi)|0\rangle = \frac{1}{4}\langle 0|\hat{S}^\dagger(\hat{a} + \hat{a}^\dagger)\hat{S}\hat{S}^\dagger(\hat{a} + \hat{a}^\dagger)\hat{S}|0\rangle \\ &= \frac{1}{4}\langle 0|(\tilde{a} + \tilde{a}^\dagger)(\tilde{a} + \tilde{a}^\dagger)|0\rangle = \frac{1}{4}\langle 0|e^{-2r}(\hat{a} + \hat{a}^\dagger)^2|0\rangle = \frac{e^{-2r}}{4}. \end{aligned}$$

Similarly we can obtain the respective quantities for $\hat{X}_2$ and the uncertainties are:

$$\langle \hat{X}_1 \rangle = \langle \hat{X}_2 \rangle = 0 \Longrightarrow \Delta\hat{X}_1 = \frac{e^{-r}}{2}, \quad \Delta\hat{X}_2 = \frac{e^r}{2}.$$

1.5.1 Displaced squeezing state

Now,

Displaced squeezing state $\quad |\xi, \alpha\rangle = \hat{D}(\alpha)\hat{S}(\xi)\,|0\rangle\,.$

Now, the operators are:

Displaced squeezing operator
$$\begin{aligned} \tilde{a} &= \hat{S}^\dagger(\xi)\hat{D}^\dagger(\alpha)\hat{a}\hat{D}(\alpha)\hat{S}(\xi) = \cosh(r)\hat{a} - e^{i\phi}\sinh(r)\hat{a}^\dagger + \alpha, \\ \tilde{a}^\dagger &= \hat{S}^\dagger(\xi)\hat{D}^\dagger(\alpha)\hat{a}^\dagger\hat{D}(\alpha)\hat{S}(\xi) = \cosh(r)\hat{a}^\dagger - e^{-i\phi}\sinh(r)\hat{a} + \alpha^*. \end{aligned} \tag{1.15}$$

The expected number of photons in a displaced squeezed state is:

$$\langle 0|\tilde{a}^\dagger\tilde{a}|0\rangle = \langle 0|[\cosh(r)\hat{a}^\dagger - e^{-i\phi}\sinh(r)\hat{a} + \alpha^*][\cosh(r)\hat{a} - e^{i\phi}\sinh(r)\hat{a}^\dagger + \alpha]|0\rangle = \sinh^2|\xi| + |\alpha|^2.$$

The expected value in the quadrature value is:

$$\begin{aligned} \langle \xi, \alpha|\hat{X}_1|\xi, \alpha\rangle &= \langle 0|\hat{S}^\dagger\hat{D}^\dagger\hat{X}_1\hat{D}\hat{S}|0\rangle = \langle 0|\hat{S}^\dagger\hat{D}^\dagger(\frac{\hat{a} + \hat{a}^\dagger}{2})\hat{D}\hat{S}|0\rangle = \frac{1}{2}\langle 0|(\tilde{a} + \tilde{a}^\dagger)|0\rangle \\ &= \frac{1}{2}\langle 0|[\cosh(r)\hat{a} - e^{i\phi}\sinh(r)\hat{a}^\dagger + \alpha + \cosh(r)\hat{a}^\dagger - e^{-i\phi}\sinh(r)\hat{a} + \alpha^*]|0\rangle = \mathrm{Re}\,(\alpha)\,. \\ \langle \xi, \alpha|\hat{X}_2|\xi, \alpha\rangle &= \mathrm{Im}\,(\alpha)\,. \end{aligned}$$

On the other hand, the quadrature uncertainties are:

$$
\begin{aligned}
\Delta\hat{X}_1^2 &= \langle\xi,\alpha|\hat{X}_1^2|\xi,\alpha\rangle - \langle\xi,\alpha|\hat{X}_1|\xi,\alpha\rangle^2 = \langle 0|\hat{S}^\dagger\hat{D}^\dagger\hat{X}_1\hat{D}\hat{S}\hat{S}^\dagger\hat{D}^\dagger\hat{X}_1\hat{D}\hat{S}|0\rangle - \mathrm{Re}\,(\alpha)^2 \\
&= \langle 0|\left(\frac{\tilde{a}+\tilde{a}^\dagger}{2}\right)\left(\frac{\tilde{a}+\tilde{a}^\dagger}{2}\right)|0\rangle - \mathrm{Re}\,(\alpha)^2 \\
&= \frac{1}{4}\langle 0|[\cosh(r)\hat{a} - e^{i\phi}\sinh(r)\hat{a}^\dagger + \alpha + \cosh(r)\hat{a}^\dagger - e^{-i\phi}\sinh(r)\hat{a} + \alpha^*]^2|0\rangle - \mathrm{Re}\,(\alpha)^2 \\
&= \frac{1}{4}(\cosh^2(r) + \sinh^2(r) - 2\cosh(r)\sinh(r)\cos\phi) + \mathrm{Re}\,(\alpha)^2 - \mathrm{Re}\,(\alpha)^2 \\
\Delta\hat{X}_1^2 &= \frac{1}{4}[\cosh^2(r) + \sinh^2(r) - 2\cosh(r)\sinh(r)\cos(\phi)]. \\
\Delta\hat{X}_2^2 &= \frac{1}{4}[\cosh^2(r) + \sinh^2(r) + 2\cosh(r)\sinh(r)\cos(\phi)].
\end{aligned}
$$

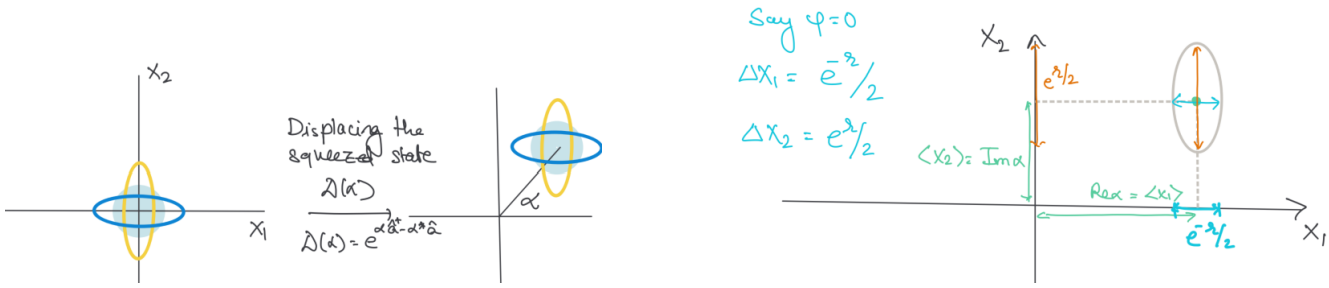

(a) **(b)**

Figure 1.1

1.5.2 Displaced squeezed temporal state

This is the most general case of the two above.

The expected value of $\hat{X}_1(t)$ is

$$
\begin{aligned}
\langle\hat{X}_1(t)\rangle &= \langle 0|\hat{S}^\dagger\hat{D}^\dagger\frac{\hat{a}e^{-i\omega t} + \hat{a}^\dagger e^{i\omega t}}{2}\hat{D}\hat{S}|0\rangle = \frac{1}{2}\langle 0|\tilde{a}e^{-i\omega t} + \tilde{a}^\dagger e^{i\omega t}|0\rangle \\
&= \frac{1}{2}\langle 0|\left[\cosh(r)\hat{a}e^{-i\omega t} - e^{i\phi}\sinh(r)\hat{a}^\dagger e^{-i\omega t} + \alpha e^{-i\omega t} + \cosh(r)\hat{a}^\dagger e^{i\omega t} - e^{-i\phi}\sinh(r)\hat{a}e^{i\omega t} + \alpha^* e^{i\omega t}\right]|0\rangle \\
&= \frac{1}{2}[\alpha e^{-i\omega t} + \alpha^* e^{i\omega t}] \\
\langle\hat{X}_1(t)\rangle &= \mathrm{Re}\left(\alpha e^{-i\omega t}\right).
\end{aligned}
$$

Similarly,

$$
\begin{aligned}
\langle\hat{X}_2(t)\rangle &= \langle 0|\hat{S}^\dagger\hat{D}^\dagger\frac{\hat{a}e^{-i\omega t} - \hat{a}^\dagger e^{i\omega t}}{2i}\hat{D}\hat{S}|0\rangle = \frac{1}{2i}\langle 0|\tilde{a}e^{-i\omega t} + \tilde{a}^\dagger e^{i\omega t}|0\rangle \\
&= \frac{1}{2i}\langle 0|\left[\cosh(r)\hat{a}e^{-i\omega t} - e^{i\phi}\sinh(r)\hat{a}^\dagger e^{-i\omega t} + \alpha e^{-i\omega t} - \cosh(r)\hat{a}^\dagger e^{i\omega t} + e^{-i\phi}\sinh(r)\hat{a}e^{i\omega t} - \alpha^* e^{i\omega t}\right]|0\rangle \\
&= \frac{1}{2}[\alpha e^{-i\omega t} - \alpha^* e^{i\omega t}] \\
\langle\hat{X}_2(t)\rangle &= \mathrm{Im}\left(\alpha e^{-i\omega t}\right).
\end{aligned}
$$

Doing the same for the operators squared:

$$\begin{aligned}
\langle \hat{X}_1^2(t)\rangle &= \langle 0|\hat{S}^\dagger \hat{D}^\dagger \left(\frac{\hat{a}e^{-i\omega t}+\hat{a}^\dagger e^{i\omega t}}{2}\right)^2 \hat{D}\hat{S}|0\rangle \\
&= \frac{1}{4}\langle 0|\hat{S}^\dagger \hat{D}^\dagger \left(\hat{a}e^{-i\omega t}+\hat{a}^\dagger e^{i\omega t}\right)\hat{D}\hat{S}\hat{S}^\dagger \hat{D}^\dagger \left(\hat{a}e^{-i\omega t}+\hat{a}^\dagger e^{i\omega t}\right)\hat{D}\hat{S}|0\rangle \\
&= \frac{1}{4}\langle 0|(\tilde{a}e^{-i\omega t}+\tilde{a}^\dagger e^{i\omega t})^2|0\rangle \\
&= \frac{1}{4}\left[e^{-i2\omega t}\langle 0|\tilde{a}^2|0\rangle + e^{i2\omega t}\langle 0|\tilde{a}^{\dagger 2}|0\rangle + \langle 0|\tilde{a}\tilde{a}^\dagger|0\rangle + \langle 0|\tilde{a}^\dagger\tilde{a}|0\rangle\right].
\end{aligned}$$

We compute each term separately:

$$\begin{aligned}
\langle 0|\tilde{a}^2|0\rangle =& \langle 0|(\cosh(r)\hat{a} - e^{i\phi}\sinh(r)\hat{a}^\dagger + \alpha)(\cosh(r)\hat{a} - e^{i\phi}\sinh(r)\hat{a}^\dagger + \alpha)|0\rangle \\
=& \cosh^2(r)\langle \hat{a}^2\rangle - e^{i\phi}\sinh(r)\cosh(r)\langle \hat{a}\hat{a}^\dagger\rangle + \alpha\cosh(r)\langle \hat{a}\rangle - e^{i\phi}\sinh(r)\cosh(r)\langle \hat{a}^\dagger\hat{a}\rangle \\
&+ e^{i2\phi}\sinh^2(r)\langle \hat{a}^{\dagger 2}\rangle - \alpha e^{i\phi}\sinh(r)\langle \hat{a}^\dagger\rangle + \alpha\cosh(r)\langle \hat{a}\rangle - \alpha e^{i\phi}\sinh(r)\langle \hat{a}^\dagger\rangle + \alpha^2 \\
&= \alpha^2 - e^{i\phi}\sinh(r)\cosh(r) \\
\langle 0|\tilde{a}^2|0\rangle =& \alpha^2 - \frac{1}{2}e^{i\phi}\sinh(2r).
\end{aligned}$$

$$\begin{aligned}
\langle 0|\tilde{a}^{\dagger 2}|0\rangle =& \langle 0|(\cosh(r)\hat{a}^\dagger - e^{-i\phi}\sinh(r)\hat{a} + \alpha^*)(\cosh(r)\hat{a}^\dagger - e^{-i\phi}\sinh(r)\hat{a} + \alpha^*)|0\rangle \\
=& \cosh^2(r)\langle \hat{a}^{\dagger 2}\rangle - e^{-i\phi}\cosh(r)\sinh(r)\langle \hat{a}^\dagger\hat{a}\rangle + \alpha^*\cosh(r)\langle \hat{a}^\dagger\rangle - e^{-i\phi}\sinh(r)\cosh(r)\langle \hat{a}\hat{a}^\dagger\rangle \\
&+ e^{-i2\phi}\sinh^2(r)\langle \hat{a}^2\rangle - \alpha^* e^{-i\phi}\sinh(r)\langle \hat{a}\rangle + \alpha^*\cosh(r)\langle \hat{a}^\dagger\rangle - \alpha^* e^{-i\phi}\sinh(r)\langle \hat{a}^\dagger\rangle + \alpha^{*2} \\
=& \alpha^{*2} - e^{-i\phi}\sinh(r)\cosh(r) \\
\langle 0|\tilde{a}^{\dagger 2}|0\rangle =& \alpha^{*2} - \frac{1}{2}e^{-i\phi}\sinh(2r).
\end{aligned}$$

$$\begin{aligned}
\langle 0|\tilde{a}\tilde{a}^\dagger|0\rangle =& \langle 0|(\cosh(r)\hat{a} - e^{i\phi}\sinh(r)\hat{a}^\dagger + \alpha)(\cosh(r)\hat{a}^\dagger - e^{-i\phi}\sinh(r)\hat{a} + \alpha^*)|0\rangle \\
\langle 0|\tilde{a}\tilde{a}^\dagger|0\rangle =& \cosh^2(r) + |\alpha|^2.
\end{aligned}$$

$$\begin{aligned}
\langle 0|\tilde{a}^\dagger\tilde{a}|0\rangle =& \langle 0|(\cosh(r)\hat{a}^\dagger - e^{-i\phi}\sinh(r)\hat{a} + \alpha^*)(\cosh(r)\hat{a} - e^{i\phi}\sinh(r)\hat{a}^\dagger + \alpha)|0\rangle \\
\langle 0|\tilde{a}^\dagger\tilde{a}|0\rangle =& \sinh^2(r) + |\alpha|^2.
\end{aligned}$$

Putting all together:

$$\begin{aligned}
\langle \hat{X}_1^2(t)\rangle &= \frac{1}{4}\left\{[\alpha^2 - \frac{1}{2}e^{i\phi}\sinh(2r)]e^{-i2\omega t} + [\alpha^{*2} - \frac{1}{2}e^{-i\phi}\sinh(2r)]e^{i2\omega t} + \cosh^2(r) + |\alpha|^2 + \sinh^2(r) + |\alpha|^2\right\} \\
&= \frac{1}{4}\left[(\alpha e^{-i\omega t} + \alpha^* e^{i\omega t})^2 + \cosh(2r) - \sinh(2r)\cos(\phi - 2\omega t)\right] \\
\langle \hat{X}_1^2(t)\rangle &= [\mathrm{Re}\left(\alpha e^{-i\omega t}\right)]^2 + \frac{1}{4}[\cosh(2r) - \sinh(2r)\cos(\phi - 2\omega t)].
\end{aligned}$$

The uncertainty is:

$$\Delta\hat{X}_1(t) = \sqrt{\langle \hat{X}_1^2(t)\rangle - \langle \hat{X}_1(t)\rangle^2} = \frac{1}{2}\sqrt{\cosh(2r) - \sinh(2r)\cos(\phi - 2\omega t)}.$$

Similarly,

$$\begin{aligned}
\langle \hat{X}_2^2(t)\rangle &= \langle 0|\hat{S}^\dagger \hat{D}^\dagger \left(\frac{\hat{a}e^{-i\omega t} - \hat{a}^\dagger e^{i\omega t}}{2i}\right)^2 \hat{D}\hat{S}|0\rangle \\
&= -\frac{1}{4}\langle 0|\hat{S}^\dagger \hat{D}^\dagger(\hat{a}e^{-i\omega t} - \hat{a}^\dagger e^{i\omega t})\hat{D}\hat{S}\hat{S}^\dagger \hat{D}^\dagger(\hat{a}e^{-i\omega t} + \hat{a}^\dagger e^{i\omega t})\hat{D}\hat{S}|0\rangle \\
&= -\frac{1}{4}\langle 0|(\tilde{a}e^{-i\omega t} - \tilde{a}^\dagger e^{i\omega t})^2|0\rangle \\
&= -\frac{1}{4}[e^{-i2\omega t}\langle 0|\tilde{a}^2|0\rangle + e^{i2\omega t}\langle 0|\tilde{a}^{\dagger 2}|0\rangle - \langle 0|\tilde{a}\tilde{a}^\dagger|0\rangle - \langle 0|\tilde{a}^\dagger\tilde{a}|0\rangle].
\end{aligned}$$

We use the previous results to get

$$\begin{aligned}
\langle \hat{X}_2^2(t)\rangle &= -\frac{1}{4}\left\{[\alpha^2 - \frac{1}{2}e^{i\phi}\sinh(2r)]e^{-i2\omega t} + [\alpha^{*2} - \frac{1}{2}e^{-i\phi}\sinh(2r)]e^{i2\omega t} - \cosh^2(r) - |\alpha|^2 - \sinh^2(r) - |\alpha|^2\right\} \\
&= -\frac{1}{4}[(\alpha e^{-i\omega t} - \alpha^* e^{i\omega t})^2 - \cosh(2r) - \sinh(2r)\cos(\phi - 2\omega t)] \\
\langle \hat{X}_2^2(t)\rangle &= [\mathrm{Im}\left(\alpha e^{-i\omega t}\right)]^2 + \frac{1}{4}[\cosh(2r) + \sinh(2r)\cos(\phi - 2\omega t)].
\end{aligned}$$

And the uncertainty is:

$$\Delta\hat{X}_2(t) = \sqrt{\langle \hat{X}_2^2(t)\rangle - \langle \hat{X}_2(t)\rangle^2} = \frac{1}{2}\sqrt{\cosh(2r) + \sinh(2r)\cos(\phi - 2\omega t)}$$

We can verify that $\Delta\hat{X}_1(0) = e^{-r}/2$ and $\Delta\hat{X}_2(0) = e^r/2$ when $\phi = t = 0$. The following table sumarizes the most improtant results for the most general case from which we can get the squeezed or displaced states.

Table 1.1 Summary of the displaced squeezed temporal state $|\xi, \alpha\rangle = \hat{D}(\alpha)\hat{S}(\xi)\,|0\rangle$ with $\xi = r\underline{/\phi}$.

BCH formula	$e^L A e^{-L} = A + [L, A] + \frac{1}{2!}[L, [L, A]] + \cdots$
Displaced and Squeezed operator	$\hat{D}(\alpha) = e^{\alpha\hat{a}^\dagger - \alpha^*\hat{a}}$ $\quad \hat{S}(\xi) = e^{\frac{1}{2}(\xi^*\hat{a}^2 - \xi\hat{a}^{\dagger 2})}$
Quadrature operators	$\hat{X}_1(t) = \frac{\hat{a}e^{-i\omega t} + \hat{a}^\dagger e^{i\omega t}}{2}$ $\quad \hat{X}_2(t) = \frac{\hat{a}e^{-i\omega t} - \hat{a}^\dagger e^{i\omega}}{2i}$
DS Operator	$\tilde{a} = \hat{S}^\dagger\hat{D}^\dagger\hat{a}\hat{D}\hat{S} = \cosh(r)\hat{a} - e^{i\phi}\sinh(r)\hat{a}^\dagger + \alpha$
Mean value	$\langle \hat{X}_1(t)\rangle = \mathrm{Re}\left(\alpha e^{-i\omega t}\right)$ $\quad \langle \hat{X}_2(t)\rangle = \mathrm{Im}\left(\alpha e^{-i\omega t}\right)$
Variance	$\langle \hat{X}_1^2(t)\rangle = \langle \hat{X}_1(t)\rangle^2 + \frac{1}{4}[\cosh(2r) - \sinh(2r)\cos(\phi - 2\omega t)]$
	$\langle \hat{X}_2^2(t)\rangle = \langle \hat{X}_2(t)\rangle^2 + \frac{1}{4}[\cosh(2r) + \sinh(2r)\cos(\phi - 2\omega t)]$

1.6 Thermal fields

1.6.1 Thermal fields

A black body can be modeled as a cavity containing radiation at thermal equilibrium with its walls. The radiation is thus coupled to a heat bath and so is not a truly free field. Assuming the coupling is weak, we can treat the field as if it were an isolated system that can be described as a microcanonical ensemble.

Lets consider a single-mode field in thermal equilibrium with the walls of cavity at temperature T. The probability P_n that the mode is thermally xcited in the nth level is

$$P_n = \frac{\exp(-E_n/k_B T)}{\sum_n \exp(-E_n/k_B T)}, \quad k_B = 1.38 \cdot 10^{-23}\ J/K.$$

We introduce the density operator for the thermal field:

$$\rho_{Th} = \frac{\exp(-\hat{H}/k_B T)}{\mathrm{Tr}\left[\exp(-\hat{H}/k_B T)\right]}, \quad \hat{H} = \hbar\omega(\hat{a}^\dagger \hat{a} + \frac{1}{2}).$$

Bibliography

Mathematics

[1] Daniel Fleisch. *A student's guide to Maxwell's equations*. Cambridge University Press, 2008.

[2] Gregory J Gbur. *Mathematical methods for optical physics and engineering*. Cambridge University Press, 2011.

[3] David J Griffiths. *Introduction to electrodynamics*. Cambridge University Press, 2023.

[4] Dennis G Zill. *Advanced engineering mathematics*. Jones & Bartlett Learning, 2020.

Chapter 2

Optical devices

2.1 Beam splitter 26

2.1 Beam splitter

Let us consider the action of a beam splitter (BS) on two input modes of same frequency and polarization. Clasically, the output E-field can be defined in terms of the input E-fields:

$$\begin{bmatrix} E_1' \\ E_2' \end{bmatrix} = \begin{bmatrix} t' & r \\ r' & t \end{bmatrix} \begin{bmatrix} E_1 \\ E_2 \end{bmatrix}.$$

$\{r, t\}$ and $\{r', t'\}$ are reflection/transmission coefficient associated with the two interfaces of the BS. From energy conservation, we must have

$$\text{Energy conservation in the BS} \qquad |E_1|^2 + |E_2|^2 = |E_1'|^2 + |E_2'|^2.$$

If we assume $E_2 = 0$, then

$$|E_1|^2 = |t'E_1|^2 + |r'E_1|^2 \longrightarrow |r'|^2 + |t'|^2 = 1. \tag{2.1}$$

Similarly, setting $E_1 = 0$ yields

$$|E_2|^2 = |rE_2|^2 + |tE_2|^2 \longrightarrow |r|^2 + |t|^2 = 1. \tag{2.2}$$

In general,

$$\begin{aligned}
|E_1|^2 + |E_2|^2 &= |E_1'|^2 + |E_2'|^2 \\
&= (t'E_1 + rE_2)(t'^* E_1^* + r^* E_2^*) + (r'E_1 + tE_2)(r'^* E_1^* + t^* E_2^*) \\
&= |t'|^2|E_1|^2 + |r|^2|E_2|^2 + |r'|^2|E_1|^2 + |t|^2|E_2|^2 + rt'^* E_1^* E_2 + t'r^* E_1 E_2^* + r't^* E_1 E_2^* + r'^* t E_1^* E_2 \\
|E_1|^2 + |E_2|^2 &= |E_1|^2(|r'|^2 + |t'|^2) + |E_2|^2(|r|^2 + |t|^2) + E_1^* E_2(rt'^* + r'^* t) + E_1 E_2^*(r't^* + r^* t') \\
0 &= E_1^* E_2(rt'^* + r'^* t) + c.c.
\end{aligned}$$

Thus,

$$rt'^* + r'^* t = 0. \tag{2.3}$$

For a $50:50$ BS which as $r' = 1/\sqrt{2}$, $t' = 1/\sqrt{2}$, and $r = 1/\sqrt{2}$, (2.1), (2.2) and (2.3) implies that $t = -1/\sqrt{2}$. Similarly, the quantum description of the BS is

$$\begin{bmatrix} \hat{a}_1' \\ \hat{a}_2' \end{bmatrix} = \frac{1}{\sqrt{2}} \begin{bmatrix} 1 & 1 \\ 1 & -1 \end{bmatrix} \begin{bmatrix} \hat{a}_1 \\ \hat{a}_2 \end{bmatrix}. \tag{2.4}$$

The ladder operators are equal to the E-fields. In addition, the output modes are written as a linear combination of the input modes:

$$\begin{matrix} \hat{a}_1' = \frac{1}{\sqrt{2}}(\hat{a}_1 + \hat{a}_2) \\ \hat{a}_2' = \frac{1}{\sqrt{2}}(\hat{a}_1 - \hat{a}_2) \end{matrix} \longrightarrow \begin{matrix} \hat{a}_1 = \frac{1}{\sqrt{2}}(\hat{a}_1' + \hat{a}_2') \\ \hat{a}_2 = \frac{1}{\sqrt{2}}(\hat{a}_1' - \hat{a}_2') \end{matrix}$$

Ejemplo 2.1 **Single photon incident in one input**

The input is:

$$\text{Input} = |1\rangle_1 |0\rangle_2 = (\hat{a}_1^\dagger |0\rangle_1) |0\rangle_2 = |1\rangle_1 |0\rangle_2.$$

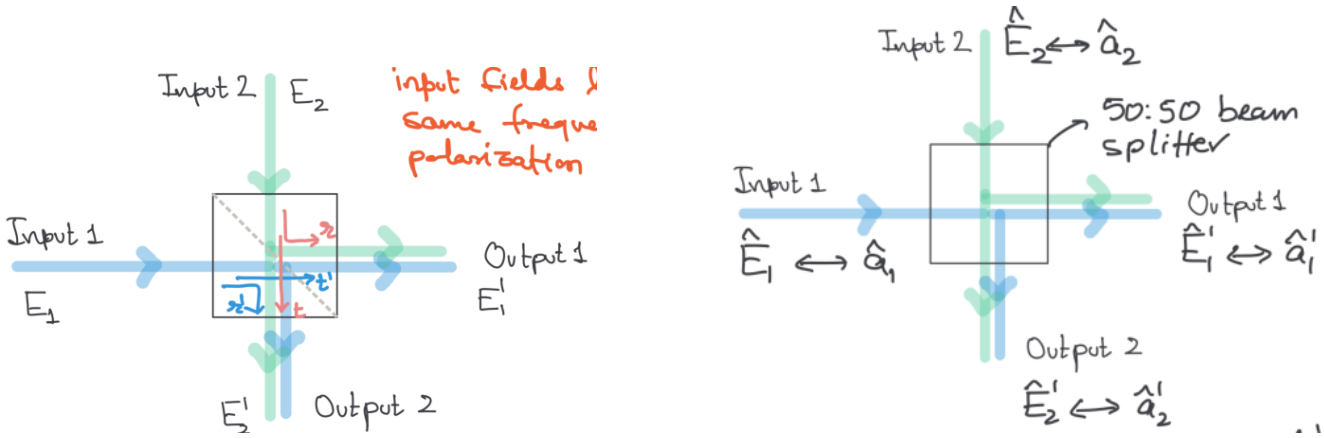

(a) Classical description **(b)** Quantum description

Figure 2.1 Description of a beamsplitter (BS).

Note that

$$\hat{a}_1 = \frac{1}{\sqrt{2}}(\hat{a}_1' + \hat{a}_2') \quad \text{and} \quad \hat{a}_1^\dagger = \frac{1}{\sqrt{2}}(\hat{a}_1'^\dagger + \hat{a}_2'^\dagger).$$

The output is then

$$\text{Output} = \frac{1}{\sqrt{2}}(\hat{a}_1'^\dagger + \hat{a}_2'^\dagger)\,|0\rangle_{1'}\,|0\rangle_{2'} = \frac{1}{\sqrt{2}}[|1\rangle_{1'}\,|0\rangle_{2'} + |0\rangle_{1'}\,|1\rangle_{2'}].$$

Thus, there is a $50:50$ probability of detecting the photon in one of the ouput ports.

Ejemplo 2.2 **Both input with photons**

The input is:

$$\text{Input} = |1\rangle_1\,|1\rangle_2 = \hat{a}_1^\dagger\,|0\rangle_1\,\hat{a}_2^\dagger\,|0\rangle_2\,.$$

The output is:

$$\begin{aligned}
\text{Output} &= \frac{1}{2}[\hat{a}_1'^\dagger + \hat{a}_2'^\dagger][\hat{a}_1'^\dagger - \hat{a}_2'^\dagger]\,|0\rangle_{1'}\,|0\rangle_{2'} \\
&= \frac{1}{2}[\hat{a}_1'^\dagger\hat{a}_1'^\dagger - \hat{a}_2'^\dagger\hat{a}_2'^\dagger + \cancel{\hat{a}_1'^\dagger\hat{a}_2'^\dagger} - \cancel{\hat{a}_2'^\dagger\hat{a}_1'^\dagger}]\,|0\rangle_{1'}\,|0\rangle_{2'} \\
&= \frac{1}{2}[\sqrt{2}\,|2\rangle_{1'}\,|0\rangle_{2'} - \sqrt{2}\,|0\rangle_{1'}\,|2\rangle_{2'}] \\
\text{Output} &= \frac{1}{\sqrt{2}}[|2\rangle_{1'}\,|0\rangle_{2'} - |0\rangle_{1'}\,|2\rangle_{2'}].
\end{aligned}$$

Thus, when two photons are simultaneously incident on each input, both either go into output 1 or output 2 but never in both a the same time.

Ejemplo 2.3 **Mach-Zehnder**

a) Express the output modes $\{\hat{b}_1, \hat{b}_2\}$ in terms of the input modes $\{\hat{a}_1, \hat{a}_2\}$ assuming the first BS is $50:50$.

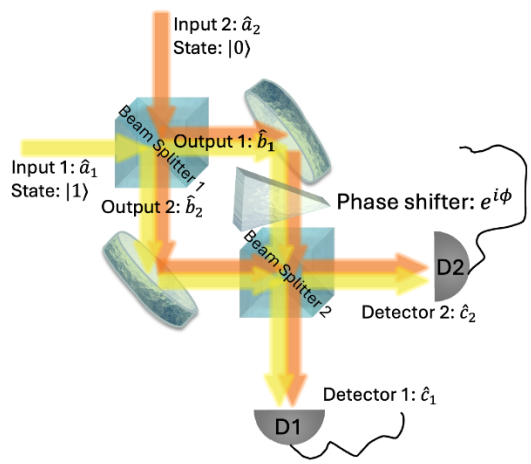

b) What is the expected number of photons $\langle \hat{b}_i^\dagger \hat{b}_i \rangle$ in each mode?

c) If $\hat{b}_1 \to \hat{b}_1 e^{i\phi}$, determine the output mode operators are the detector positions $\hat{c}_1 = \frac{1}{\sqrt{2}}(\hat{b}_1 e^{i\phi} + \hat{b}_2)$ and $\hat{b}_2 = \frac{1}{\sqrt{2}}(\hat{b}_1 e^{i\phi} - \hat{b}_2)$ in terms of the input mode operators $\{\hat{a}_1, \hat{a}_2\}$.

d) What is the number of photons detected at detector 1 as a function of ϕ?

Solution

(a) For the $50:50$ beamsplitter 1, we have:

$$\begin{bmatrix} \hat{b}_1 \\ \hat{b}_2 \end{bmatrix} = \frac{1}{\sqrt{2}} \begin{bmatrix} 1 & 1 \\ 1 & -1 \end{bmatrix} \begin{bmatrix} \hat{a}_1 \\ \hat{a}_2 \end{bmatrix}, \quad \text{with} \quad \begin{bmatrix} \hat{a}_1 \\ \hat{a}_2 \end{bmatrix} = \frac{1}{\sqrt{2}} \begin{bmatrix} 1 & 1 \\ 1 & -1 \end{bmatrix} \begin{bmatrix} \hat{b}_1 \\ \hat{b}_2 \end{bmatrix}.$$

(b) From the last part, we know that

$$\hat{a}_1 = \frac{1}{\sqrt{2}}(\hat{b}_1 + \hat{b}_2) \xrightarrow{h.c.} \hat{a}_1^\dagger = \frac{1}{\sqrt{2}}(\hat{b}_1^\dagger + \hat{b}_2^\dagger), \quad \text{and} \quad \hat{a}_2 = \frac{1}{\sqrt{2}}(\hat{b}_1 - \hat{b}_2) \xrightarrow{h.c.} \hat{a}_2^\dagger = \frac{1}{\sqrt{2}}(\hat{b}_1^\dagger - \hat{b}_2^\dagger).$$

The input is then:

$$\text{Input} = |1\rangle_1 |0\rangle_2 = \hat{a}_1^\dagger |0\rangle_1 |0\rangle_2 .$$

Output is:

$$\text{Output} = \frac{1}{\sqrt{2}}(\hat{b}_1^\dagger + \hat{b}_2^\dagger) |0\rangle_1 |0\rangle_2 = \frac{1}{\sqrt{2}}[|1\rangle_{1'} |0\rangle_{2'} + |0\rangle_{1'} |1\rangle_{2'}].$$

We expect then to have the same probability of getting one photon at each output.
The expected value at output 1 is:

$$\begin{aligned} {}_2\langle 0|_1 \langle 1| \hat{b}_1^\dagger \hat{b}_1 |1\rangle_1 |0\rangle_2 &= \frac{1}{2}\langle 0,1|(\hat{a}_1^\dagger + \hat{a}_2^\dagger)(\hat{a}_1 + \hat{a}_2)|1,0\rangle \\ &= \frac{1}{2} \langle 0,1| (\hat{a}_1^\dagger \hat{a}_1 + \hat{a}_1^\dagger \hat{a}_2 + \hat{a}_2^\dagger \hat{a}_1 + \hat{a}_2^\dagger \hat{a}_2) |1,0\rangle \\ {}_2\langle 0|_1 \langle 1| \hat{b}_1^\dagger \hat{b}_1 |1\rangle_1 |0\rangle_2 &= \frac{1}{2}. \end{aligned}$$

Likewise, the expected value at output 2 is:

$$\begin{aligned} {}_2\langle 0|_1 \langle 1| \hat{b}_2^\dagger \hat{b}_2 |1\rangle_1 |0\rangle_2 &= \frac{1}{2}\langle 0,1|(\hat{a}_1^\dagger - \hat{a}_2^\dagger)(\hat{a}_1 - \hat{a}_2)|1,0\rangle \\ &= \frac{1}{2} \langle 0,1| (\hat{a}_1^\dagger \hat{a}_1 - \hat{a}_1^\dagger \hat{a}_2 - \hat{a}_2^\dagger \hat{a}_1 + \hat{a}_2^\dagger \hat{a}_2) |1,0\rangle \\ {}_2\langle 0|_1 \langle 1| \hat{b}_2^\dagger \hat{b}_2 |1\rangle_1 |0\rangle_2 &= \frac{1}{2}. \end{aligned}$$

(c) We replace the first output as the input of the second output:

$$\hat{c}_1 = \frac{1}{\sqrt{2}}[\hat{b}_1 e^{i\phi} + \hat{b}_2] = \frac{1}{2}\left[(\hat{a}_1 + \hat{a}_2)e^{i\phi} + (\hat{a}_1 - \hat{a}_2)\right] = \frac{1}{2}[\hat{a}_1(1 + e^{i\phi}) + \hat{a}_2(e^{i\phi} - 1)],$$
$$\hat{c}_2 = \frac{1}{\sqrt{2}}[\hat{b}_1 e^{i\phi} - \hat{b}_2] = \frac{1}{2}\left[(\hat{a}_1 + \hat{a}_2)e^{i\phi} - (\hat{a}_1 - \hat{a}_2)\right] = \frac{1}{2}[\hat{a}_1(e^{i\phi} - 1) + \hat{a}_2(1 + e^{i\phi})].$$

(d) The expected number of photons at detector 1 is:

$$\begin{aligned}
\langle 0,1|\hat{c}_1^\dagger \hat{c}_1|1,0\rangle &= \frac{1}{4}\left\{[\hat{a}_1^\dagger(1 + e^{-i\phi}) + \hat{a}_2^\dagger(e^{-i\phi} - 1)][\hat{a}_1(1 + e^{i\phi}) + \hat{a}_2(e^{i\phi} - 1)]\right\} \\
&= \frac{1}{4}\langle 0,1|\left\{\hat{a}_1^\dagger\hat{a}_1(\cdots) + \hat{a}_1^\dagger\hat{a}_2(\cdots) + \hat{a}_2^\dagger\hat{a}_1(\cdots) + \hat{a}_2^\dagger\hat{a}_2(\cdots)\right\}|1,0\rangle \\
&= \frac{1}{4}(1 + e^{-i\phi})(1 + e^{i\phi}) \\
\langle 0,1|\hat{c}_1^\dagger \hat{c}_1|1,0\rangle &= \frac{1}{2}[1 + \cos\phi] = \cos^2\frac{\phi}{2}.
\end{aligned}$$

By conservation of energy (or probability), the expected number of photon at detector 2 is:

$$\langle 0,1|\hat{c}_2^\dagger \hat{c}_2|1,0\rangle = \sin^2\frac{\phi}{2}.$$

Chapter 3

Nonclassical light

3.1 Detection of quadrature states 31
3.2 Generation of squeezed states 32
A.1 Density operator 36

3.1 Detection of quadrature states

Modes at the beam splitter output are:

$$\hat{A}_1 = \frac{1}{\sqrt{2}}(\hat{a}_1 + \hat{a}_2), \quad \hat{A}_2 = \frac{1}{\sqrt{2}}(\hat{a}_1 - \hat{a}_2).$$

Detectors D_1, D_2 measure the intensity at each output:

$$\text{Photocurrent} \qquad \hat{I}_k \propto \langle \hat{N}_k \rangle = \langle \hat{A}_k^\dagger \hat{A}_k \rangle \,. \tag{3.1}$$

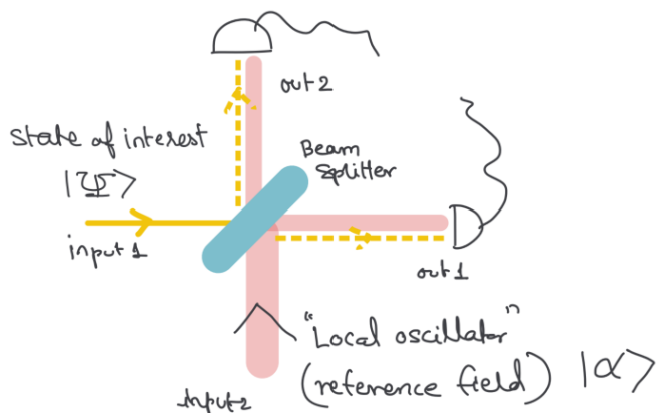

Figure 3.1 Balanced homodyne detection.

Let us consider the number operator in each output:

$$\hat{N}_1 = \hat{A}_1^\dagger \hat{A}_1 = \left(\frac{\hat{a}_1^\dagger + \hat{a}_2^\dagger}{\sqrt{2}}\right)\left(\frac{\hat{a}_1 + \hat{a}_2}{\sqrt{2}}\right) = \frac{1}{2}(\hat{a}_1^\dagger \hat{a}_1 + \hat{a}_2^\dagger \hat{a}_2 + \hat{a}_1^\dagger \hat{a}_2 + \hat{a}_2^\dagger \hat{a}_1),$$

$$\hat{N}_2 = \hat{A}_2^\dagger \hat{A}_2 = \left(\frac{\hat{a}_1^\dagger - \hat{a}_2^\dagger}{\sqrt{2}}\right)\left(\frac{\hat{a}_1 - \hat{a}_2}{\sqrt{2}}\right) = \frac{1}{2}(\hat{a}_1^\dagger \hat{a}_1 + \hat{a}_2^\dagger \hat{a}_2 - \hat{a}_1^\dagger \hat{a}_2 - \hat{a}_2^\dagger \hat{a}_1),$$

$$\hat{N}_1 - \hat{N}_2 = \hat{a}_1^\dagger \hat{a}_2 + \hat{a}_2^\dagger \hat{a}_1.$$

Let us consider that the input 2 contains a strong **coherent state field** that we refer to as *local oscillator*. Thus the total state over which the average is being taken is

$$\underbrace{|\Psi_1\rangle}_{\text{Input 1}} \quad \underbrace{|\alpha_2\rangle}_{\text{Coherent state input 2}} \quad \Longrightarrow \hat{a}_2 \, |\alpha_2\rangle = \alpha_2 \, |\alpha_2\rangle \,. \tag{3.2}$$

This produces the following irradiances:

$$I_1 = \langle \psi_1 \alpha_2 | \hat{A}_1^\dagger \hat{A}_1 | \alpha_2 \Psi_1 \rangle = \langle \Psi_1 \alpha_2 | \frac{\hat{a}_1^\dagger + \hat{a}_2^\dagger}{\sqrt{2}} \frac{\hat{a}_1 + \hat{a}_2}{\sqrt{2}} | \alpha_2 \Psi_1 \rangle = \frac{1}{2} \langle \Psi_1 \alpha_2 | (\hat{a}_1^\dagger + \alpha_2^*)(\hat{a}_1 + \alpha_2) | \alpha_2 \Psi_1 \rangle$$

$$= \frac{1}{2} \langle \Psi_1 | (\hat{a}^\dagger \hat{a}_1 + \hat{a}_1 \alpha_2^* + \hat{a}_1^\dagger \alpha_2 + |\alpha_2|^2) | \Psi_1 \rangle,$$

$$I_2 = \langle \psi_1 \alpha_2 | \hat{A}_2^\dagger \hat{A}_2 | \alpha_2 \Psi_1 \rangle = \langle \Psi_1 \alpha_2 | \frac{\hat{a}_1^\dagger - \hat{a}_2^\dagger}{\sqrt{2}} \frac{\hat{a}_1 - \hat{a}_2}{\sqrt{2}} | \alpha_2 \Psi_1 \rangle = \frac{1}{2} \langle \Psi_1 \alpha_2 | (\hat{a}_1^\dagger - \alpha_2^*)(\hat{a}_1 - \alpha_2) | \alpha_2 \Psi_1 \rangle$$

$$= \frac{1}{2} \langle \Psi_1 | (\hat{a}_1^\dagger \hat{a}_1 - \hat{a}_1 \alpha_2^* - \hat{a}_1^\dagger \alpha_2 + |\alpha_2|^2) | \Psi_1 \rangle.$$

By taking the difference $I_1 - I_2$, we can change the nature of α_2 to have different quadratures:

$$I_1 - I_2 \propto \langle \hat{N}_1 - \hat{N}_2 \rangle = \langle \Psi_1 | \hat{a}_1 \alpha_2^* + \hat{a}_1^\dagger \alpha_2 | \Psi_1 \rangle = \begin{cases} 2\alpha_2 \langle \Psi_1 | \hat{X}_1 | \Psi_1 \rangle, & \alpha_2 = \alpha_2^*, \\ -2i\alpha_2 \langle \Psi_1 | \hat{X}_2 | \Psi_1 \rangle, & \alpha_2 = -\alpha_2^*. \end{cases}$$

In general by changing the phase of input 2 we can measure a general quadrature. Noise in intensity corresponds to noise in specific quadratures.
Say $\alpha_2 = |\alpha_2| e^{i\varphi_\alpha}$, then:

$$\hat{N}_1 - \hat{N}_2 = |\alpha_2|(\hat{a}_1 e^{-i\varphi_\alpha} + \hat{a}_1^\dagger e^{i\varphi_\alpha}) = |\alpha_2|(\hat{a}_1 + \hat{a}_1^\dagger)\cos\varphi_\alpha + i|\alpha_2|(\hat{a}_1 - \hat{a}_2^\dagger)\sin\varphi_\alpha = 2|\alpha_2|(\cos\varphi_\alpha \hat{X}_1 - i\sin\varphi_\alpha \hat{X}_2).$$

The noise in the difference photocurrent is thus proportional to:

$$\langle (\hat{N}_1 - \hat{N}_2)^2 \rangle - \langle \hat{N}_1 - \hat{N}_2 \rangle^2 = \langle (\alpha_2^* \hat{a}_1 + \alpha_2 \hat{a}_1^\dagger)^2 \rangle - \langle (\alpha_2^* \hat{a}_1 + \alpha_2 \hat{a}_1^\dagger) \rangle^2.$$

The term in red can be $\hat{X}_1$ or $\hat{X}_2$ depending on the phase of α_2, as stated above.

- Noise in photocurrent difference corresponds to uncertainty in quadratures.
- If a quadrature measurement has uncertainty $\Delta X_\phi^2 < 1/4$.

3.2 Generation of squeezed states

The following is a scheme of a nonlinear medium. Radiation from oscillating dipoles is of different frequency as the input stimulation. Nonlinear polarization induced in a medium by an E-field $\boldsymbol{E}$ is:

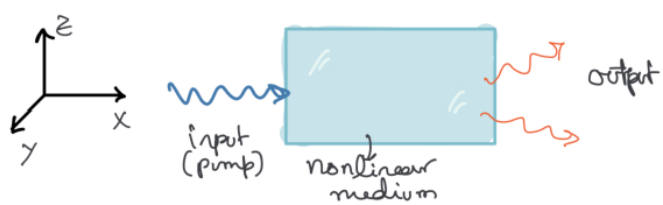

Figure 3.1 Nonlinear medium

$$\boldsymbol{P}_i = \varepsilon_0 \left[\chi_{jk}^{(1)} \boldsymbol{E}_k + \varepsilon_0 \chi_{jkl}^{(2)} \boldsymbol{E}_k \boldsymbol{E}_l + \cdots \right].$$

This polarization is for one dipole, the total would be a sum over all of them. Thses quantities are tensor. In particular, we have a linear and second-order polarization terms:

$$\boldsymbol{P}_{Lj} = \text{Linear polarization} = \varepsilon_0 \chi_{jk}^{(1)} \boldsymbol{E}_k$$
$$\boldsymbol{P}_{NLj} = \text{Second-order polarization} = \varepsilon_0 \chi_{jkl}^{(2)} \boldsymbol{E}_k \boldsymbol{E}_l.$$

The interaction (dipole-field) energy density associated with the field becomes:

$$\begin{aligned} U = -\boldsymbol{D} \cdot \boldsymbol{E} &= \underbrace{-\varepsilon_0 \boldsymbol{E}^2 - \boldsymbol{P}_L \cdot \boldsymbol{E}}_{\alpha \boldsymbol{E}^2 (\text{linear})} - \boldsymbol{P}_{NL}^{(2)} \cdot \boldsymbol{E} \\ &= -\varepsilon_0 [\chi_{jk}^{(1)} \boldsymbol{E}_k + \chi_{jkl}^{(2)} \boldsymbol{E}_j \boldsymbol{E}_k] \boldsymbol{E}_l = \underbrace{-\varepsilon_0 \chi_{jk}^{(1)} \boldsymbol{E}_k \boldsymbol{E}_l}_{U_L} + \underbrace{-\varepsilon_0 \chi_{jkl}^{(2)} \boldsymbol{E}_j \boldsymbol{E}_k \boldsymbol{E}_l}_{U_{NL}^{(2)} \text{ (Squeezed output)}}. \end{aligned}$$

We will analyze the above nonlinear Hamiltonian for the specific interaction where we have an incident blue photon corresponding spontaneously down-converted to two red photons (nonlinear process). The total E-field present is:

$$\hat{\boldsymbol{E}}_{tot} = \boldsymbol{E}_B + \hat{\boldsymbol{E}}, \qquad \begin{array}{l} \boldsymbol{E}_B = \text{Incidence classical blue field} \\ \hat{\boldsymbol{E}} = \text{Quantized E-field} \end{array} .$$

Hamiltonian becomes

$$\hat{H}^{(2)}_{NL} = -\int dV U^{(2)}_{NL} = -\varepsilon_0 \int dV \chi^{(2)}_{jkl} (\boldsymbol{E}_B + \hat{\boldsymbol{E}})_j (\boldsymbol{E}_B + \hat{\boldsymbol{E}})_k (\boldsymbol{E}_B + \hat{\boldsymbol{E}})_l$$

For further simplification let us assume that only $\chi^{(2)}_{zzz} \neq 0 = \chi^{(2)}$. This is a simplifying assumption, used only for making the calculations easier. The E-field and the E-field operators to be used are of the form:

$$\boldsymbol{E}_B = \hat{\boldsymbol{z}} \left[\mathcal{E}_B e^{i(k_B z - \omega_B t)} + \mathcal{E}^*_B e^{-i(k_B z - \omega_B t)} \right], \quad \hat{\boldsymbol{E}}_z = i \sum_{\boldsymbol{k}} \hat{\boldsymbol{z}} \sqrt{\frac{\hbar\omega}{2\varepsilon_0 V}} \left[\hat{a}_{\boldsymbol{k},z} e^{i(\boldsymbol{k}\cdot\boldsymbol{r} - \omega t)} - \hat{a}^\dagger_{\boldsymbol{k},z} e^{-i(\boldsymbol{k}\cdot\boldsymbol{r} - \omega t)} \right]$$

We are only studyng the simplest case where squeezed light is generated. There will be 4 different kinds of terms resulting from the above combination of E-fields:

$$\underbrace{(E_{Bz} + \hat{E}_z)}_{(1)} \underbrace{(E_{Bz} + \hat{E}_z)}_{(2)} \underbrace{(E_{Bz} + \hat{E}_z)}_{(3)} .$$

(1) $E_{Bz} E_{Bz} E_{Bz}$ This is constant and doest no contain any operator: only adds global phase.

(2) $E_{Bz} E_{Bz} \hat{E}_z$ Such a term can be simplified as follows

$$\begin{aligned} & i E^2_{Bz} \sum_{\boldsymbol{k}} \sqrt{\frac{\hbar\omega}{2\varepsilon_0 V}} \left[\hat{a}_{\boldsymbol{k},z} e^{i(\boldsymbol{k}\cdot\boldsymbol{r} - \omega t)} - \hat{a}^\dagger_{kz} e^{-i(\boldsymbol{k}\cdot\boldsymbol{r} - \omega t)} \right] \\ = & i \left[\mathcal{E}^2_B e^{i2(k_B z - \omega_B t)} + \mathcal{E}^{*2}_B e^{-i2(k_B z - \omega_B t)} + |\mathcal{E}_B|^2 \right] \sum_{\boldsymbol{k}} \sqrt{\frac{\hbar\omega}{2\varepsilon_0 V}} \left[\hat{a}_{\boldsymbol{k},z} e^{i(\boldsymbol{k}\cdot\boldsymbol{r} - \omega t)} - \hat{a}^\dagger_{\boldsymbol{k},z} e^{-i(\boldsymbol{k}\cdot\boldsymbol{r} - \omega t)} \right] . \end{aligned}$$

The above product has time dependent terms of the type $e^{i(2\omega_B \pm \omega)t}$, $e^{\pm i\omega t}$. For optical frequencies $\{\omega_B, \omega\}$ both of these terms are fast oscillating and they average to zero over typical timescales of observations $t \sim 1\ ns$.

(3) $E_{Bz} \hat{E}_z \hat{E}_z$ This term contributes to the nonlinear Hamiltonian as follows:

$$\begin{aligned} \hat{H}^{(2)}_{NL} &= -3\varepsilon_0 \chi^{(2)} \int dV E_{Bz} \hat{E}_z \hat{E}_z \\ E_{Bz} &= \mathcal{E}_B e^{i(\boldsymbol{k}_B\cdot\boldsymbol{r} - \omega_B t)} + \mathcal{E}^*_B e^{-i(\boldsymbol{k}_B\cdot\boldsymbol{r} - \omega_B t)}, \\ \hat{E}_z &= i \sum_{\boldsymbol{k}} \sqrt{\frac{\hbar\omega}{2\varepsilon_0 V}} \left[\hat{a}_{\boldsymbol{k},z} e^{i(\boldsymbol{k}\cdot\boldsymbol{r} - \omega t)} - \hat{a}^\dagger_{\boldsymbol{k},z} e^{-i(\boldsymbol{k}\cdot\boldsymbol{r} - \omega t)} \right] \end{aligned}$$

Substituting the E-fields in the nonlinear Hamiltonian:

$$\begin{aligned} \hat{H}^{(2)}_{NL} = & -\frac{3\varepsilon_0}{2V} \chi^{(2)} \hbar \int dV \left[\mathcal{E}_B e^{i(\boldsymbol{k}_B\cdot\boldsymbol{r} - \omega_B t)} + \mathcal{E}^*_B e^{-i(\boldsymbol{k}_B\cdot\boldsymbol{r} - \omega t)} \right] \\ & \sum_{k_1} \sqrt{\omega_1} \left[\hat{a}_{\boldsymbol{k}_1} e^{i(\boldsymbol{k}_1\cdot\boldsymbol{r} - \omega_1 t)} - \hat{a}^\dagger_{\boldsymbol{k}_1} e^{-i(\boldsymbol{k}_1\cdot\boldsymbol{r} - \omega_1 t)} \right] \sum_{k_2} \sqrt{\omega_2} \left[\hat{a}_{k_2} e^{i(\boldsymbol{k}_2\cdot\boldsymbol{r} - \omega_2 t)} - \hat{a}^\dagger_{k_2} e^{-i(\boldsymbol{k}_2\cdot\boldsymbol{r} - \omega_2 t)} \right] \end{aligned}$$

Considering the time-dependent terms:

$$e^{i(\omega_B-\omega_1-\omega_2)t},\ e^{i(\omega_B+\omega_1+\omega_2)t},\ e^{i(\omega_B-\omega_1+\omega_2)t},\ e^{i(\omega_B+\omega_1-\omega_2)t}.$$

These are all fast oscillating terms, which averages to zero. To get a non-zero contribution we choose

$$\omega_B = \omega_1 + \omega_2 \Longrightarrow \text{Energy conservation}\,. \tag{3.3}$$

Similarly,

$$\int dV e^{i(\boldsymbol{k}_B-\boldsymbol{k}_1-\boldsymbol{k}_2)\cdot\boldsymbol{r}}.$$

For this integral to not vanish

$$\boldsymbol{k}_B = \boldsymbol{k}_1 + \boldsymbol{k}_2 \Longrightarrow \text{Momentum conservation}\,. \tag{3.4}$$

This is the **spontaneous parametric down-conversion** SPDC process.

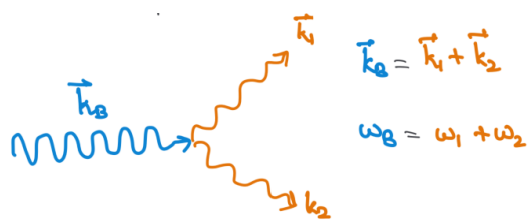

Figure 3.2 Energy and momentum conservation.

Thus, only keeping the terms that conserve energy and momentum:

$$\hat{H}^{(2)}_{NL} = -\frac{3}{2}\hbar\chi^{(2)}\sqrt{\omega_1\omega_2}\left[\mathcal{E}_B\hat{a}^\dagger_{k_1}\hat{a}^\dagger_{k_2} + \mathcal{E}^*_B\hat{a}_{k_1}\hat{a}_{k_2}\right].$$

If the two modes are the same:

$$\hat{H}^{(2)}_{NL} = -\frac{1}{2}\left[\xi^*\hat{a}^2 + \xi\hat{a}^{\dagger 2}\right], \quad \xi = 3\hbar\chi^{(2)}\omega\mathcal{E}_B, \quad \text{and} \quad \begin{array}{l}\omega_B = 2\omega \Longrightarrow \omega = \omega_B/2\\ \boldsymbol{k}_B = 2\boldsymbol{k} \Longrightarrow \boldsymbol{k} = \boldsymbol{k}_B/2\end{array}.$$

The corresponding evolution operator becomes

$$U(t,0) = e^{-i\hat{H}^{(2)}_{NL}t/\hbar} = e^{\frac{1}{2}[\xi^*\hat{a}^2-\xi\hat{a}^{\dagger 2}]}, \quad \xi = 3i\chi^{(2)}\mathcal{E}_B\omega t. \tag{3.5}$$

Thus starting with an initial vacuum state in the red modes the system one obtains a squeezed vacuum output.

This page is blank intentionally

Chapter A

Density operator (review from app knight)

A.1 Density operator

A.1.1 Definition

State vectors $|\psi\rangle$ convey the maximal amount of information about a system allowed by the laws of quantum mechanics.

If $|\psi_1\rangle$ and $|\psi_2\rangle$ are two possible quantum states then so is their coherent superporition

$$|\psi\rangle = c_1 |\psi_1\rangle + c_2 |\psi_2\rangle , \quad |c_1|^2 + |c_2|^2 = 1.$$

However, there are situations where the state vector is not precisely known. It may be possible to write state vectors for the multicomponent system but not for the subsystem of interest.

For instance, a system of two spin-1/2 with eigenstates $\{|\uparrow\rangle , |\downarrow\rangle\}$. A possible state of the combined system is

$$|\psi\rangle = \frac{1}{\sqrt{2}} \left[|\uparrow\rangle_1 |\downarrow\rangle_2 - |\downarrow\rangle_1 |\uparrow\rangle_2 \right] .$$

This equation is an entangled state. An entangled state cannot be factored, in any basis, into a product of states of the two subsystems, that is,

$$\text{Entangled state} \qquad |\psi\rangle \neq |\text{spin } 1\rangle |\text{spin } 2\rangle .$$

Quantum states described by state vectors are said to be *pure states*. States that cannot be described by state vectors are said to be in *mixed states*. Mixed states are described by the density operator

$$\text{Mixed state} \qquad \hat{\rho} = \sum_i p_i |\psi_i\rangle \langle\psi_i| , \tag{A.1}$$

where the sym is over an ensemble and p_i is the probability of the system being in the ith state of the ensemble $|\psi_i\rangle$. The probabilities satisfy the obvious relations

$$0 \leq p_i \leq 1, \qquad \sum_i p_i = 1, \qquad \sum_i p_i^2 \leq 1.$$

For the pure state, all the p_i vanish except the jth with $p_i \delta_{ij}$. Then,

$$\text{Pure state} \qquad \hat{\rho} = |\psi_j\rangle \langle\psi_j| .$$

The density operator for the pure state $|\psi_j\rangle$ is just the projection onto the state $|\psi_j\rangle$, while the general case (A.1) is a sum of the projection operators over the ensemble, weighted with the probabilities of each member of the ensemble.

In an orthonormal basis $\{|\varphi_n\rangle\}$, the ith member of the ensemble can be projected as

$$|\psi_i\rangle = \sum_n |\varphi_n\rangle \langle\varphi_n|\psi_i\rangle = \sum_n c_n^{(i)} |\varphi_n\rangle, \quad c_n^{(i)} = \langle\varphi_n|\psi_i\rangle.$$

The matrix element of $\hat{\rho}$ between the n and n' eigenstates is

$$\langle\varphi_n|\hat{\rho}|\varphi_{n'}\rangle = \sum_i \langle\varphi_n|\psi_i\rangle p_i \langle\psi_i|\varphi_{n'}\rangle = \sum_i p_i c_n^{(i)} c_{n'}^{(i)*}.$$

The quantities $\langle\varphi_n|\hat{\rho}|\varphi_{n'}\rangle$ form the elements of the density matrix. The trace of this matrix is

$$\mathrm{Tr}\,[\hat{\rho}] = \sum_n \langle\varphi_n|\hat{\rho}|\varphi_n\rangle = \sum_{i,n} \langle\varphi_n|\psi_i\rangle p_i \langle\psi_i|\varphi_n\rangle = \sum_{i,n} p_i \langle\psi_i|\varphi_n\rangle\langle\varphi_n|\psi_i\rangle = \sum_i p_i = 1.$$

Since $\hat{\rho}$ is Hermitian, the diagonal elements $0 \leq \langle\varphi_n|\hat{\rho}|\varphi_n\rangle \leq 1$.
Let us now consider the square $\hat{\rho}^2 = \hat{\rho}\cdot\hat{\rho}$. For a pure state, we have

$$\hat{\rho}^2 = |\psi\rangle\langle\psi|\psi\rangle\langle\psi| = |\psi\rangle\langle\psi| = \hat{\rho} \Longrightarrow \mathrm{Tr}\left[\hat{\rho}^2\right] = \mathrm{Tr}\,[\hat{\rho}] = 1.$$

For a statistical mixture

$$\hat{\rho}^2 = \sum_{i,j} p_i p_j |\psi_i\rangle\langle\psi_i|\psi_j\rangle\langle\psi_j|.$$

Its trace is

$$\mathrm{Tr}\left[\hat{\rho}^2\right] = \sum_n \langle\varphi_n|\hat{\rho}^2|\varphi_n\rangle = \sum_{n,i,j} p_i p_j \langle\varphi_n|\psi_i\rangle\langle\psi_i|\psi_j\rangle\langle\psi_j|\varphi_n\rangle = \sum_{i,j} p_i p_j |\langle\psi_i|\psi_j\rangle|^2 \leq \left[\sum_i p_i\right]^2 - 1.$$

Thus, we have

$$\mathrm{Tr}\left[\hat{\rho}^2\right] \begin{cases} = 1, & \text{pure state} \\ < 1, & \text{mixed state} \end{cases}. \tag{A.2}$$

The ensemble average (or expectation value for pure state) of some operator $\hat{O}$ is

$$\text{Expectation} \qquad \langle\hat{O}\rangle = \mathrm{Tr}\left[\hat{\rho}\hat{O}\right] = \begin{cases} \langle\psi_i|\hat{O}|\psi_i\rangle, & \text{pure state} \\ \sum_i p_i \langle\psi_i|\hat{O}|\psi_i\rangle, & \text{mixed state} \end{cases}. \tag{A.3}$$

Formally we can use the density operator to express the expectation as:

$$\langle\hat{O}\rangle = \mathrm{Tr}\left[\hat{\rho}\hat{O}\right] = \sum_n \langle\varphi_n|\hat{\rho}\hat{O}|\varphi_n\rangle = \sum_{n,i} p_i \langle\varphi_n|\psi_i\rangle\langle\psi_i|\hat{O}|\varphi_n\rangle = \sum_{i,n} p_i \langle\psi_i|\hat{O}|\varphi_n\rangle\langle\varphi_n|\psi_i\rangle = \sum_i p_i \langle\psi_i|\hat{O}|\varphi_i\rangle.$$

A.1.2 Entangled states

Lets consider a two-particle system and that each particle can be in either of two one-particle states $|\psi_1\rangle$ or $|\psi_2\rangle$. Using the notation $\left|\psi_i^{(j)}\right\rangle$=particle j in state i, we consider a pure two-particle superposition state

$$|\psi\rangle = C_1 \left|\psi_1^{(1)}\right\rangle \otimes \left|\psi_2^{(2)}\right\rangle + C_2 \left|\psi_2^{(1)}\right\rangle \otimes \left|\psi_1^{(2)}\right\rangle.$$

This can be extended for multiparticle systems, where we can define the *reduced density operators* for each of the subsystems by tracing the density operator over the states of all the other systems. The reduced density operator for particle 1 is

$$\hat{\rho}^{(1)} = \mathrm{Tr}_2[\hat{\rho}] = \langle\psi_1^{(2)}|\hat{\rho}|\psi_1^{(2)}\rangle + \langle\psi_2^{(2)}|\hat{\rho}|\psi_2^{(2)}\rangle = |C_1|^2 \left|\psi_1^{(1)}\right\rangle \left\langle\psi_1^{(1)}\right| + |C_2|^2 \left|\psi_2^{(1)}\right\rangle \left\langle\psi_2^{(1)}\right| .$$

This has the form of a mixed state for particle 1 as long as $C_i \neq 0,\ i = 1, 2$. Simiarly, for particle 2,

$$\hat{\rho}^{(2)} = \mathrm{Tr}_1[\hat{\rho}] = |C_1|^2 \left|\psi_1^{(2)}\right\rangle \left\langle\psi_1^{(2)}\right| + |C_2|^2 \left|\psi_2^{(2)}\right\rangle \left\langle\psi_2^{(2)}\right| .$$

When one of the particles is considered without regards to the other, it is generally in a mixed state. Thus one may characterized the degree of entanglement according to the degree of purity of either of the subsystems.

- $\mathrm{Tr}\left[\hat{\rho}^{(2)}\right]^2 = 1$, the state $|\psi\rangle$ is not an entangled state.
- $\mathrm{Tr}\left[\hat{\rho}^{(2)}\right]^2 < 1$, then $|\psi\rangle$ describes an entanglement between subsystems 1 and 2.

A.1.3 Dynamics of the density operator

The density operator evolves unitarily according to

$$\text{von Neumann eq 1} \qquad \partial_t \hat{\rho} = \frac{i}{\hbar}[\hat{\rho}, \hat{H}], \quad \text{con} \quad i\hbar\partial_t |\psi_i\rangle = \hat{H} |\psi_i\rangle . \tag{A.4}$$

Alternatively, we may write

$$\text{Heisenberg picture of } \hat{\rho} \qquad \hat{\rho}(t) = \hat{U}(t,0)\hat{\rho}(0)\hat{U}^\dagger(t,0),$$

where the unitary evolution operator $\hat{U}(t,0)$ satisfies the equation

$$i\hbar\partial_t \hat{U} = \hat{H}\hat{U}. \tag{A.5}$$

The equation is sometimes written as

$$\text{von Neumann eq 2} \qquad i\hbar\partial_t \hat{\rho}(t) = [\hat{H}, \hat{\rho}(t)] = \mathcal{L}\hat{\rho}(t) , \tag{A.6}$$

where $\mathcal{L}$ is known as the Liouvilian superoperator.