

Frankfurt am Main, April 24, 2024

TSACE-TSAUG Meeting # 10

RJDemetra tools for statistical production

ALESSANDRO PIOVANI | alessandro.piovani@istat.it

Istat | Directorate For Methodology and Statistical Process Design

Presentation Overview

○Pt.1: Tool for specification conversion

- JD_JSON format
- TRAMO-SEATS (Gomez & Maravall) to RJDemetra (v2) / JDemetra+

○Pt.2: RJDemetra Processor: an RJDemetra processing pipeline ready for you

- Architecture
- Adaptable input interfaces to suit your context

Pt.1: Tool for specification conversion


(TRAMO-SEATS to JDemetra+ and RJDemetra)



Specifications in JDemetra+ and RJDemetra

JDemetra+ specifications can be retrieved from:

- the **workspace** (XML files into nested folders)
- **.cfgx** files
- **.RData** files (only RJDemetra and rjd3)

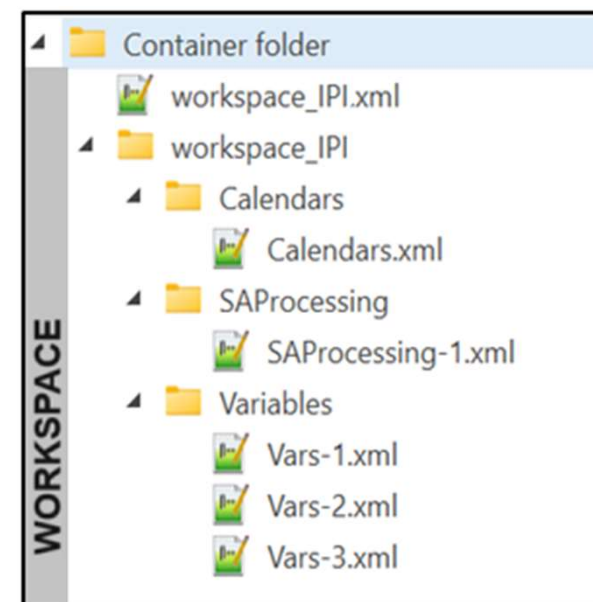

Why do we need this?

We found **difficulties** in handling specifications/workspaces **in memorization stage**:

- limited transparency
 - workspace XML are verbous
 - .cfgx or .RData files are not human-readable
- our database stores individual time series information, workspaces are designed for multiple time series
- one workspace for time-series is not practical for seasonal adjustment in JD+
- need a directory storage system (on filesystem or BLOB type field on DB) for workspaces
- workspaces store data, specifications, and external regressors together
- difficulties for the users in refreshing data (input time series and external regressors).
 - JD+ providers keep searching for data in the exact same location where they were originally loaded

JD_JSON format

○ JSON format:

- simple and widely recognized format → many libraries in any languages to handle it
- JavaScript types to represent the data → similar and easy to be mapped in R/Java types
- "key":value pairs, divided by comma, enclosed in { }; arrays enclosed in []; nested JSONs allowed
- easy to read and write for users

○ Key-values specifications format:

- same as `c("SA_spec", "TRAMO_SEATS")` class attributes from **RJDemetra** (v2)
- **little additions**
 - series name → to link specification and data
 - external regressors info → information to retrieve ext.reg., preferred to values for readability
- comments with JavaScript/Java format (`//` inline, `/* ... */` multiline)

JD_JSON: examples

```
{
  "series_name" : "FATEXP_10",
  "spec"        : "RSA0",
  "transform.function" : "Log", // inline Comment
  "usrdef.outliersEnabled" : true,
  "usrdef.outliersType"   : ["AO", "LS"],
  "usrdef.outliersDate"   : ["2010-06-01", "2009-01-01"],
  "arima.mu"              : false
}
```

```
{
  "series_name" : "C_DEFL",
  "spec"        : "RSA0",
  "transform.function" : "Log",
  "usrdef.outliersEnabled" : true,
  "usrdef.outliersType"   : ["AO", "LS", "AO", "AO", "AO", "AO"],
  "usrdef.outliersDate"   : ["2007-12-01", "2008-11-01", "2020-03-01", "2020-04-01", "2020-05-01", "2020-06-01"],
  "userdef.varFromFile"   : true,
  "userdef.varFromFile.infoList": [ { "file_name": "tdu02m.txt", "start": "2002-01-01", "frequency": 12 },
                                     { "file_name": "lym_02.txt", "start": "2002-01-01", "frequency": 12 } ],
  "usrdef.varEnabled"      : true,
  "usrdef.varType"         : ["Calendar", "Calendar"],
  "tradingdays.option"    : "UserDefined",
  "arima.mu"               : false
}
```

JD_JSON: attributes borrowed from RJDemetra class c("SA_spec", "TRAMO_SEATS")

SOURCE: RJDemetra documentation

| Arguments | |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| tramoseats_spec | TRAMO-SEATS model specification |
| Description | |
| Function to create (and/or modify) a c("SA_spec", "TRAMO_SEATS") class object with the SA model specification for the TRAMO-SEATS method. It can be done from a pre-defined 'JDemetra+' model specification (a character), a previous specification (c("SA_spec", "TRAMO_SEATS") object) or a seasonal adjustment model (c("SA", "TRAMO_SEATS") object). | |
| Usage | |
| <pre>tramoseats_spec(spec = c("RSAfull", "RSA0", "RSA1", "RSA2", "RSA3", "RSA4", "RSA5"), preliminary.check = NA, estimate.from = NA_character_, estimate.to = NA_character_, estimate.first = NA_integer_, estimate.last = NA_integer_, estimate.exclFirst = NA_integer_, estimate.exclLast = NA_integer_, estimate.tol = NA_integer_, estimate.eml = NA, estimate.urfinal = NA_integer_, transform.function = c(NA, "Auto", "None", "Log"), transform.fct = NA_integer_, usrdef.outliersEnabled = NA, usrdef.outliersType = NA, usrdef.outliersDate = NA, usrdef.outliersCoef = NA, ...)</pre> | |
| spec | a TRAMO-SEATS model specification. It can be the 'JDemetra+' name (character) of a predefined TRAMO-SEATS model specification (see <i>Details</i>), an object of class c("SA_spec", "TRAMO_SEATS") or an object of class c("SA", "TRAMO_SEATS"). The default is "RSAfull". |
| preliminary.check | a logical to check the quality of the input series and exclude highly problematic series e.g. the series with a number of identical observations and/or missing values above pre-specified threshold values. The time span of the series, which is the (sub)period used to estimate the regarima model, is controlled by the following six variables: estimate.from, estimate.to, estimate.first, estimate.last, estimate.exclFirst and estimate.exclLast; where estimate.from and estimate.to have priority over the remaining span control variables, estimate.last and estimate.first have priority over estimate.exclFirst and estimate.exclLast, and estimate.last has priority over estimate.first. Default= "All". |
| estimate.from | a character in format "YYYY-MM-DD" indicating the start of the time span (e.g. "1900-01-01"). It can be combined with the parameter estimate.to. |
| estimate.to | a character in format "YYYY-MM-DD" indicating the end of the time span (e.g. "2020-12-31"). It can be combined with the parameter estimate.from. |
| estimate.first | numeric, the number of periods considered at the beginning of the series. |
| estimate.last | numeric, the number of periods considered at the end of the series. |
| estimate.exclFirst | numeric, the number of periods excluded at the beginning of the series. It can be combined with the parameter estimate.exclLast. |
| ... | |

JD_JSON: additional attributes with respect to RJDemetra c("SA_spec", "TRAMO_SEATS")

- **series_name**: a character string indicating the name of the time series. Mandatory, because it allows the matching between specification and rawdata.
- **userdef.varFromFile**: logical indicating whether user-defined variable data will be read from the files specified by *userdef.varFromFile.infoList*, instead of *userdef.var* (raw data). If TRUE, the *userdef.var* field is ignored; if FALSE, *userdef.varFromFile.infoList* is ignored. Default = FALSE.
- **userdef.varFromFile.infoList**: A vector of JSON elements, each with the attributes:
 - **container**: character string representing the name of the file/entity containing the external regressor data;
 - **start**: a character string in the format "YYYY-MM-DD" indicating the starting time of the external regressor data;
 - **n_var**: number of variables contained in the file (in general =1 or =6 for 6TD setting)

JD_JSON: additional attributes with respect to RJDemetra c("SA_spec", "TRAMO_SEATS")

- **frequency**: numeric. Frequency of the data: E.g. frequency=4 → quarterly data frequency=12 → monthly data.
- **method**: "TS" for TRAMO-SEATS, "X" for X13 (X13 not implemented yet).
- **intervention_variables**: a vector of JSON elements, each one with the attributes:
 - **delta**: Numeric;
 - **delta_s**: Numeric;
 - **sequences**: JSON array: every element has the fields
 - **start**: a character string in the format "YYYY-MM-DD"
 - **end**: a character string in the format "YYYY-MM-DD"
- **ramps**: a vector of JSON elements, each with the attributes:
 - **start**: a character string in the format "YYYY-MM-DD" indicating the starting time of the ramp;
 - **end**: a character string in the format "YYYY-MM-DD" indicating the end time of the ramp;

EX. of RAMPS: [{"start":"2020-01-01","end":"2020-12-31"}, {"start":"2008-01-01","end":"2009-01-01"}]

EX. of IVs: [{"delta":1,"delta_s":1,"seq":[{"start":"2001-01-01","end":"2001-12-31"}]},
{"delta":0.75,"delta_s":0,"seq":[{"start":"2004-01-01","end":"2005-12-31"}]}]

JD_JSON: additional attributes with respect to RJDemetra c("SA_spec", "TRAMO_SEATS")

```
{
  "series_name" : "FATEXP_10",
  "spec"       : "RSA0",
  "transform.function" : "Log", // inline Comment
  "usrdef.outliersEnabled" : true,
  "usrdef.outliersType"   : ["AO", "LS"],
  "usrdef.outliersDate"   : ["2010-06-01", "2009-01-01"],
  "arima.mu"             : false
}
```

Series name

External regressors information


```
{
  "series_name" : "C_DEFL",
  "spec"       : "RSA0",
  "transform.function" : "Log",
  "usrdef.outliersEnabled" : true,
  "usrdef.outliersType"   : ["AO", "LS", "AO", "AO", "AO", "AO"],
  "usrdef.outliersDate"   : ["2007-12-01", "2008-11-01", "2020-03-01", "2020-04-01", "2020-05-01", "2020-06-01"],
  "userdef.varFromFile"   : true,
  "userdef.varFromFile.infoList": [ { "file_name": "tdu02m.txt", "start": "2002-01-01", "frequency": 12 },
                                     { "file_name": "lym_02.txt", "start": "2002-01-01", "frequency": 12 } ],
  "usrdef.varEnabled"     : true,
  "usrdef.varType"        : ["Calendar", "Calendar"],
  "tradingdays.option"   : "UserDefined",
  "arima.mu"             : false
}
```

JD_JSON: features

- Already documented in large part → see `tramoseats_spec` function in RJDemetra doc.
- Easy to read and write for users → no nested objects, apart from `userdef.varFromFile.infoList`
- Easy to be stored into a DB → TEXT/VARCHAR or JSON* field DB types
 - * some DBMS allow querying fields directly from JSON!
- Easy to be handled in R and Java → many libraries available (R: `jsonlite/rjson`, Java: `jackson`)
→ easy to be read by RJDemetra
- Facilitates synthesis → like specifying arguments to the `tramoseats_spec` function → default specification to assign values not provided by the user (e.g. "RSA0")
→ tools to produce the full version (see slide 13)

From full to synthetic version and vice versa

```
{
  "series_name": "FATEXP_15",
  "spec": "RSA0",
  "usrdef.outliersEnabled": true,
  "usrdef.outliersType": ["AO", "LS"],
  "usrdef.outliersDate": ["2009-09-01", "2009-03-01"],
  "arima.mu": false,
  "arima.p": 1,
  "arima.d": 0,
  "arima.q": 0,
  "arima.bq": 0
},
```



```
{
  "series_name": "FATEXP_15",
  "spec": "RSA0",
  "preliminary.check": true,
  "estimate.from": "NA",
  "estimate.to": "NA",
  "estimate.first": "NA",
  "estimate.last": "NA",
  "estimate.exclFirst": 0,
  "estimate.exclLast": 0,
  "estimate.tol": 1e-07,
  "estimate.eml": true,
  "estimate.urfinal": 0.96,
  "transform.function": "None",
  "transform.fct": 0.95,
  "usrdef.outliersEnabled": true,
  ...
  "arima.mu": false,
  "arima.p": 1,
  "arima.d": 0,
  "arima.q": 0,
  "arima.bp": 0,
  "arima.bd": 1,
  "arima.bq": 0,
  "arima.coefEnabled": false,
  "arima.coef": "NA",
  "arima.coefType": "NA",
  "fcst.horizon": -2,
  "seats.predictionLength": -1,
  "seats.approx": "Legacy",
  "seats.trendBoundary": 0.5,
  "seats.seasdBoudary": 0.8,
  "seats.seasdBoudary1": 0.8,
  "seats.seasTol": 2,
  "seats.maBoundary": 0.95,
  "seats.method": "Burman"
},
```

JD_JSON.R

- `from_reduced_to_full_JD_JSON_file(...)`
- `from_full_to_reduced_JD_JSON_file(...)`

Workflow & Software

Now:



Work in progress:



JD_JSON.R

- JD_JSON_from_virtual_workspace(...)
- JD_JSON_to_virtual_workspace(...)
- JD_JSON_to_TSplus (...)*
- from_reduced_to_full_JD_JSON_obj (...)
- JD_JSON_from_materialized_workspace(...)
- JD_JSON_to_materialized_workspace(...)
- JD_JSON_from_TSplus(...)*
- from_full_to_reduced_JD_JSON_obj(...)

} interoperability with JD+

* = work in progress

Pt.2: RJDemetra Processor: an RJDemetra processing pipeline ready for you



General overview

JD_JSON format is a component of a larger processing system that is:

- **R/RJDemetra based**
- **Object Oriented** → S4 Object System for R
- **Modular architecture**

This system is the response of our needs of:

- **a semi-automated production pipeline, interoperable with the JD+ suite**
→ workspaces as interoperability tool
- **use RJDemetra API with many time series without "hardcoding" specifications**
→ JD_JSON format
- **a tool expandable and adaptable to many situations**
→ adapting to various input formats/producing custom output
- **a platform maintainable also by statisticians without expertise in Java**
→ building R prototypes converted into Java by IT teams

Building blocks

Responsibility

JD_JSON file processor.R

- JD_JSON_file_processor (input_data_reader, ext_reg_data_reader, spec_file_name, output_workspace_dir, series_to_proc_names)

Processing and output of the results

JD_JSON.R

Interaction with workspace and input-output of specifications

c ("Extended tramoseats spec")

- Extends c("SA_spec", "TRAMOSEATS") from RJDemetra
- Attributes
- Constructor(...)
- to_JD_JSON(...)
- from_JD_JSON(...)
- to_named_list(...)
- from_named_list(...)
- to_sa_spec(...)
- from_sa_spec(...)
- to_tramoseats_spec_args(...)

Interaction with RJDemetra

DATA READERS


c ("Data_reader")

c ("Data_reader_ext_reg")

Acquisition of the input data

Full JDProcessor Stack + possible extensions(*)

Notation: when a block lies on top of another, it means that it uses (or could use) it. → dependencies description

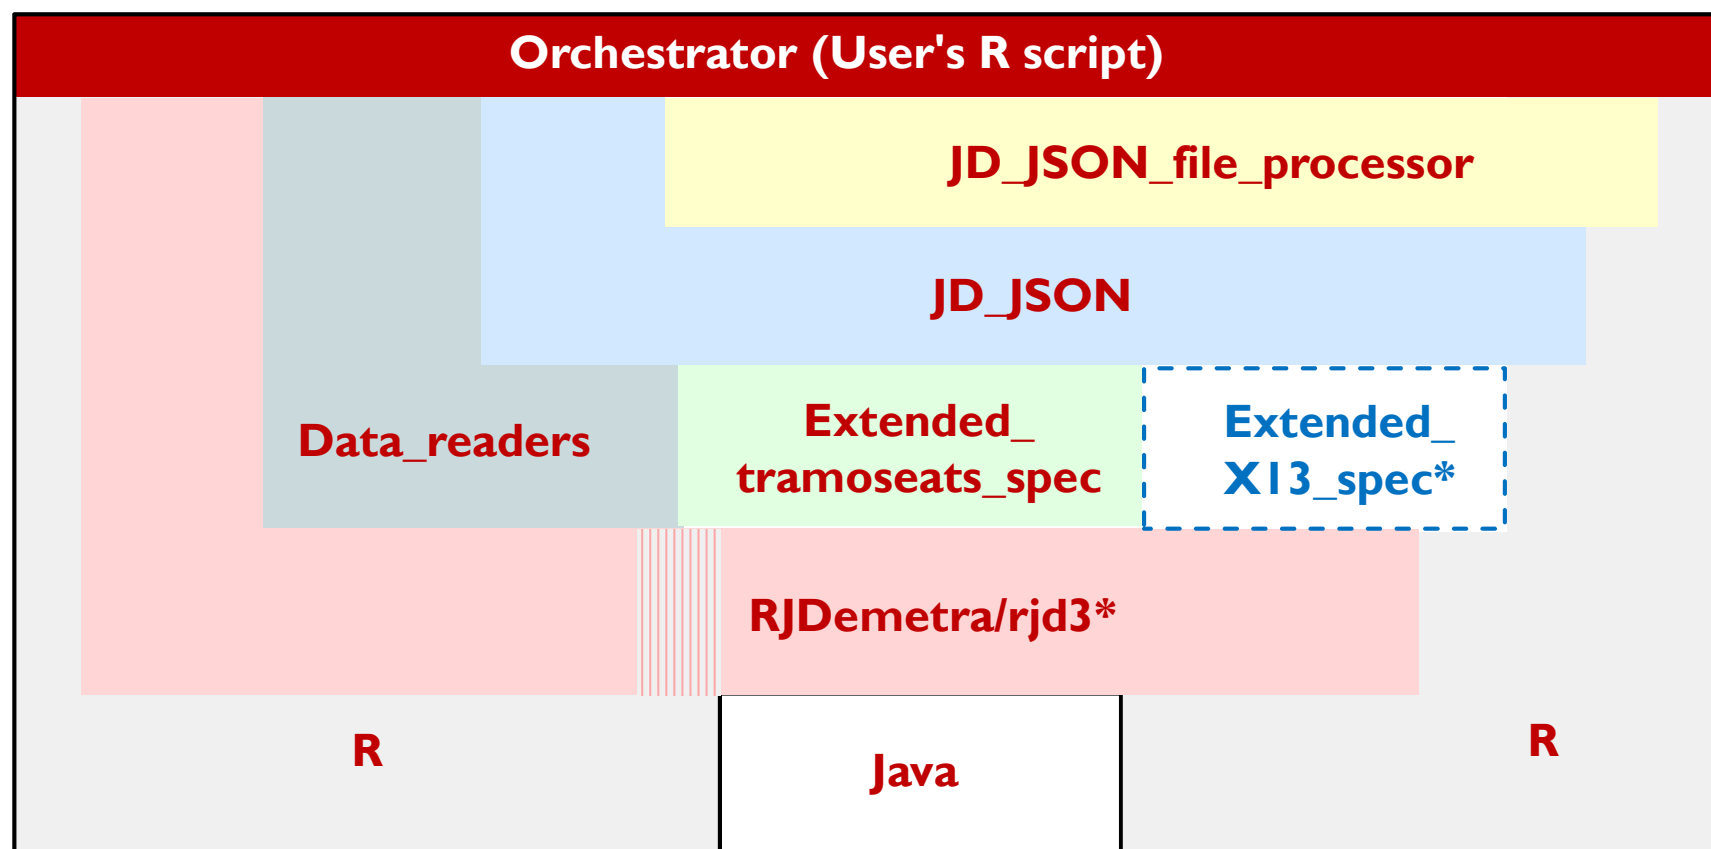

Adapt to your environment through PROVIDER interfaces

- To utilize JDProcessor in your environment, simply **implement the Provider and Provider_ext_reg interfaces** to read your data and external regressors.
 - flexible input, strict rules for the output
 - e.g. Provider_csv, Provider_txt, Provider_jdbc
- Then, pass the Providers to the processor.

Provider:

- Constructor's arguments:
 - input_source: "ANY"
- **read_data(...)** method:
 - **output: mts** (multivariate time series) obj., with time series names and dates
 - no specific input (...)

| | FATEXP_10 | FATEXP_11 | FATEXP_13 |
|------------|-----------|-----------|-----------|
| 2006-09-01 | 14,2 | 18,8 | 42,2 |
| 2006-10-01 | 14,9 | 21,3 | 43,6 |
| 2006-11-01 | 14 | 18,4 | 45,1 |
| 2006-12-01 | 13 | 15 | 45,8 |
| 2007-01-01 | 14,2 | 19,7 | 45,8 |
| 2007-02-01 | 14,9 | 20,2 | 44,4 |



PROVIDER_EXT_REG interface

Provider_ext_reg:

- Constructor: input_source (type : "ANY")
- **read_ext_reg_data** (var_info=NULL, time_series_info=NULL, ...):
 - var_info = list with filename, start_date and frequency
 - time_series_info = series_name,
 - output: ts (time series) object
- **read_ext_reg_info** (var_info_container, ...):
 - e.g. var_info_container = ext_reg_files_folder
 - **output: list of ext_var_info** for each ts →


how to read data
from var. info.

how to
produce var.
info.
(metadata)



| Name | Type | Value |
|-----------------|---------------|--------------------|
| all_jmodel_vars | list [105] | List of length 105 |
| FATEXP_10 | list [0] | List of length 0 |
| C_DEFL | list [2] | List of length 2 |
| [[1]] | list [3] | List of length 3 |
| file_name | character [1] | 'tdu02m.txt' |
| start | character [1] | '2002-01-01' |
| frequency | double [1] | 12 |
| [[2]] | list [3] | List of length 3 |
| file_name | character [1] | 'lym_02.txt' |
| start | character [1] | '2002-01-01' |
| frequency | double [1] | 12 |


Adapt the processor with your Data Readers


Input_ext_reg

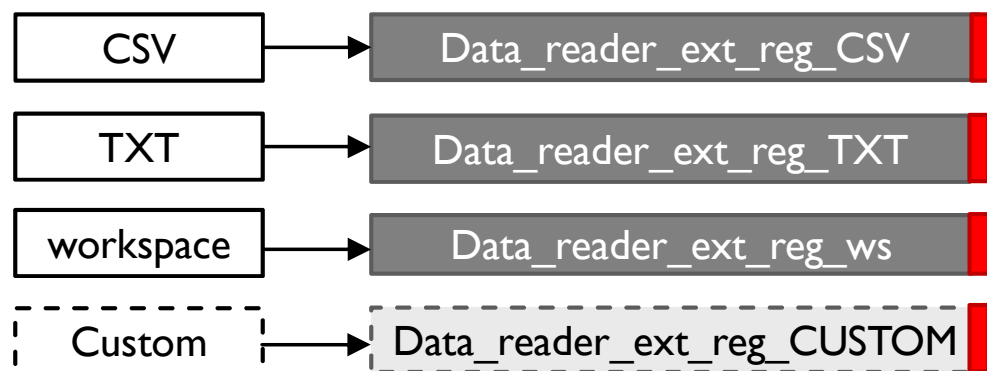


Input_data

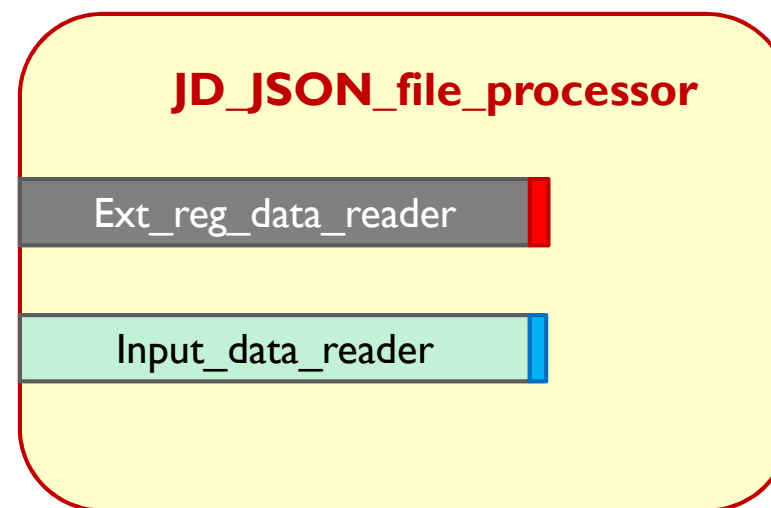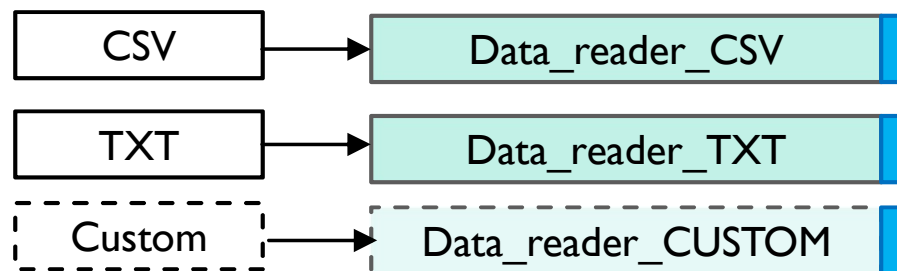

 Data_reader_ext_reg interface

 Data_reader interface

Interoperability with JDemetra+ (GUI, Cruncher, ...) through Workspace

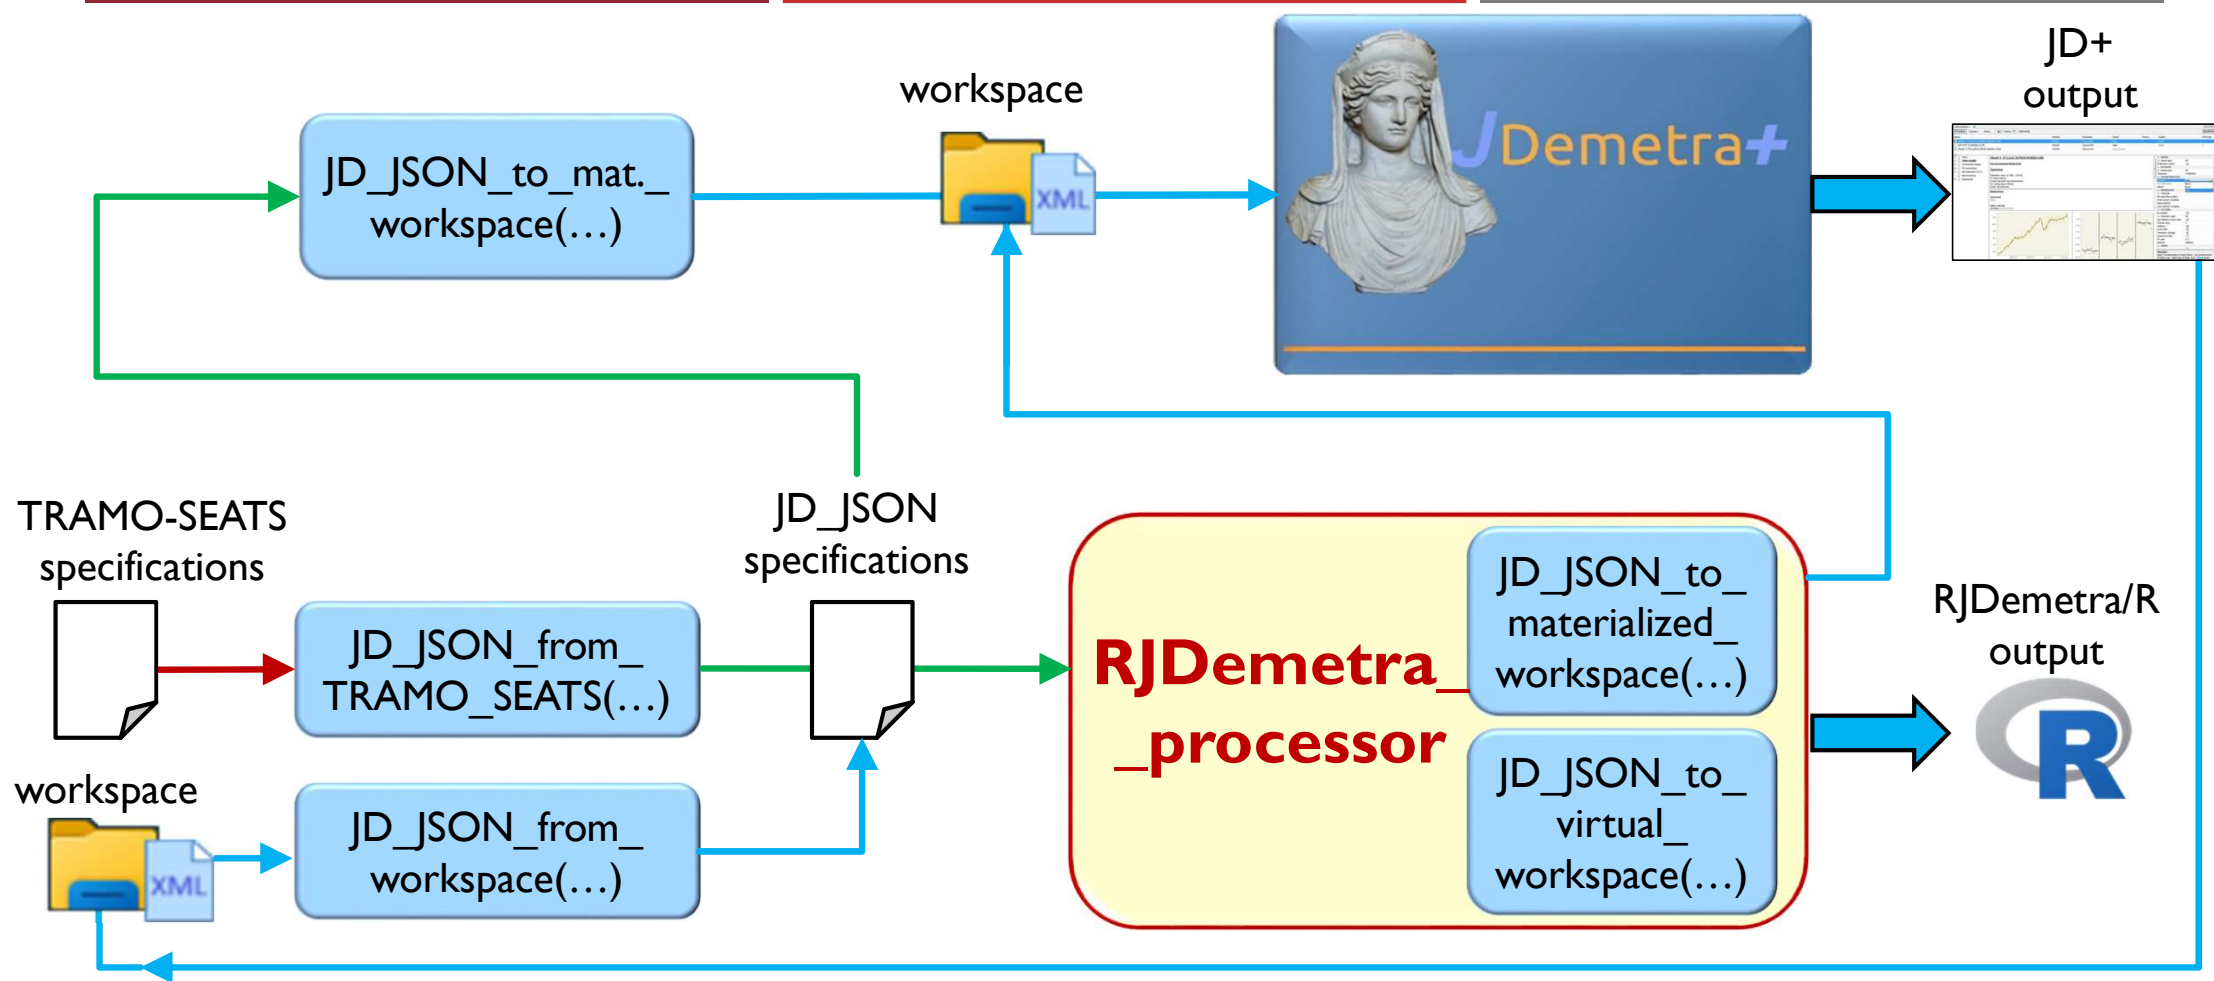

Example of use: orchestrator.R

```
input_workspace_directory <- "C:\\Workspace-dir\\WS-FAT.xml" #Built with sa_ext plugin
input_data_file_name      <- "C:\\SITIC-FAT\\raw_data.csv"
regr_directory            <- "C:\\SITIC-FAT\\TS_regr" #Folder with external regressors
spec_file_name            <- "C:\\JD_JSON_specifications.txt"

diff <- TRUE # Reduced JSON if diff=TRUE, Full JD_JSON format otherwise

##### Operational flow #####

input_data_provider      <- Provider_csv_istat_format(input_data_file_name)
ext_reg_input_provider   <- Provider_ext_reg_tsplus(regr_directory)

JD_JSON_from_materialized_workspace(input_workspace_directory, ext_reg_input_provider,
                                     JSON_file_name = spec_file_name, diff)

models <- JD_JSON_file_processor(input_data_provider, ext_reg_input_provider,
                                 spec_file_name, "output_workspace_container") #RJDemetra models

from_reduced_to_full_JD_JSON_file(spec_file_name, "JD_JSON_specifications_full.txt")
```

Future developments

- X13 integration
- Developing some default input providers
- Creating a rjd3-based version instead of RJDemetra
- Production of output formatting components
- Enhancing code performance by using RJDemetra functions that operate directly on Java objects rather than R ones
- Add other custom fields to JD_JSON ("Keep_ARIMA_coefficients_fixed", ...) and relative functionalities in the processor
- Addition of detailed error messages
- Additional testing


Source code

Source code is available on GitHub:

<https://github.com/AlessandroPiovani/RJDProcessor>

For information contact me at:

- alessandro.piovani@istat.it
- alessandro.piovani13@gmail.com

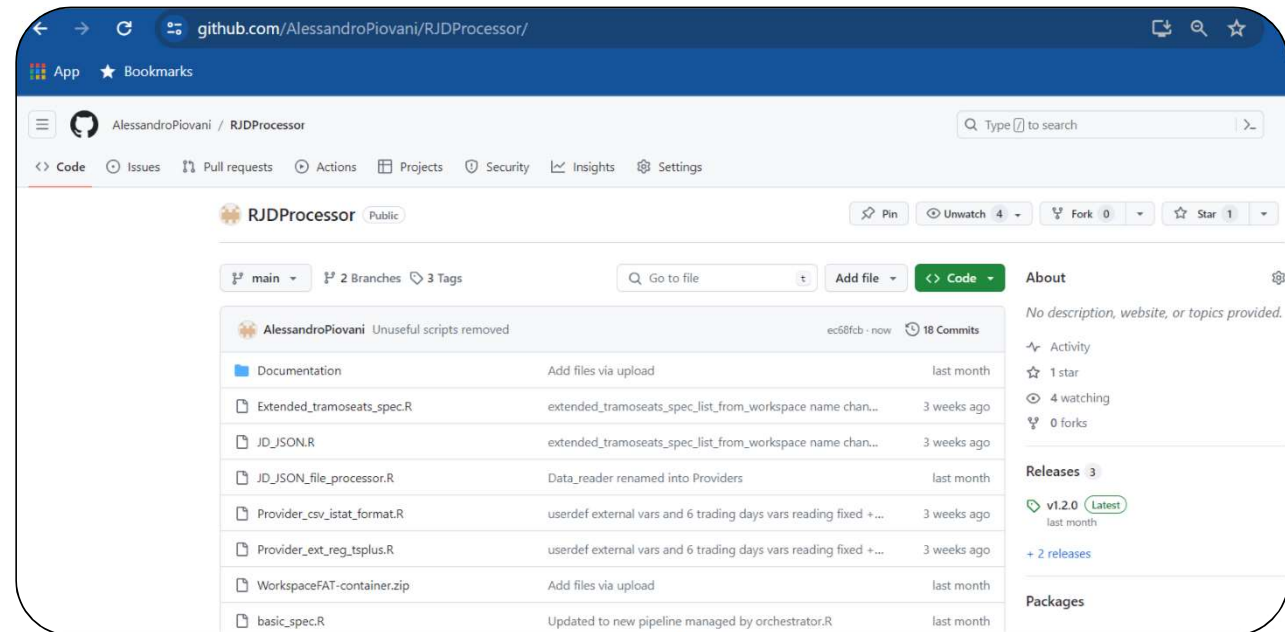

Thanks for your attention!

ALESSANDRO PIOVANI
alessandro.piovani@istat.it