

USB debugging & Screen mirroring

How should developers set up RayNeo glasses before testing and debugging applications on real devices?

After connecting the glasses device via the Rayneo data cable, you can use ADB to perform advanced testing and debugging on Android applications, read running logs, and view related performance attributes such as Profiler.




X2 glasses have ADB install permission disabled by default, so please execute the following commands to enable the install permission before installing an apk:

```
adb shell settings put global mercury_install_allowed 1
```


Please check the ADB switch at: [ADB指令](#)

Connect RayNeo Glasses - Unity via USB

1. Connect the device to the computer via the Rayneo data cable.
2. To verify the connection, open the Unity project, then click File > Build Settings on the menu bar.
3. In the Platform list, select Android, then click Switch Platform. If the platform is already set to Android, skip to the next step.

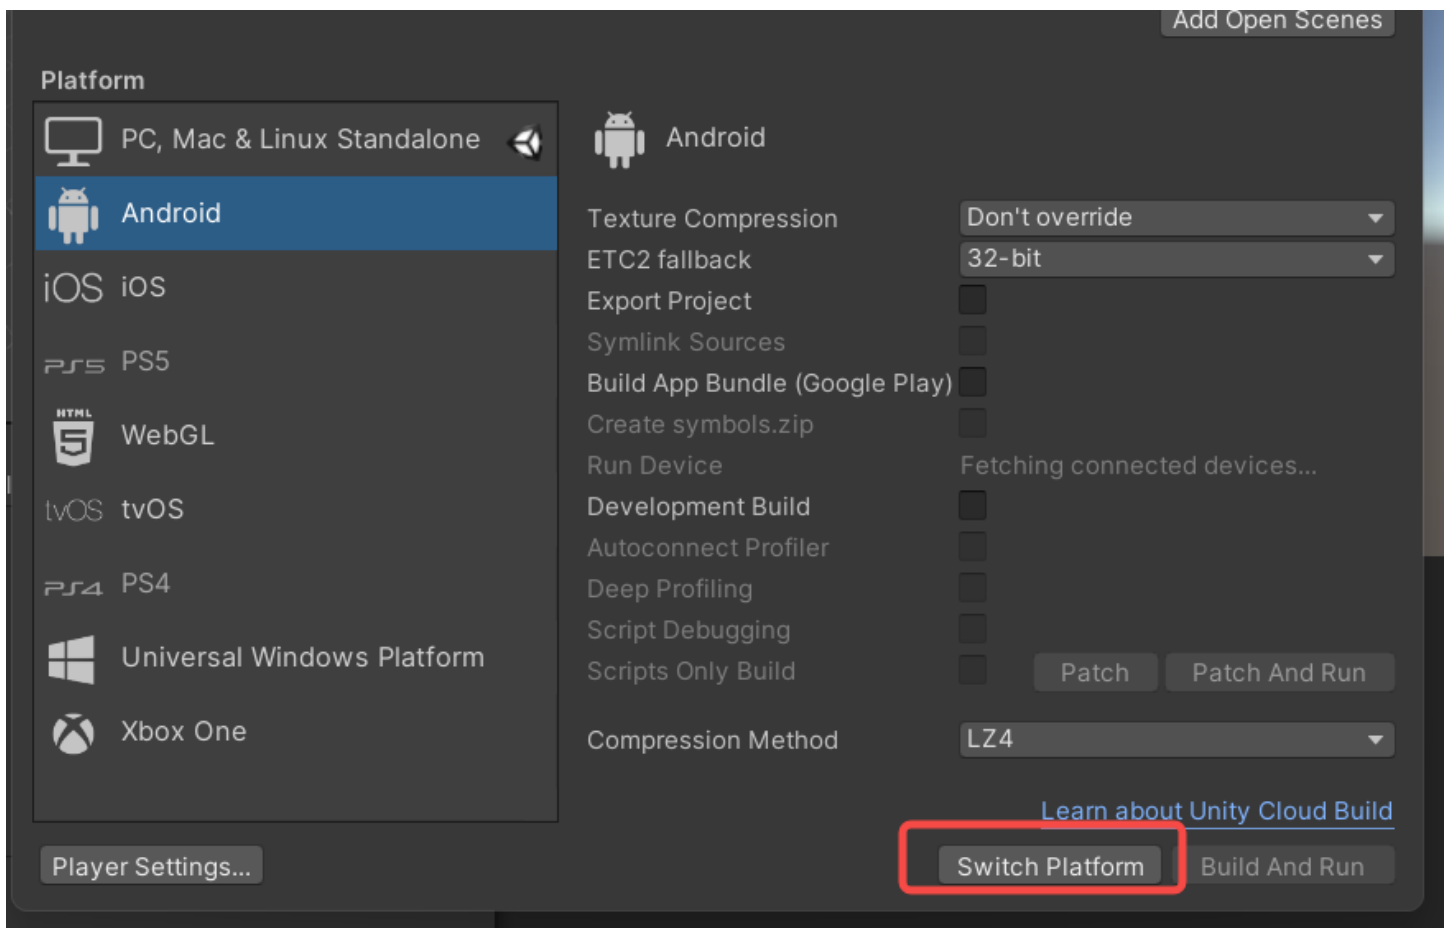

4. In the Run Device list, simply select the corresponding device. If you don't see your Android phone in the list, click Refresh.

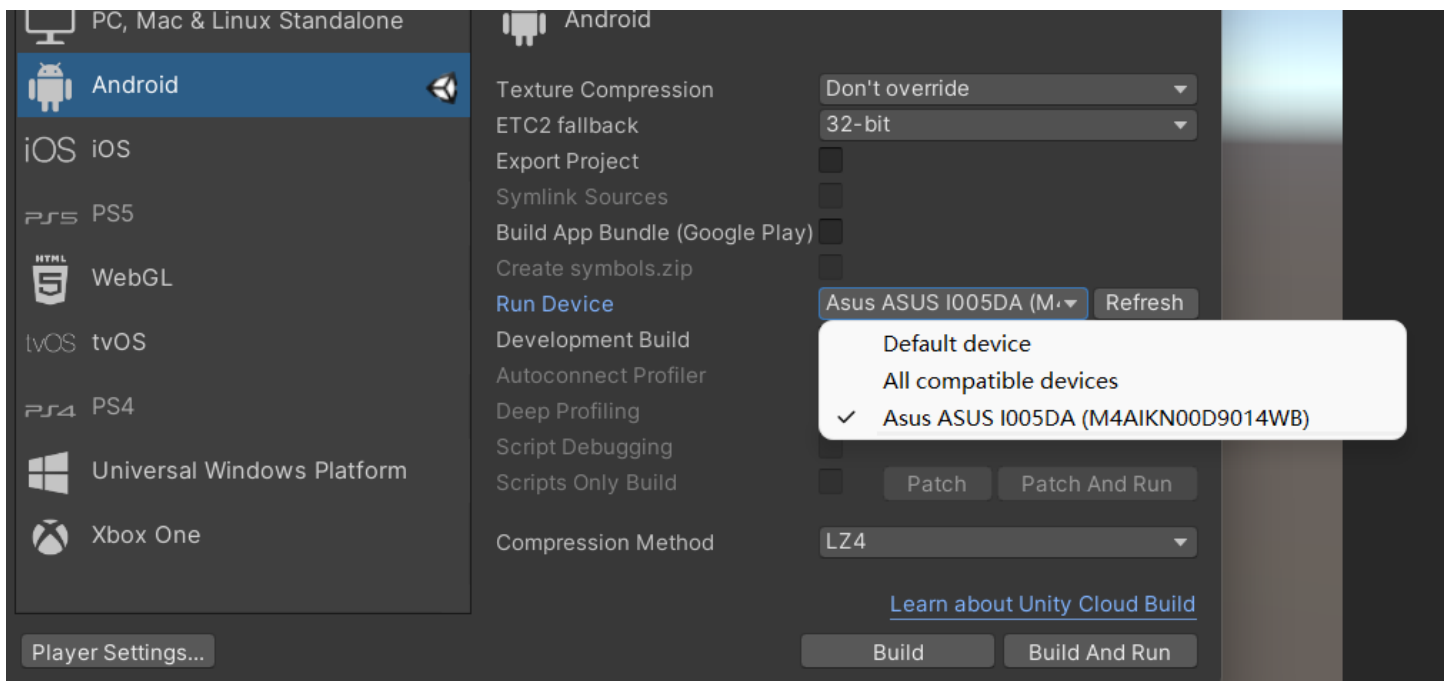

5. Click Build And Run to run the application on an Android phone.

6. If you see the program successfully running on Android, proceed to the next step.

Use screen mirroring tools to assist development

To project the content of the glasses onto the PC for easy development, you can download [anlink](#) (Windows only), or use [scrcpy](#) for projection

Introduction to scrcpy Screen Mirroring


Scrcpy can project the phone screen onto a computer via ADB and control Android devices using a mouse. It can be connected via USB or Wi-Fi. The following describes the process of using USB connection

1. Download Scrcpy

Download Method-github	https://github.com/Genymobile/scrcpy/releases/tag/v2.0
Download Method - File	 scrcpy-win64-v1.24.7z

2. Open the command line

Unzip and open the command line (hold shift and right-click in an empty area of the folder)

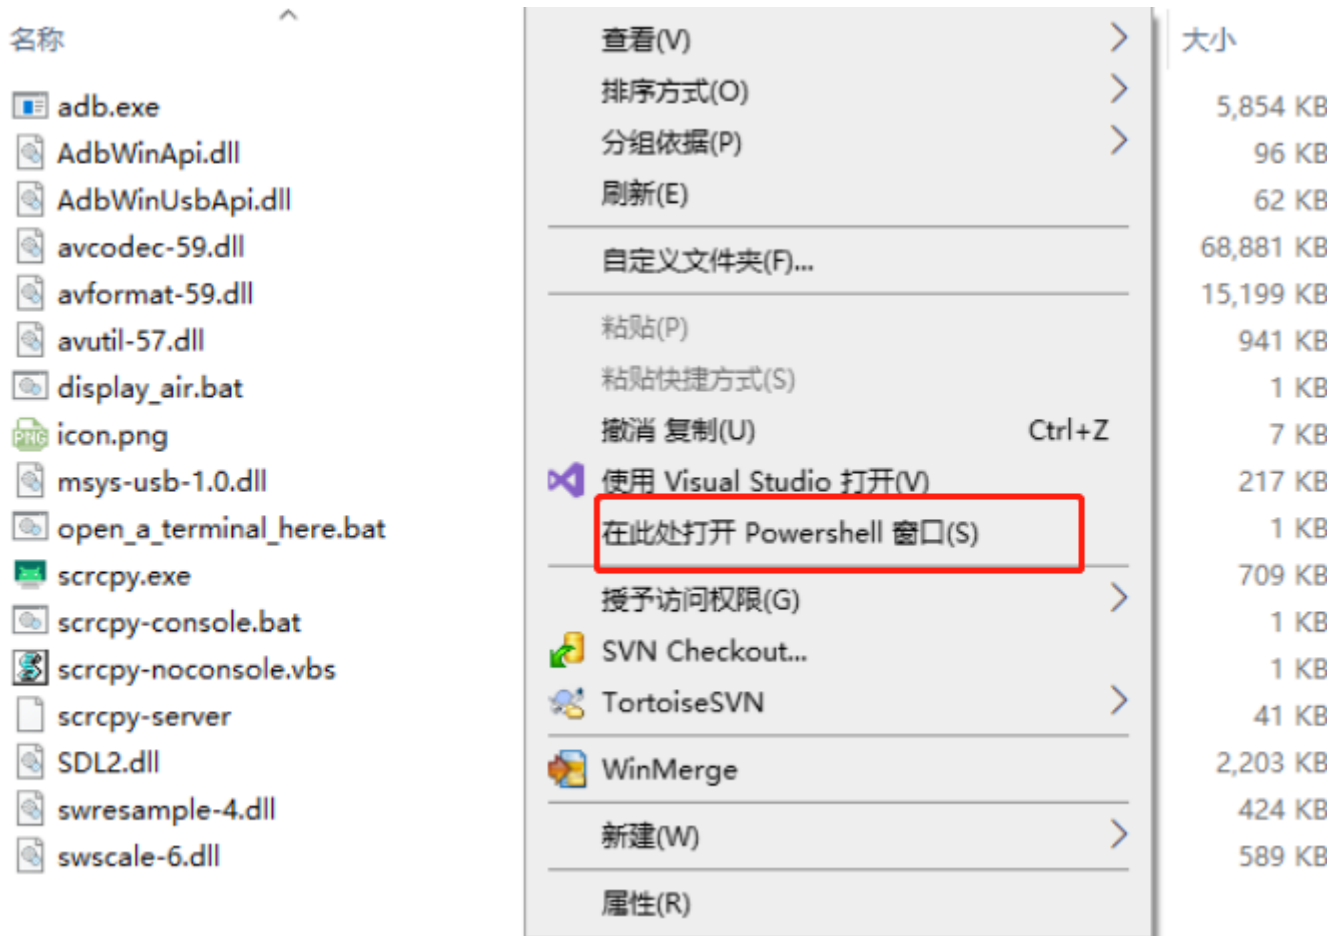

3. Confirm the device connection status

Use the following command to check the device connection status

Code block

```
1 .\adb.exe devices
```

```
.\adb.exe devices
List of devices attached
901fd925    device
```


4. Start screen mirroring

Execute the following command to project the screen device

Code block

```
1 .\scrcpy.exe --display 0
```


When the following screen appears, the screen mirroring is completed

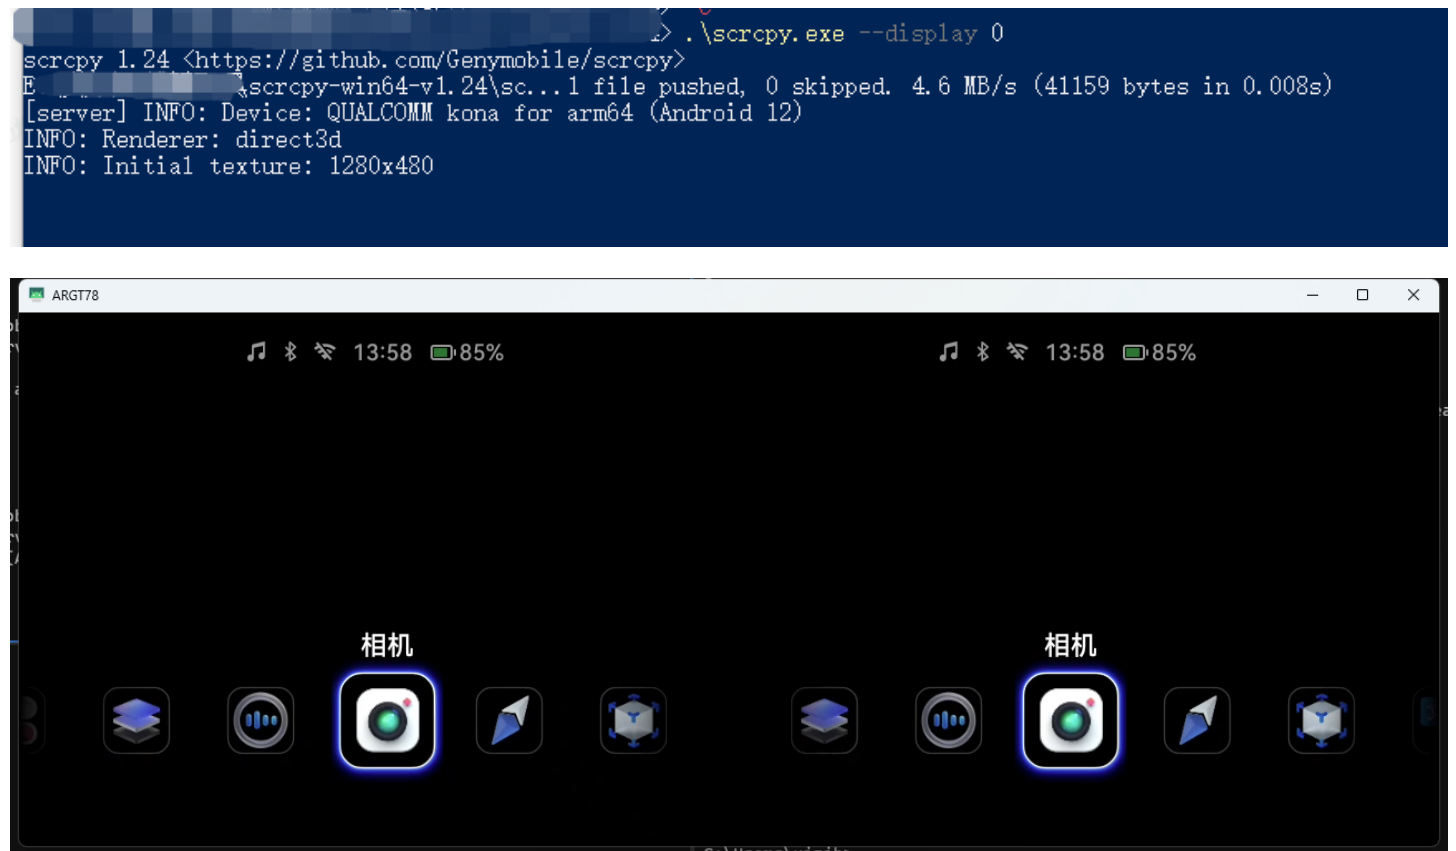

At this time, the mouse can perform operations such as sliding and clicking on it

5. Other issues

If you find that there is a display in the glasses, but a black screen in scrcpy, it is because Single Pass has been selected, which offers better performance. However, if you do need a display, please change it to Multi-pass

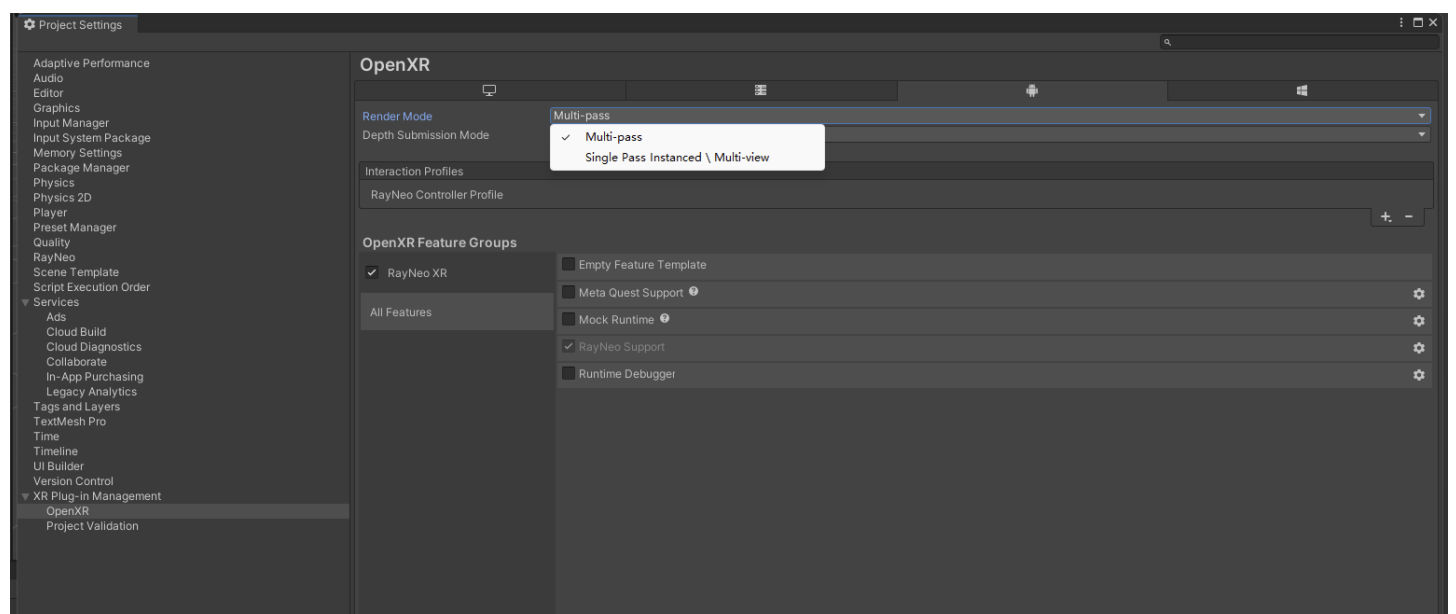



Scrcpy Screen Mirroring - Mac Version

Using scrcpy on a Mac can be a bit troublesome. You can refer to the following two methods:



[Reference 1]<https://guozh.net/install-scrcpy-on-macos/>

[Reference 2]

1.<https://www.macports.org/install.php>

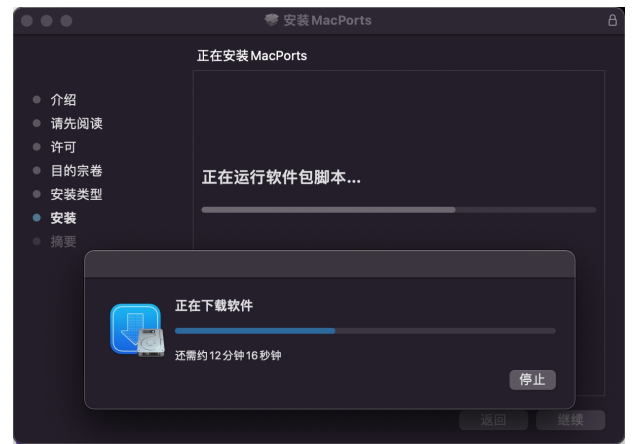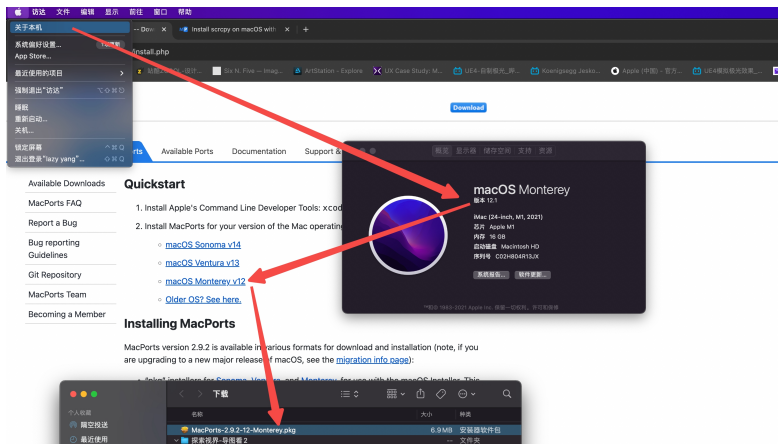

2.<https://ports.macports.org/port/scrcpy/>

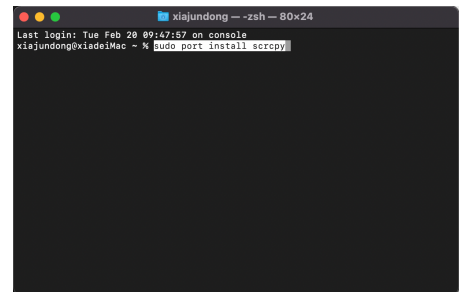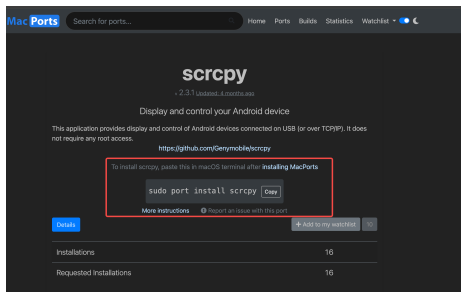

 Return to the [homepage](#)