

Student: Alexander Cher-Aime Email: acheraime@usf.edu


Time on Task: 2 hours, 14 minutes Progress: 100%

Report Generated: Sunday, February 15, 2026 at 11:43 PM

Section 1: Hands-On Demonstration


Part 1: Configure Wireshark and Generate Network Traffic

29. Make a screen capture showing the successful FTP and SFTP file transfers.

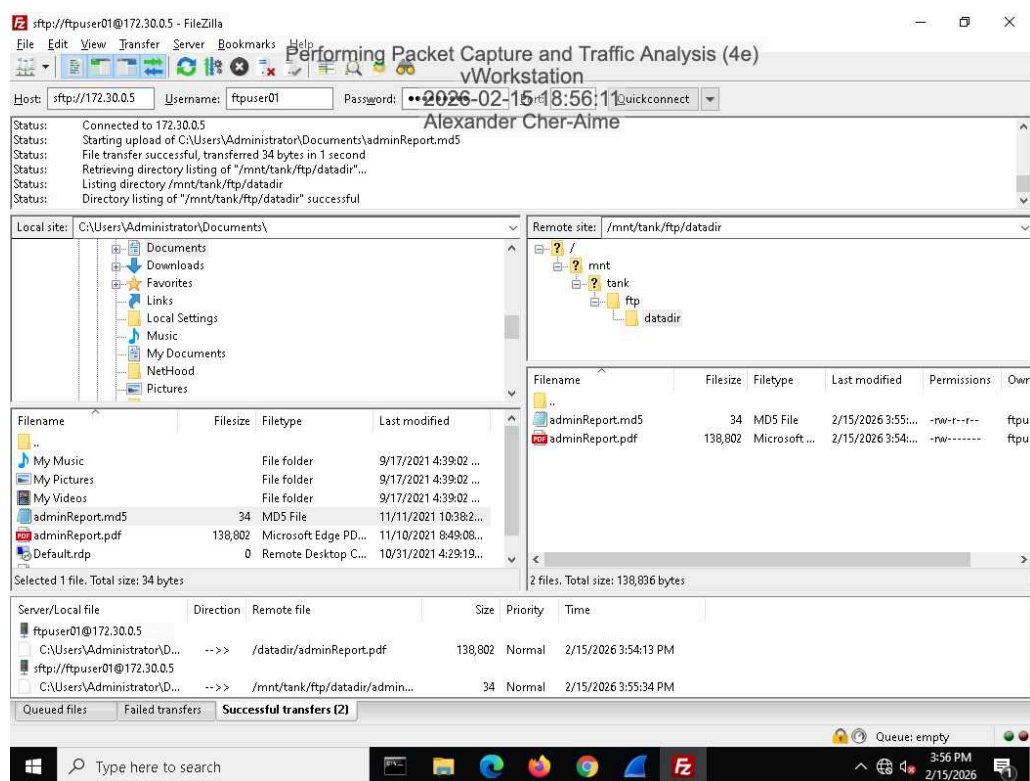


Part 2: Analyze Traffic Using Wireshark


7. Make a screen capture showing the **ICMP** payload.

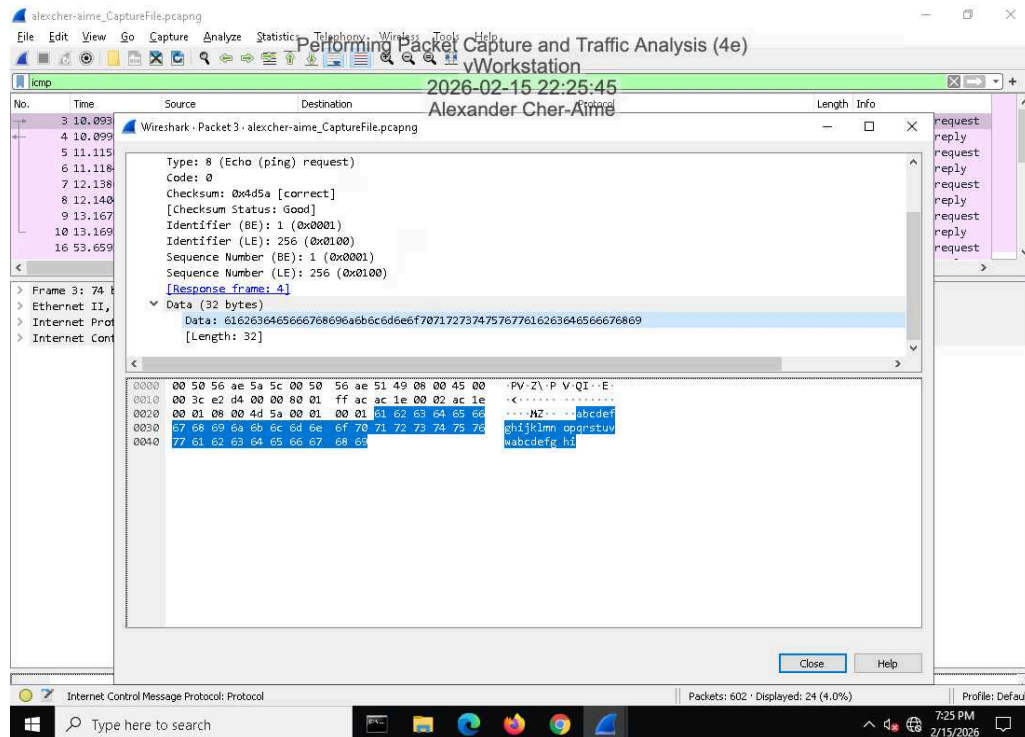


15. Make a screen capture showing the **Last Login:** information in the Packet Details pane.

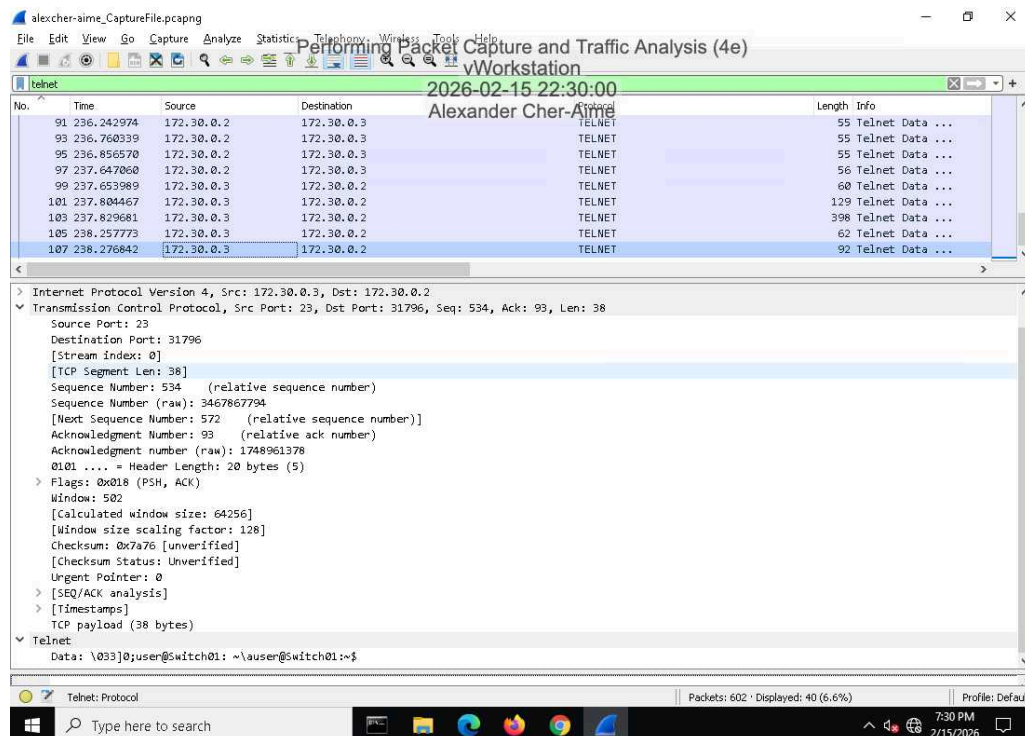


21. Make a screen capture showing the SSHv2 encryption and mac selections for the SSH connection.

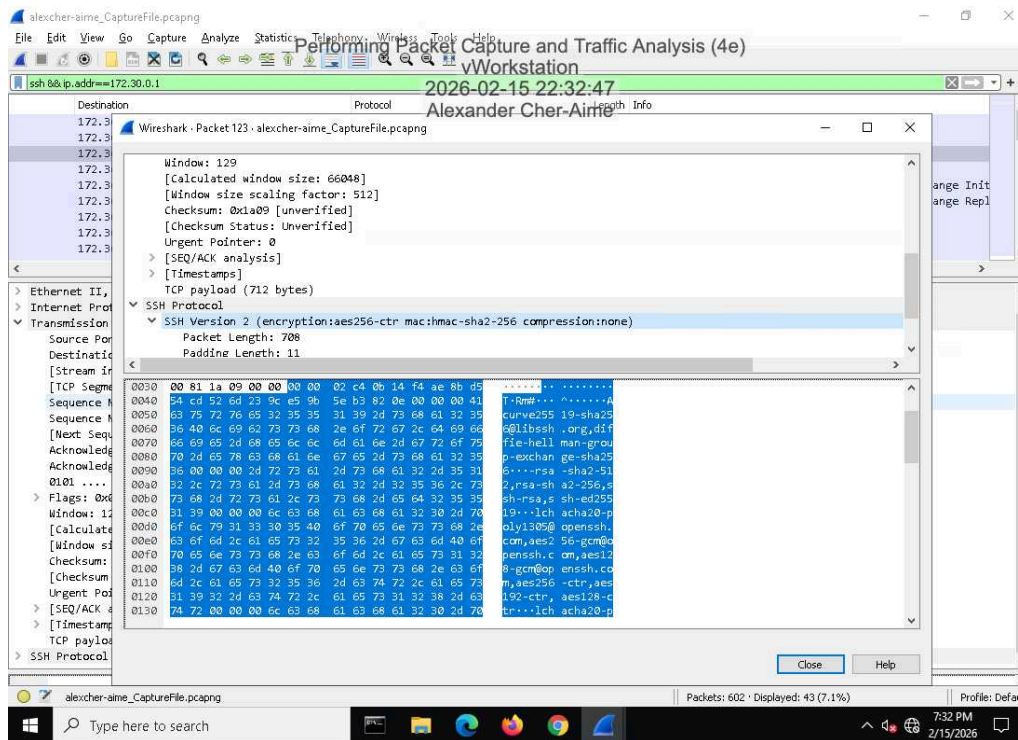


26. Make a screen capture showing the **highlighted (encrypted) data** in the Packet Bytes pane.

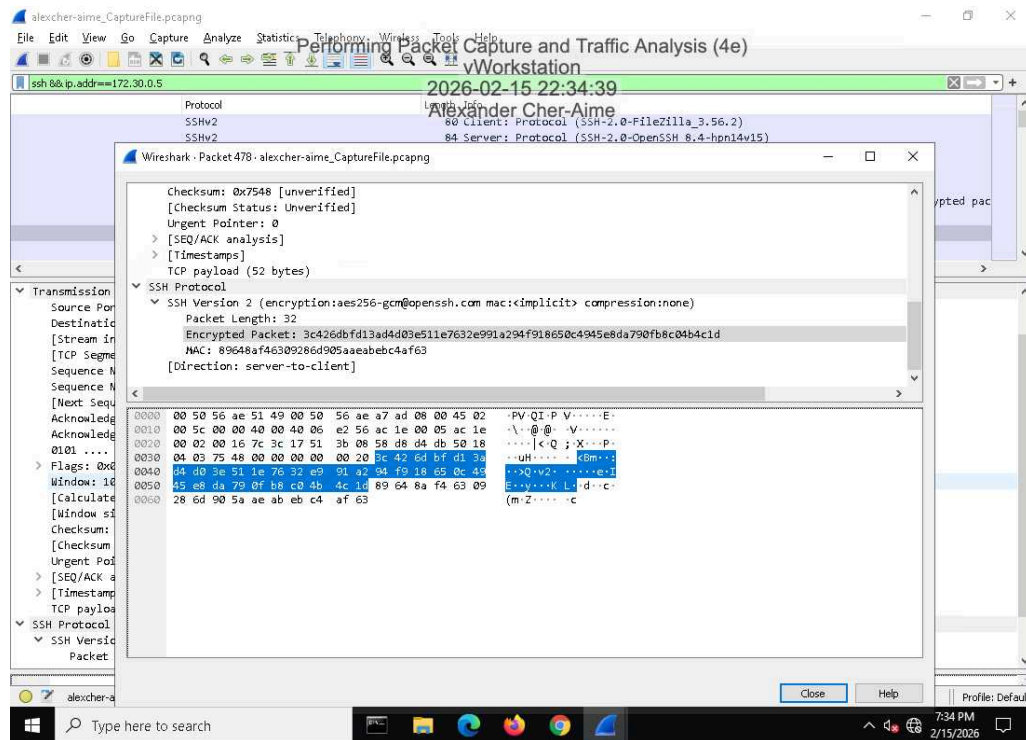

31. Make a screen capture showing the passive port specified by the FTP server in the Packet Details pane.

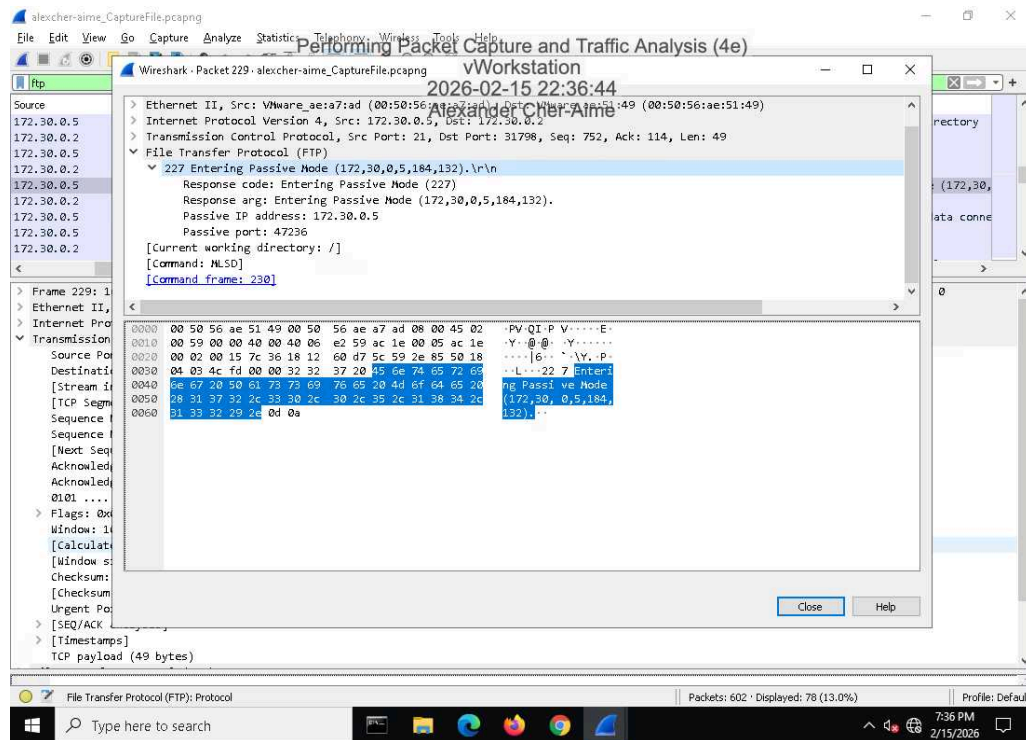


35. Make a screen capture showing the **Destination Port** field value in the **Packet Details** pane.

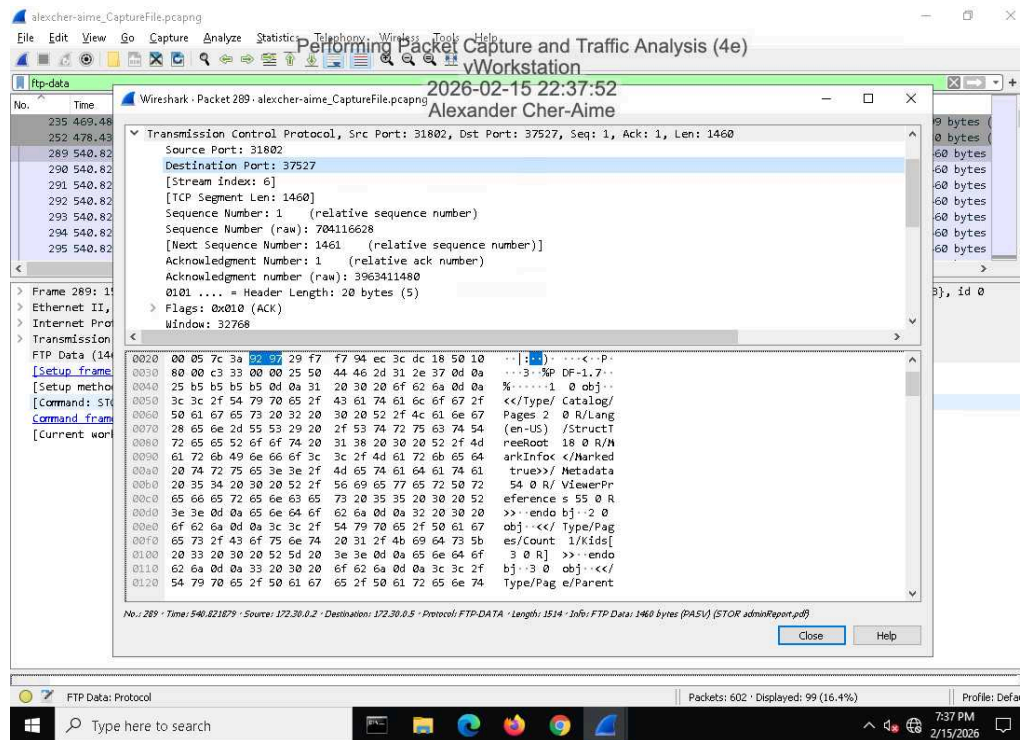


Section 2: Applied Learning

Part 1: Configure Wireshark and Generate Network Traffic


11. Make screen capture showing `sta1-wlan0` connected to the SecureLabs-WiFi network.

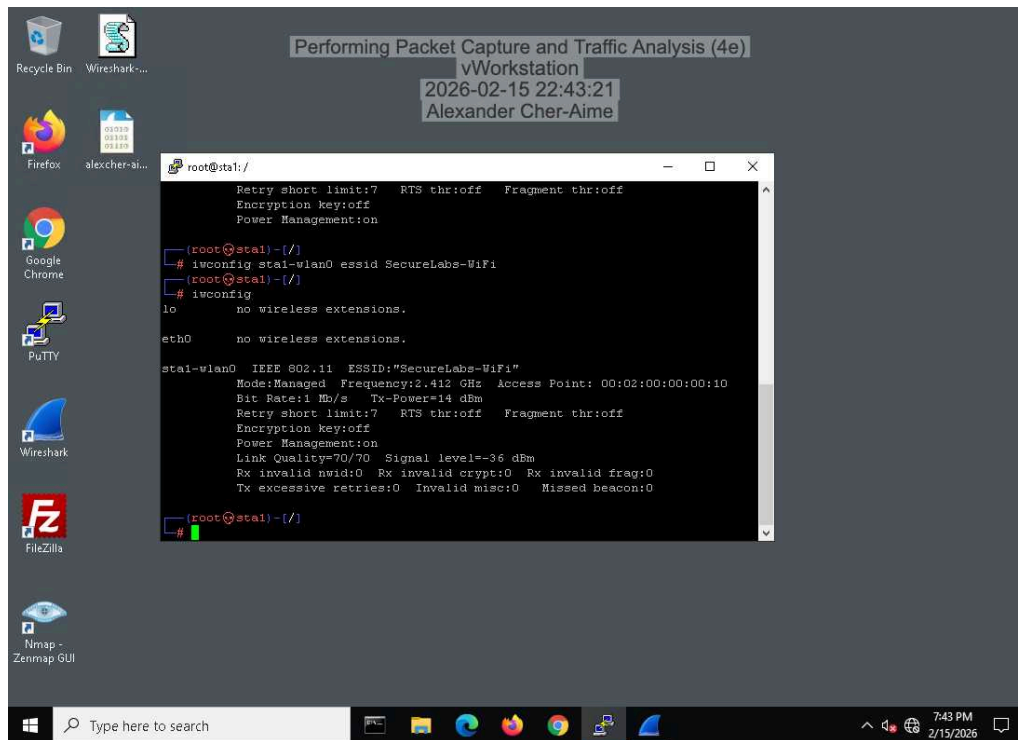

18. Make a screen capture showing the **updated security mode** on the **Status** page.

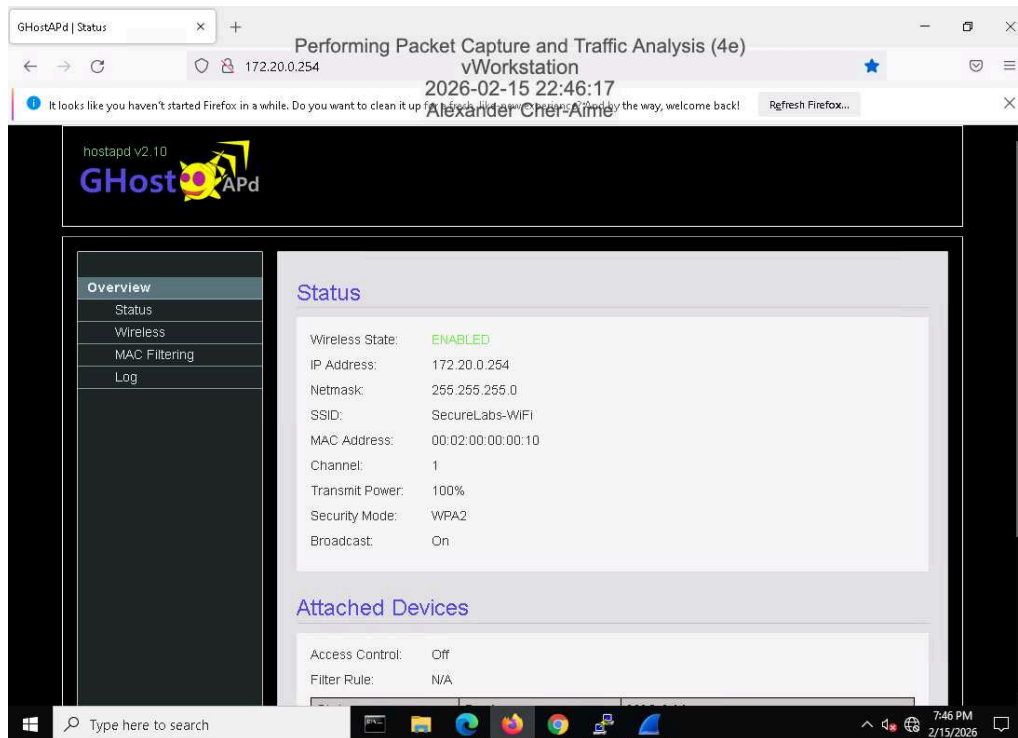


24. Make a screen capture showing the **connection to the now-encrypted WLAN**.

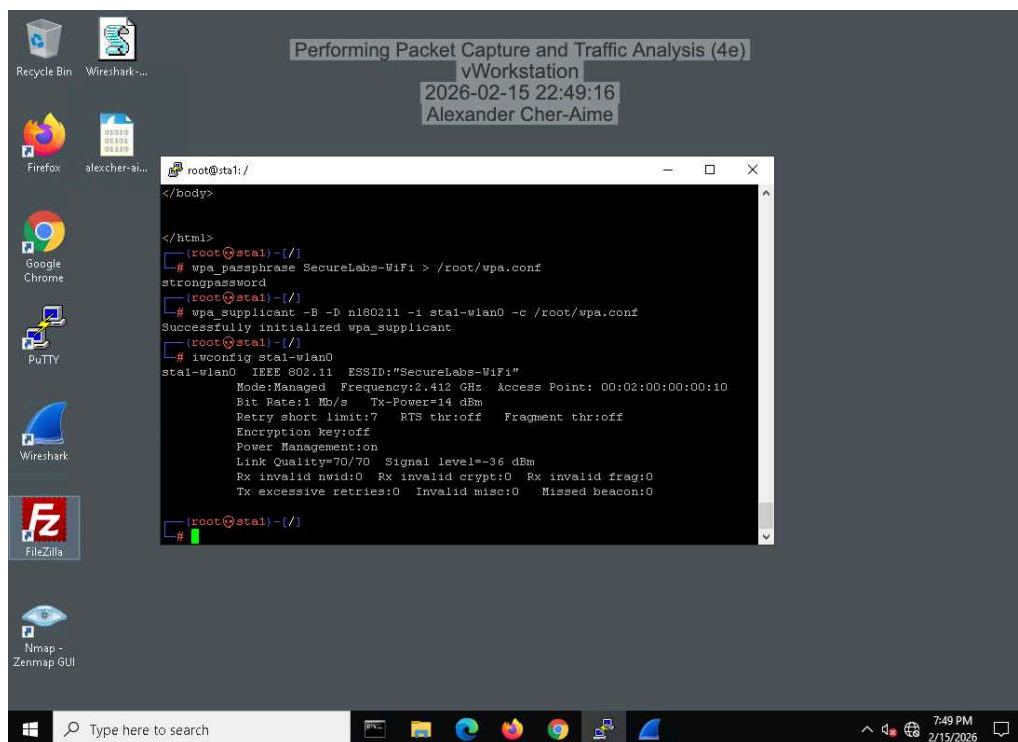


Part 2: Analyze Traffic Using Wireshark


5. Make a screen capture showing the SSID and channel in the Packet Details pane.

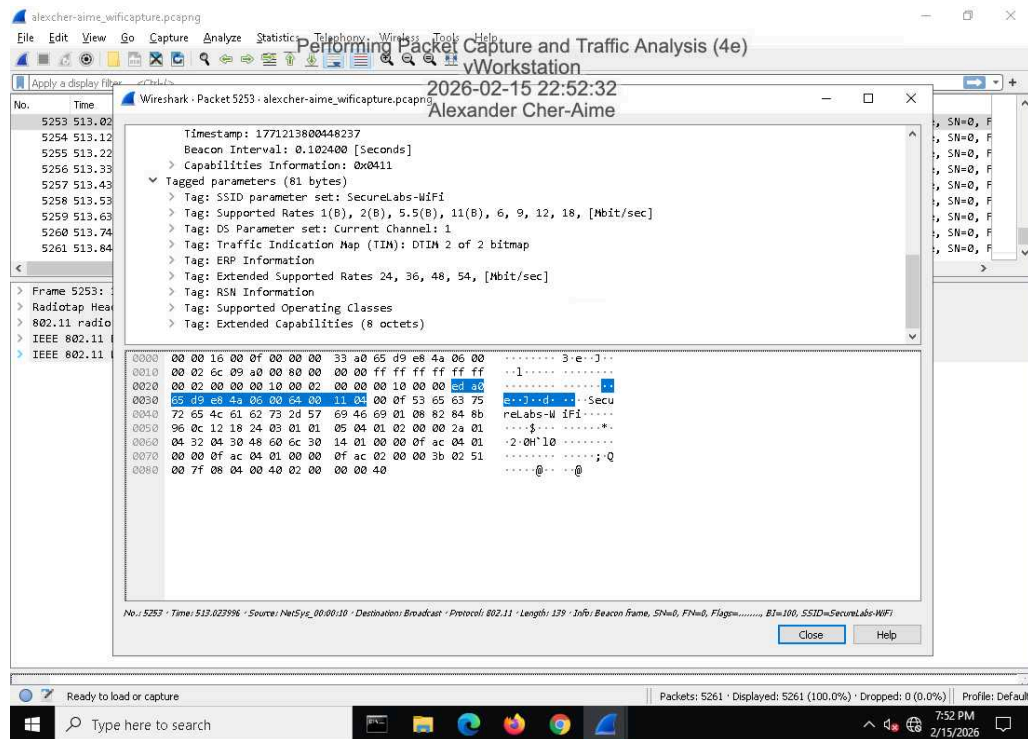


11. Make a screen capture showing the Packet Details for the ICMP packet.

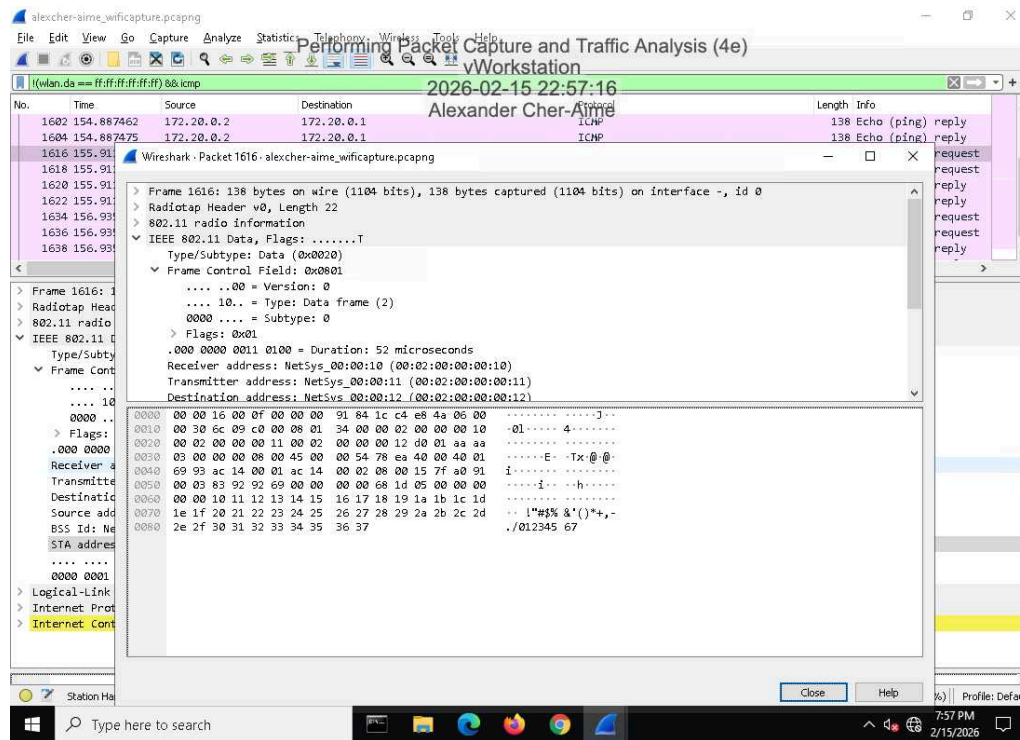

14. Make a screen capture showing the Packet Details for the HTTP packet.

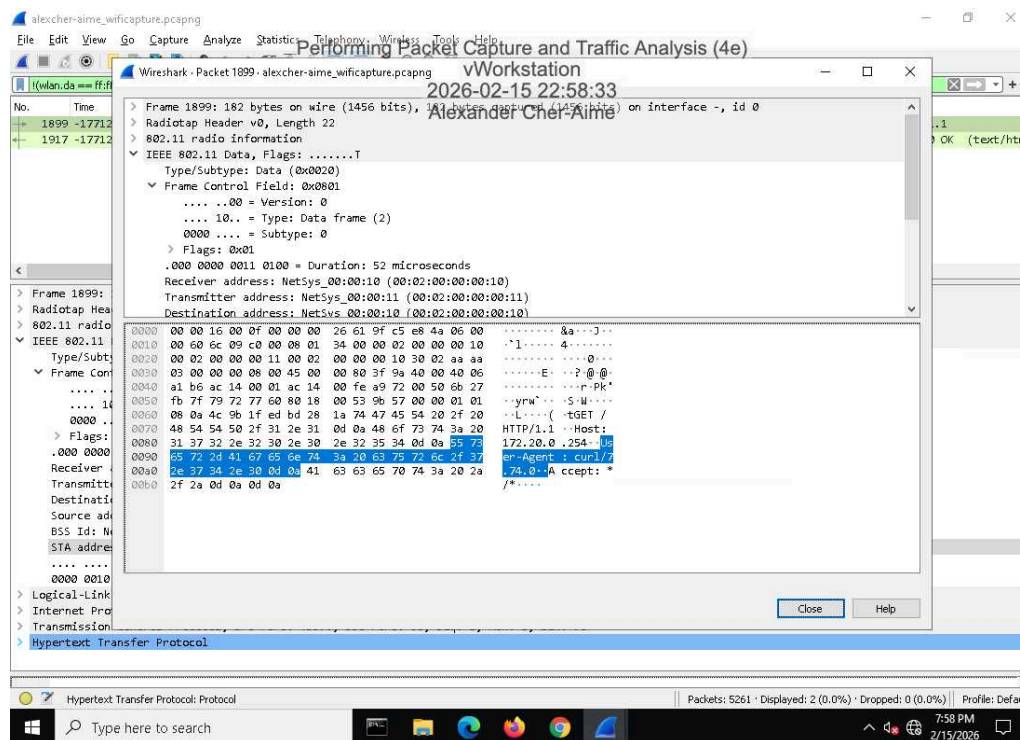


18. Make a screen capture showing the **key information for Message 3** in the four-way handshake.

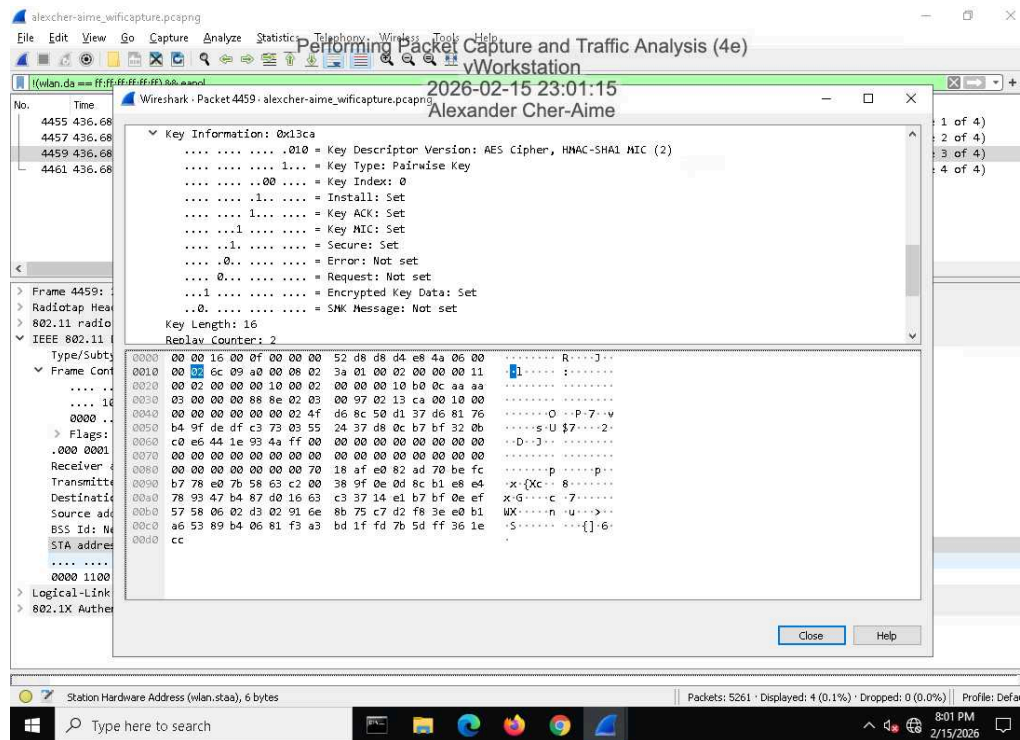

Section 3: Challenge and Analysis

Part 1: Generate Malicious Network Traffic

Make a screen capture showing the `aiirplay-ng --deauth` output.

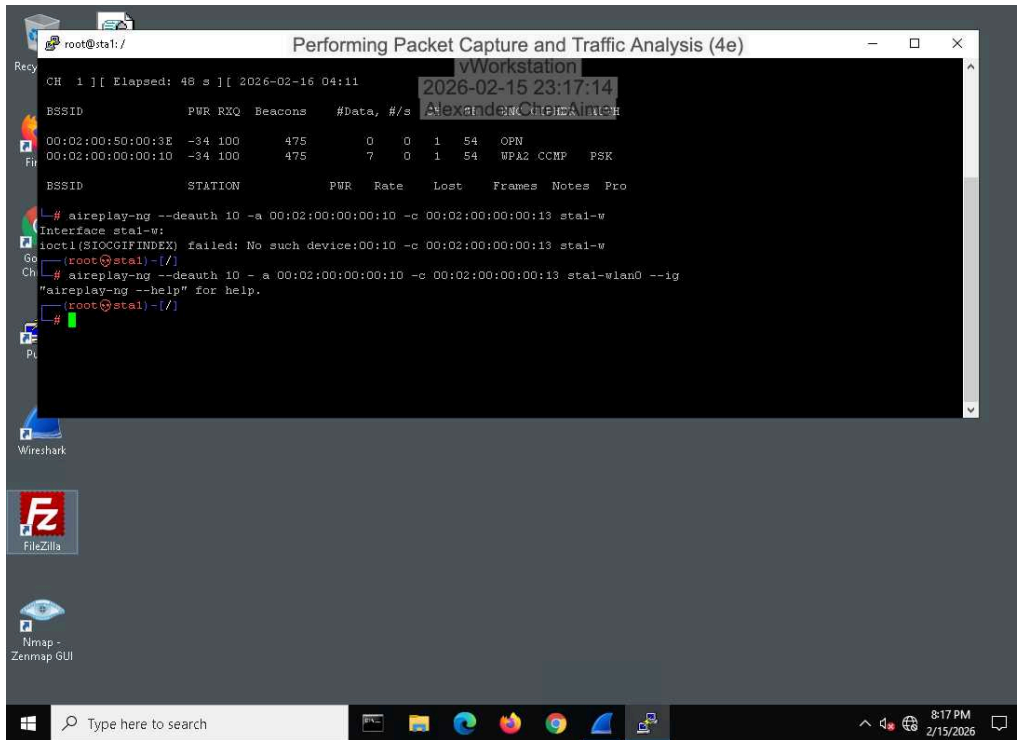

```
CH 1 ] [ Elapsed: 48 s ] [ 2026-02-16 04:11
BSSID      PWR RXO  Beacons  #Data, #/s
00:02:00:00:00:3E -34 100    475      0  0  1  54  OPN
00:02:00:00:00:10 -34 100    475      7  0  1  54  WPA2 CCMP PSK


BSSID      STATION    PWR  Rate  Lost  Frames Notes Pro
# aiirplay-ng --deauth 10 -a 00:02:00:00:00:10 -c 00:02:00:00:00:13 stail-w
Interface stail-w:
ioctl(SIOCGIFINDEX) failed: No such device:00:10 -c 00:02:00:00:00:13 stail-w
Go
# aiirplay-ng --deauth 10 -a 00:02:00:00:00:10 -c 00:02:00:00:00:13 stail-wlan0 --ig
"aiirplay-ng --help" for help.
#
```

Part 2: Analyze Malicious Network Traffic

Performing Packet Capture and Traffic Analysis (4e)

Fundamentals of Information Systems Security, Fourth Edition - Lab 03

Make a screen capture showing one of the deauth packets that you generated between the BSSID and your selected station.

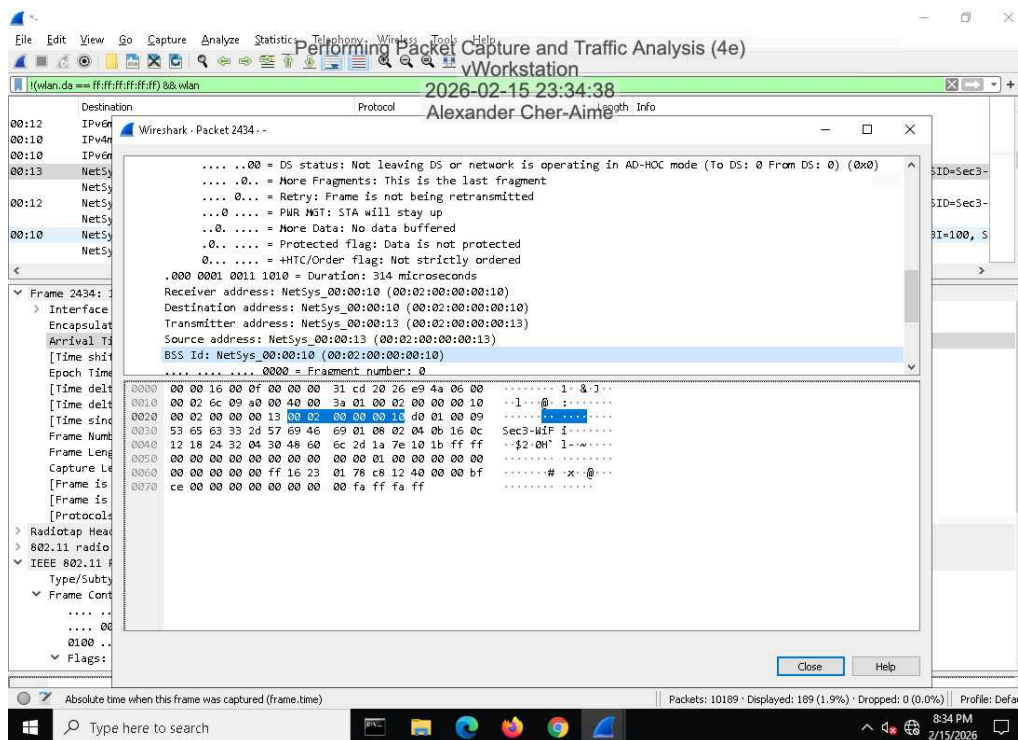

Make a screen capture showing the packets related to the four-way handshake.

