

Student:  
Alexander Cher-Aime

Email:  
acheraime@usf.edu

Time on Task:  
1 hour, 49 minutes


Progress:  
100%

Report Generated: Sunday, March 29, 2026 at 2:16 PM

## Hands-On Demonstration


### Part 1: Identifying Failed Logon Attempts on Windows Systems

8. Make a screen capture showing the **Security Event Properties** dialog box on the vWorkstation.

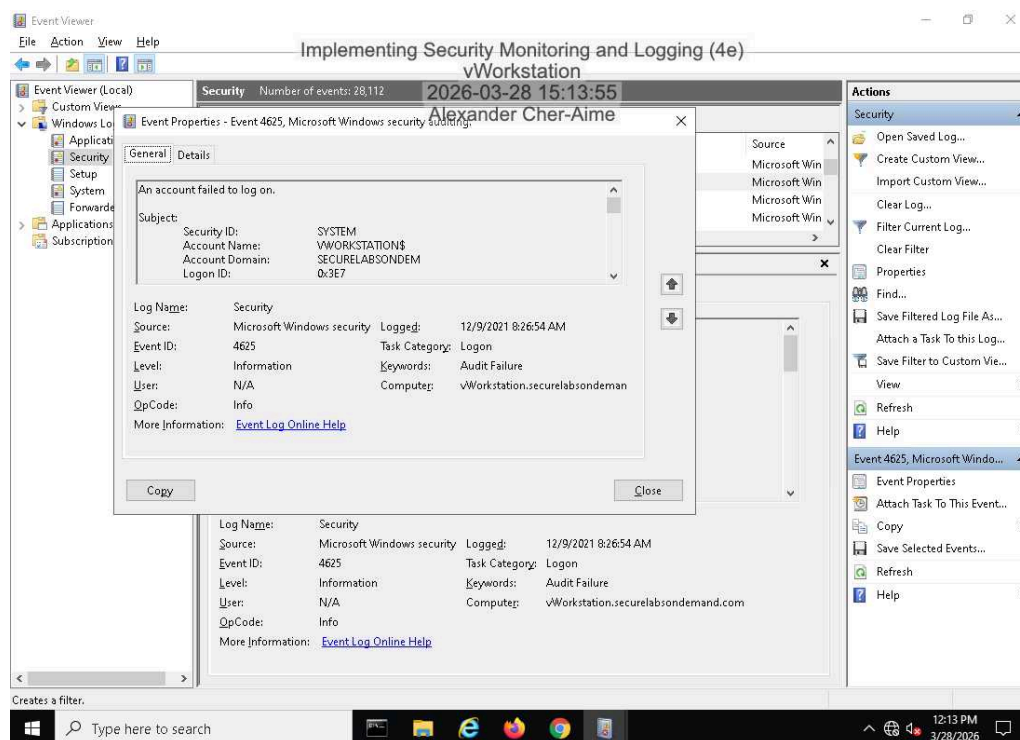


### Part 2: Monitoring Network Activity with Snort


17. Make a screen capture showing the updated Pass Lists page.

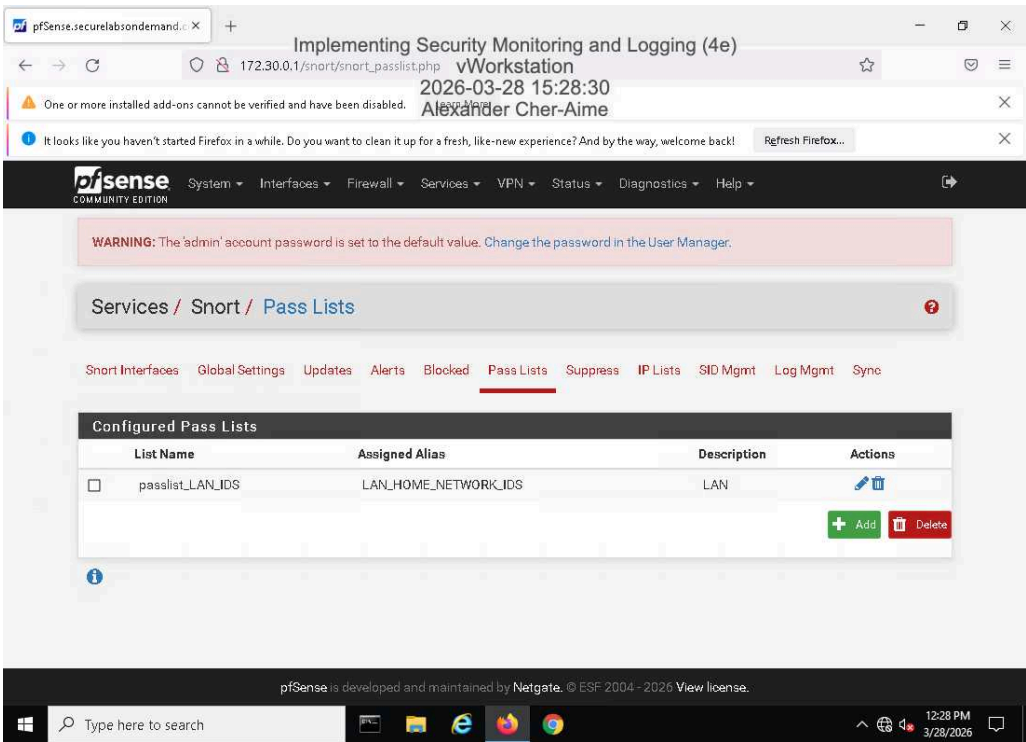


31. Make a screen capture showing the active Snort status on the LAN interface.

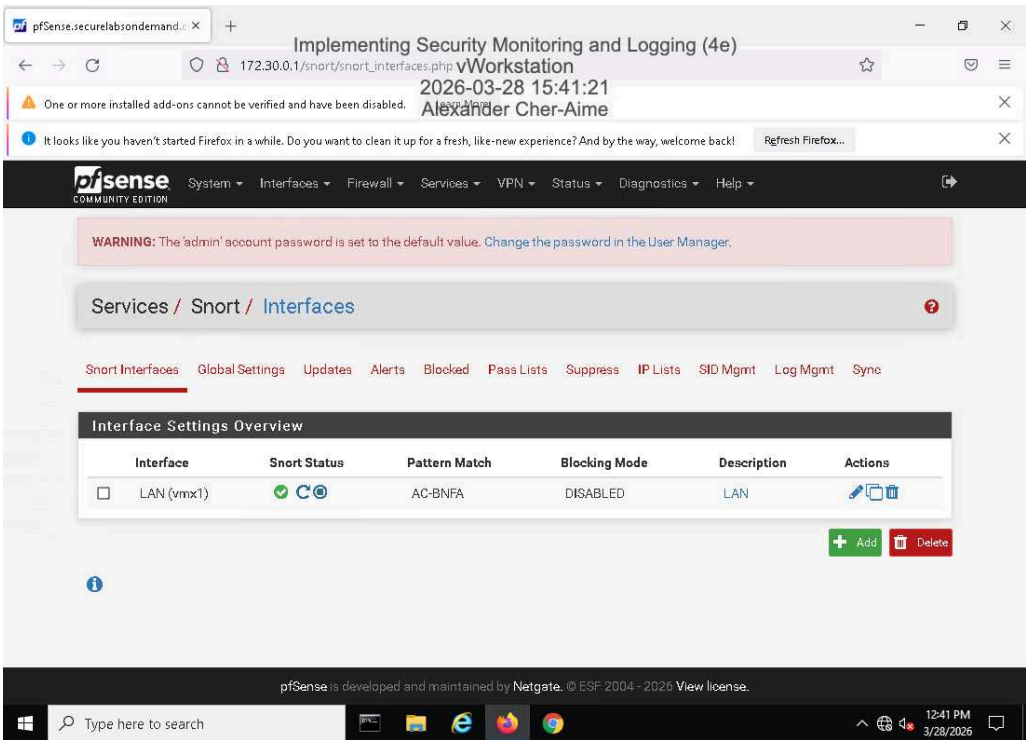

### 36. Make a screen capture showing the successful ping results.

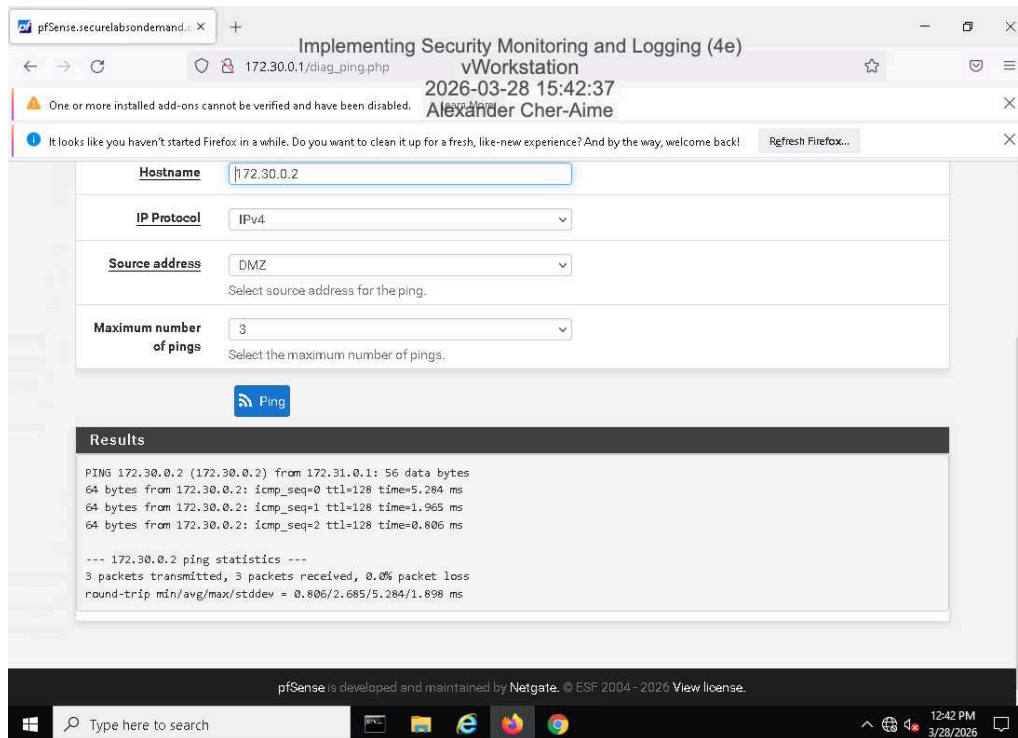


### 41. Make a screen capture showing the ICMP alerts in the Snort Active Log.

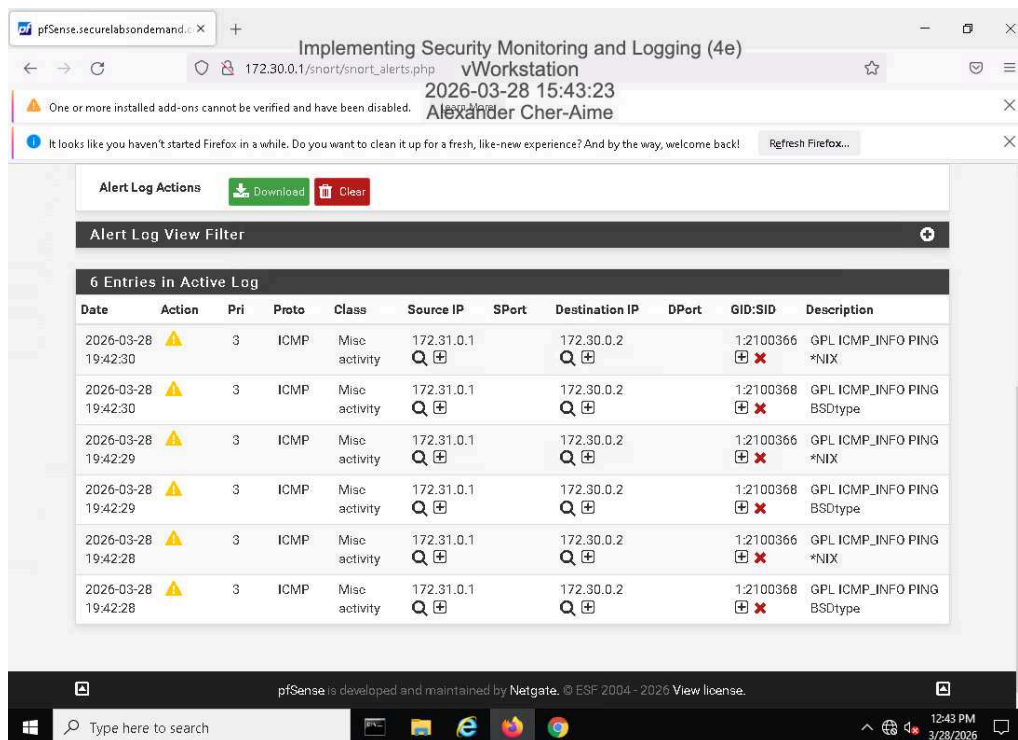


## Applied Learning

### Part 1: Identifying Failed Logon Attempts on Linux Systems

11. Make a screen capture showing the edited `rsyslog.conf` file.

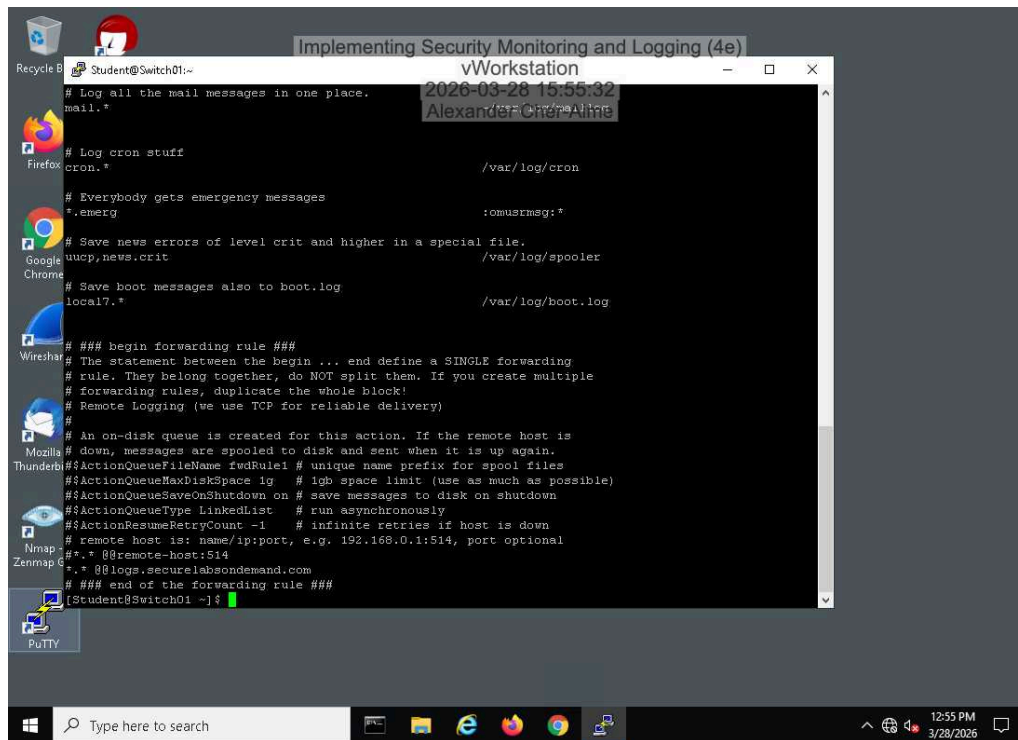


## 22. Make a screen capture showing the failed login attempts.

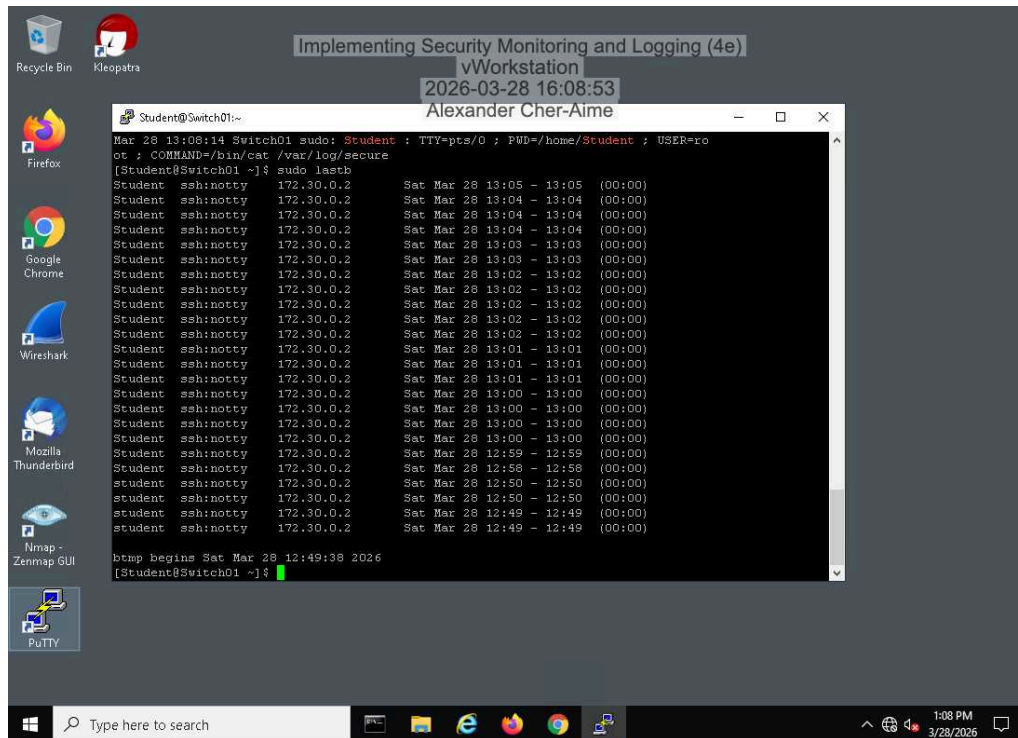

The screenshot shows a vWorkstation window titled "Implementing Security Monitoring and Logging (4e)" with a timestamp of "2026-03-28 16:08:53" and the user "Alexander Cher-Aime". The terminal window is titled "Student@Switch01:~" and displays the output of the command "cat /var/log/secure". The output shows a series of failed login attempts for the user "notty" from the IP address "172.30.0.2" on "Sat Mar 28 13:05" through "12:49". The attempts are listed in a table format with columns for the user, host, and time. The terminal also shows the command "btmap begins Sat Mar 28 12:49:38 2026" and the prompt "[Student@Switch01 ~]#".

```
Student@Switch01:~  
Mar 28 13:08:14 Switch01 sudo: Student : TTY=pts/0 ; PWD=/home/Student ; USER=root ; COMMAND=/bin/cat /var/log/secure  
[Student@Switch01 ~]# sudo lastb  
Student ssh:notty 172.30.0.2 Sat Mar 28 13:05 - 13:05 (00:00)  
Student ssh:notty 172.30.0.2 Sat Mar 28 13:04 - 13:04 (00:00)  
Student ssh:notty 172.30.0.2 Sat Mar 28 13:04 - 13:04 (00:00)  
Student ssh:notty 172.30.0.2 Sat Mar 28 13:04 - 13:04 (00:00)  
Student ssh:notty 172.30.0.2 Sat Mar 28 13:03 - 13:03 (00:00)  
Student ssh:notty 172.30.0.2 Sat Mar 28 13:03 - 13:03 (00:00)  
Student ssh:notty 172.30.0.2 Sat Mar 28 13:02 - 13:02 (00:00)  
Student ssh:notty 172.30.0.2 Sat Mar 28 13:02 - 13:02 (00:00)  
Student ssh:notty 172.30.0.2 Sat Mar 28 13:02 - 13:02 (00:00)  
Student ssh:notty 172.30.0.2 Sat Mar 28 13:02 - 13:02 (00:00)  
Student ssh:notty 172.30.0.2 Sat Mar 28 13:01 - 13:01 (00:00)  
Student ssh:notty 172.30.0.2 Sat Mar 28 13:01 - 13:01 (00:00)  
Student ssh:notty 172.30.0.2 Sat Mar 28 13:01 - 13:01 (00:00)  
Student ssh:notty 172.30.0.2 Sat Mar 28 13:00 - 13:00 (00:00)  
Student ssh:notty 172.30.0.2 Sat Mar 28 13:00 - 13:00 (00:00)  
Student ssh:notty 172.30.0.2 Sat Mar 28 13:00 - 13:00 (00:00)  
Student ssh:notty 172.30.0.2 Sat Mar 28 12:59 - 12:59 (00:00)  
Student ssh:notty 172.30.0.2 Sat Mar 28 12:58 - 12:58 (00:00)  
Student ssh:notty 172.30.0.2 Sat Mar 28 12:50 - 12:50 (00:00)  
Student ssh:notty 172.30.0.2 Sat Mar 28 12:50 - 12:50 (00:00)  
Student ssh:notty 172.30.0.2 Sat Mar 28 12:49 - 12:49 (00:00)  
Student ssh:notty 172.30.0.2 Sat Mar 28 12:49 - 12:49 (00:00)  
btmap begins Sat Mar 28 12:49:38 2026  
[Student@Switch01 ~]#
```

## 24. Make a screen capture showing the last 10 log messages.

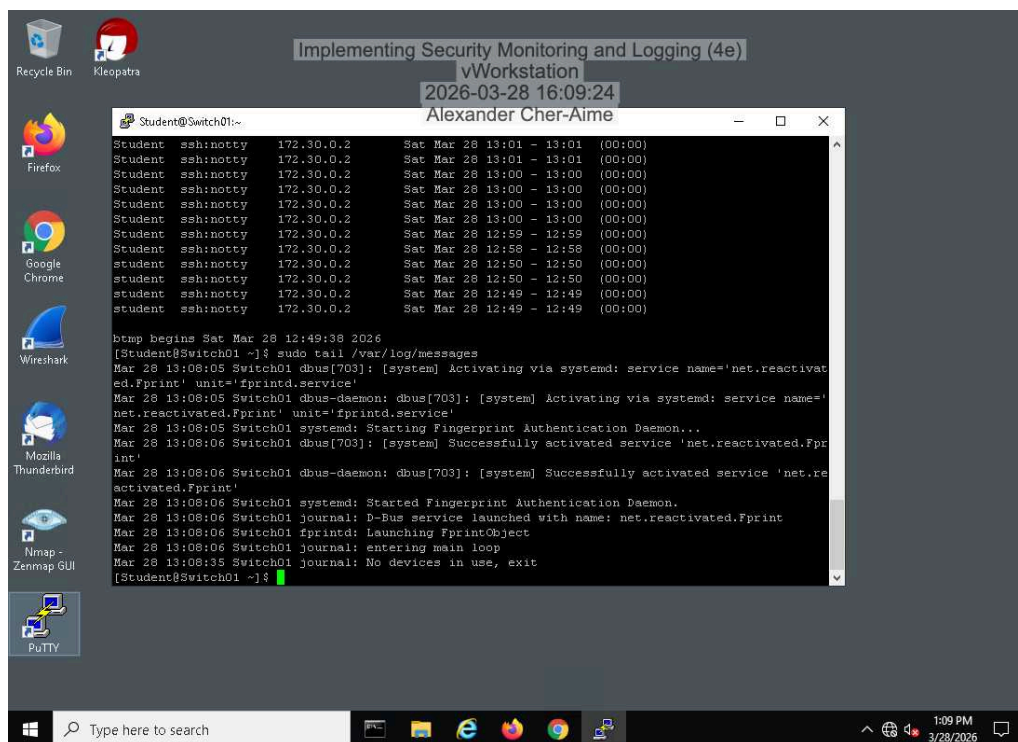


The screenshot shows a vWorkstation window titled "Implementing Security Monitoring and Logging (4e)" with a timestamp of "2026-03-28 16:09:24" and the user "Alexander Cher-Aime". The terminal window is titled "Student@Switch01:~" and displays the output of the command "tail /var/log/messages". The output shows the last 10 log messages, including the activation of the "net.reactivated.Fprint" service and the launch of the "Fprintd" daemon. The messages are listed in a table format with columns for the user, host, and time. The terminal also shows the command "btmap begins Sat Mar 28 12:49:38 2026" and the prompt "[Student@Switch01 ~]#".

```
Student@Switch01:~  
Mar 28 13:08:05 Switch01 dbus[703]: [system] Activating via systemd: service name='net.reactivated.Fprint' unit='fprintd.service'  
Mar 28 13:08:05 Switch01 dbus-daemon: dbus[703]: [system] Activating via systemd: service name='net.reactivated.Fprint' unit='fprintd.service'  
Mar 28 13:08:05 Switch01 systemd: Starting Fingerprint Authentication Daemon...  
Mar 28 13:08:06 Switch01 dbus[703]: [system] Successfully activated service 'net.reactivated.Fprint'  
Mar 28 13:08:06 Switch01 dbus-daemon: dbus[703]: [system] Successfully activated service 'net.reactivated.Fprint'  
Mar 28 13:08:06 Switch01 systemd: Started Fingerprint Authentication Daemon.  
Mar 28 13:08:06 Switch01 journal: D-Bus service launched with name: net.reactivated.Fprint  
Mar 28 13:08:06 Switch01 fprintd: Launching FprintObject  
Mar 28 13:08:06 Switch01 journal: entering main loop  
Mar 28 13:08:35 Switch01 journal: No devices in use, exit  
[Student@Switch01 ~]#
```

## Part 2: Monitoring File Integrity with Tripwire

12. Make a screen capture showing the **Object Summary** section for the Tripwire report.

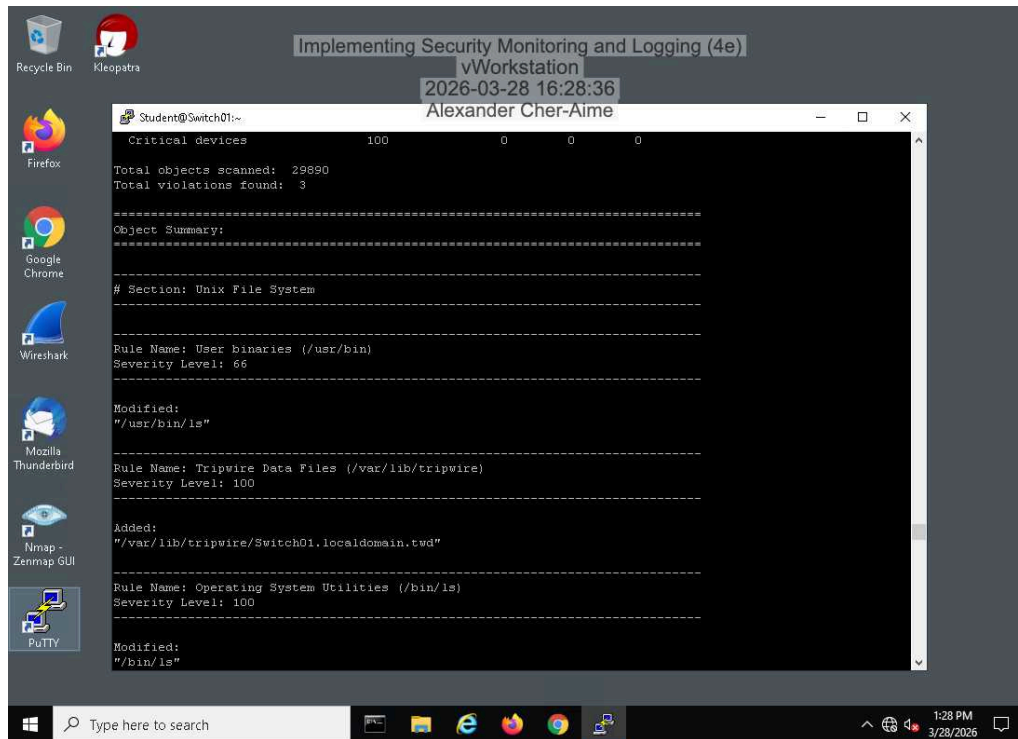




## Challenge and Analysis

### Part 1: Identifying Additional Event Types in the Event Viewer

Make a screen capture showing the **Security Event Properties** dialog box for an **Audit Failure** associated with **Event ID 5061**.

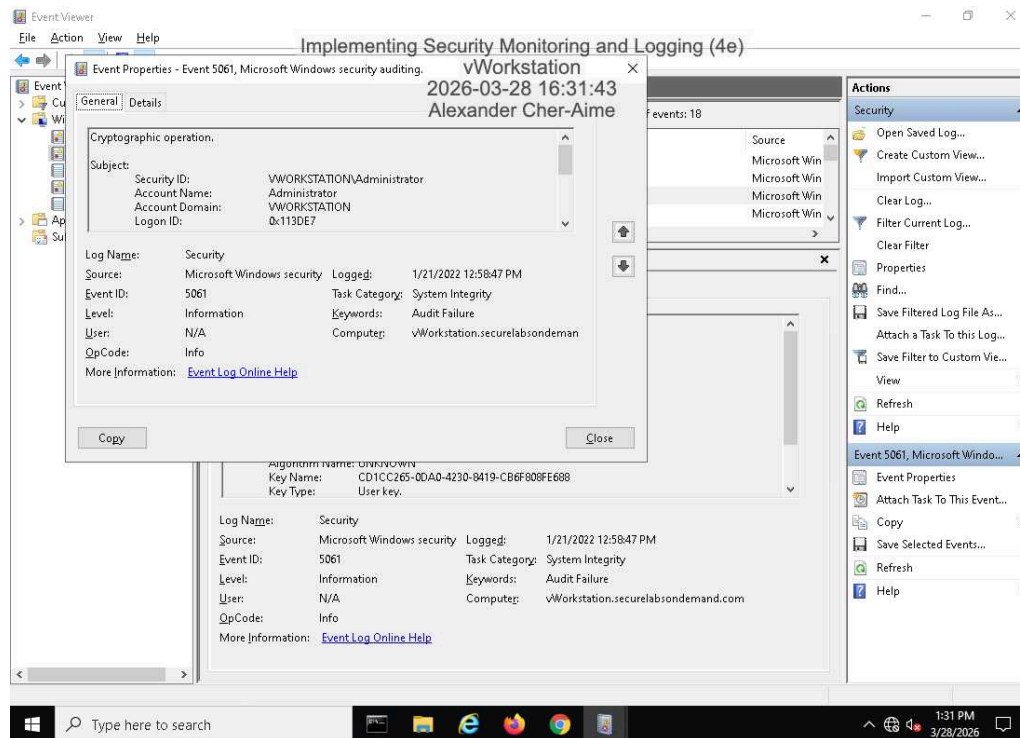

**Provide a brief explanation** of the operation that would generate a security event with Event ID 5061.

An operation that would generate a security event within ID 5061, would be someone trying to download an unauthorized application. The reason I say that is because the category is an system integrity failure.

### Part 2: Configuring Snort as an Intrusion Prevention System

# Implementing Security Monitoring and Logging (4e)

Fundamentals of Information Systems Security, Fourth Edition - Lab 08

Make a screen capture showing the **Legacy Blocking Mode** enabled on the LAN interface.

