CITS2211 Assignment 2

Name: Baasil Siddiqui
Student Id: 23895849

Question 1

a)



b)

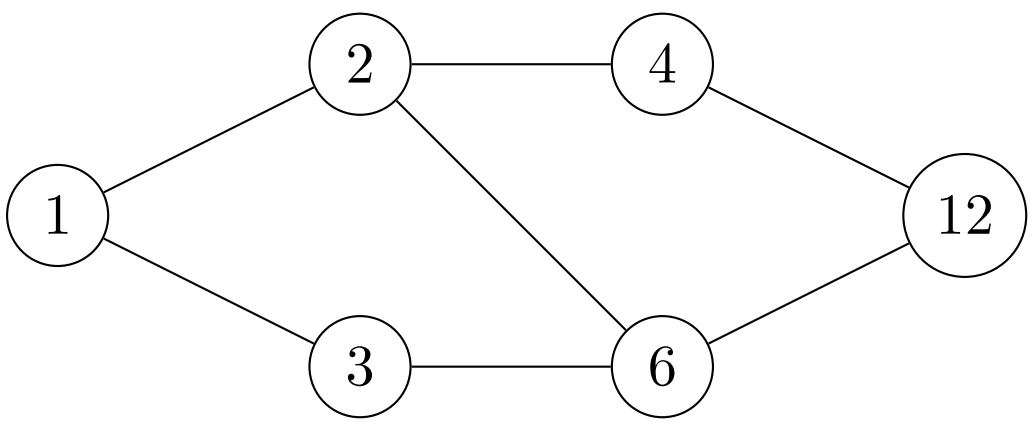

c)



Question 2

a)

the relation is reflexive if $\forall x \in \mathbb{R}((x, x) \in R)$
subtrating any real number by itself results in zero which is an integer, Hence R is reflexive.

The relation is symmetric if for all $(x, y) \in R$, $(y, x) \in R$ if $x \neq y$ we need to show that if x - y is an integer, y - x is an integer as well

$$\text{let } x - y = k \text{ where } x \in \mathbb{Z}$$
$$y - x = -k \text{ (arithmetic)}$$

k is an integer so -k is an integer as
hence, y - x is an integer
Therefore, we have proved that is $(x, y) \in R$ then $(y, x) \in R$ and relation R is symmetric
The relation R is transitive if for all $x, y, z \in \mathbb{R}$ if xRy and yRz then xRz holds
so we need to prove that if $x - y \in \mathbb{Z}$ and $y - z \in \mathbb{Z}$ then $x - z \in \mathbb{Z}$

$$\begin{aligned}
\text{let } x - y &= k_1 \text{ where } k_1 \text{ is an integer} \\
\text{let } y - z &= k_2 \text{ where } k_2 \text{ is an integer} \\
x - z &= (x - y) + (y - z) \text{ (adding and substracting y)} \\
&= k_1 + k_2
\end{aligned}$$

both k_1 and k_2 are integers so $k_1 + k_2$ is integer as well, so x - z is an integer and $(x, z) \in R$ and the relation R is transitive

Q.E.D.

b)

i.
the equivalence class of any real number x is given by
$[x] = \{y \in \mathbb{R} \mid y - x \in \mathbb{Z}\}$
let y - x be an integer k then y = x + k
Therefore, the equivalence class of any real number x consists of all numbers produced by adding an integer to x since the numbers integers is infinite, each equivalence class is infinite

ii.
as proved in part **i** every real number has an equivalence classes therefore, the total number of equivalence classes are infinite.

Question 4

a)

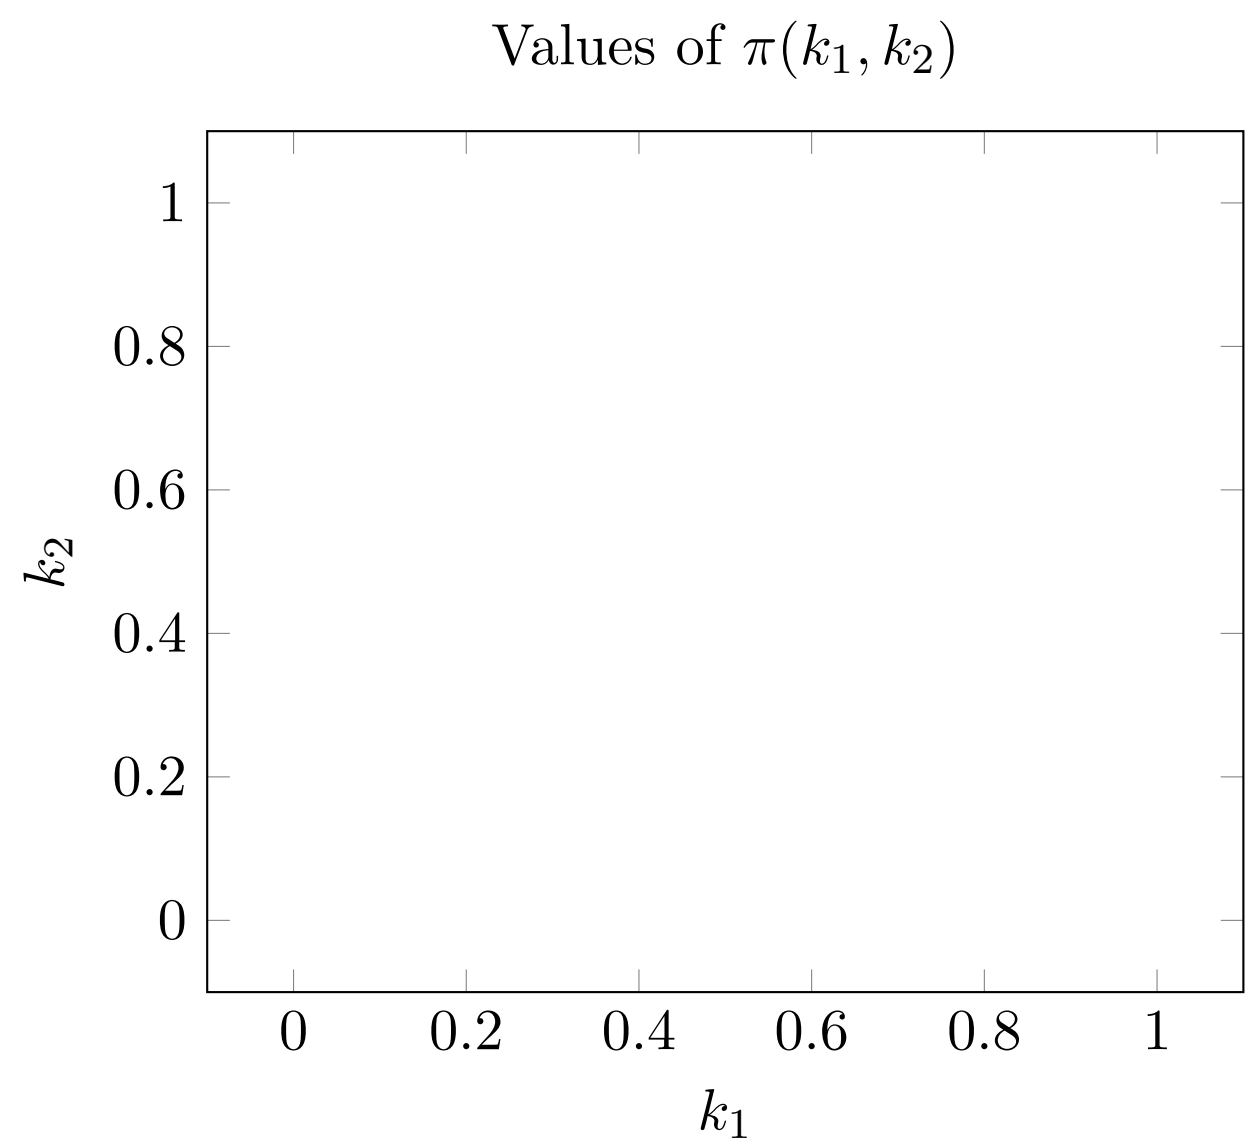

---

b)

The function π is bijection between $\mathbb{N}^2$ and $\mathbb{N}$
We need to prove that there exists a bijection between $\mathbb{N}^n$ and $\mathbb{N}$

Question 6

a)

States: $Q = \{q_1, q_2, q_3\}$
Start state: $q_0 = q_1$
Alphabet: $\Sigma = \{0, 1\}$
Accepting states: $F = \{q_1, q_3\}$
State transition: $\delta : Q \times \Sigma - > \mathcal{P}(Q)$

b)

FSM recognises the symbols 1 and 0

- q_1 is the starting state and it stays there if it reads 0 and moves to q_2 if it reads 1
- in state q_2 it doesn't move if it reads 0 and moves to q_3 if it reads 1
- in state q_3 it only accepts the symbol 0 and stays in q_3

states q_1 and q_3 are the accepting states
Thus, the FSM accepts strings that contain exactly two 1s and any number of 0s including none anywhere

c)

0*10*10*

Question 7

States:
set of States of the DFSM is the powerset of the states of the original NFSM
$Q = \{\phi, \{q_0\}, \{q_1\}, \{q_0, q_1\}\}$

Initial state:
The initial state of the DFSM is a singleton set containing the initial state of the NFSM
$\{q_0\}$ is the initial state

Accepting states:
accepting states of the DFSM are the states containing any accepting states of NFSM
$\{q_1\}$ and $\{q_0, q_1\}$ are the accepting states

The Transition Function:
The transition function, δ , returns the union of all states that are reachable via the original transition function δ' , by consuming the input from any of the NFSM states in the current DFSM state, i.e., $\delta(s, x) = \bigcup\{\delta'(q, x) \mid q \in s\}$

The Result could be simplified by removing the state $\{q_1\}$ since there is no way to reach the state and it's part of the combined state $\{q_0, q_1\}$