

qpp  
0.1

Generated by Doxygen 1.8.5

Wed Apr 9 2014 04:37:04



# Contents

<b>1</b>	<b>Namespace Index</b>	<b>1</b>
1.1	Namespace List . . . . .	1
<b>2</b>	<b>Hierarchical Index</b>	<b>3</b>
2.1	Class Hierarchy . . . . .	3
<b>3</b>	<b>Class Index</b>	<b>5</b>
3.1	Class List . . . . .	5
<b>4</b>	<b>File Index</b>	<b>7</b>
4.1	File List . . . . .	7
<b>5</b>	<b>Namespace Documentation</b>	<b>9</b>
5.1	qpp Namespace Reference . . . . .	9
5.1.1	Function Documentation . . . . .	12
5.1.1.1	absm . . . . .	13
5.1.1.2	adjoint . . . . .	13
5.1.1.3	anticomm . . . . .	14
5.1.1.4	channel . . . . .	14
5.1.1.5	choi . . . . .	15
5.1.1.6	choi2kraus . . . . .	15
5.1.1.7	comm . . . . .	16
5.1.1.8	conjugate . . . . .	16
5.1.1.9	cosm . . . . .	16
5.1.1.10	det . . . . .	17
5.1.1.11	disp . . . . .	17
5.1.1.12	disp . . . . .	17
5.1.1.13	displn . . . . .	17
5.1.1.14	displn . . . . .	18
5.1.1.15	displnSTL . . . . .	18
5.1.1.16	displnSTL . . . . .	18
5.1.1.17	dispSTL . . . . .	18
5.1.1.18	dispSTL . . . . .	18

5.1.1.19	<a href="#">evals</a>	19
5.1.1.20	<a href="#">evecs</a>	19
5.1.1.21	<a href="#">expandout</a>	20
5.1.1.22	<a href="#">expm</a>	20
5.1.1.23	<a href="#">fun</a>	21
5.1.1.24	<a href="#">funm</a>	21
5.1.1.25	<a href="#">grams</a>	22
5.1.1.26	<a href="#">grams</a>	22
5.1.1.27	<a href="#">hevals</a>	23
5.1.1.28	<a href="#">hevecs</a>	23
5.1.1.29	<a href="#">kron</a>	23
5.1.1.30	<a href="#">kronlist</a>	24
5.1.1.31	<a href="#">kronpow</a>	24
5.1.1.32	<a href="#">load</a>	24
5.1.1.33	<a href="#">loadMATLABmatrix</a>	24
5.1.1.34	<a href="#">loadMATLABmatrix</a>	24
5.1.1.35	<a href="#">loadMATLABmatrix</a>	24
5.1.1.36	<a href="#">logm</a>	25
5.1.1.37	<a href="#">norm</a>	25
5.1.1.38	<a href="#">powm</a>	25
5.1.1.39	<a href="#">proj</a>	26
5.1.1.40	<a href="#">ptrace</a>	26
5.1.1.41	<a href="#">ptrace2</a>	27
5.1.1.42	<a href="#">ptranspose</a>	27
5.1.1.43	<a href="#">rand</a>	28
5.1.1.44	<a href="#">rand</a>	28
5.1.1.45	<a href="#">rand</a>	28
5.1.1.46	<a href="#">rand</a>	28
5.1.1.47	<a href="#">randH</a>	28
5.1.1.48	<a href="#">randket</a>	28
5.1.1.49	<a href="#">randKraus</a>	29
5.1.1.50	<a href="#">randn</a>	29
5.1.1.51	<a href="#">randn</a>	29
5.1.1.52	<a href="#">randn</a>	29
5.1.1.53	<a href="#">randn</a>	29
5.1.1.54	<a href="#">randrho</a>	30
5.1.1.55	<a href="#">randU</a>	30
5.1.1.56	<a href="#">randV</a>	30
5.1.1.57	<a href="#">renyi</a>	30
5.1.1.58	<a href="#">renyi_inf</a>	31

5.1.1.59	<a href="#">reshape</a>	31
5.1.1.60	<a href="#">save</a>	31
5.1.1.61	<a href="#">saveMATLABmatrix</a>	31
5.1.1.62	<a href="#">saveMATLABmatrix</a>	32
5.1.1.63	<a href="#">saveMATLABmatrix</a>	32
5.1.1.64	<a href="#">shannon</a>	32
5.1.1.65	<a href="#">sinm</a>	33
5.1.1.66	<a href="#">spectralpwm</a>	33
5.1.1.67	<a href="#">sqrtm</a>	33
5.1.1.68	<a href="#">sum</a>	34
5.1.1.69	<a href="#">super</a>	34
5.1.1.70	<a href="#">syspermute</a>	35
5.1.1.71	<a href="#">trace</a>	35
5.1.1.72	<a href="#">transpose</a>	36
5.1.2	<a href="#">Variable Documentation</a>	36
5.1.2.1	<a href="#">gt</a>	36
5.1.2.2	<a href="#">rdevs</a>	36
5.2	<a href="#">qpp::ct Namespace Reference</a>	36
5.2.1	<a href="#">Function Documentation</a>	36
5.2.1.1	<a href="#">omega</a>	36
5.2.2	<a href="#">Variable Documentation</a>	36
5.2.2.1	<a href="#">chop</a>	36
5.2.2.2	<a href="#">ee</a>	36
5.2.2.3	<a href="#">eps</a>	36
5.2.2.4	<a href="#">ii</a>	36
5.2.2.5	<a href="#">pi</a>	36
5.3	<a href="#">qpp::internal Namespace Reference</a>	37
5.3.1	<a href="#">Function Documentation</a>	37
5.3.1.1	<a href="#">_check_col_vector</a>	37
5.3.1.2	<a href="#">_check_dims</a>	37
5.3.1.3	<a href="#">_check_dims_match_mat</a>	37
5.3.1.4	<a href="#">_check_eq_dims</a>	37
5.3.1.5	<a href="#">_check_nonzero_size</a>	37
5.3.1.6	<a href="#">_check_perm</a>	37
5.3.1.7	<a href="#">_check_row_vector</a>	37
5.3.1.8	<a href="#">_check_square_mat</a>	37
5.3.1.9	<a href="#">_check_subsys</a>	37
5.3.1.10	<a href="#">_check_vector</a>	37
5.3.1.11	<a href="#">_multiidx2n</a>	37
5.3.1.12	<a href="#">_n2multiidx</a>	38

5.3.1.13	<a href="#">_pttranspose_worker</a>	38
5.3.1.14	<a href="#">_syspermute_worker</a>	38
5.4	<a href="#">qpp::stat Namespace Reference</a>	38
5.5	<a href="#">qpp::types Namespace Reference</a>	38
5.5.1	<a href="#">Typedef Documentation</a>	39
5.5.1.1	<a href="#">bra</a>	39
5.5.1.2	<a href="#">cmat</a>	39
5.5.1.3	<a href="#">cplx</a>	39
5.5.1.4	<a href="#">dmat</a>	39
5.5.1.5	<a href="#">DynMat</a>	39
5.5.1.6	<a href="#">fmat</a>	39
5.5.1.7	<a href="#">imat</a>	39
5.5.1.8	<a href="#">ket</a>	39
<b>6</b>	<b>Class Documentation</b>	<b>41</b>
6.1	<a href="#">qpp::stat::DiscreteDistribution Class Reference</a>	41
6.1.1	<a href="#">Constructor &amp; Destructor Documentation</a>	41
6.1.1.1	<a href="#">DiscreteDistribution</a>	41
6.1.1.2	<a href="#">DiscreteDistribution</a>	41
6.1.1.3	<a href="#">DiscreteDistribution</a>	41
6.1.2	<a href="#">Member Function Documentation</a>	41
6.1.2.1	<a href="#">probabilities</a>	41
6.1.2.2	<a href="#">sample</a>	42
6.1.3	<a href="#">Member Data Documentation</a>	42
6.1.3.1	<a href="#">_d</a>	42
6.2	<a href="#">qpp::stat::DiscreteDistributionFromComplex Class Reference</a>	42
6.2.1	<a href="#">Constructor &amp; Destructor Documentation</a>	42
6.2.1.1	<a href="#">DiscreteDistributionFromComplex</a>	43
6.2.1.2	<a href="#">DiscreteDistributionFromComplex</a>	43
6.2.1.3	<a href="#">DiscreteDistributionFromComplex</a>	43
6.2.1.4	<a href="#">DiscreteDistributionFromComplex</a>	44
6.2.2	<a href="#">Member Function Documentation</a>	44
6.2.2.1	<a href="#">cplx2amplitudes</a>	44
6.2.2.2	<a href="#">probabilities</a>	44
6.2.2.3	<a href="#">sample</a>	44
6.2.3	<a href="#">Member Data Documentation</a>	44
6.2.3.1	<a href="#">_d</a>	44
6.3	<a href="#">qpp::Exception Class Reference</a>	44
6.3.1	<a href="#">Member Enumeration Documentation</a>	46
6.3.1.1	<a href="#">Type</a>	46

6.3.2	Constructor & Destructor Documentation	46
6.3.2.1	Exception	46
6.3.2.2	Exception	47
6.3.2.3	~Exception	47
6.3.3	Member Function Documentation	47
6.3.3.1	_construct_exception_msg	47
6.3.3.2	what	47
6.3.4	Member Data Documentation	47
6.3.4.1	_custom	47
6.3.4.2	_msg	47
6.3.4.3	_type	47
6.3.4.4	_where	47
6.4	qpp::Gates Class Reference	47
6.4.1	Constructor & Destructor Documentation	48
6.4.1.1	Gates	48
6.4.1.2	Gates	48
6.4.1.3	~Gates	48
6.4.2	Member Function Documentation	48
6.4.2.1	CTRL	49
6.4.2.2	Fd	49
6.4.2.3	getInstance	49
6.4.2.4	Id	49
6.4.2.5	operator=	49
6.4.2.6	Rtheta	49
6.4.2.7	Xd	50
6.4.2.8	Zd	50
6.4.3	Member Data Documentation	50
6.4.3.1	b00	50
6.4.3.2	b01	50
6.4.3.3	b10	50
6.4.3.4	b11	50
6.4.3.5	CNOTab	50
6.4.3.6	CNOTba	50
6.4.3.7	CS	50
6.4.3.8	CZ	50
6.4.3.9	FRED	50
6.4.3.10	H	50
6.4.3.11	Id2	50
6.4.3.12	S	51
6.4.3.13	SWAP	51

6.4.3.14	T	51
6.4.3.15	TOF	51
6.4.3.16	X	51
6.4.3.17	x0	51
6.4.3.18	x1	51
6.4.3.19	Y	51
6.4.3.20	y0	51
6.4.3.21	y1	51
6.4.3.22	Z	51
6.4.3.23	z0	51
6.4.3.24	z1	51
6.5	qpp::stat::NormalDistribution Class Reference	51
6.5.1	Constructor & Destructor Documentation	51
6.5.1.1	NormalDistribution	51
6.5.2	Member Function Documentation	51
6.5.2.1	sample	52
6.5.3	Member Data Documentation	52
6.5.3.1	_d	52
6.6	qpp::RandomDevices Class Reference	52
6.6.1	Constructor & Destructor Documentation	52
6.6.1.1	RandomDevices	52
6.6.1.2	RandomDevices	53
6.6.1.3	~RandomDevices	53
6.6.2	Member Function Documentation	53
6.6.2.1	getInstance	53
6.6.2.2	operator=	53
6.6.3	Member Data Documentation	53
6.6.3.1	_rd	53
6.6.3.2	_rng	53
6.7	qpp::Timer Class Reference	53
6.7.1	Constructor & Destructor Documentation	53
6.7.1.1	Timer	53
6.7.1.2	~Timer	53
6.7.2	Member Function Documentation	53
6.7.2.1	seconds	53
6.7.2.2	tic	54
6.7.2.3	toc	54
6.7.3	Friends And Related Function Documentation	54
6.7.3.1	operator<<	54
6.7.4	Member Data Documentation	54



6.7.4.1	<code>_end</code>	54
6.7.4.2	<code>_start</code>	54
6.8	<code>qpp::stat::UniformRealDistribution</code> Class Reference	54
6.8.1	Constructor & Destructor Documentation	54
6.8.1.1	<code>UniformRealDistribution</code>	54
6.8.2	Member Function Documentation	54
6.8.2.1	<code>sample</code>	54
6.8.3	Member Data Documentation	55
6.8.3.1	<code>_d</code>	55
<b>7</b>	<b>File Documentation</b>	<b>57</b>
7.1	<code>include/channels.h</code> File Reference	57
7.2	<code>include/constants.h</code> File Reference	58
7.3	<code>include/entropies.h</code> File Reference	59
7.4	<code>include/exception.h</code> File Reference	61
7.5	<code>include/functions.h</code> File Reference	61
7.6	<code>include/gates.h</code> File Reference	64
7.7	<code>include/internal.h</code> File Reference	65
7.8	<code>include/io.h</code> File Reference	67
7.9	<code>include/matlab.h</code> File Reference	68
7.10	<code>include/qpp.h</code> File Reference	69
7.11	<code>include/randevs.h</code> File Reference	70
7.12	<code>include/random.h</code> File Reference	72
7.13	<code>include/stat.h</code> File Reference	73
7.14	<code>include/timer.h</code> File Reference	74
7.15	<code>include/types.h</code> File Reference	75
7.16	<code>src/main.cpp</code> File Reference	77
7.16.1	Function Documentation	77
7.16.1.1	<code>main</code>	77



# Chapter 1

## Namespace Index

### 1.1 Namespace List

Here is a list of all namespaces with brief descriptions:

<a href="#">qpp</a>	9
<a href="#">qpp::ct</a>	36
<a href="#">qpp::internal</a>	37
<a href="#">qpp::stat</a>	38
<a href="#">qpp::types</a>	38



## Chapter 2

# Hierarchical Index

### 2.1 Class Hierarchy

This inheritance list is sorted roughly, but not completely, alphabetically:

qpp::stat::DiscreteDistribution . . . . .	41
qpp::stat::DiscreteDistributionFromComplex . . . . .	42
exception	
qpp::Exception . . . . .	44
qpp::Gates . . . . .	47
qpp::stat::NormalDistribution . . . . .	51
qpp::RandomDevices . . . . .	52
qpp::Timer . . . . .	53
qpp::stat::UniformRealDistribution . . . . .	54



## Chapter 3

# Class Index

### 3.1 Class List

Here are the classes, structs, unions and interfaces with brief descriptions:

<a href="#">qpp::stat::DiscreteDistribution</a>	41
<a href="#">qpp::stat::DiscreteDistributionFromComplex</a>	42
<a href="#">qpp::Exception</a>	44
<a href="#">qpp::Gates</a>	47
<a href="#">qpp::stat::NormalDistribution</a>	51
<a href="#">qpp::RandomDevices</a>	52
<a href="#">qpp::Timer</a>	53
<a href="#">qpp::stat::UniformRealDistribution</a>	54





# Chapter 4

## File Index

### 4.1 File List

Here is a list of all files with brief descriptions:

include/channels.h	57
include/constants.h	58
include/entropies.h	59
include/exception.h	61
include/functions.h	61
include/gates.h	64
include/internal.h	65
include/io.h	67
include/matlab.h	68
include/qpp.h	69
include/randevs.h	70
include/random.h	72
include/stat.h	73
include/timer.h	74
include/types.h	75
src/main.cpp	77



## Chapter 5

# Namespace Documentation

### 5.1 qpp Namespace Reference

#### Namespaces

- [ct](#)
- [internal](#)
- [stat](#)
- [types](#)

#### Classes

- class [Exception](#)
- class [Gates](#)
- class [RandomDevices](#)
- class [Timer](#)

#### Functions

- [types::cmat channel](#) (const [types::cmat](#) &rho, const std::vector< [types::cmat](#) > &Ks)
- [types::cmat super](#) (const std::vector< [types::cmat](#) > &Ks)
- [types::cmat choi](#) (const std::vector< [types::cmat](#) > &Ks)
- std::vector< [types::cmat](#) > [choi2kraus](#) (const [types::cmat](#) &A)
- template<typename Derived >  
double [shannon](#) (const Eigen::MatrixBase< Derived > &A)
- template<typename Derived >  
double [renyi](#) (const double alpha, const Eigen::MatrixBase< Derived > &A)
- template<typename Derived >  
double [renyi\\_inf](#) (const Eigen::MatrixBase< Derived > &A)
- template<typename Derived >  
[types::DynMat](#)< typename  
Derived::Scalar > [transpose](#) (const Eigen::MatrixBase< Derived > &A)
- template<typename Derived >  
[types::DynMat](#)< typename  
Derived::Scalar > [conjugate](#) (const Eigen::MatrixBase< Derived > &A)
- template<typename Derived >  
[types::DynMat](#)< typename  
Derived::Scalar > [adjoint](#) (const Eigen::MatrixBase< Derived > &A)
- template<typename Derived >  
Derived::Scalar [trace](#) (const Eigen::MatrixBase< Derived > &A)

- `template<typename Derived >`  
`Derived::Scalar det (const Eigen::MatrixBase< Derived > &A)`
- `template<typename Derived >`  
`Derived::Scalar sum (const Eigen::MatrixBase< Derived > &A)`
- `template<typename Derived >`  
`double norm (const Eigen::MatrixBase< Derived > &A)`
- `template<typename Derived >`  
`types::cmat evals (const Eigen::MatrixBase< Derived > &A)`
- `template<typename Derived >`  
`types::cmat evecs (const Eigen::MatrixBase< Derived > &A)`
- `template<typename Derived >`  
`types::cmat hevals (const Eigen::MatrixBase< Derived > &A)`
- `template<typename Derived >`  
`types::cmat hevecs (const Eigen::MatrixBase< Derived > &A)`
- `template<typename Derived >`  
`types::cmat funm (const Eigen::MatrixBase< Derived > &A, types::cplx(*f)(const types::cplx &))`
- `template<typename Derived >`  
`types::cmat sqrtm (const Eigen::MatrixBase< Derived > &A)`
- `template<typename Derived >`  
`types::cmat absm (const Eigen::MatrixBase< Derived > &A)`
- `template<typename Derived >`  
`types::cmat expm (const Eigen::MatrixBase< Derived > &A)`
- `template<typename Derived >`  
`types::cmat logm (const Eigen::MatrixBase< Derived > &A)`
- `template<typename Derived >`  
`types::cmat sinm (const Eigen::MatrixBase< Derived > &A)`
- `template<typename Derived >`  
`types::cmat cosm (const Eigen::MatrixBase< Derived > &A)`
- `template<typename Derived >`  
`types::cmat spectralpowm (const Eigen::MatrixBase< Derived > &A, const types::cplx z)`
- `template<typename Derived >`  
`types::DynMat< typename  
Derived::Scalar > powm (const Eigen::MatrixBase< Derived > &A, size_t n)`
- `template<typename OutputScalar , typename Derived >`  
`types::DynMat< OutputScalar > fun (const Eigen::MatrixBase< Derived > &A, OutputScalar(*f)(const type-  
name Derived::Scalar &))`
- `template<typename Derived1 , typename Derived2 >`  
`types::DynMat< typename  
Derived1::Scalar > kron (const Eigen::MatrixBase< Derived1 > &A, const Eigen::MatrixBase< Derived2 > &B)`
- `template<typename Derived >`  
`types::DynMat< typename  
Derived::Scalar > kronlist (const std::vector< types::DynMat< typename Derived::Scalar > > &As)`
- `template<typename Derived >`  
`types::DynMat< typename  
Derived::Scalar > kronpow (const Eigen::MatrixBase< Derived > &A, size_t n)`
- `template<typename Derived >`  
`types::DynMat< typename  
Derived::Scalar > reshape (const Eigen::MatrixBase< Derived > &A, size_t rows, size_t cols)`
- `template<typename Derived >`  
`types::DynMat< typename  
Derived::Scalar > syspermute (const Eigen::MatrixBase< Derived > &A, const std::vector< size_t > perm,  
const std::vector< size_t > &dims)`
- `template<typename Derived >`  
`types::DynMat< typename  
Derived::Scalar > ptrace2 (const Eigen::MatrixBase< Derived > &A, const std::vector< size_t > dims)`

- `template<typename Derived >`  
`types::DynMat< typename`  
`Derived::Scalar > ptrace` (const Eigen::MatrixBase< Derived > &A, const std::vector< size\_t > &subsys,  
const std::vector< size\_t > &dims)
- `template<typename Derived >`  
`types::DynMat< typename`  
`Derived::Scalar > ptranspose` (const Eigen::MatrixBase< Derived > &A, const std::vector< size\_t > &sub-  
sys, const std::vector< size\_t > &dims)
- `template<typename Derived1 , typename Derived2 >`  
`types::DynMat< typename`  
`Derived1::Scalar > comm` (const Eigen::MatrixBase< Derived1 > &A, const Eigen::MatrixBase< Derived2  
> &B)
- `template<typename Derived1 , typename Derived2 >`  
`types::DynMat< typename`  
`Derived1::Scalar > anticomm` (const Eigen::MatrixBase< Derived1 > &A, const Eigen::MatrixBase< De-  
rived2 > &B)
- `template<typename Derived >`  
`types::DynMat< typename`  
`Derived::Scalar > proj` (const Eigen::MatrixBase< Derived > &V)
- `template<typename Derived >`  
`types::DynMat< typename`  
`Derived::Scalar > expandout` (const Eigen::MatrixBase< Derived > &A, size\_t pos, const std::vector< size\_t  
> &dims)
- `template<typename Derived >`  
`types::DynMat< typename`  
`Derived::Scalar > grams` (const std::vector< types::DynMat< typename Derived::Scalar > > &Vs)
- `template<typename Derived >`  
`types::DynMat< typename`  
`Derived::Scalar > grams` (const Eigen::MatrixBase< Derived > &A)
- `template<typename T >`  
`void dispSTL` (const T &x, const std::string &separator=" ", const std::string &start="[" , const std::string  
&end="]", std::ostream &os=std::cout)
- `template<typename T >`  
`void displnSTL` (const T &x, const std::string &separator=" ", const std::string &start="[" , const std::string  
&end="]", std::ostream &os=std::cout)
- `template<typename T >`  
`void dispSTL` (const T \*x, const size\_t n, const std::string &separator=" ", const std::string &start="[" , const  
std::string &end="]", std::ostream &os=std::cout)
- `template<typename T >`  
`void displnSTL` (const T \*x, const size\_t n, const std::string &separator=" ", const std::string &start="[" , const  
std::string &end="]", std::ostream &os=std::cout)
- `template<typename Derived >`  
`void disp` (const Eigen::MatrixBase< Derived > &A, double chop=ct::chop, std::ostream &os=std::cout)
- `template<typename Derived >`  
`void displn` (const Eigen::MatrixBase< Derived > &A, double chop=ct::chop, std::ostream &os=std::cout)
- `void disp` (const types::cplx c, double chop=ct::chop, std::ostream &os=std::cout)
- `void displn` (const types::cplx c, double chop=ct::chop, std::ostream &os=std::cout)
- `template<typename Derived >`  
`void save` (const Eigen::MatrixBase< Derived > &A, const std::string &fname)
- `template<typename Derived >`  
`types::DynMat< typename`  
`Derived::Scalar > load` (const std::string &fname)
- `template<typename Derived >`  
`Derived loadMATLABmatrix` (const std::string &mat\_file, const std::string &var\_name)
- `template<>`  
`types::dmat loadMATLABmatrix` (const std::string &mat\_file, const std::string &var\_name)

- `template<>`  
`types::cmat loadMATLABmatrix` (const std::string &mat\_file, const std::string &var\_name)
- `template<typename Derived >`  
void `saveMATLABmatrix` (const Eigen::MatrixBase< Derived > &A, const std::string &mat\_file, const std::string &var\_name, const std::string &mode)
- `template<>`  
void `saveMATLABmatrix` (const Eigen::MatrixBase< typename `types::dmat` > &A, const std::string &mat\_file, const std::string &var\_name, const std::string &mode)
- `template<>`  
void `saveMATLABmatrix` (const Eigen::MatrixBase< typename `types::cmat` > &A, const std::string &mat\_file, const std::string &var\_name, const std::string &mode)
- `template<typename Derived >`  
Derived `rand` (size\_t rows, size\_t cols, double a=0, double b=1)
- `template<>`  
`types::dmat rand` (size\_t rows, size\_t cols, double a, double b)
- `template<>`  
`types::cmat rand` (size\_t rows, size\_t cols, double a, double b)
- double `rand` (double a=0, double b=1)
- `template<typename Derived >`  
Derived `randn` (size\_t rows, size\_t cols, double mean=0, double sigma=1)
- `template<>`  
`types::dmat randn` (size\_t rows, size\_t cols, double mean, double sigma)
- `template<>`  
`types::cmat randn` (size\_t rows, size\_t cols, double mean, double sigma)
- double `randn` (double mean=0, double sigma=1)
- `types::cmat randU` (size\_t D)
- `types::cmat randV` (size\_t Din, size\_t Dout)
- std::vector< `types::cmat` > `randKraus` (size\_t n, size\_t D)
- `types::cmat randH` (size\_t D)
- `types::ket randket` (size\_t D)
- `types::cmat randrho` (size\_t D)


## Variables

- `RandomDevices` & `rdevs` = `RandomDevices::getInstance()`
- const `Gates` & `gt` = `Gates::getInstance()`

### 5.1.1 Function Documentation


#### 5.1.1.1 `template<typename Derived > types::cmat qpp::absm ( const Eigen::MatrixBase< Derived > & A )`

Here is the call graph for this function:

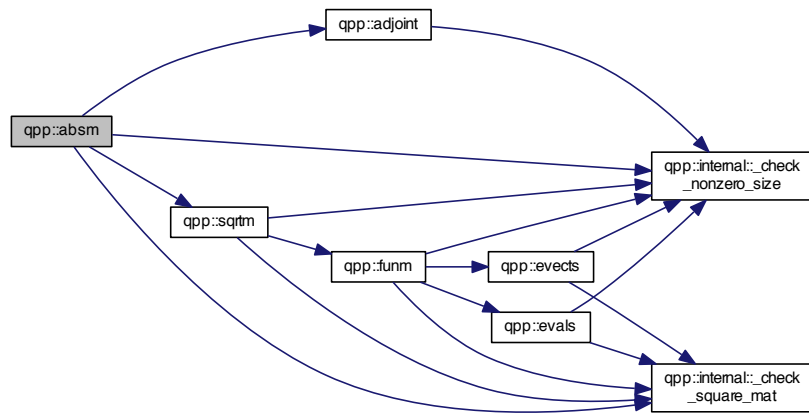

#### 5.1.1.2 `template<typename Derived > types::DynMat<typename Derived::Scalar> qpp::adjoint ( const Eigen::MatrixBase< Derived > & A )`

Here is the call graph for this function:




5.1.1.3 `template<typename Derived1 , typename Derived2 > types::DynMat<typename Derived1::Scalar> qpp::anticomm ( const Eigen::MatrixBase< Derived1 > & A, const Eigen::MatrixBase< Derived2 > & B )`

Here is the call graph for this function:



5.1.1.4 `types::cmat qpp::channel ( const types::cmat & rho, const std::vector< types::cmat > & Ks )`

Here is the call graph for this function:

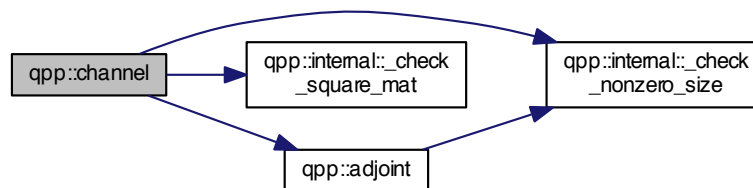



#### 5.1.1.5 `types::cmat qpp::choi ( const std::vector< types::cmat > & Ks )`

Here is the call graph for this function:



#### 5.1.1.6 `std::vector<types::cmat> qpp::choi2kraus ( const types::cmat & A )`

Here is the call graph for this function:



5.1.1.7 `template<typename Derived1 , typename Derived2 > types::DynMat<typename Derived1::Scalar> qpp::comm ( const Eigen::MatrixBase< Derived1 > & A, const Eigen::MatrixBase< Derived2 > & B )`

Here is the call graph for this function:




5.1.1.8 `template<typename Derived > types::DynMat<typename Derived::Scalar> qpp::conjugate ( const Eigen::MatrixBase< Derived > & A )`

Here is the call graph for this function:




5.1.1.9 `template<typename Derived > types::cmat qpp::cosm ( const Eigen::MatrixBase< Derived > & A )`

Here is the call graph for this function:

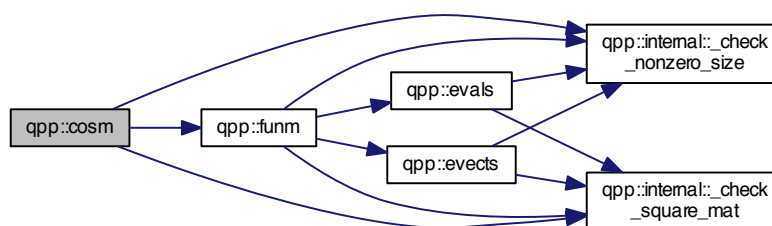

5.1.1.10 `template<typename Derived > Derived::Scalar qpp::det ( const Eigen::MatrixBase< Derived > & A )`

Here is the call graph for this function:



5.1.1.11 `template<typename Derived > void qpp::disp ( const Eigen::MatrixBase< Derived > & A, double chop = ct::chop, std::ostream & os = std::cout )`

5.1.1.12 `void qpp::disp ( const types::cplx c, double chop = ct::chop, std::ostream & os = std::cout )`

Here is the call graph for this function:



5.1.1.13 `template<typename Derived > void qpp::displn ( const Eigen::MatrixBase< Derived > & A, double chop = ct::chop, std::ostream & os = std::cout )`

Here is the call graph for this function:



5.1.1.14 `void qpp::displn ( const types::cplx c, double chop = ct : : chop, std::ostream & os = std : : cout )`

Here is the call graph for this function:



5.1.1.15 `template<typename T> void qpp::displnSTL ( const T & x, const std::string & separator = " ", const std::string & start = " [ ", const std::string & end = " ] ", std::ostream & os = std : : cout )`

Here is the call graph for this function:



5.1.1.16 `template<typename T> void qpp::displnSTL ( const T * x, const size_t n, const std::string & separator = " ", const std::string & start = " [ ", const std::string & end = " ] ", std::ostream & os = std : : cout )`

Here is the call graph for this function:




5.1.1.17 `template<typename T> void qpp::dispSTL ( const T & x, const std::string & separator = " ", const std::string & start = " [ ", const std::string & end = " ] ", std::ostream & os = std : : cout )`

5.1.1.18 `template<typename T> void qpp::dispSTL ( const T * x, const size_t n, const std::string & separator = " ", const std::string & start = " [ ", const std::string & end = " ] ", std::ostream & os = std : : cout )`


5.1.1.19 `template<typename Derived> types::cmat qpp::evals ( const Eigen::MatrixBase< Derived > & A )`

Here is the call graph for this function:

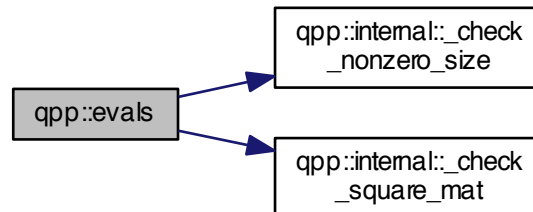


5.1.1.20 `template<typename Derived> types::cmat qpp::evecs ( const Eigen::MatrixBase< Derived > & A )`

Here is the call graph for this function:

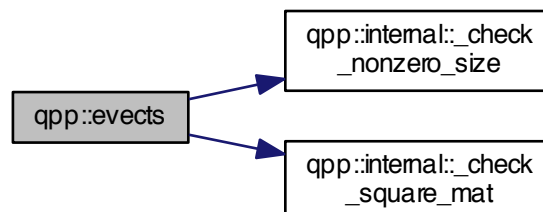


5.1.1.21 `template<typename Derived> types::DynMat<typename Derived::Scalar> qpp::expandout ( const Eigen::MatrixBase< Derived> & A, size_t pos, const std::vector< size_t> & dims )`

Here is the call graph for this function:

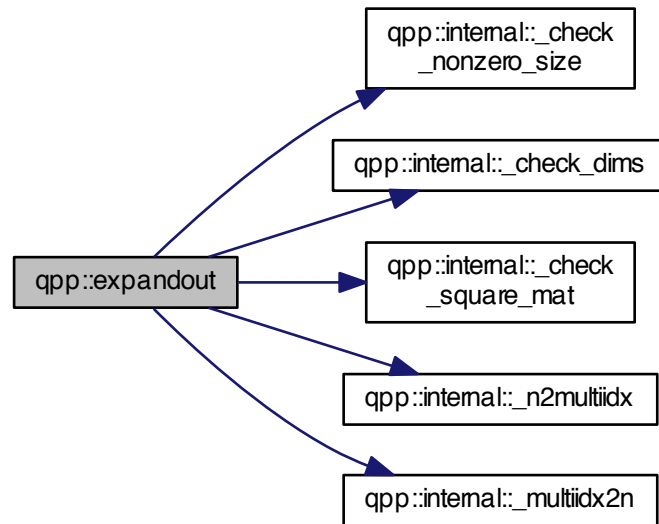

5.1.1.22 `template<typename Derived> types::cmat qpp::expm ( const Eigen::MatrixBase< Derived> & A )`

Here is the call graph for this function:

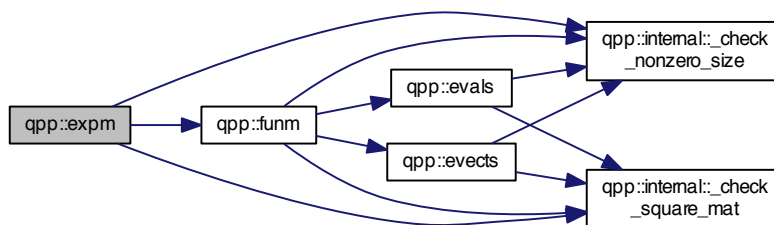

5.1.1.23 `template<typename OutputScalar , typename Derived > types::DynMat<OutputScalar> qpp::fun ( const Eigen::MatrixBase< Derived > & A, OutputScalar*)(const typename Derived::Scalar &) f )`

Here is the call graph for this function:



5.1.1.24 `template<typename Derived > types::cmat qpp::funm ( const Eigen::MatrixBase< Derived > & A, types::cplx*)(const types::cplx &) f )`


Parameters

<i>A</i>	input matrix
<i>f</i>	function pointer

Returns


`types::cmat`

Here is the call graph for this function:

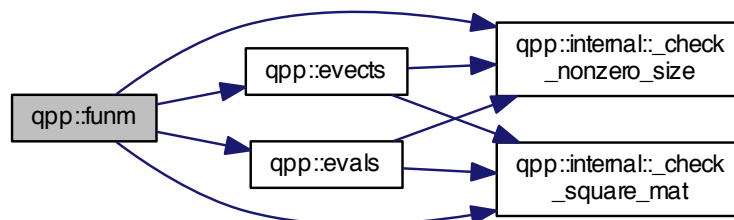

5.1.1.25 `template<typename Derived > types::DynMat<typename Derived::Scalar> qpp::grams ( const std::vector< types::DynMat< typename Derived::Scalar > > & Vs )`

Here is the call graph for this function:

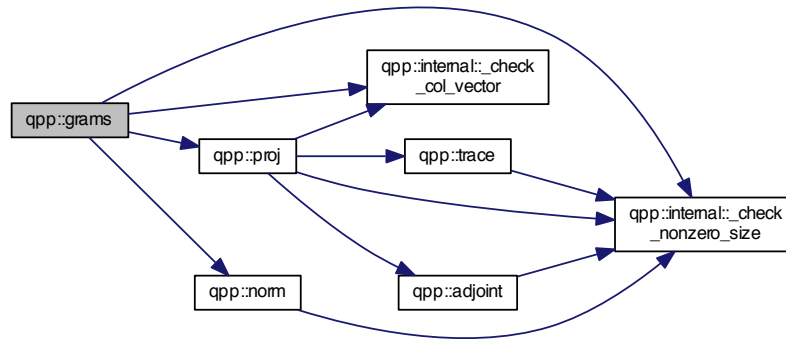

5.1.1.26 `template<typename Derived > types::DynMat<typename Derived::Scalar> qpp::grams ( const Eigen::MatrixBase< Derived > & A )`


Here is the call graph for this function:






5.1.1.27 `template<typename Derived> types::cmat qpp::hevals ( const Eigen::MatrixBase< Derived > & A )`

Here is the call graph for this function:

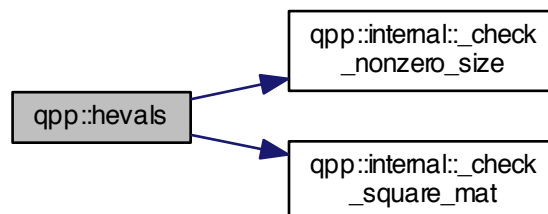


5.1.1.28 `template<typename Derived> types::cmat qpp::hevects ( const Eigen::MatrixBase< Derived > & A )`

Here is the call graph for this function:

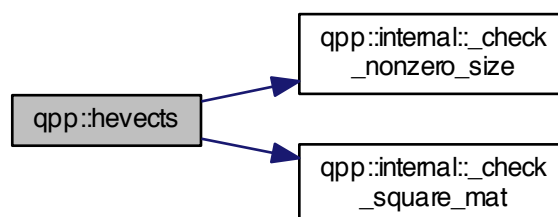


5.1.1.29 `template<typename Derived1, typename Derived2> types::DynMat<typename Derived1::Scalar> qpp::kron ( const Eigen::MatrixBase< Derived1 > & A, const Eigen::MatrixBase< Derived2 > & B )`

Here is the call graph for this function:



5.1.1.30 `template<typename Derived> types::DynMat<typename Derived::Scalar> qpp::kronlist ( const std::vector< types::DynMat< typename Derived::Scalar> > & As )`

Here is the call graph for this function:



5.1.1.31 `template<typename Derived> types::DynMat<typename Derived::Scalar> qpp::kronpow ( const Eigen::MatrixBase< Derived> & A, size_t n )`

Here is the call graph for this function:



5.1.1.32 `template<typename Derived> types::DynMat<typename Derived::Scalar> qpp::load ( const std::string & fname )`


5.1.1.33 `template<typename Derived> Derived qpp::loadMATLABmatrix ( const std::string & mat_file, const std::string & var_name )`

5.1.1.34 `template<> types::dmat qpp::loadMATLABmatrix ( const std::string & mat_file, const std::string & var_name )`

5.1.1.35 `template<> types::cmat qpp::loadMATLABmatrix ( const std::string & mat_file, const std::string & var_name )`


5.1.1.36 `template<typename Derived> types::cmat qpp::logm ( const Eigen::MatrixBase< Derived> & A )`

Here is the call graph for this function:

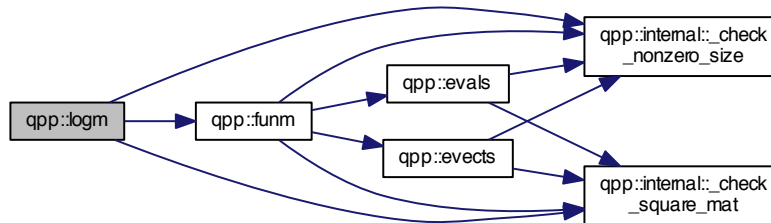


5.1.1.37 `template<typename Derived> double qpp::norm ( const Eigen::MatrixBase< Derived> & A )`

Here is the call graph for this function:




5.1.1.38 `template<typename Derived> types::DynMat<typename Derived::Scalar> qpp::powm ( const Eigen::MatrixBase< Derived> & A, size_t n )`

Here is the call graph for this function:

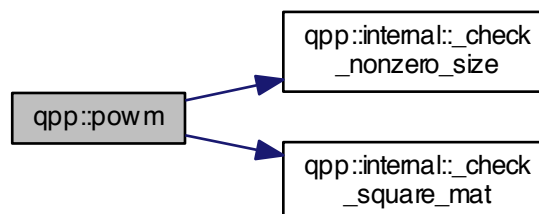


5.1.1.39 `template<typename Derived> types::DynMat<typename Derived::Scalar> qpp::proj ( const Eigen::MatrixBase<Derived> & V )`

Here is the call graph for this function:

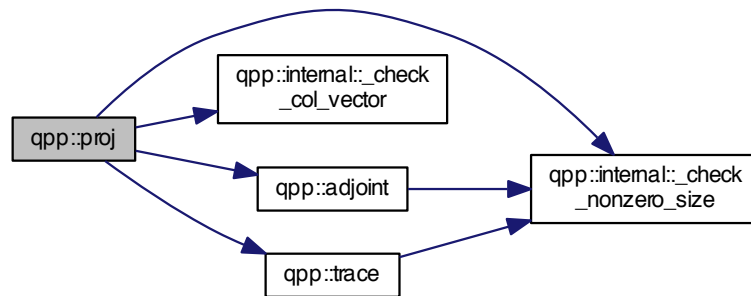


5.1.1.40 `template<typename Derived> types::DynMat<typename Derived::Scalar> qpp::ptrace ( const Eigen::MatrixBase<Derived> & A, const std::vector<size_t> & subsys, const std::vector<size_t> & dims )`

Here is the call graph for this function:

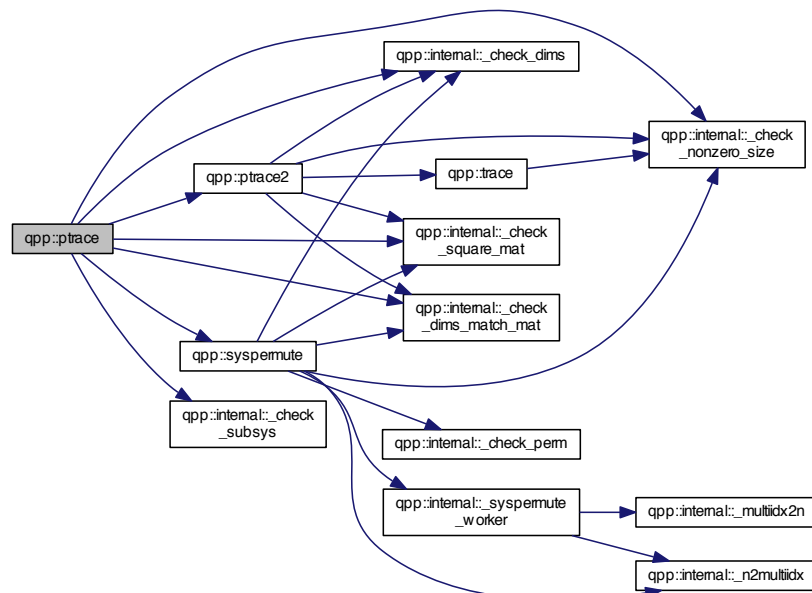


5.1.1.41 `template<typename Derived> types::DynMat<typename Derived::Scalar> qpp::ptrace2 ( const Eigen::MatrixBase< Derived> & A, const std::vector< size_t> dims )`

Here is the call graph for this function:

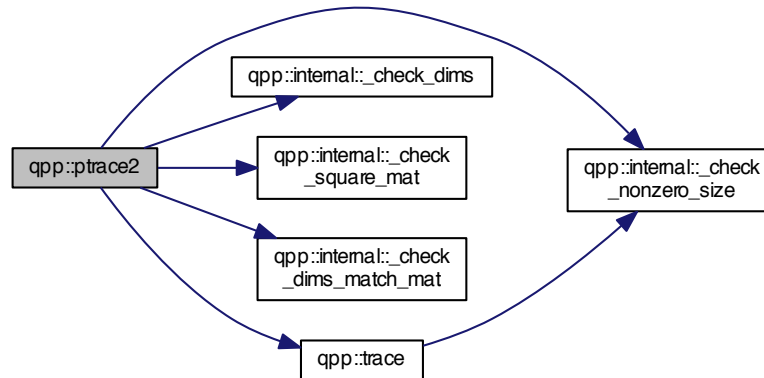

5.1.1.42 `template<typename Derived> types::DynMat<typename Derived::Scalar> qpp::ptrtranspose ( const Eigen::MatrixBase< Derived> & A, const std::vector< size_t> & subsys, const std::vector< size_t> & dims )`

Here is the call graph for this function:

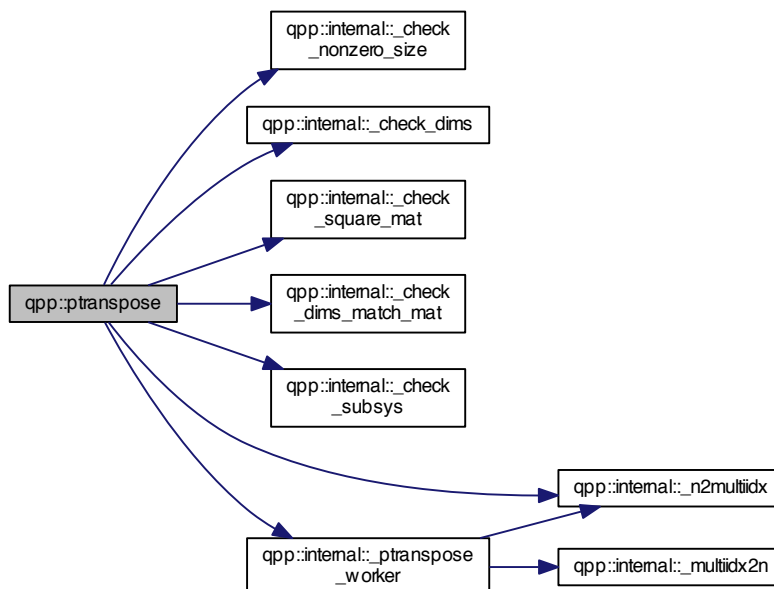


5.1.1.43 `template<typename Derived > Derived qpp::rand ( size_t rows, size_t cols, double a = 0, double b = 1 )`

5.1.1.44 `template<> types::dmat qpp::rand ( size_t rows, size_t cols, double a, double b )`

5.1.1.45 `template<> types::cmat qpp::rand ( size_t rows, size_t cols, double a, double b )`


5.1.1.46 `double qpp::rand ( double a = 0, double b = 1 )`

Here is the call graph for this function:




5.1.1.47 `types::cmat qpp::randH ( size_t D )`

Here is the call graph for this function:




5.1.1.48 `types::ket qpp::randket ( size_t D )`

Here is the call graph for this function:

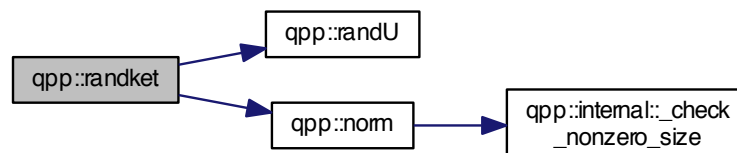

5.1.1.49 `std::vector<types::cmat> qpp::randKraus ( size_t n, size_t D )`


Here is the call graph for this function:

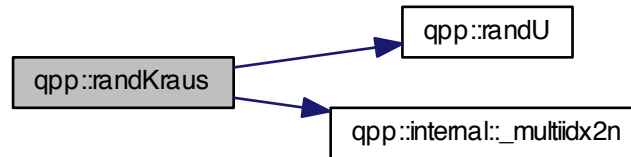

5.1.1.50 `template<typename Derived> Derived qpp::randn ( size_t rows, size_t cols, double mean = 0, double sigma = 1 )`

5.1.1.51 `template<> types::dmat qpp::randn ( size_t rows, size_t cols, double mean, double sigma )`


Here is the call graph for this function:



5.1.1.52 `template<> types::cmat qpp::randn ( size_t rows, size_t cols, double mean, double sigma )`


5.1.1.53 `double qpp::randn ( double mean = 0, double sigma = 1 )`

Here is the call graph for this function:



#### 5.1.1.54 `types::cmat qpp::randrho ( size_t D )`

Here is the call graph for this function:

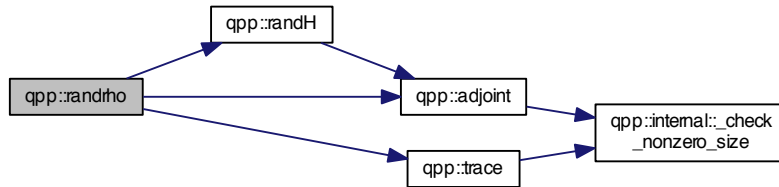

#### 5.1.1.55 `types::cmat qpp::randU ( size_t D )`


#### 5.1.1.56 `types::cmat qpp::randV ( size_t Din, size_t Dout )`

Here is the call graph for this function:



#### 5.1.1.57 `template<typename Derived> double qpp::renyi ( const double alpha, const Eigen::MatrixBase< Derived > & A )`


Here is the call graph for this function:

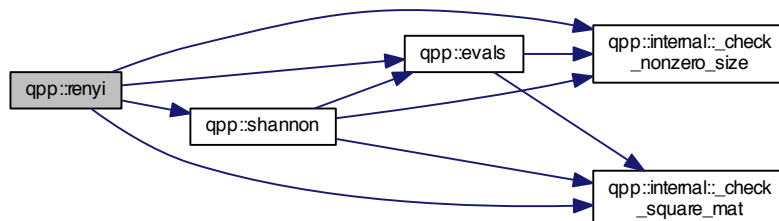




5.1.1.58 `template<typename Derived> double qpp::renyi_inf ( const Eigen::MatrixBase< Derived> & A )`

Here is the call graph for this function:

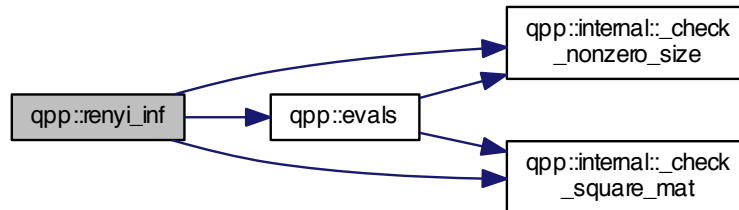


5.1.1.59 `template<typename Derived> types::DynMat<typename Derived::Scalar> qpp::reshape ( const Eigen::MatrixBase< Derived> & A, size_t rows, size_t cols )`

Here is the call graph for this function:



5.1.1.60 `template<typename Derived> void qpp::save ( const Eigen::MatrixBase< Derived> & A, const std::string & fname )`


Here is the call graph for this function:



5.1.1.61 `template<typename Derived> void qpp::saveMATLABmatrix ( const Eigen::MatrixBase< Derived> & A, const std::string & mat_file, const std::string & var_name, const std::string & mode )`


5.1.1.62 `template<> void qpp::saveMATLABmatrix ( const Eigen::MatrixBase< typename types::dmat > & A, const std::string & mat_file, const std::string & var_name, const std::string & mode )`

Here is the call graph for this function:




5.1.1.63 `template<> void qpp::saveMATLABmatrix ( const Eigen::MatrixBase< typename types::cmat > & A, const std::string & mat_file, const std::string & var_name, const std::string & mode )`

Here is the call graph for this function:




5.1.1.64 `template<typename Derived> double qpp::shannon ( const Eigen::MatrixBase< Derived > & A )`

Here is the call graph for this function:

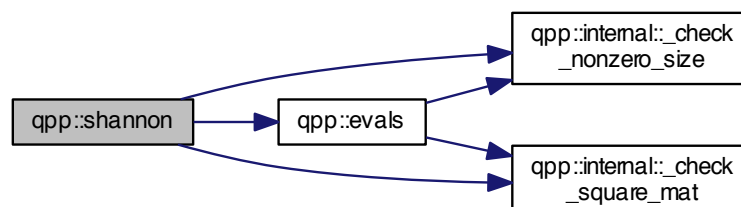


5.1.1.65 `template<typename Derived> types::cmat qpp::sinm ( const Eigen::MatrixBase< Derived > & A )`

Here is the call graph for this function:

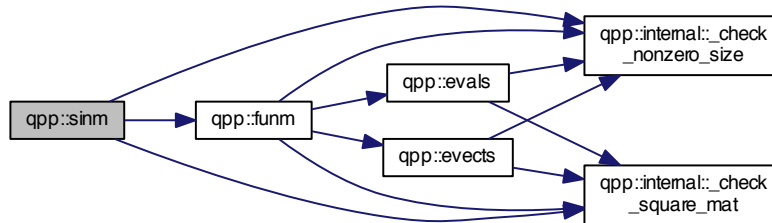


5.1.1.66 `template<typename Derived> types::cmat qpp::spectralpowm ( const Eigen::MatrixBase< Derived > & A, const types::cplx z )`

Here is the call graph for this function:

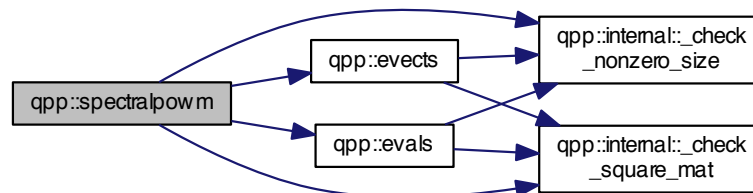


5.1.1.67 `template<typename Derived> types::cmat qpp::sqrtm ( const Eigen::MatrixBase< Derived > & A )`

Here is the call graph for this function:

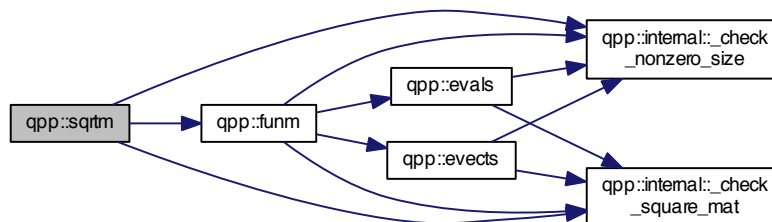


5.1.1.68 `template<typename Derived > Derived::Scalar qpp::sum ( const Eigen::MatrixBase< Derived > & A )`

Here is the call graph for this function:




5.1.1.69 `types::cmat qpp::super ( const std::vector< types::cmat > & Ks )`

Here is the call graph for this function:

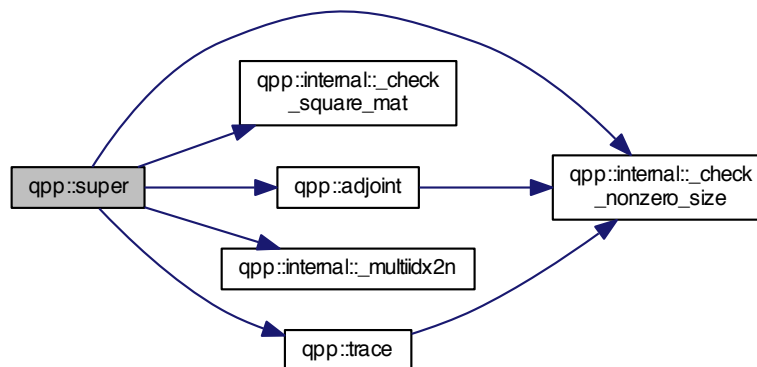


5.1.1.70 `template<typename Derived> types::DynMat<typename Derived::Scalar> qpp::syspermute ( const Eigen::MatrixBase< Derived> & A, const std::vector< size_t> perm, const std::vector< size_t> & dims )`

Here is the call graph for this function:

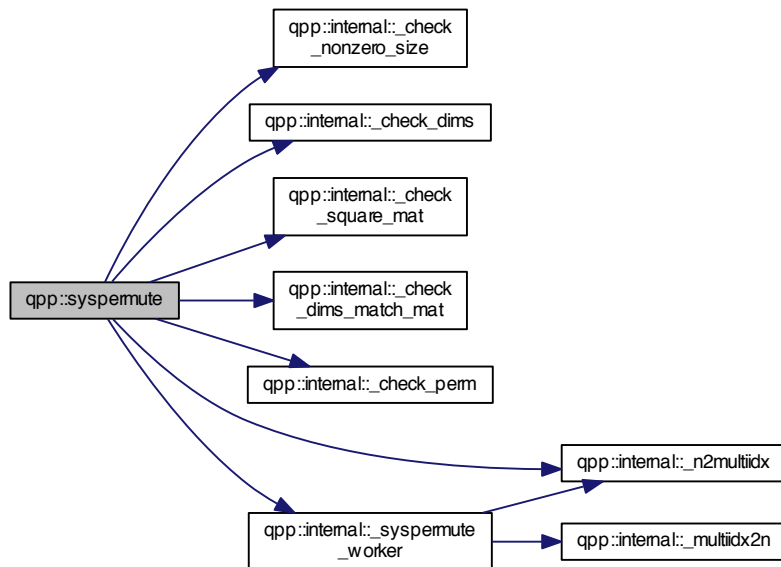


5.1.1.71 `template<typename Derived> Derived::Scalar qpp::trace ( const Eigen::MatrixBase< Derived> & A )`

Here is the call graph for this function:



5.1.1.72 `template<typename Derived > types::DynMat<typename Derived::Scalar> qpp::transpose ( const Eigen::MatrixBase< Derived > & A )`

Here is the call graph for this function:



## 5.1.2 Variable Documentation

5.1.2.1 `const Gates& qpp::gt = Gates::getInstance()`

5.1.2.2 `RandomDevices& qpp::rdevs = RandomDevices::getInstance()`

## 5.2 qpp::ct Namespace Reference

### Functions

- `std::complex< double > omega (size_t D)`

### Variables

- `const double chop = 1e-10`
- `const double eps = 1e-14`
- `const std::complex< double > ii = { 0, 1 }`
- `const double pi = 3.141592653589793238462643383279502884`
- `const double ee = 2.718281828459045235360287471352662497`

### 5.2.1 Function Documentation

5.2.1.1 `std::complex<double> qpp::ct::omega ( size_t D )`

### 5.2.2 Variable Documentation

5.2.2.1 `const double qpp::ct::chop = 1e-10`

5.2.2.2 `const double qpp::ct::ee = 2.718281828459045235360287471352662497`

5.2.2.3 `const double qpp::ct::eps = 1e-14`

5.2.2.4 `const std::complex<double> qpp::ct::ii = { 0, 1 }`

5.2.2.5 `const double qpp::ct::pi = 3.141592653589793238462643383279502884`

## 5.3 qpp::internal Namespace Reference

### Functions

- void [\\_n2multiidx](#) (size\_t n, size\_t numdims, const size\_t \*dims, size\_t \*result)
- size\_t [\\_multiidx2n](#) (const size\_t \*midx, size\_t numdims, const size\_t \*dims)
- template<typename Derived >  
bool [\\_check\\_square\\_mat](#) (const Eigen::MatrixBase< Derived > &A)
- template<typename Derived >  
bool [\\_check\\_vector](#) (const Eigen::MatrixBase< Derived > &A)
- template<typename Derived >  
bool [\\_check\\_row\\_vector](#) (const Eigen::MatrixBase< Derived > &A)
- template<typename Derived >  
bool [\\_check\\_col\\_vector](#) (const Eigen::MatrixBase< Derived > &A)
- template<typename T >  
bool [\\_check\\_nonzero\\_size](#) (const T &x)
- bool [\\_check\\_dims](#) (const std::vector< size\_t > &dims)
- template<typename Derived >  
bool [\\_check\\_dims\\_match\\_mat](#) (const std::vector< size\_t > &dims, const Eigen::MatrixBase< Derived > &A)
- bool [\\_check\\_eq\\_dims](#) (const std::vector< size\_t > &dims, size\_t dim)
- bool [\\_check\\_subsys](#) (const std::vector< size\_t > &subsys, const std::vector< size\_t > &dims)
- bool [\\_check\\_perm](#) (const std::vector< size\_t > &perm, const std::vector< size\_t > &dims)
- template<typename Scalar >  
void [\\_syspermute\\_worker](#) (const size\_t \*midxcol, size\_t numdims, const size\_t \*cdims, const size\_t \*cperm, size\_t i, size\_t j, size\_t &iperm, size\_t &jperm, const [types::DynMat](#)< Scalar > &A, [types::DynMat](#)< Scalar > &result)
- template<typename Scalar >  
void [\\_ptranspose\\_worker](#) (const size\_t \*midxcol, size\_t numdims, size\_t numsubsys, const size\_t \*cdims, const size\_t \*csubsys, size\_t i, size\_t j, size\_t &iperm, size\_t &jperm, const [types::DynMat](#)< Scalar > &A, [types::DynMat](#)< Scalar > &result)

### 5.3.1 Function Documentation

5.3.1.1 template<typename Derived > bool qpp::internal::\_check\_col\_vector ( const Eigen::MatrixBase< Derived > &A )

5.3.1.2 bool qpp::internal::\_check\_dims ( const std::vector< size\_t > &dims )

5.3.1.3 template<typename Derived > bool qpp::internal::\_check\_dims\_match\_mat ( const std::vector< size\_t > &dims, const Eigen::MatrixBase< Derived > &A )

5.3.1.4 bool qpp::internal::\_check\_eq\_dims ( const std::vector< size\_t > &dims, size\_t dim )

5.3.1.5 template<typename T > bool qpp::internal::\_check\_nonzero\_size ( const T &x )

5.3.1.6 bool qpp::internal::\_check\_perm ( const std::vector< size\_t > &perm, const std::vector< size\_t > &dims )

5.3.1.7 template<typename Derived > bool qpp::internal::\_check\_row\_vector ( const Eigen::MatrixBase< Derived > &A )

5.3.1.8 template<typename Derived > bool qpp::internal::\_check\_square\_mat ( const Eigen::MatrixBase< Derived > &A )

5.3.1.9 bool qpp::internal::\_check\_subsys ( const std::vector< size\_t > &subsys, const std::vector< size\_t > &dims )


5.3.1.10 template<typename Derived > bool qpp::internal::\_check\_vector ( const Eigen::MatrixBase< Derived > &A )

5.3.1.11 size\_t qpp::internal::\_multiidx2n ( const size\_t \*midx, size\_t numdims, const size\_t \*dims )

5.3.1.12 `void qpp::internal::_n2multiidx ( size_t n, size_t numdims, const size_t * dims, size_t * result )`


5.3.1.13 `template<typename Scalar > void qpp::internal::_ptranpose_worker ( const size_t * midxcol, size_t numdims, size_t numsubsys, const size_t * cdims, const size_t * csubsys, size_t i, size_t j, size_t & iperm, size_t & jperm, const types::DynMat< Scalar > & A, types::DynMat< Scalar > & result )`

Here is the call graph for this function:



5.3.1.14 `template<typename Scalar > void qpp::internal::_syspermute_worker ( const size_t * midxcol, size_t numdims, const size_t * cdims, const size_t * cperm, size_t i, size_t j, size_t & iperm, size_t & jperm, const types::DynMat< Scalar > & A, types::DynMat< Scalar > & result )`

Here is the call graph for this function:

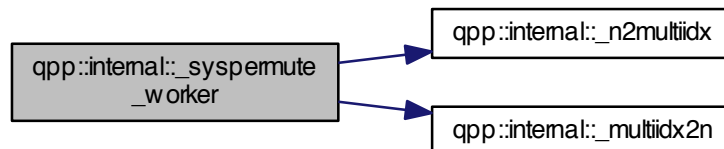

## 5.4 qpp::stat Namespace Reference

### Classes

- class [NormalDistribution](#)
- class [UniformRealDistribution](#)
- class [DiscreteDistribution](#)
- class [DiscreteDistributionFromComplex](#)

## 5.5 qpp::types Namespace Reference



## Typedefs

- typedef std::complex< double > [cplx](#)
- typedef Eigen::MatrixXcd [cmat](#)
- typedef Eigen::MatrixXd [dmat](#)
- typedef Eigen::MatrixXf [fmat](#)
- typedef Eigen::MatrixXi [imat](#)
- typedef Eigen::Matrix< [cplx](#), Eigen::Dynamic, 1 > [ket](#)
- typedef Eigen::Matrix< [cplx](#), 1, Eigen::Dynamic > [bra](#)
- template<typename Scalar > using [DynMat](#) = Eigen::Matrix< Scalar, Eigen::Dynamic, Eigen::Dynamic >

### 5.5.1 Typedef Documentation

5.5.1.1 typedef Eigen::Matrix<cplx, 1, Eigen::Dynamic> [qpp::types::bra](#)

5.5.1.2 typedef Eigen::MatrixXcd [qpp::types::cmat](#)

5.5.1.3 typedef std::complex<double> [qpp::types::cplx](#)

5.5.1.4 typedef Eigen::MatrixXd [qpp::types::dmat](#)

5.5.1.5 template<typename Scalar > using [qpp::types::DynMat](#) = typedef Eigen::Matrix<Scalar, Eigen::Dynamic, Eigen::Dynamic>

5.5.1.6 typedef Eigen::MatrixXf [qpp::types::fmat](#)

5.5.1.7 typedef Eigen::MatrixXi [qpp::types::imat](#)

5.5.1.8 typedef Eigen::Matrix<cplx, Eigen::Dynamic, 1> [qpp::types::ket](#)



## Chapter 6

# Class Documentation

### 6.1 qpp::stat::DiscreteDistribution Class Reference

```
#include <stat.h>
```

#### Public Member Functions

- `template<typename InputIterator >`  
`DiscreteDistribution` (InputIterator first, InputIterator last)
- `DiscreteDistribution` (std::initializer\_list< double > weights)
- `DiscreteDistribution` (std::vector< double > weights)
- `size_t sample` ()
- `std::vector< double > probabilities` ()

#### Protected Attributes

- `std::discrete_distribution`  
`< size_t > _d`

#### 6.1.1 Constructor & Destructor Documentation

6.1.1.1 `template<typename InputIterator > qpp::stat::DiscreteDistribution::DiscreteDistribution ( InputIterator first, InputIterator last )` [inline]

6.1.1.2 `qpp::stat::DiscreteDistribution::DiscreteDistribution ( std::initializer_list< double > weights )` [inline]


6.1.1.3 `qpp::stat::DiscreteDistribution::DiscreteDistribution ( std::vector< double > weights )` [inline]

#### 6.1.2 Member Function Documentation

6.1.2.1 `std::vector<double> qpp::stat::DiscreteDistribution::probabilities ( )` [inline]

### 6.1.2.2 `size_t qpp::stat::DiscreteDistribution::sample ( )` [inline]

Here is the call graph for this function:



## 6.1.3 Member Data Documentation

### 6.1.3.1 `std::discrete_distribution<size_t> qpp::stat::DiscreteDistribution::_d` [protected]

The documentation for this class was generated from the following file:

- include/[stat.h](#)

## 6.2 `qpp::stat::DiscreteDistributionFromComplex` Class Reference

```
#include <stat.h>
```

### Public Member Functions

- `template<typename InputIterator >`  
`DiscreteDistributionFromComplex` (InputIterator first, InputIterator last)
- `DiscreteDistributionFromComplex` (std::initializer\_list< [types::cplx](#) > amplitudes)
- `DiscreteDistributionFromComplex` (std::vector< [types::cplx](#) > amplitudes)
- `DiscreteDistributionFromComplex` (const [types::cmat](#) &V)
- `size_t sample ()`
- `std::vector< double > probabilities ()`

### Protected Member Functions

- `template<typename InputIterator >`  
`std::vector< double > cplx2amplitudes` (InputIterator first, InputIterator last)

### Protected Attributes

- `std::discrete_distribution`  
`< size_t > _d`

### 6.2.1 Constructor & Destructor Documentation


6.2.1.1 `template<typename InputIterator> qpp::stat::DiscreteDistributionFromComplex::DiscreteDistributionFromComplex ( InputIterator first, InputIterator last ) [inline]`

Here is the call graph for this function:




6.2.1.2 `qpp::stat::DiscreteDistributionFromComplex::DiscreteDistributionFromComplex ( std::initializer_list< types::cplx > amplitudes ) [inline]`

Here is the call graph for this function:




6.2.1.3 `qpp::stat::DiscreteDistributionFromComplex::DiscreteDistributionFromComplex ( std::vector< types::cplx > amplitudes ) [inline]`

Here is the call graph for this function:



6.2.1.4 `qpp::stat::DiscreteDistributionFromComplex::DiscreteDistributionFromComplex ( const types::cmat & V )`  
`[inline]`

Here is the call graph for this function:

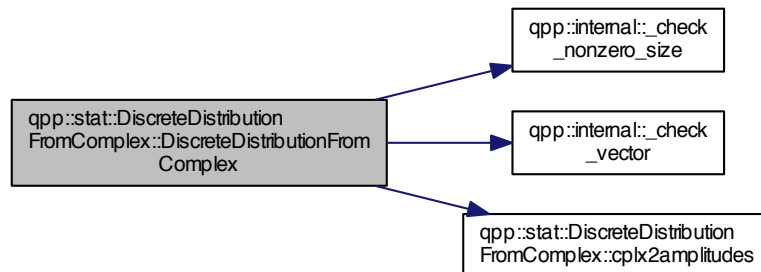


## 6.2.2 Member Function Documentation

6.2.2.1 `template<typename InputIterator > std::vector<double> qpp::stat::DiscreteDistributionFromComplex::cplx2amplitudes ( InputIterator first, InputIterator last )` `[inline]`,  
`[protected]`

6.2.2.2 `std::vector<double> qpp::stat::DiscreteDistributionFromComplex::probabilities ( )` `[inline]`

6.2.2.3 `size_t qpp::stat::DiscreteDistributionFromComplex::sample ( )` `[inline]`

Here is the call graph for this function:



## 6.2.3 Member Data Documentation

6.2.3.1 `std::discrete_distribution<size_t> qpp::stat::DiscreteDistributionFromComplex::_d` `[protected]`


The documentation for this class was generated from the following file:

- [include/stat.h](#)


## 6.3 qpp::Exception Class Reference

```
#include <exception.h>
```

Inheritance diagram for qpp::Exception:



Collaboration diagram for qpp::Exception:



## Public Types

- enum `Type` {  
`Type::UNKNOWN_EXCEPTION = 0`, `Type::ZERO_SIZE`, `Type::MATRIX_NOT_SQUARE`, `Type::MATRIX_NOT_CVECTOR`,  
`Type::MATRIX_NOT_RVECTOR`, `Type::MATRIX_NOT_VECTOR`, `Type::DIMS_INVALID`, `Type::DIMS_NOT_EQUAL`,  
`Type::DIMS_MISMATCH_MATRIX`, `Type::SUBSYS_MISMATCH_DIMS`, `Type::PERM_MISMATCH_DIMS`,  
`Type::NOT_QUBIT_GATE`,  
`Type::NOT_QUBIT_SUBSYS`, `Type::OUT_OF_RANGE`, `Type::UNDEFINED_TYPE`, `Type::TYPE_MISMATCH`,  
`Type::CUSTOM_EXCEPTION` }

## Public Member Functions

- `Exception` (const std::string &where, const `Type` &type)
- `Exception` (const std::string &where, const std::string &custom)
- virtual const char \* `what` () const noexcept override
- virtual `~Exception` () noexcept

## Private Member Functions

- `std::string _construct_exception_msg ()`

## Private Attributes

- `std::string _where`
- `std::string _msg`
- `Type _type`
- `std::string _custom`

## 6.3.1 Member Enumeration Documentation

6.3.1.1 `enum qpp::Exception::Type` `[strong]`


Enumerator

***UNKNOWN\_EXCEPTION***  
***ZERO\_SIZE***  
***MATRIX\_NOT\_SQUARE***  
***MATRIX\_NOT\_CVECTOR***  
***MATRIX\_NOT\_RVECTOR***  
***MATRIX\_NOT\_VECTOR***  
***DIMS\_INVALID***  
***DIMS\_NOT\_EQUAL***  
***DIMS\_MISMATCH\_MATRIX***  
***SUBSYS\_MISMATCH\_DIMS***  
***PERM\_MISMATCH\_DIMS***  
***NOT\_QUBIT\_GATE***  
***NOT\_QUBIT\_SUBSYS***  
***OUT\_OF\_RANGE***  
***UNDEFINED\_TYPE***  
***TYPE\_MISMATCH***  
***CUSTOM\_EXCEPTION***

## 6.3.2 Constructor & Destructor Documentation

6.3.2.1 `qpp::Exception::Exception ( const std::string & where, const Type & type )` `[inline]`


Here is the call graph for this function:





6.3.2.2 `qpp::Exception::Exception ( const std::string & where, const std::string & custom )` `[inline]`

Here is the call graph for this function:



6.3.2.3 `virtual qpp::Exception::~~Exception ( )` `[inline],[virtual],[noexcept]`

### 6.3.3 Member Function Documentation

6.3.3.1 `std::string qpp::Exception::_construct_exception_msg ( )` `[inline],[private]`

6.3.3.2 `virtual const char* qpp::Exception::what ( ) const` `[inline],[override],[virtual],[noexcept]`

### 6.3.4 Member Data Documentation

6.3.4.1 `std::string qpp::Exception::_custom` `[private]`

6.3.4.2 `std::string qpp::Exception::_msg` `[private]`

6.3.4.3 `Type qpp::Exception::_type` `[private]`

6.3.4.4 `std::string qpp::Exception::_where` `[private]`

The documentation for this class was generated from the following file:

- [include/exception.h](#)

## 6.4 qpp::Gates Class Reference

```
#include <gates.h>
```

### Public Member Functions

- [Gates](#) (const [Gates](#) &)=delete
- [Gates](#) & [operator=](#) (const [Gates](#) &)=delete
- virtual [~Gates](#) ()=default
- [types::cmat Rtheta](#) (double theta) const
- [types::cmat Id](#) (size\_t D) const
- [types::cmat Zd](#) (size\_t D) const
- [types::cmat Fd](#) (size\_t D) const
- [types::cmat Xd](#) (size\_t D) const
- [types::cmat CTRL](#) (const [types::cmat](#) &A, const std::vector< size\_t > &ctrl, const std::vector< size\_t > &gate, size\_t n, size\_t D=2) const

## Static Public Member Functions

- static const [Gates](#) & [getInstance](#) ()

## Public Attributes

- [types::cmat Id2](#)
- [types::cmat H](#)
- [types::cmat X](#)
- [types::cmat Y](#)
- [types::cmat Z](#)
- [types::cmat S](#)
- [types::cmat T](#)
- [types::cmat CNOTab](#)
- [types::cmat CZ](#)
- [types::cmat CS](#)
- [types::cmat CNOTba](#)
- [types::cmat SWAP](#)
- [types::cmat TOF](#)
- [types::cmat FRED](#)
- [types::ket x0](#)
- [types::ket x1](#)
- [types::ket y0](#)
- [types::ket y1](#)
- [types::ket z0](#)
- [types::ket z1](#)
- [types::ket b00](#)
- [types::ket b01](#)
- [types::ket b10](#)
- [types::ket b11](#)

## Private Member Functions

- [Gates](#) ()

### 6.4.1 Constructor & Destructor Documentation

6.4.1.1 `qpp::Gates::Gates ( )` `[inline], [private]`


6.4.1.2 `qpp::Gates::Gates ( const Gates & )` `[delete]`

6.4.1.3 `virtual qpp::Gates::~~Gates ( )` `[virtual], [default]`

### 6.4.2 Member Function Documentation

6.4.2.1 `types::cmat qpp::Gates::CTRL ( const types::cmat & A, const std::vector< size_t > & ctrl, const std::vector< size_t > & gate, size_t n, size_t D = 2 ) const` [inline]

Here is the call graph for this function:

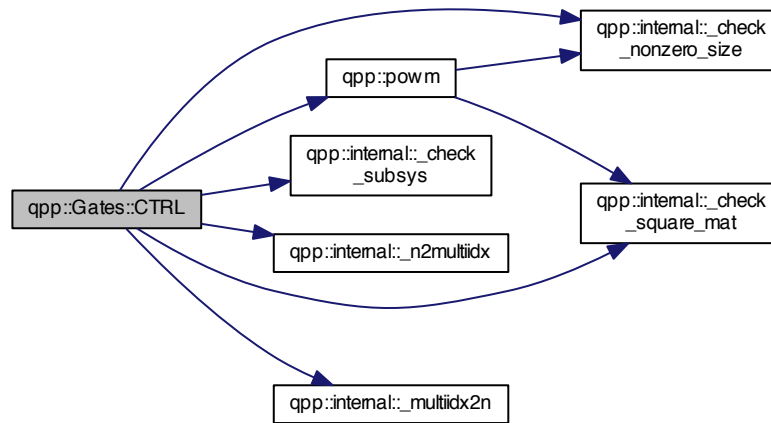

6.4.2.2 `types::cmat qpp::Gates::Fd ( size_t D ) const` [inline]

Here is the call graph for this function:



6.4.2.3 `static const Gates& qpp::Gates::getInstance ( )` [inline],[static]


6.4.2.4 `types::cmat qpp::Gates::Id ( size_t D ) const` [inline]

6.4.2.5 `Gates& qpp::Gates::operator= ( const Gates & )` [delete]

6.4.2.6 `types::cmat qpp::Gates::Rtheta ( double theta ) const` [inline]

#### 6.4.2.7 `types::cmat qpp::Gates::Xd ( size_t D ) const` `[inline]`

Here is the call graph for this function:

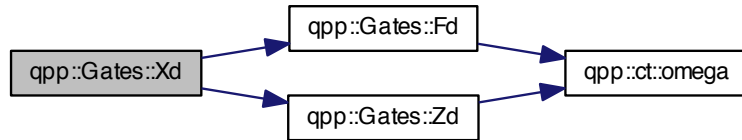

#### 6.4.2.8 `types::cmat qpp::Gates::Zd ( size_t D ) const` `[inline]`

Here is the call graph for this function:



### 6.4.3 Member Data Documentation

6.4.3.1 `types::ket qpp::Gates::b00`

6.4.3.2 `types::ket qpp::Gates::b01`

6.4.3.3 `types::ket qpp::Gates::b10`

6.4.3.4 `types::ket qpp::Gates::b11`

6.4.3.5 `types::cmat qpp::Gates::CNOTab`

6.4.3.6 `types::cmat qpp::Gates::CNOTba`

6.4.3.7 `types::cmat qpp::Gates::CS`

6.4.3.8 `types::cmat qpp::Gates::CZ`

6.4.3.9 `types::cmat qpp::Gates::FRED`

6.4.3.10 `types::cmat qpp::Gates::H`

6.4.3.11 `types::cmat qpp::Gates::Id2`

- 6.4.3.12 `types::cmat qpp::Gates::S`
- 6.4.3.13 `types::cmat qpp::Gates::SWAP`
- 6.4.3.14 `types::cmat qpp::Gates::T`
- 6.4.3.15 `types::cmat qpp::Gates::TOF`
- 6.4.3.16 `types::cmat qpp::Gates::X`
- 6.4.3.17 `types::ket qpp::Gates::x0`
- 6.4.3.18 `types::ket qpp::Gates::x1`
- 6.4.3.19 `types::cmat qpp::Gates::Y`
- 6.4.3.20 `types::ket qpp::Gates::y0`
- 6.4.3.21 `types::ket qpp::Gates::y1`
- 6.4.3.22 `types::cmat qpp::Gates::Z`
- 6.4.3.23 `types::ket qpp::Gates::z0`
- 6.4.3.24 `types::ket qpp::Gates::z1`

The documentation for this class was generated from the following file:

- [include/gates.h](#)

## 6.5 qpp::stat::NormalDistribution Class Reference

```
#include <stat.h>
```

### Public Member Functions

- [NormalDistribution](#) (double mean=0, double sigma=1)
- double [sample](#) ()

### Protected Attributes

- `std::normal_distribution _d`


### 6.5.1 Constructor & Destructor Documentation

6.5.1.1 `qpp::stat::NormalDistribution::NormalDistribution ( double mean = 0, double sigma = 1 )` `[inline]`

### 6.5.2 Member Function Documentation

### 6.5.2.1 `double qpp::stat::NormalDistribution::sample ( ) [inline]`

Here is the call graph for this function:



## 6.5.3 Member Data Documentation

### 6.5.3.1 `std::normal_distribution qpp::stat::NormalDistribution::_d [protected]`

The documentation for this class was generated from the following file:

- [include/stat.h](#)

## 6.6 qpp::RandomDevices Class Reference

```
#include <randevs.h>
```

### Public Member Functions

- [RandomDevices](#) (const [RandomDevices](#) &)=delete
- [RandomDevices](#) & [operator=](#) (const [RandomDevices](#) &)=delete
- virtual [~RandomDevices](#) ()=default

### Static Public Member Functions

- static [RandomDevices](#) & [getInstance](#) ()

### Public Attributes

- `std::random_device` [\\_rd](#)
- `std::mt19937` [\\_rng](#)

### Private Member Functions

- [RandomDevices](#) ()

## 6.6.1 Constructor & Destructor Documentation

### 6.6.1.1 `qpp::RandomDevices::RandomDevices ( ) [inline],[private]`

6.6.1.2 `qpp::RandomDevices::RandomDevices ( const RandomDevices & ) [delete]`

6.6.1.3 `virtual qpp::RandomDevices::~~RandomDevices ( ) [virtual],[default]`

## 6.6.2 Member Function Documentation

6.6.2.1 `static RandomDevices& qpp::RandomDevices::getInstance ( ) [inline],[static]`

6.6.2.2 `RandomDevices& qpp::RandomDevices::operator= ( const RandomDevices & ) [delete]`

## 6.6.3 Member Data Documentation

6.6.3.1 `std::random_device qpp::RandomDevices::_rd`

6.6.3.2 `std::mt19937 qpp::RandomDevices::_rng`

The documentation for this class was generated from the following file:

- [include/randevs.h](#)

## 6.7 qpp::Timer Class Reference

```
#include <timer.h>
```

### Public Member Functions

- [Timer](#) ()
- void [tic](#) ()
- void [toc](#) ()
- double [seconds](#) () const
- virtual [~Timer](#) ()=default

### Protected Attributes

- `std::chrono::high_resolution_clock::time_point _start`
- `std::chrono::high_resolution_clock::time_point _end`

### Friends

- `std::ostream & operator<< (std::ostream &os, const Timer &rhs)`

## 6.7.1 Constructor & Destructor Documentation

6.7.1.1 `qpp::Timer::Timer ( ) [inline]`

6.7.1.2 `virtual qpp::Timer::~~Timer ( ) [virtual],[default]`

## 6.7.2 Member Function Documentation

6.7.2.1 `double qpp::Timer::seconds ( ) const [inline]`

6.7.2.2 void qpp::Timer::tic ( ) [inline]

6.7.2.3 void qpp::Timer::toc ( ) [inline]

### 6.7.3 Friends And Related Function Documentation

6.7.3.1 std::ostream& operator<< ( std::ostream & *os*, const Timer & *rhs* ) [friend]

### 6.7.4 Member Data Documentation

6.7.4.1 std::chrono::high\_resolution\_clock::time\_point qpp::Timer::\_end [protected]

6.7.4.2 std::chrono::high\_resolution\_clock::time\_point qpp::Timer::\_start [protected]

The documentation for this class was generated from the following file:

- include/timer.h

## 6.8 qpp::stat::UniformRealDistribution Class Reference

```
#include <stat.h>
```

### Public Member Functions

- [UniformRealDistribution](#) (double *a*=0, double *b*=1)
- double [sample](#) ()

### Protected Attributes

- std::uniform\_real\_distribution \_d


### 6.8.1 Constructor & Destructor Documentation

6.8.1.1 qpp::stat::UniformRealDistribution::UniformRealDistribution ( double *a* = 0, double *b* = 1 ) [inline]

### 6.8.2 Member Function Documentation

6.8.2.1 double qpp::stat::UniformRealDistribution::sample ( ) [inline]

Here is the call graph for this function:





### 6.8.3 Member Data Documentation

#### 6.8.3.1 `std::uniform_real_distribution qpp::stat::UniformRealDistribution::_d` [protected]

The documentation for this class was generated from the following file:

- [include/stat.h](#)




## Chapter 7

# File Documentation


### 7.1 include/channels.h File Reference

```
#include <vector>
#include <cmath>
#include "types.h"
#include "internal.h"
#include "exception.h"
#include "constants.h"
```

Include dependency graph for channels.h:

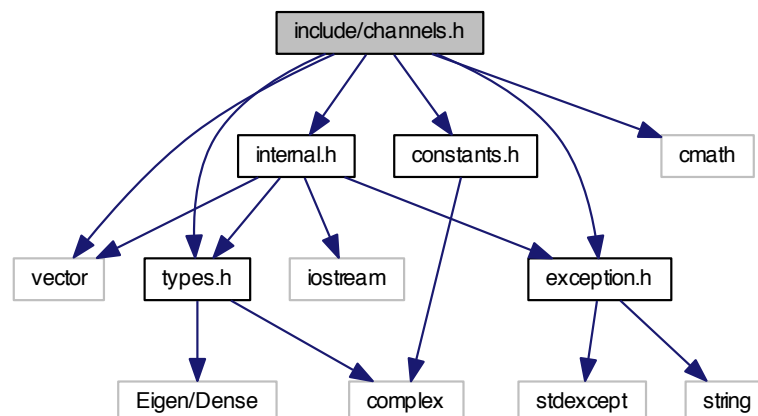

This graph shows which files directly or indirectly include this file:

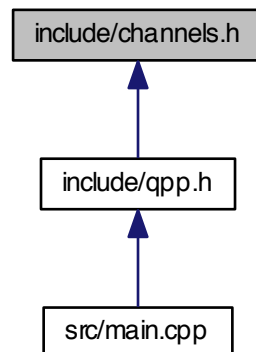

## Namespaces

- [qpp](#)


## Functions

- `types::cmat` [qpp::channel](#) (`const types::cmat &rho`, `const std::vector< types::cmat > &Ks`)
- `types::cmat` [qpp::super](#) (`const std::vector< types::cmat > &Ks`)
- `types::cmat` [qpp::choi](#) (`const std::vector< types::cmat > &Ks`)
- `std::vector< types::cmat >` [qpp::choi2kraus](#) (`const types::cmat &A`)


## 7.2 include/constants.h File Reference

```
#include <complex>
```

Include dependency graph for constants.h:



This graph shows which files directly or indirectly include this file:

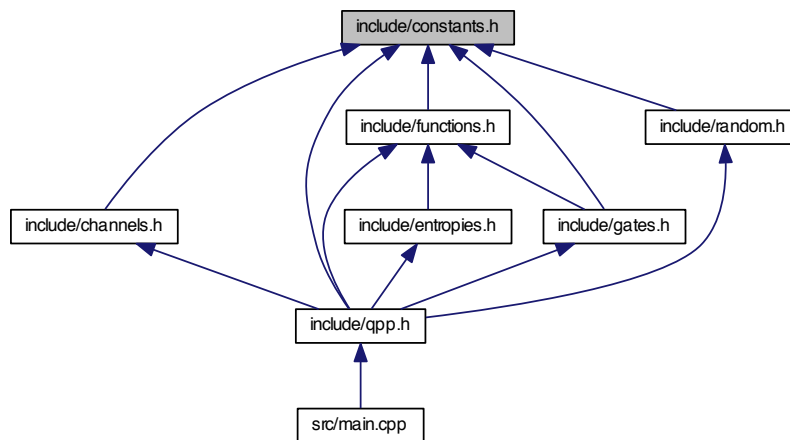

## Namespaces

- [qpp](#)
- [qpp::ct](#)

## Functions

- `std::complex< double > qpp::ct::omega (size_t D)`

## Variables

- `const double qpp::ct::chop = 1e-10`
- `const double qpp::ct::eps = 1e-14`
- `const std::complex< double > qpp::ct::ii = { 0, 1 }`
- `const double qpp::ct::pi = 3.141592653589793238462643383279502884`
- `const double qpp::ct::ee = 2.718281828459045235360287471352662497`


## 7.3 include/entropies.h File Reference

```


#include <cmath>
#include "types.h"
#include "functions.h"
#include "internal.h"
#include "exception.h"

```

Include dependency graph for entropies.h:

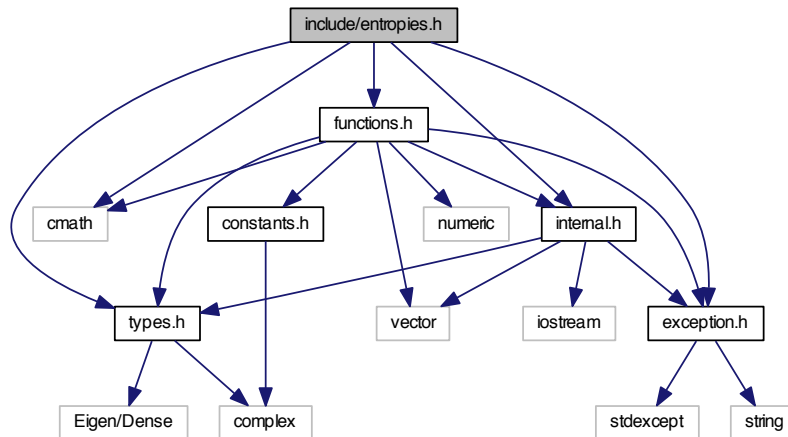

This graph shows which files directly or indirectly include this file:

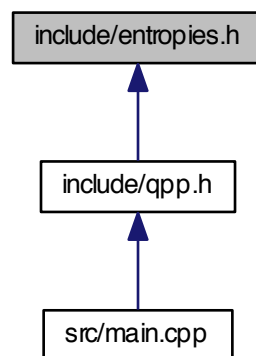

## Namespaces

- [qpp](#)

## Functions


- `template<typename Derived >`  
`double qpp::shannon (const Eigen::MatrixBase< Derived > &A)`
- `template<typename Derived >`  
`double qpp::renyi (const double alpha, const Eigen::MatrixBase< Derived > &A)`
- `template<typename Derived >`  
`double qpp::renyi\_inf (const Eigen::MatrixBase< Derived > &A)`

## 7.4 include/exception.h File Reference


```
#include <stdexcept>
```

```
#include <string>
```

Include dependency graph for exception.h:



This graph shows which files directly or indirectly include this file:

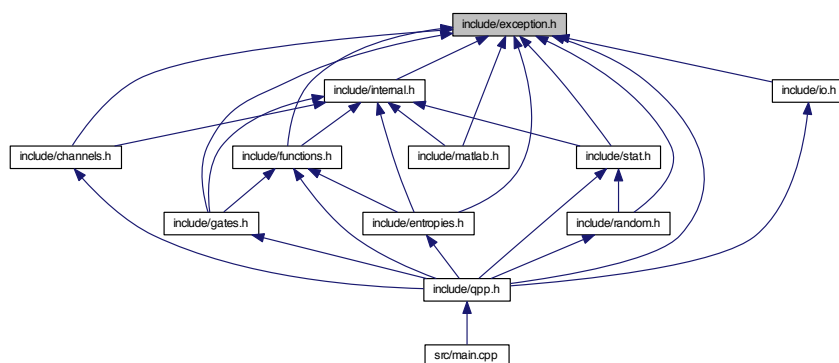

### Classes

- class [qpp::Exception](#)


### Namespaces

- [qpp](#)


## 7.5 include/functions.h File Reference

```
#include <numeric>
```

```
#include <vector>
#include <cmath>
#include "types.h"
#include "internal.h"
#include "exception.h"
#include "constants.h"
Include dependency graph for functions.h:
```

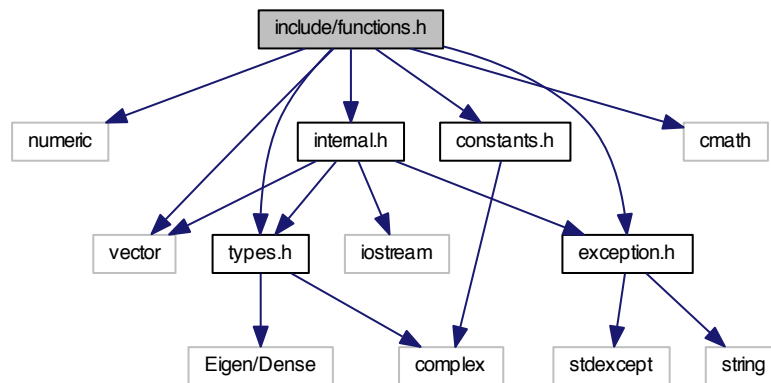

This graph shows which files directly or indirectly include this file:

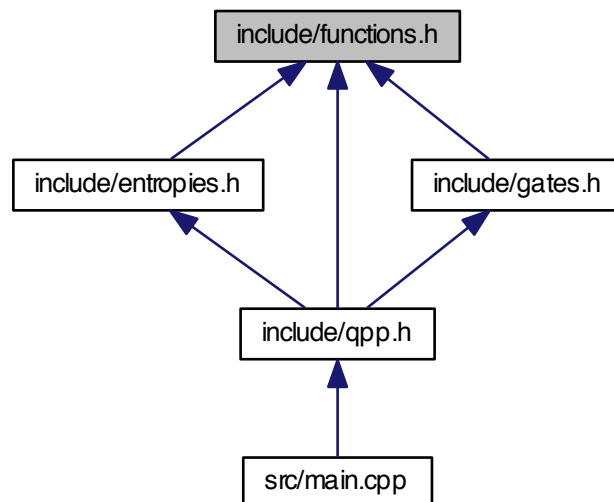

## Namespaces

- [qpp](#)



## Functions


- `template<typename Derived >`  
`types::DynMat< typename`  
`Derived::Scalar > qpp::transpose (const Eigen::MatrixBase< Derived > &A)`
- `template<typename Derived >`  
`types::DynMat< typename`  
`Derived::Scalar > qpp::conjugate (const Eigen::MatrixBase< Derived > &A)`
- `template<typename Derived >`  
`types::DynMat< typename`  
`Derived::Scalar > qpp::adjoint (const Eigen::MatrixBase< Derived > &A)`
- `template<typename Derived >`  
`Derived::Scalar qpp::trace (const Eigen::MatrixBase< Derived > &A)`
- `template<typename Derived >`  
`Derived::Scalar qpp::det (const Eigen::MatrixBase< Derived > &A)`
- `template<typename Derived >`  
`Derived::Scalar qpp::sum (const Eigen::MatrixBase< Derived > &A)`
- `template<typename Derived >`  
`double qpp::norm (const Eigen::MatrixBase< Derived > &A)`
- `template<typename Derived >`  
`types::cmat qpp::evals (const Eigen::MatrixBase< Derived > &A)`
- `template<typename Derived >`  
`types::cmat qpp::evecs (const Eigen::MatrixBase< Derived > &A)`
- `template<typename Derived >`  
`types::cmat qpp::hevals (const Eigen::MatrixBase< Derived > &A)`
- `template<typename Derived >`  
`types::cmat qpp::hevecs (const Eigen::MatrixBase< Derived > &A)`
- `template<typename Derived >`  
`types::cmat qpp::funm (const Eigen::MatrixBase< Derived > &A, types::cplx(*f)(const types::cplx &))`
- `template<typename Derived >`  
`types::cmat qpp::sqrtm (const Eigen::MatrixBase< Derived > &A)`
- `template<typename Derived >`  
`types::cmat qpp::absm (const Eigen::MatrixBase< Derived > &A)`
- `template<typename Derived >`  
`types::cmat qpp::expm (const Eigen::MatrixBase< Derived > &A)`
- `template<typename Derived >`  
`types::cmat qpp::logm (const Eigen::MatrixBase< Derived > &A)`
- `template<typename Derived >`  
`types::cmat qpp::sinm (const Eigen::MatrixBase< Derived > &A)`
- `template<typename Derived >`  
`types::cmat qpp::cosm (const Eigen::MatrixBase< Derived > &A)`
- `template<typename Derived >`  
`types::cmat qpp::spectralpwm (const Eigen::MatrixBase< Derived > &A, const types::cplx z)`
- `template<typename Derived >`  
`types::DynMat< typename`  
`Derived::Scalar > qpp::pwm (const Eigen::MatrixBase< Derived > &A, size_t n)`
- `template<typename OutputScalar , typename Derived >`  
`types::DynMat< OutputScalar > qpp::fun (const Eigen::MatrixBase< Derived > &A, OutputScalar(*f)(const`  
`typename Derived::Scalar &))`
- `template<typename Derived1 , typename Derived2 >`  
`types::DynMat< typename`  
`Derived1::Scalar > qpp::kron (const Eigen::MatrixBase< Derived1 > &A, const Eigen::MatrixBase< De-`  
`derived2 > &B)`
- `template<typename Derived >`  
`types::DynMat< typename`  
`Derived::Scalar > qpp::kronlist (const std::vector< types::DynMat< typename Derived::Scalar > > &As)`

- `template<typename Derived >`  
`types::DynMat< typename`  
`Derived::Scalar > qpp::kronpow (const Eigen::MatrixBase< Derived > &A, size_t n)`
- `template<typename Derived >`  
`types::DynMat< typename`  
`Derived::Scalar > qpp::reshape (const Eigen::MatrixBase< Derived > &A, size_t rows, size_t cols)`
- `template<typename Derived >`  
`types::DynMat< typename`  
`Derived::Scalar > qpp::syspermute (const Eigen::MatrixBase< Derived > &A, const std::vector< size_t >`  
`perm, const std::vector< size_t > &dims)`
- `template<typename Derived >`  
`types::DynMat< typename`  
`Derived::Scalar > qpp::ptrace2 (const Eigen::MatrixBase< Derived > &A, const std::vector< size_t > dims)`
- `template<typename Derived >`  
`types::DynMat< typename`  
`Derived::Scalar > qpp::ptrace (const Eigen::MatrixBase< Derived > &A, const std::vector< size_t > &sub-`  
`sys, const std::vector< size_t > &dims)`
- `template<typename Derived >`  
`types::DynMat< typename`  
`Derived::Scalar > qpp::ptranspose (const Eigen::MatrixBase< Derived > &A, const std::vector< size_t >`  
`&subsys, const std::vector< size_t > &dims)`
- `template<typename Derived1 , typename Derived2 >`  
`types::DynMat< typename`  
`Derived1::Scalar > qpp::comm (const Eigen::MatrixBase< Derived1 > &A, const Eigen::MatrixBase< De-`  
`derived2 > &B)`
- `template<typename Derived1 , typename Derived2 >`  
`types::DynMat< typename`  
`Derived1::Scalar > qpp::anticomm (const Eigen::MatrixBase< Derived1 > &A, const Eigen::MatrixBase<`  
`Derived2 > &B)`
- `template<typename Derived >`  
`types::DynMat< typename`  
`Derived::Scalar > qpp::proj (const Eigen::MatrixBase< Derived > &V)`
- `template<typename Derived >`  
`types::DynMat< typename`  
`Derived::Scalar > qpp::expandout (const Eigen::MatrixBase< Derived > &A, size_t pos, const std::vector<`  
`size_t > &dims)`
- `template<typename Derived >`  
`types::DynMat< typename`  
`Derived::Scalar > qpp::grams (const std::vector< types::DynMat< typename Derived::Scalar > > &Vs)`
- `template<typename Derived >`  
`types::DynMat< typename`  
`Derived::Scalar > qpp::grams (const Eigen::MatrixBase< Derived > &A)`


## 7.6 include/gates.h File Reference

```
#include "types.h"
#include "constants.h"
#include "functions.h"
#include "internal.h"
#include "exception.h"
```

Include dependency graph for gates.h:

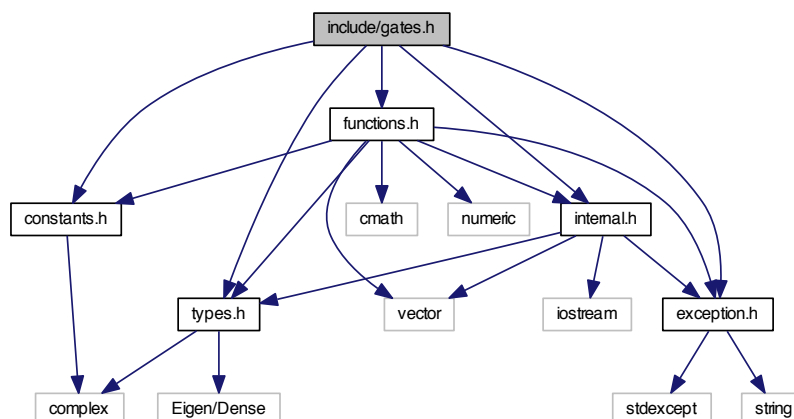

This graph shows which files directly or indirectly include this file:

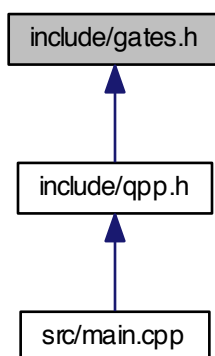

## Classes

- class `qpp::Gates`


## Namespaces

- `qpp`


## 7.7 include/internal.h File Reference

```
#include <vector>
```

```
#include <iostream>
#include "types.h"
#include "exception.h"
Include dependency graph for internal.h:
```

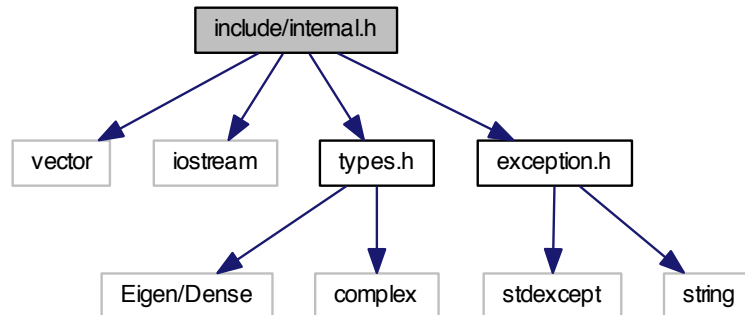

This graph shows which files directly or indirectly include this file:

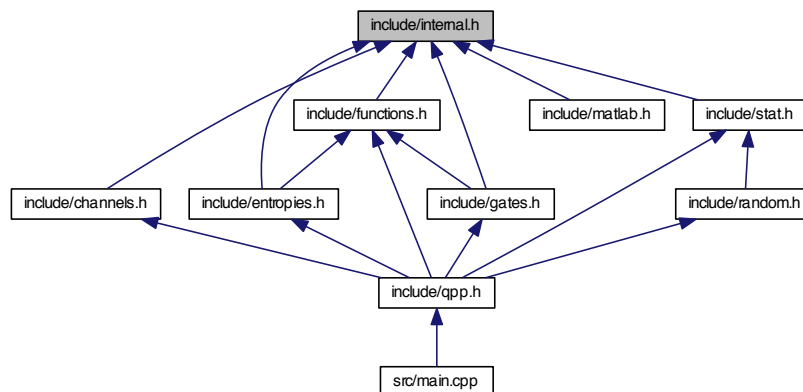

## Namespaces

- `qpp`
- `qpp::internal`


## Functions

- void `qpp::internal::_n2multiidx` (size\_t n, size\_t numdims, const size\_t \*dims, size\_t \*result)
- size\_t `qpp::internal::_multiidx2n` (const size\_t \*midx, size\_t numdims, const size\_t \*dims)
- template<typename Derived >  
bool `qpp::internal::_check_square_mat` (const Eigen::MatrixBase< Derived > &A)
- template<typename Derived >  
bool `qpp::internal::_check_vector` (const Eigen::MatrixBase< Derived > &A)


- template<typename Derived >  
bool [qpp::internal::\\_check\\_row\\_vector](#) (const Eigen::MatrixBase< Derived > &A)
- template<typename Derived >  
bool [qpp::internal::\\_check\\_col\\_vector](#) (const Eigen::MatrixBase< Derived > &A)
- template<typename T >  
bool [qpp::internal::\\_check\\_nonzero\\_size](#) (const T &x)
- bool [qpp::internal::\\_check\\_dims](#) (const std::vector< size\_t > &dims)
- template<typename Derived >  
bool [qpp::internal::\\_check\\_dims\\_match\\_mat](#) (const std::vector< size\_t > &dims, const Eigen::MatrixBase< Derived > &A)
- bool [qpp::internal::\\_check\\_eq\\_dims](#) (const std::vector< size\_t > &dims, size\_t dim)
- bool [qpp::internal::\\_check\\_subsys](#) (const std::vector< size\_t > &subsys, const std::vector< size\_t > &dims)
- bool [qpp::internal::\\_check\\_perm](#) (const std::vector< size\_t > &perm, const std::vector< size\_t > &dims)
- template<typename Scalar >  
void [qpp::internal::\\_syspermute\\_worker](#) (const size\_t \*midxcol, size\_t numdims, const size\_t \*cdims, const size\_t \*cperm, size\_t i, size\_t j, size\_t &iperm, size\_t &jperm, const types::DynMat< Scalar > &A, types::DynMat< Scalar > &result)
- template<typename Scalar >  
void [qpp::internal::\\_ptranspose\\_worker](#) (const size\_t \*midxcol, size\_t numdims, size\_t numsubsys, const size\_t \*cdims, const size\_t \*csubsys, size\_t i, size\_t j, size\_t &iperm, size\_t &jperm, const types::DynMat< Scalar > &A, types::DynMat< Scalar > &result)

## 7.8 include/io.h File Reference

```
#include <stdexcept>
#include <vector>
#include <iostream>
#include <iomanip>
#include <fstream>
#include "types.h"
#include "exception.h"
Include dependency graph for io.h:
```

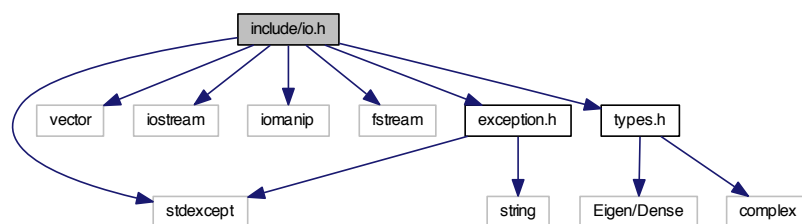

This graph shows which files directly or indirectly include this file:

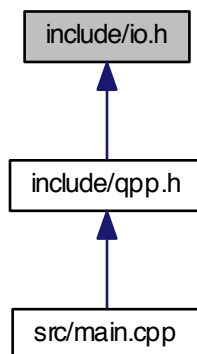

## Namespaces

- [qpp](#)

## Functions


- `template<typename T >`  
`void qpp::dispSTL (const T &x, const std::string &separator=" ", const std::string &start="[" , const std::string &end="]", std::ostream &os=std::cout)`
- `template<typename T >`  
`void qpp::displnSTL (const T &x, const std::string &separator=" ", const std::string &start="[" , const std::string &end="]", std::ostream &os=std::cout)`
- `template<typename T >`  
`void qpp::dispSTL (const T *x, const size_t n, const std::string &separator=" ", const std::string &start="[" , const std::string &end="]", std::ostream &os=std::cout)`
- `template<typename T >`  
`void qpp::displnSTL (const T *x, const size_t n, const std::string &separator=" ", const std::string &start="[" , const std::string &end="]", std::ostream &os=std::cout)`
- `template<typename Derived >`  
`void qpp::disp (const Eigen::MatrixBase< Derived > &A, double chop=ct::chop, std::ostream &os=std::cout)`
- `template<typename Derived >`  
`void qpp::displn (const Eigen::MatrixBase< Derived > &A, double chop=ct::chop, std::ostream &os=std::cout)`
- `void qpp::disp (const types::cplx c, double chop=ct::chop, std::ostream &os=std::cout)`
- `void qpp::displn (const types::cplx c, double chop=ct::chop, std::ostream &os=std::cout)`
- `template<typename Derived >`  
`void qpp::save (const Eigen::MatrixBase< Derived > &A, const std::string &fname)`
- `template<typename Derived >`  
`types::DynMat< typename`  
`Derived::Scalar > qpp::load (const std::string &fname)`

## 7.9 include/matlab.h File Reference

```
#include <Eigen/Dense>
```

```
#include <string>
#include <stdexcept>
#include "types.h"
#include "internal.h"
#include "exception.h"
#include "mat.h"
#include "mex.h"
```

Include dependency graph for matlab.h:

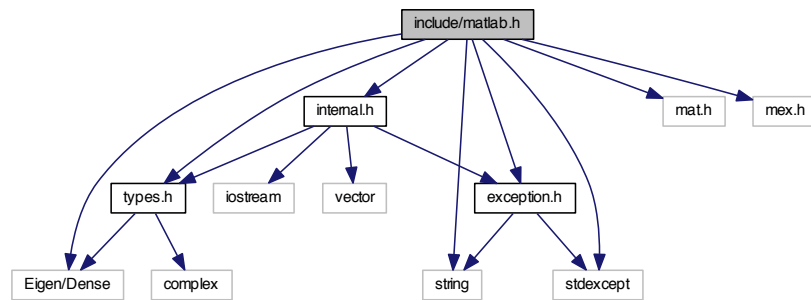

## Namespaces

- [qpp](#)

## Functions

- `template<typename Derived >`  
`Derived qpp::loadMATLABmatrix (const std::string &mat_file, const std::string &var_name)`
- `template<>`  
`types::dmat qpp::loadMATLABmatrix (const std::string &mat_file, const std::string &var_name)`
- `template<>`  
`types::cmat qpp::loadMATLABmatrix (const std::string &mat_file, const std::string &var_name)`
- `template<typename Derived >`  
`void qpp::saveMATLABmatrix (const Eigen::MatrixBase< Derived > &A, const std::string &mat_file, const std::string &var_name, const std::string &mode)`
- `template<>`  
`void qpp::saveMATLABmatrix (const Eigen::MatrixBase< typename types::dmat > &A, const std::string &mat_file, const std::string &var_name, const std::string &mode)`
- `template<>`  
`void qpp::saveMATLABmatrix (const Eigen::MatrixBase< typename types::cmat > &A, const std::string &mat_file, const std::string &var_name, const std::string &mode)`


## 7.10 include/qpp.h File Reference

```
#include "types.h"
```






Include dependency graph for randevs.h:

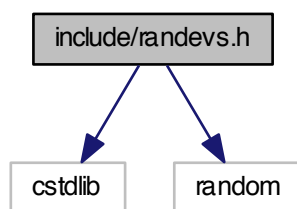

This graph shows which files directly or indirectly include this file:

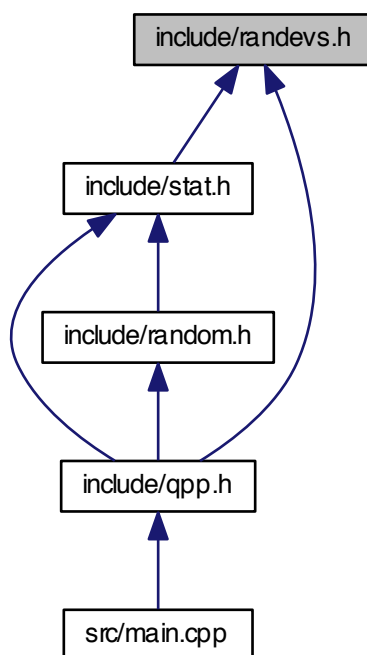

## Classes


- class [qpp::RandomDevices](#)

## Namespaces


- [qpp](#)

## 7.12 include/random.h File Reference

```
#include "types.h"
#include "stat.h"
#include "constants.h"
#include "exception.h"
Include dependency graph for random.h:
```

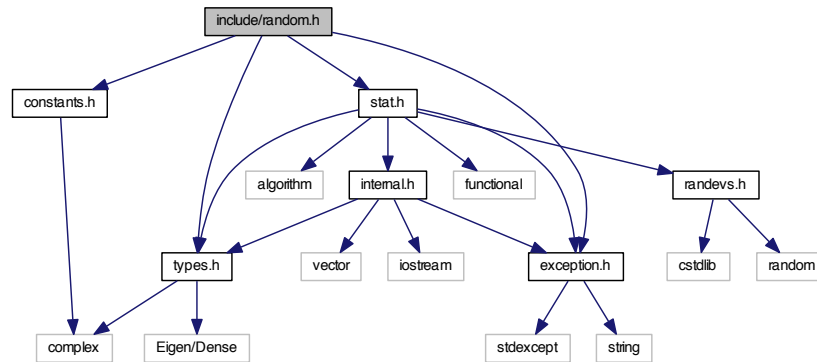

This graph shows which files directly or indirectly include this file:

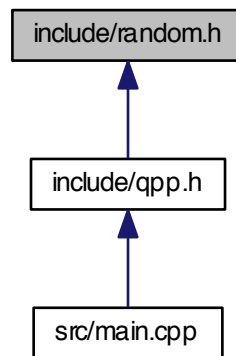

### Namespaces

- [qpp](#)


### Functions

- `template<typename Derived >`  
Derived [qpp::rand](#) (size\_t rows, size\_t cols, double a=0, double b=1)
- `template<>`  
`types::dmat` [qpp::rand](#) (size\_t rows, size\_t cols, double a, double b)


- `template<>`  
`types::cmat qpp::rand (size_t rows, size_t cols, double a, double b)`
- `double qpp::rand (double a=0, double b=1)`
- `template<typename Derived >`  
`Derived qpp::randn (size_t rows, size_t cols, double mean=0, double sigma=1)`
- `template<>`  
`types::dmat qpp::randn (size_t rows, size_t cols, double mean, double sigma)`
- `template<>`  
`types::cmat qpp::randn (size_t rows, size_t cols, double mean, double sigma)`
- `double qpp::randn (double mean=0, double sigma=1)`
- `types::cmat qpp::randU (size_t D)`
- `types::cmat qpp::randV (size_t Din, size_t Dout)`
- `std::vector< types::cmat > qpp::randKraus (size_t n, size_t D)`
- `types::cmat qpp::randH (size_t D)`
- `types::ket qpp::randket (size_t D)`
- `types::cmat qpp::randrho (size_t D)`

## 7.13 include/stat.h File Reference

```
#include <algorithm>
#include <functional>
#include "types.h"
#include "internal.h"
#include "exception.h"
#include "randevs.h"
Include dependency graph for stat.h:
```

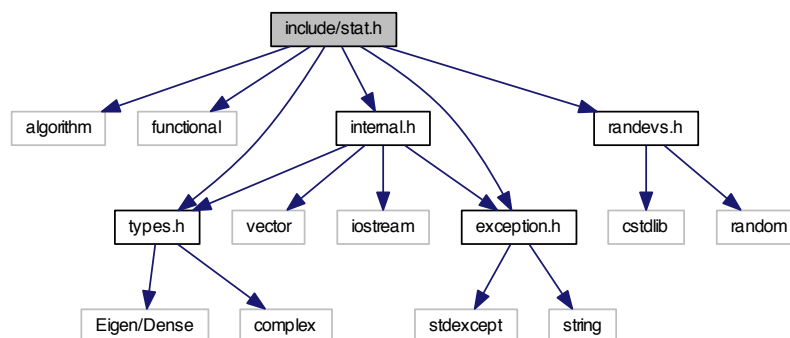

This graph shows which files directly or indirectly include this file:

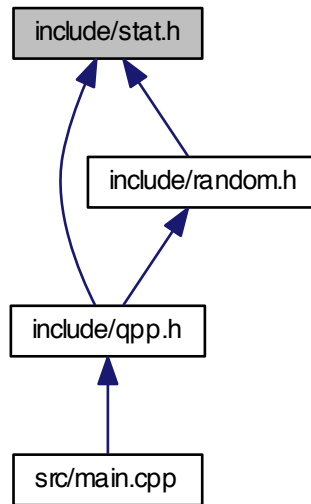

## Classes

- class [qpp::stat::NormalDistribution](#)
- class [qpp::stat::UniformRealDistribution](#)
- class [qpp::stat::DiscreteDistribution](#)
- class [qpp::stat::DiscreteDistributionFromComplex](#)


## Namespaces

- [qpp](#)
- [qpp::stat](#)


## 7.14 include/timer.h File Reference

```
#include <ostream>
#include <chrono>
```

Include dependency graph for timer.h:

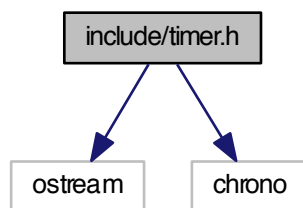

This graph shows which files directly or indirectly include this file:

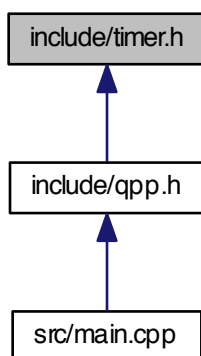

## Classes

- class [qpp::Timer](#)


## Namespaces

- [qpp](#)


## 7.15 include/types.h File Reference

```
#include <Eigen/Dense>
#include <complex>
```

Include dependency graph for types.h:

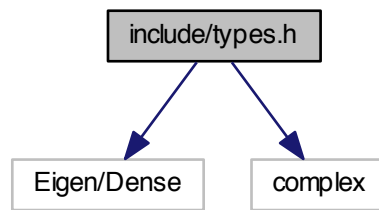

This graph shows which files directly or indirectly include this file:

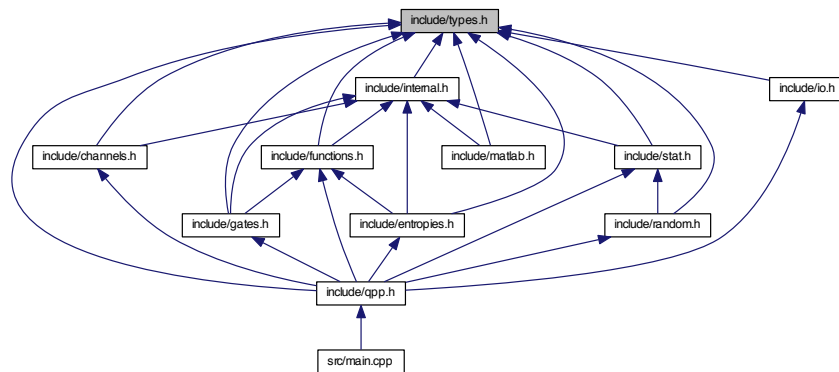

## Namespaces


- [qpp](#)
- [qpp::types](#)

## Typedefs

- `typedef std::complex< double > qpp::types::cplx`
- `typedef Eigen::MatrixXcd qpp::types::cmat`
- `typedef Eigen::MatrixXd qpp::types::dmat`
- `typedef Eigen::MatrixXf qpp::types::fmat`
- `typedef Eigen::MatrixXi qpp::types::imat`
- `typedef Eigen::Matrix< cplx,  
Eigen::Dynamic, 1 > qpp::types::ket`
- `typedef Eigen::Matrix< cplx,  
1, Eigen::Dynamic > qpp::types::bra`
- `template<typename Scalar >  
using qpp::types::DynMat = Eigen::Matrix< Scalar, Eigen::Dynamic, Eigen::Dynamic >`

```
#include "qpp.h"
```

Include dependency graph for main.cpp:

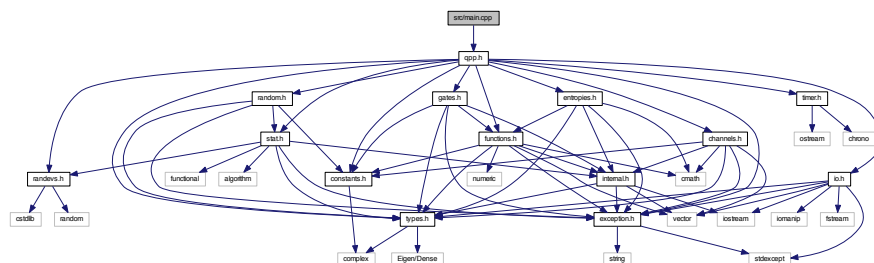

- `int main ()`

### 7.16.1.1 int main ( )