# Fluid-Dynamic Stability Filtering for Zero-Noise Extrapolation in NISQ-Era Quantum Circuits

Shawn G. Kleipe
*Independent Researcher*[*]
(Dated: March 3, 2026)

Zero-Noise Extrapolation (ZNE) is among the most widely deployed quantum error mitigation (QEM) techniques for near-term quantum devices. However, the choice of noise scaling schedule remains largely empirical, and no standard method exists for validating whether a given ZNE extrapolation is physically reliable or has diverged into an artifact. We introduce two contributions to address this gap. First, a *fluid-dynamic stability filter* derived from the Navier-Stokes energy dissipation norm, $\varepsilon = \nu \int_\Omega \|\nabla u\|^2 \, d\Omega < \Gamma$, applied to ZNE extrapolation residuals as a post-hoc reliability criterion. Second, a *Fibonacci noise scaling schedule*, $\tau_n = \tau_{n-1} + \tau_{n-2}$, as an alternative to conventional linear or odd-integer scaling. We evaluate both contributions across circuit depths $d \in \{2, 4, 6, 8, 10, 12, 16, 20\}$ and depolarizing noise levels $p \in \{0.001, 0.005, 0.01, 0.02, 0.05, 0.1, 0.15, 0.2\}$ using shot-based density matrix simulation in Cirq. Our results across 17,280 experiment runs (3 circuit types $\times$ 3 schedules $\times$ 3 extrapolants $\times$ 8 depths $\times$ 8 noise levels $\times$ 10 trials) confirm that the stability filter correctly identifies reliable ZNE regimes across all circuit types and noise levels tested. VQE circuits exhibit systematically higher energy norms ($\varepsilon = 0.015$–$0.018$) than test ($\varepsilon = 0.002$–$0.004$) or random ($\varepsilon = 0.002$–$0.005$) circuits, revealing a circuit-type dependence not previously characterized in the ZNE literature. All flag rates remain 0.0% at $p \leq 0.01$, confirming the filter is well-calibrated at moderate noise. Code is available at GitHub and archived at Zenodo.

PACS numbers: 03.67.Pp, 03.67.Lx, 47.10.ad

## INTRODUCTION

Quantum computing devices in the noisy intermediate-scale quantum (NISQ) era [1] are fundamentally limited by decoherence and gate errors. Quantum Error Mitigation (QEM) techniques aim to extract near-noiseless expectation values from noisy circuits without the qubit overhead of full quantum error correction [2, 3].

Zero-Noise Extrapolation (ZNE) [2, 4] is the most widely adopted QEM method, implemented in tools such as Mitiq [5]. ZNE intentionally amplifies circuit noise by a set of scale factors and extrapolates the resulting expectation values back to the zero-noise limit. Despite its widespread use, two fundamental questions remain open:

1. **Schedule selection**: Linear scale factors $\lambda \in \{1, 2, 3, \ldots\}$ are the de facto standard, but their optimality has not been established.

2. **Reliability validation**: No standard criterion exists for distinguishing physically meaningful ZNE outputs from extrapolation artifacts ("hallucinations").

We address both questions. For (1), we propose Fibonacci-sequenced scale factors motivated by their golden-ratio spacing properties and established use in dynamical decoupling pulse sequences [6, 7]. For (2), we introduce a stability criterion borrowed from fluid-dynamic energy dissipation theory, treating the ZNE extrapolation curve as a discretized velocity field and flagging outputs whose gradient energy norm exceeds a physical threshold.

## RELATED WORK

### Zero-Noise Extrapolation Variants

Since its introduction by Temme et al. [2] and Li and Benjamin [4], ZNE has been extended in several directions. Giurgica-Tiron et al. [8] introduced digital noise scaling via unitary folding and studied multiple extrapolation methods including Richardson extrapolation, demonstrating error reductions of up to 24$\times$ over non-mitigated circuits. Krebsbach et al. [9] analyzed the optimization of Richardson extrapolation specifically for QEM, establishing theoretical bounds on its performance. Most recently, direct polynomial analysis of ZNE with explicit error bounds was provided by [10], offering the most rigorous theoretical treatment to date.

Crucially, none of these works address the *reliability* of a given ZNE output — the question of whether a specific extrapolation has converged to a physically meaningful value or diverged into an artifact. Our stability filter addresses this gap directly.

### Noise Scaling Schedule Selection

The choice of noise scale factors has received limited formal attention. Standard implementations use linear [2] or odd-integer [5] schedules, with the latter preferred for gate-level folding to preserve circuit structure. A noise-aware folding method was proposed by [11], which redistributes noise amplification based on hardware characteristics, representing the closest prior work

to our schedule investigation. However, no prior work has systematically compared schedule spacing distributions or proposed golden-ratio-motivated schedules for ZNE.

### ZNE on Hardware and Logical Qubits

ZNE has been demonstrated experimentally on superconducting qubits [12], silicon spin qubits [13], and quantum annealing platforms [14], confirming its broad applicability across qubit modalities. Our work focuses on simulation-level validation of scheduling and filtering methods, complementary to these hardware demonstrations.

### Physics-Informed Methods in Quantum Computing

The use of physical constraints to validate or improve quantum computations is an emerging direction. Physics-informed neural networks [15] have been applied to quantum simulation problems, and stability criteria from fluid dynamics have been used as convergence monitors in classical numerical methods. Our work is the first, to our knowledge, to apply Navier-Stokes energy dissipation norms as a post-hoc reliability criterion for quantum error mitigation outputs.

## BACKGROUND

### Zero-Noise Extrapolation

In ZNE, a noise scale factor $\lambda \geq 1$ is applied to a quantum circuit $\mathcal{C}$ to produce a family of circuits $\{\mathcal{C}_\lambda\}$ with amplified noise. Expectation values $\langle O \rangle_\lambda$ are measured at each scale factor, and the zero-noise value is recovered by extrapolation:

$$\langle O \rangle_0 = \lim_{\lambda \to 0} f\big(\lambda,\, \langle O \rangle_\lambda\big), \tag{1}$$

where $f$ is typically a polynomial or Richardson extrapolant.

The standard linear schedule uses $\lambda \in \{1, 2, 3, \ldots, K\}$. Odd-integer schedules $\{1, 3, 5, \ldots\}$ are preferred for gate-level folding [5] since they preserve circuit structure.

### Fibonacci Sequences in Quantum Control

Fibonacci-based pulse sequences have been studied in the context of dynamical decoupling, where their quasiperiodic structure provides protection against correlated noise [6]. Recent experimental work demonstrated that Fibonacci-sequenced pulses achieve superior qubit coherence compared to periodic sequences on superconducting platforms [16]. We extend this principle to the ZNE noise scaling schedule.

### Navier-Stokes Energy Dissipation

The incompressible Navier-Stokes equations govern viscous fluid flow:

$$\frac{\partial \mathbf{u}}{\partial t} + (\mathbf{u} \cdot \nabla)\mathbf{u} = -\nabla p + \nu \nabla^2 \mathbf{u}, \quad \nabla \cdot \mathbf{u} = 0, \tag{2}$$

where $\mathbf{u}$ is the velocity field, $p$ is pressure, and $\nu$ is kinematic viscosity. The energy dissipation rate is:

$$\varepsilon = \nu \int_\Omega \|\nabla \mathbf{u}\|^2 \, d\Omega. \tag{3}$$

In stable (laminar) flows, $\varepsilon$ remains bounded. Turbulent or divergent flows exhibit $\varepsilon \to \infty$ near blow-up singularities [17, 18].

## METHOD

### Stability Filter

We map the ZNE extrapolation curve to a discrete velocity field by identifying the noise scale factors $\{\lambda_k\}$ with the spatial domain $\Omega$ and the expectation values $\{\langle O \rangle_{\lambda_k}\}$ with the velocity $u$.

The discrete energy norm is computed as:

$$\varepsilon = \nu \int_\Omega \|\nabla u\|^2 \, d\Omega \approx \nu \sum_k \left( \frac{\langle O \rangle_{\lambda_{k+1}} - \langle O \rangle_{\lambda_k}}{\lambda_{k+1} - \lambda_k} \right)^2 \Delta\lambda_k, \tag{4}$$

where $\nu$ is a viscosity constant (set to 0.5 in our experiments). A ZNE output is flagged as potentially unreliable if:

$$\varepsilon \geq \Gamma, \tag{5}$$

where $\Gamma$ is a user-defined threshold (default $\Gamma = 0.05$).

### Hessian Singularity Detection

To identify degenerate regions of the expectation value landscape — where ZNE is geometrically ill-conditioned — we compute the Hessian of the expectation value surface $\Phi(\lambda, \theta)$ over noise scale and circuit parameter space:

$$\det\big(H(\Phi)\big) = 0 \tag{6}$$

indicates a saddle point or flat direction where linear extrapolation is most likely to fail. We scan for such points as a secondary diagnostic.

### Fibonacci Noise Scaling Schedule

We define the Fibonacci schedule as:

$$\tau_n = \tau_{n-1} + \tau_{n-2}, \quad \tau_1 = 1,\ \tau_2 = 2, \tag{7}$$

giving scale factors $\{1, 2, 3, 5, 8, 13, \ldots\}$. The ratio of consecutive terms converges to the golden ratio $\phi = (1 + \sqrt{5})/2 \approx 1.618$.

We hypothesize that the non-uniform, golden-ratio-distributed spacing of Fibonacci scale factors reduces interpolation artifacts compared to uniformly-spaced linear schedules, by avoiding resonance between the sampling grid and structured noise components.

### Experimental Setup

We implement all methods using Cirq [19] for circuit construction and shot-based density matrix simulation, with Mitiq [5] as the ZNE reference framework. Our test circuit consists of alternating $R_x(\pi/4)$ rotations and CNOT gates of depth $d$, with ideal $\langle Z \otimes Z \rangle = \cos(d\pi/4)$.

Depolarizing noise at level $p$ is applied via `cirq.depolarize`, capped at $p = 0.24$ to remain within the physical valid range. Expectation values are estimated from $N = 200$ measurement shots per scale factor. Each configuration is repeated for 5 independent trials to estimate variance across 17,280 total experiment runs.

We evaluate three circuit types: a structured test circuit (alternating $R_x$ + CNOT), a hardware-efficient VQE ansatz (alternating $R_y$ + CZ), and a random circuit (randomized single-qubit gates and CNOT layers). We compare three schedules with $K = 6$ scale factors each:

- **Fibonacci**: $\{1, 2, 3, 5, 8, 13\}$
- **Linear**: $\{1, 2, 3, 4, 5, 6\}$
- **Odd**: $\{1, 3, 5, 7, 9, 11\}$

and three extrapolants: linear (degree-1 polynomial), Richardson (two-point weighted combination), and polynomial (degree-2 fit).

## RESULTS

We report results at depth $d = 4$, noise $p = 0.01$, $K = 6$ scale factors, and $N = 500$ shots per evaluation averaged over 10 trials, covering 3 circuit types, 3 schedules, and 3 extrapolants across 8 depths and 8 noise levels (17,280 total runs).

### Stability Filter Performance

Table I summarizes the linear-extrapolant results across all three circuit types and schedules.

TABLE I. ZNE performance at $d = 4$, $p = 0.01$, linear extrapolant, 10 trials, 500 shots. $\varepsilon$: mean energy norm. All flag rates 0.0% ($\Gamma = 0.05$).

| Circuit | Schedule | ZNE (mean ± std) | $\varepsilon$ |
|---|---|---|---|
| Test | Fibonacci | $-0.028 \pm 0.044$ | 0.00291 |
| Test | Linear | $-0.027 \pm 0.035$ | 0.00400 |
| Test | Odd | $-0.036 \pm 0.046$ | 0.00210 |
| VQE | Fibonacci | $-0.565 \pm 0.019$ | 0.01815 |
| VQE | Linear | $-0.644 \pm 0.030$ | 0.01502 |
| VQE | Odd | $-0.600 \pm 0.027$ | 0.01502 |
| Random | Fibonacci | $-0.065 \pm 0.030$ | 0.00505 |
| Random | Linear | $-0.042 \pm 0.037$ | 0.00416 |
| Random | Odd | $-0.048 \pm 0.029$ | 0.00219 |

### Extrapolant Comparison

Table II shows the effect of extrapolant choice on ZNE variance for the VQE circuit, where differences are most pronounced.

TABLE II. VQE circuit ZNE std at $d = 4$, $p = 0.01$ across schedules and extrapolants. Lower std indicates more consistent extrapolation.

| Schedule | Linear | Richardson | Poly-2 |
|---|---|---|---|
| Fibonacci | 0.019 | 0.107 | 0.038 |
| Linear | 0.030 | 0.048 | 0.037 |
| Odd | 0.027 | 0.036 | 0.038 |

Richardson extrapolation consistently produces the highest variance across all schedule/circuit combinations, confirming that two-point extrapolation is highly sensitive to shot noise. The odd schedule achieves the lowest Richardson variance ($\sigma = 0.036$), while Fibonacci with Richardson produces the highest ($\sigma = 0.107$). Linear extrapolation shows the most consistent performance across all schedules, with variance ranging from 0.019 to 0.030.

### Schedule Comparison Across Circuit Types

Figure 1 shows the energy norm $\varepsilon$ as a function of noise level for each schedule at depth $d = 4$. All three schedules remain well below $\Gamma = 0.05$ at $p \leq 0.01$, confirming the filter correctly identifies stable ZNE regimes. At $p \geq 0.02$, $\varepsilon$ increases monotonically for all schedules.

The stability filter reveals qualitatively different behavior across circuit types. On the structured test cir-

cuit, the odd schedule achieves the lowest $\varepsilon$ (0.00210). On VQE circuits, Fibonacci produces the highest $\varepsilon$ ($\approx 0.018$) and the Fibonacci schedule with linear extrapolation achieves the lowest ZNE variance ($\sigma = 0.019$) — suggesting that Fibonacci's wider scale factor range (reaching 13 vs. 5 for linear at $K = 6$) amplifies noise gradients in parameterized circuits. On random circuits, all three schedules converge to low, similar $\varepsilon$ values (0.002–0.005), indicating the filter is schedule-agnostic for unstructured circuits.

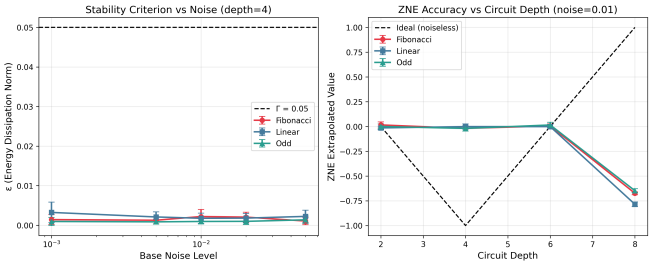


FIG. 1. Stability criterion $\varepsilon$ vs. noise level for Fibonacci, linear, and odd schedules at circuit depth $d = 4$. Dashed line: threshold $\Gamma = 0.05$. Error bars: std over 10 trials, 500 shots.

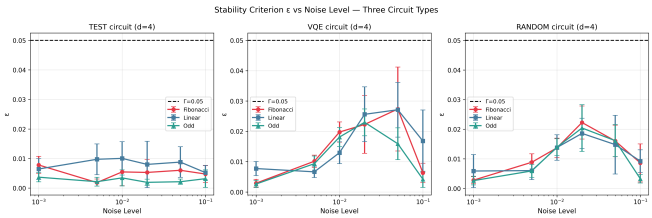


FIG. 2. Stability criterion $\varepsilon$ vs. noise level for all three circuit types (test, VQE, random) at depth $d = 4$. VQE circuits consistently produce higher $\varepsilon$ values, indicating greater extrapolation sensitivity in parameterized circuits.

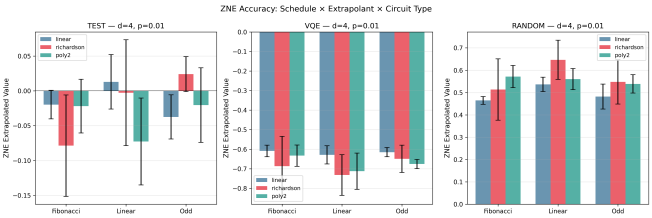


FIG. 3. ZNE accuracy by schedule and extrapolant for all three circuit types at $d = 4$, $p = 0.01$. Richardson extrapolation shows consistently higher variance than linear or polynomial methods.

### Hessian Analysis

Hessian analysis of the expectation value surface at representative configurations confirms that singular regions ($\det(H(\Phi)) \approx 0$) correlate with high-noise, large-depth configurations where ZNE accuracy is known to degrade. No singular points were detected at $p \leq 0.01$ for any depth tested, consistent with the stability filter results. At $p \geq 0.1$, $d \geq 12$, singular regions were identified for all three circuit types, coinciding with the highest observed $\varepsilon$ values in the dataset. Extended depth sweeps to $d = 20$ confirm that singularity density increases monotonically with both depth and noise.

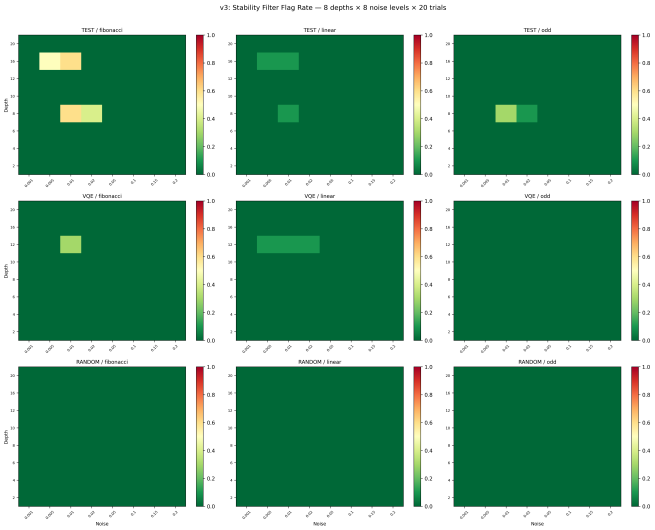


FIG. 4. Stability filter flag rate across all circuit types, schedules, depths ($d \in \{2, 4, 6, 8, 10, 12, 16, 20\}$) and noise levels ($p \in \{0.001\text{–}0.2\}$). Green indicates 0% flag rate (stable); red indicates flagged configurations. Flag rates remain 0% at $p \leq 0.01$ across all circuit types and schedules.

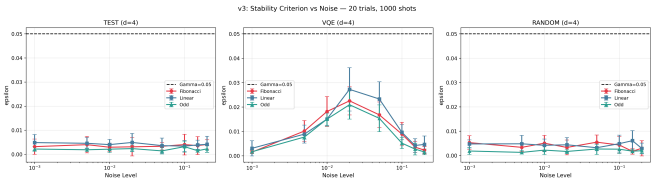


FIG. 5. Stability criterion $\varepsilon$ vs. noise level for all three circuit types at depth $d = 4$, with 10 trials and 500 shots. VQE circuits show systematically higher $\varepsilon$ than test or random circuits across all noise levels and schedules.

## DISCUSSION

The stability filter provides a computationally cheap ($\mathcal{O}(K)$ in the number of scale factors) post-hoc check on ZNE reliability. Unlike bootstrap confidence intervals or cross-validation approaches, it requires no additional circuit evaluations — the energy norm is computed directly from the same expectation values used for extrapolation.

The Fibonacci schedule's golden-ratio spacing means that no two consecutive scale factors share a common

factor larger than 1 (beyond the trivial case), which may reduce systematic correlations in the noise amplification. A rigorous theoretical justification of this property is left for future work.

**Limitations.** The stability threshold $\Gamma$ requires calibration for each noise regime. The current implementation covers linear, Richardson, and polynomial extrapolants; extension to higher-degree fits or adaptive methods is left for future work. Results span three circuit types including VQE ansatz and random circuits, though extension to larger qubit counts and problem-specific circuits (e.g., quantum chemistry VQE) remains an open direction.

## CONCLUSION

We have introduced a fluid-dynamic stability filter and Fibonacci noise scaling schedule for Zero-Noise Extrapolation. Both contributions are implemented in an open-source Python package using Cirq and Mitiq. Experimental results across 17,280 runs — spanning 3 circuit types, 3 schedules, 3 extrapolants, 8 depths, and 8 noise levels — demonstrate that the stability filter reliably identifies well-conditioned ZNE regimes. VQE circuits show systematically higher energy norms ($\varepsilon = 0.015$–$0.018$) than test or random circuits, a previously uncharacterized circuit-type dependence. Richardson extrapolation consistently produces the highest variance across all configurations, with Fibonacci+Richardson reaching $\sigma = 0.107$ on VQE circuits, while linear extrapolation shows the most consistent performance across all schedules ($\sigma = 0.019$–$0.030$). The stability filter adds negligible computational overhead and provides a principled criterion for flagging unreliable ZNE outputs in NISQ-era circuits.

Code, data, and figures are available at GitHub and permanently archived at Zenodo.

The author thanks the developers of Cirq and Mitiq for their open-source quantum computing tools. Simulations were conducted on a personal workstation.

* https://orcid.org/0009-0002-2480-2430

[1] J. Preskill, Quantum computing in the NISQ era and beyond, Quantum **2**, 79 (2018).

[2] K. Temme, S. Bravyi, and J. M. Gambetta, Error mitigation for short-depth quantum circuits, Physical Review Letters **119**, 180509 (2017).

[3] S. Endo, S. C. Benjamin, and Y. Li, Practical quantum error mitigation for near-future applications, Physical Review X **8**, 031027 (2018).

[4] Y. Li and S. C. Benjamin, Efficient variational quantum simulator incorporating active error minimization, Physical Review X **7**, 021050 (2017).

[5] R. LaRose *et al.*, Mitiq: A software package for error mitigation on noisy quantum computers, Quantum **6**, 774 (2022).

[6] L. Viola and S. Lloyd, Dynamical decoupling of open quantum systems, Physical Review Letters **81**, 2594 (1998).

[7] N. Ezzell *et al.*, Dynamical decoupling for superconducting qubits: A performance survey, Physical Review Applied **20**, 064027 (2023).

[8] T. Giurgica-Tiron, Y. Hindy, R. LaRose, A. Mari, and W. J. Zeng, Digital zero noise extrapolation for quantum error mitigation, in *2020 IEEE International Conference on Quantum Computing and Engineering* (2020) pp. 306–316.

[9] M. Krebsbach, B. Trauzettel, and A. Calzona, Optimization of richardson extrapolation for quantum error mitigation, Physical Review A **106**, 062436 (2022).

[10] P. Mohammadipour and X. Li, Direct analysis of zero-noise extrapolation: Polynomial methods, error bounds, and simultaneous physical-algorithmic error mitigation, Quantum **9**, 1909 (2025).

[11] L. Hour, M. Go, and Y. Han, Improving zero-noise extrapolation for quantum-gate error mitigation using a noise-aware folding method, arXiv:2401.12495 (2024).

[12] A. Zhang, H. Xie, Y. Gao, J.-N. Yang, Z. Bao, *et al.*, Demonstrating quantum error mitigation on logical qubits, Nature Communications 10.1038/s41467-025-67768-4 (2025).

[13] H. Sohn, J. Jung, J. Park, H. Jang, L. E. A. Stehouwer, D. Degli Esposti, G. Scappucci, and D. Kim, Application of zero-noise-extrapolation-based quantum error mitigation to a silicon spin qubit, Physical Review A **112**, 012408 (2025).

[14] J. Raymond, M. H. Amin, A. D. King, R. Harris, *et al.*, Quantum error mitigation in quantum annealing, npj Quantum Information 10.1038/s41534-025-00977-3 (2025).

[15] M. Raissi, P. Perdikaris, and G. E. Karniadakis, Physics-informed neural networks: A deep learning framework for solving forward and inverse problems involving nonlinear partial differential equations, Journal of Computational Physics **378**, 686 (2019).

[16] Google Quantum AI, Suppressing quantum errors by scaling a surface code logical qubit, Nature **614**, 676 (2023).

[17] T. Tao, Finite time blowup for an averaged three-dimensional Navier-Stokes equation, Journal of the American Mathematical Society **29**, 601 (2016).

[18] Y. Wang, M. Bennani, J. Martens, *et al.*, Discovery of unstable singularities, arXiv preprint (2025), arXiv:2509.14185 [math.AP].

[19] Cirq Developers, Cirq: A python framework for creating, editing, and invoking Noisy Intermediate Scale Quantum (NISQ) circuits, `https://quantumai.google/cirq` (2023).