

qpp
0.1

Generated by Doxygen 1.8.5

Fri Apr 4 2014 01:47:22

Contents

| | | |
|----------|-----------------------------------|----------|
| 1 | Namespace Index | 1 |
| 1.1 | Namespace List | 1 |
| 2 | Hierarchical Index | 3 |
| 2.1 | Class Hierarchy | 3 |
| 3 | Class Index | 5 |
| 3.1 | Class List | 5 |
| 4 | File Index | 7 |
| 4.1 | File List | 7 |
| 5 | Namespace Documentation | 9 |
| 5.1 | qpp Namespace Reference | 9 |
| 5.1.1 | Function Documentation | 11 |
| 5.1.1.1 | _init | 12 |
| 5.1.1.2 | absm | 12 |
| 5.1.1.3 | adjoint | 12 |
| 5.1.1.4 | anticomm | 13 |
| 5.1.1.5 | comm | 13 |
| 5.1.1.6 | conjugate | 13 |
| 5.1.1.7 | cosm | 14 |
| 5.1.1.8 | disp | 14 |
| 5.1.1.9 | disp | 14 |
| 5.1.1.10 | disp | 14 |
| 5.1.1.11 | displn | 14 |
| 5.1.1.12 | displn | 15 |
| 5.1.1.13 | displn | 15 |
| 5.1.1.14 | dya | 15 |
| 5.1.1.15 | evals | 16 |
| 5.1.1.16 | evects | 16 |
| 5.1.1.17 | expm | 16 |
| 5.1.1.18 | fun | 17 |

| | | |
|----------|------------------|----|
| 5.1.1.19 | funm | 17 |
| 5.1.1.20 | hevals | 18 |
| 5.1.1.21 | hevects | 18 |
| 5.1.1.22 | kron | 18 |
| 5.1.1.23 | kronlist | 19 |
| 5.1.1.24 | kronpow | 19 |
| 5.1.1.25 | load | 19 |
| 5.1.1.26 | loadMATLABmatrix | 19 |
| 5.1.1.27 | loadMATLABmatrix | 19 |
| 5.1.1.28 | loadMATLABmatrix | 19 |
| 5.1.1.29 | logm | 20 |
| 5.1.1.30 | norm | 20 |
| 5.1.1.31 | powm | 20 |
| 5.1.1.32 | powm | 21 |
| 5.1.1.33 | proj | 21 |
| 5.1.1.34 | ptrace | 22 |
| 5.1.1.35 | ptrace2 | 22 |
| 5.1.1.36 | ptranspose | 23 |
| 5.1.1.37 | rand | 23 |
| 5.1.1.38 | rand | 23 |
| 5.1.1.39 | rand | 23 |
| 5.1.1.40 | rand | 23 |
| 5.1.1.41 | randH | 24 |
| 5.1.1.42 | randket | 24 |
| 5.1.1.43 | randn | 24 |
| 5.1.1.44 | randn | 24 |
| 5.1.1.45 | randn | 25 |
| 5.1.1.46 | randn | 25 |
| 5.1.1.47 | randrho | 25 |
| 5.1.1.48 | randU | 25 |
| 5.1.1.49 | renyi | 26 |
| 5.1.1.50 | renyi_inf | 26 |
| 5.1.1.51 | reshape | 26 |
| 5.1.1.52 | save | 27 |
| 5.1.1.53 | saveMATLABmatrix | 27 |
| 5.1.1.54 | saveMATLABmatrix | 27 |
| 5.1.1.55 | saveMATLABmatrix | 27 |
| 5.1.1.56 | shannon | 28 |
| 5.1.1.57 | sinm | 28 |
| 5.1.1.58 | sqrtm | 28 |

| | | |
|----------|---|----|
| 5.1.1.59 | sum | 29 |
| 5.1.1.60 | syspermute | 29 |
| 5.1.1.61 | trace | 30 |
| 5.1.1.62 | transpose | 30 |
| 5.2 | qpp::ct Namespace Reference | 30 |
| 5.2.1 | Function Documentation | 30 |
| 5.2.1.1 | omega | 30 |
| 5.2.2 | Variable Documentation | 30 |
| 5.2.2.1 | chop | 30 |
| 5.2.2.2 | ee | 31 |
| 5.2.2.3 | ii | 31 |
| 5.2.2.4 | pi | 31 |
| 5.3 | qpp::gt Namespace Reference | 31 |
| 5.3.1 | Function Documentation | 31 |
| 5.3.1.1 | _init_gates | 31 |
| 5.3.1.2 | CU | 31 |
| 5.3.1.3 | CUd | 31 |
| 5.3.1.4 | Fd | 32 |
| 5.3.1.5 | Rtheta | 32 |
| 5.3.1.6 | TOF | 32 |
| 5.3.1.7 | Xd | 32 |
| 5.3.1.8 | Zd | 32 |
| 5.3.2 | Variable Documentation | 32 |
| 5.3.2.1 | CNOT | 32 |
| 5.3.2.2 | CP | 33 |
| 5.3.2.3 | H | 33 |
| 5.3.2.4 | Id2 | 33 |
| 5.3.2.5 | S | 33 |
| 5.3.2.6 | T | 33 |
| 5.3.2.7 | TOF | 33 |
| 5.3.2.8 | X | 33 |
| 5.3.2.9 | Y | 33 |
| 5.3.2.10 | Z | 33 |
| 5.4 | qpp::internal Namespace Reference | 33 |
| 5.4.1 | Function Documentation | 33 |
| 5.4.1.1 | _check_col_vector | 33 |
| 5.4.1.2 | _check_dims | 33 |
| 5.4.1.3 | _check_dims_match_mat | 34 |
| 5.4.1.4 | _check_eq_dims | 34 |
| 5.4.1.5 | _check_nonzero_size | 34 |

| | | |
|----------|--|-----------|
| 5.4.1.6 | _check_perm | 34 |
| 5.4.1.7 | _check_row_vector | 34 |
| 5.4.1.8 | _check_square_mat | 34 |
| 5.4.1.9 | _check_subsys | 34 |
| 5.4.1.10 | _check_vector | 34 |
| 5.4.1.11 | _multiidx2n | 34 |
| 5.4.1.12 | _n2multiidx | 34 |
| 5.4.1.13 | _ptranspose_worker | 34 |
| 5.4.1.14 | _syspermute_worker | 35 |
| 5.5 | qpp::stat Namespace Reference | 35 |
| 5.5.1 | Variable Documentation | 35 |
| 5.5.1.1 | _rd | 35 |
| 5.5.1.2 | _rng | 35 |
| 5.6 | qpp::types Namespace Reference | 35 |
| 5.6.1 | Typedef Documentation | 36 |
| 5.6.1.1 | cmat | 36 |
| 5.6.1.2 | cplx | 36 |
| 5.6.1.3 | dmat | 36 |
| 5.6.1.4 | DynMat | 36 |
| 5.6.1.5 | Expression2DynMat | 36 |
| 5.6.1.6 | fmat | 36 |
| 5.6.1.7 | imat | 36 |
| 6 | Class Documentation | 37 |
| 6.1 | qpp::stat::DiscreteDistribution Class Reference | 37 |
| 6.1.1 | Constructor & Destructor Documentation | 37 |
| 6.1.1.1 | DiscreteDistribution | 37 |
| 6.1.1.2 | DiscreteDistribution | 37 |
| 6.1.1.3 | DiscreteDistribution | 37 |
| 6.1.2 | Member Function Documentation | 37 |
| 6.1.2.1 | probabilities | 37 |
| 6.1.2.2 | sample | 37 |
| 6.1.3 | Member Data Documentation | 37 |
| 6.1.3.1 | _d | 37 |
| 6.2 | qpp::stat::DiscreteDistributionFromComplex Class Reference | 38 |
| 6.2.1 | Constructor & Destructor Documentation | 38 |
| 6.2.1.1 | DiscreteDistributionFromComplex | 38 |
| 6.2.1.2 | DiscreteDistributionFromComplex | 39 |
| 6.2.1.3 | DiscreteDistributionFromComplex | 39 |
| 6.2.1.4 | DiscreteDistributionFromComplex | 39 |

| | | |
|---------|---|----|
| 6.2.2 | Member Function Documentation | 39 |
| 6.2.2.1 | cplx2amplitudes | 40 |
| 6.2.2.2 | probabilities | 40 |
| 6.2.2.3 | sample | 40 |
| 6.2.3 | Member Data Documentation | 40 |
| 6.2.3.1 | _d | 40 |
| 6.3 | qpp::Exception Class Reference | 40 |
| 6.3.1 | Member Enumeration Documentation | 41 |
| 6.3.1.1 | Type | 41 |
| 6.3.2 | Constructor & Destructor Documentation | 42 |
| 6.3.2.1 | Exception | 42 |
| 6.3.2.2 | Exception | 42 |
| 6.3.2.3 | ~Exception | 42 |
| 6.3.3 | Member Function Documentation | 42 |
| 6.3.3.1 | _construct_exception_msg | 42 |
| 6.3.3.2 | what | 42 |
| 6.3.4 | Member Data Documentation | 42 |
| 6.3.4.1 | _custom | 42 |
| 6.3.4.2 | _msg | 42 |
| 6.3.4.3 | _type | 42 |
| 6.3.4.4 | _where | 42 |
| 6.4 | qpp::stat::NormalDistribution Class Reference | 43 |
| 6.4.1 | Constructor & Destructor Documentation | 43 |
| 6.4.1.1 | NormalDistribution | 43 |
| 6.4.2 | Member Function Documentation | 43 |
| 6.4.2.1 | sample | 43 |
| 6.4.3 | Member Data Documentation | 43 |
| 6.4.3.1 | _d | 43 |
| 6.5 | qpp::Timer Class Reference | 43 |
| 6.5.1 | Constructor & Destructor Documentation | 44 |
| 6.5.1.1 | Timer | 44 |
| 6.5.1.2 | ~Timer | 44 |
| 6.5.2 | Member Function Documentation | 44 |
| 6.5.2.1 | seconds | 44 |
| 6.5.2.2 | tic | 44 |
| 6.5.2.3 | toc | 44 |
| 6.5.3 | Friends And Related Function Documentation | 44 |
| 6.5.3.1 | operator<< | 44 |
| 6.5.4 | Member Data Documentation | 44 |
| 6.5.4.1 | _end | 44 |

| | | |
|----------|---|-----------|
| 6.5.4.2 | <code>_start</code> | 44 |
| 6.6 | <code>qpp::stat::UniformRealDistribution</code> Class Reference | 44 |
| 6.6.1 | Constructor & Destructor Documentation | 44 |
| 6.6.1.1 | <code>UniformRealDistribution</code> | 44 |
| 6.6.2 | Member Function Documentation | 44 |
| 6.6.2.1 | <code>sample</code> | 44 |
| 6.6.3 | Member Data Documentation | 44 |
| 6.6.3.1 | <code>_d</code> | 45 |
| 7 | File Documentation | 47 |
| 7.1 | <code>include/constants.h</code> File Reference | 47 |
| 7.2 | <code>include/entropies.h</code> File Reference | 48 |
| 7.3 | <code>include/exception.h</code> File Reference | 50 |
| 7.4 | <code>include/functions.h</code> File Reference | 51 |
| 7.5 | <code>include/gates.h</code> File Reference | 53 |
| 7.6 | <code>include/internal.h</code> File Reference | 55 |
| 7.7 | <code>include/io.h</code> File Reference | 56 |
| 7.8 | <code>include/matlab.h</code> File Reference | 57 |
| 7.9 | <code>include/qpp.h</code> File Reference | 58 |
| 7.10 | <code>include/random.h</code> File Reference | 59 |
| 7.11 | <code>include/stat.h</code> File Reference | 61 |
| 7.12 | <code>include/timer.h</code> File Reference | 62 |
| 7.13 | <code>include/types.h</code> File Reference | 63 |
| 7.14 | <code>src/main.cpp</code> File Reference | 65 |
| 7.14.1 | Function Documentation | 65 |
| 7.14.1.1 | <code>main</code> | 66 |

Chapter 1

Namespace Index

1.1 Namespace List

Here is a list of all namespaces with brief descriptions:

| | |
|-------------------------------|----|
| qpp | 9 |
| qpp::ct | 30 |
| qpp::gt | 31 |
| qpp::internal | 33 |
| qpp::stat | 35 |
| qpp::types | 35 |

Chapter 2

Hierarchical Index

2.1 Class Hierarchy

This inheritance list is sorted roughly, but not completely, alphabetically:

| | |
|--|----|
| qpp::stat::DiscreteDistribution | 37 |
| qpp::stat::DiscreteDistributionFromComplex | 38 |
| exception | |
| qpp::Exception | 40 |
| qpp::stat::NormalDistribution | 43 |
| qpp::Timer | 43 |
| qpp::stat::UniformRealDistribution | 44 |

Chapter 3

Class Index

3.1 Class List

Here are the classes, structs, unions and interfaces with brief descriptions:

| | |
|--|----|
| qpp::stat::DiscreteDistribution | 37 |
| qpp::stat::DiscreteDistributionFromComplex | 38 |
| qpp::Exception | 40 |
| qpp::stat::NormalDistribution | 43 |
| qpp::Timer | 43 |
| qpp::stat::UniformRealDistribution | 44 |

Chapter 4

File Index

4.1 File List

Here is a list of all files with brief descriptions:

| | | |
|----------|-------------|----|
| include/ | constants.h | 47 |
| include/ | entropies.h | 48 |
| include/ | exception.h | 50 |
| include/ | functions.h | 51 |
| include/ | gates.h | 53 |
| include/ | internal.h | 55 |
| include/ | io.h | 56 |
| include/ | matlab.h | 57 |
| include/ | qpp.h | 58 |
| include/ | random.h | 59 |
| include/ | stat.h | 61 |
| include/ | timer.h | 62 |
| include/ | types.h | 63 |
| src/ | main.cpp | 65 |

Chapter 5

Namespace Documentation

5.1 qpp Namespace Reference

Namespaces

- [ct](#)
- [gt](#)
- [internal](#)
- [stat](#)
- [types](#)

Classes

- class [Exception](#)
- class [Timer](#)

Functions

- `template<typename Scalar >`
`double shannon (const types::DynMat< Scalar > &A)`
- `template<typename Scalar >`
`double renyi (const double alpha, const types::DynMat< Scalar > &A)`
- `template<typename Scalar >`
`double renyi_inf (const types::DynMat< Scalar > &A)`
- `template<typename Scalar >`
`types::DynMat< Scalar > transpose (const types::DynMat< Scalar > &A)`
- `template<typename Scalar >`
`types::DynMat< Scalar > conjugate (const types::DynMat< Scalar > &A)`
- `template<typename Scalar >`
`types::DynMat< Scalar > adjoint (const types::DynMat< Scalar > &A)`
- `template<typename Scalar >`
`Scalar trace (const types::DynMat< Scalar > &A)`
- `template<typename Scalar >`
`Scalar sum (const types::DynMat< Scalar > &A)`
- `template<typename Scalar >`
`double norm (const types::DynMat< Scalar > &A)`
- `template<typename Scalar >`
`types::cmat evals (const types::DynMat< Scalar > &A)`
- `template<typename Scalar >`
`types::cmat evecs (const types::DynMat< Scalar > &A)`


- `template<typename Scalar >`
`types::cmat hevals` (const `types::DynMat< Scalar >` &A)
- `template<typename Scalar >`
`types::cmat hevects` (const `types::DynMat< Scalar >` &A)
- `template<typename Scalar >`
`types::cmat funm` (const `types::DynMat< Scalar >` &A, `types::cplx`(*f)(const `types::cplx` &))
- `template<typename Scalar >`
`types::cmat absm` (const `types::DynMat< Scalar >` &A)
- `template<typename Scalar >`
`types::cmat expm` (const `types::DynMat< Scalar >` &A)
- `template<typename Scalar >`
`types::cmat logm` (const `types::DynMat< Scalar >` &A)
- `template<typename Scalar >`
`types::cmat sqrtm` (const `types::DynMat< Scalar >` &A)
- `template<typename Scalar >`
`types::cmat sinm` (const `types::DynMat< Scalar >` &A)
- `template<typename Scalar >`
`types::cmat cosm` (const `types::DynMat< Scalar >` &A)
- `template<typename Scalar >`
`types::cmat powm` (const `types::DynMat< Scalar >` &A, const `types::cplx` z)
- `template<typename Scalar >`
`types::DynMat< Scalar >` `powm` (const `types::DynMat< Scalar >` &A, `size_t` n)
- `template<typename InputScalar , typename OutputScalar >`
`types::DynMat< OutputScalar >` `fun` (const `types::DynMat< InputScalar >` &A, `OutputScalar`(*f)(const `InputScalar` &))
- `template<typename Scalar >`
`types::DynMat< Scalar >` `kron` (const `types::DynMat< Scalar >` &A, const `types::DynMat< Scalar >` &B)
- `template<typename Scalar >`
`types::DynMat< Scalar >` `kronlist` (const `std::vector< types::DynMat< Scalar >>` &list)
- `template<typename Scalar >`
`types::DynMat< Scalar >` `kronpow` (const `types::DynMat< Scalar >` &A, `size_t` n)
- `template<typename Scalar >`
`types::DynMat< Scalar >` `reshape` (const `types::DynMat< Scalar >` &A, `size_t` rows, `size_t` cols)
- `template<typename Scalar >`
`types::DynMat< Scalar >` `syspermute` (const `types::DynMat< Scalar >` &A, const `std::vector< size_t >` perm, const `std::vector< size_t >` &dims)
- `template<typename Scalar >`
`types::DynMat< Scalar >` `ptrace2` (const `types::DynMat< Scalar >` &A, const `std::vector< size_t >` dims)
- `template<typename Scalar >`
`types::DynMat< Scalar >` `ptrace` (const `types::DynMat< Scalar >` &A, const `std::vector< size_t >` &subsys, const `std::vector< size_t >` &dims)
- `template<typename Scalar >`
`types::DynMat< Scalar >` `ptranspose` (const `types::DynMat< Scalar >` &A, const `std::vector< size_t >` &subsys, const `std::vector< size_t >` &dims)
- `template<typename Scalar >`
`types::DynMat< Scalar >` `comm` (const `types::DynMat< Scalar >` &A, const `types::DynMat< Scalar >` &B)
- `template<typename Scalar >`
`types::DynMat< Scalar >` `anticomm` (const `types::DynMat< Scalar >` &A, const `types::DynMat< Scalar >` &B)
- `template<typename Scalar >`
`types::DynMat< Scalar >` `proj` (const `types::DynMat< Scalar >` &V)
- `template<typename Scalar >`
`types::DynMat< Scalar >` `dya` (const `types::DynMat< Scalar >` &V)
- `template<typename T >`
void `disp` (const T &x, const `std::string` &separator=" ", `std::ostream` &os=`std::cout`)
- `template<typename T >`
void `displin` (const T &x, const `std::string` &separator=" ", `std::ostream` &os=`std::cout`)

- `template<typename Scalar >`
`void disp (const types::DynMat< Scalar > &A, double chop=ct::chop, std::ostream &os=std::cout)`
- `template<typename Scalar >`
`void displn (const types::DynMat< Scalar > &A, double chop=ct::chop, std::ostream &os=std::cout)`
- `void disp (const types::cplx c, double chop=ct::chop, std::ostream &os=std::cout)`
- `void displn (const types::cplx c, double chop=ct::chop, std::ostream &os=std::cout)`
- `template<typename Scalar >`
`void save (const types::DynMat< Scalar > &A, const std::string &fname)`
- `template<typename Scalar >`
`types::DynMat< Scalar > load (const std::string &fname)`
- `template<typename Scalar >`
`types::DynMat< Scalar > loadMATLABmatrix (const std::string &mat_file, const std::string &var_name)`
- `template<>`
`types::DynMat< double > loadMATLABmatrix (const std::string &mat_file, const std::string &var_name)`
- `template<>`
`types::DynMat< types::cplx > loadMATLABmatrix (const std::string &mat_file, const std::string &var_name)`
- `template<typename Scalar >`
`void saveMATLABmatrix (const types::DynMat< Scalar > &A, const std::string &mat_file, const std::string &var_name, const std::string &mode)`
- `template<>`
`void saveMATLABmatrix (const types::DynMat< double > &A, const std::string &mat_file, const std::string &var_name, const std::string &mode)`
- `template<>`
`void saveMATLABmatrix (const types::DynMat< types::cplx > &A, const std::string &mat_file, const std::string &var_name, const std::string &mode)`
- `int _init ()`
- `template<typename Scalar >`
`types::DynMat< Scalar > rand (size_t rows, size_t cols, double a=0, double b=1)`
- `template<>`
`types::DynMat< double > rand (size_t rows, size_t cols, double a, double b)`
- `template<>`
`types::DynMat< types::cplx > rand (size_t rows, size_t cols, double a, double b)`
- `double rand (double a=0, double b=1)`
- `template<typename Scalar >`
`types::DynMat< Scalar > randn (size_t rows, size_t cols, double mean=0, double sigma=1)`
- `template<>`
`types::DynMat< double > randn (size_t rows, size_t cols, double mean, double sigma)`
- `template<>`
`types::DynMat< types::cplx > randn (size_t rows, size_t cols, double mean, double sigma)`
- `double randn (double mean=0, double sigma=1)`
- `types::cmat randU (size_t D)`
- `types::cmat randH (size_t D)`
- `types::cmat randket (size_t D)`
- `types::cmat randrho (size_t D)`

5.1.1 Function Documentation


5.1.1.1 `int qpp::_init ()`

Here is the call graph for this function:




5.1.1.2 `template<typename Scalar > types::cmat qpp::absm (const types::DynMat< Scalar > & A)`

Here is the call graph for this function:

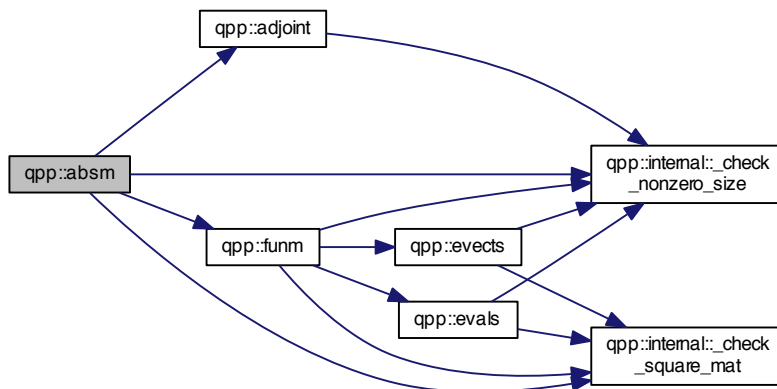


5.1.1.3 `template<typename Scalar > types::DynMat<Scalar> qpp::adjoint (const types::DynMat< Scalar > & A)`

Here is the call graph for this function:




5.1.1.4 `template<typename Scalar > types::DynMat<Scalar> qpp::anticomm (const types::DynMat< Scalar > & A, const types::DynMat< Scalar > & B)`

Here is the call graph for this function:

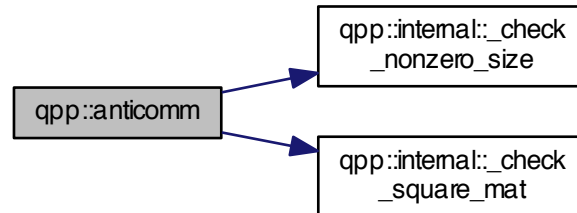


5.1.1.5 `template<typename Scalar > types::DynMat<Scalar> qpp::comm (const types::DynMat< Scalar > & A, const types::DynMat< Scalar > & B)`

Here is the call graph for this function:

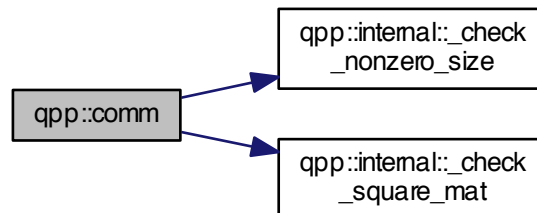


5.1.1.6 `template<typename Scalar > types::DynMat<Scalar> qpp::conjugate (const types::DynMat< Scalar > & A)`

Here is the call graph for this function:



5.1.1.7 `template<typename Scalar > types::cmat qpp::cosm (const types::DynMat< Scalar > & A)`

Here is the call graph for this function:

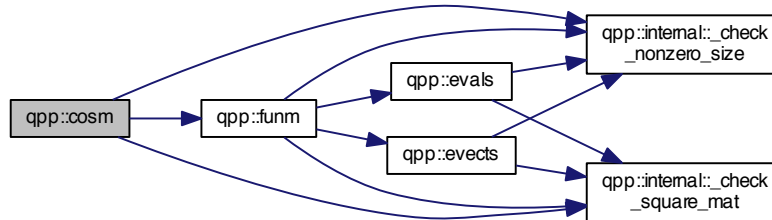

5.1.1.8 `template<typename T > void qpp::disp (const T & x, const std::string & separator = " ", std::ostream & os = std::cout)`

5.1.1.9 `template<typename Scalar > void qpp::disp (const types::DynMat< Scalar > & A, double chop = ct:::chop, std::ostream & os = std::cout)`

5.1.1.10 `void qpp::disp (const types::cplx c, double chop = ct:::chop, std::ostream & os = std::cout)`
`[inline]`

Here is the call graph for this function:



5.1.1.11 `template<typename T > void qpp::displn (const T & x, const std::string & separator = " ", std::ostream & os = std::cout)`

Here is the call graph for this function:



5.1.1.12 `template<typename Scalar > void qpp::displn (const types::DynMat< Scalar > & A, double chop = ct::chop, std::ostream & os = std::cout)`

Here is the call graph for this function:




5.1.1.13 `void qpp::displn (const types::cplx c, double chop = ct::chop, std::ostream & os = std::cout)`
[inline]

Here is the call graph for this function:




5.1.1.14 `template<typename Scalar > types::DynMat<Scalar> qpp::dya (const types::DynMat< Scalar > & V)`

Here is the call graph for this function:

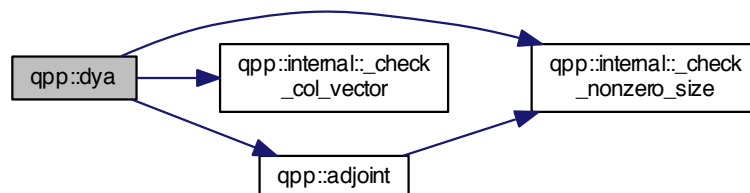


5.1.1.15 `template<typename Scalar > types::cmat qpp::evals (const types::DynMat< Scalar > & A)`

Here is the call graph for this function:

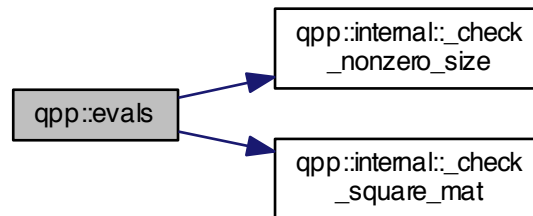


5.1.1.16 `template<typename Scalar > types::cmat qpp::evecs (const types::DynMat< Scalar > & A)`

Here is the call graph for this function:

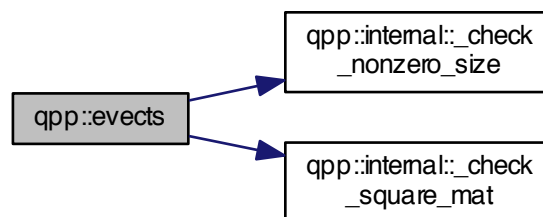


5.1.1.17 `template<typename Scalar > types::cmat qpp::expm (const types::DynMat< Scalar > & A)`

Here is the call graph for this function:

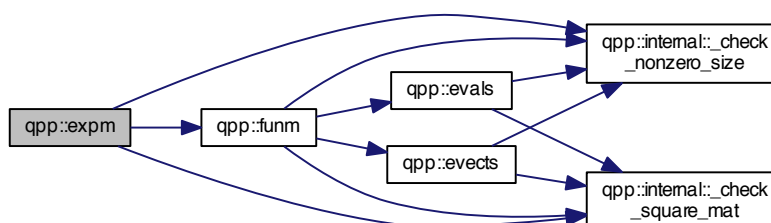

5.1.1.18 `template<typename InputScalar , typename OutputScalar > types::DynMat<OutputScalar> qpp::fun (const types::DynMat< InputScalar > & A, OutputScalar(*) (const InputScalar &) f)`

Here is the call graph for this function:



5.1.1.19 `template<typename Scalar > types::cmat qpp::funm (const types::DynMat< Scalar > & A, types::cplx(*) (const types::cplx &) f)`


Parameters

| | |
|----------|------------------|
| <i>A</i> | input matrix |
| <i>f</i> | function pointer |

Returns


`types::cmat`

Here is the call graph for this function:

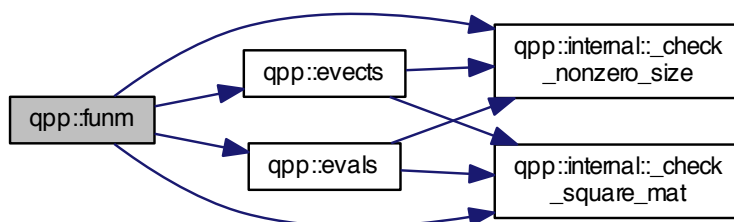


5.1.1.20 `template<typename Scalar > types::cmat qpp::hevals (const types::DynMat< Scalar > & A)`

Here is the call graph for this function:

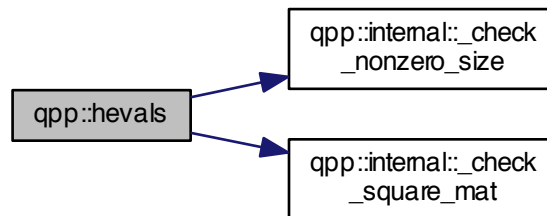


5.1.1.21 `template<typename Scalar > types::cmat qpp::hevects (const types::DynMat< Scalar > & A)`

Here is the call graph for this function:

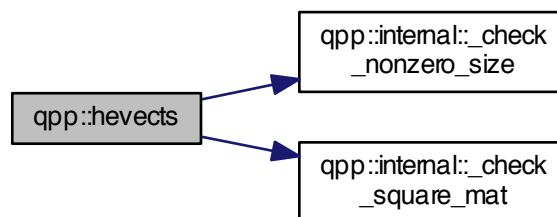

5.1.1.22 `template<typename Scalar > types::DynMat<Scalar> qpp::kron (const types::DynMat< Scalar > & A, const types::DynMat< Scalar > & B)`

Here is the call graph for this function:




5.1.1.23 `template<typename Scalar > types::DynMat<Scalar> qpp::kronlist (const std::vector< types::DynMat< Scalar >> & list)`

Here is the call graph for this function:



5.1.1.24 `template<typename Scalar > types::DynMat<Scalar> qpp::kronpow (const types::DynMat< Scalar > & A, size_t n)`

Here is the call graph for this function:



5.1.1.25 `template<typename Scalar > types::DynMat<Scalar> qpp::load (const std::string & fname)`


5.1.1.26 `template<typename Scalar > types::DynMat<Scalar> qpp::loadMATLABmatrix (const std::string & mat_file, const std::string & var_name)`

5.1.1.27 `template<> types::DynMat<double> qpp::loadMATLABmatrix (const std::string & mat_file, const std::string & var_name) [inline]`

5.1.1.28 `template<> types::DynMat<types::cplx> qpp::loadMATLABmatrix (const std::string & mat_file, const std::string & var_name) [inline]`


5.1.1.29 `template<typename Scalar > types::cmat qpp::logm (const types::DynMat< Scalar > & A)`

Here is the call graph for this function:

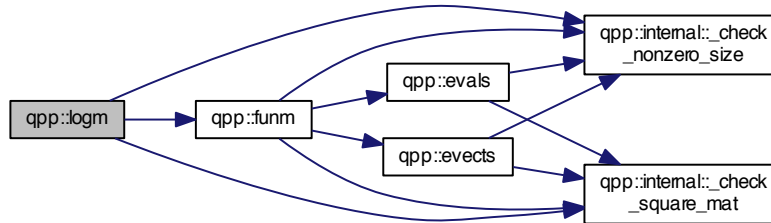


5.1.1.30 `template<typename Scalar > double qpp::norm (const types::DynMat< Scalar > & A)`

Here is the call graph for this function:




5.1.1.31 `template<typename Scalar > types::cmat qpp::powm (const types::DynMat< Scalar > & A, const types::cplx z)`

Here is the call graph for this function:

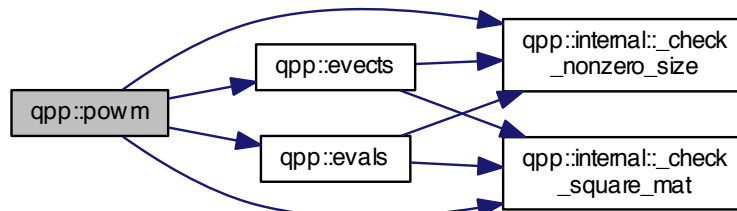


5.1.1.32 `template<typename Scalar > types::DynMat<Scalar> qpp::powm (const types::DynMat< Scalar > & A, size_t n)`

Here is the call graph for this function:

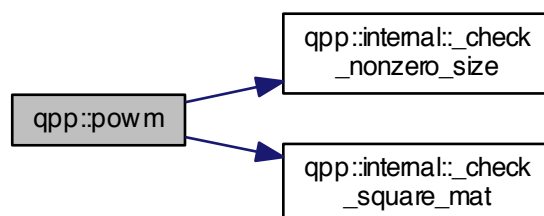


5.1.1.33 `template<typename Scalar > types::DynMat<Scalar> qpp::proj (const types::DynMat< Scalar > & V)`

Here is the call graph for this function:

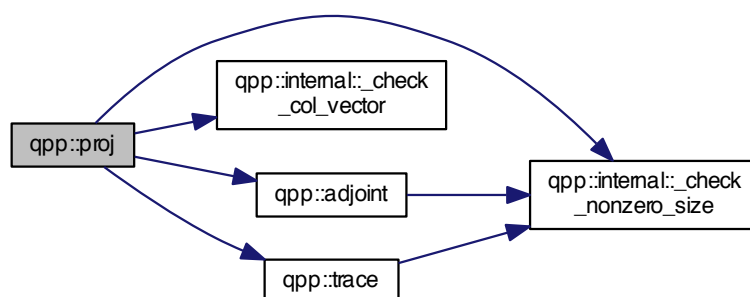


5.1.1.34 `template<typename Scalar> types::DynMat<Scalar> qpp::ptrace (const types::DynMat< Scalar> & A, const std::vector< size_t> & subsys, const std::vector< size_t> & dims)`

Here is the call graph for this function:

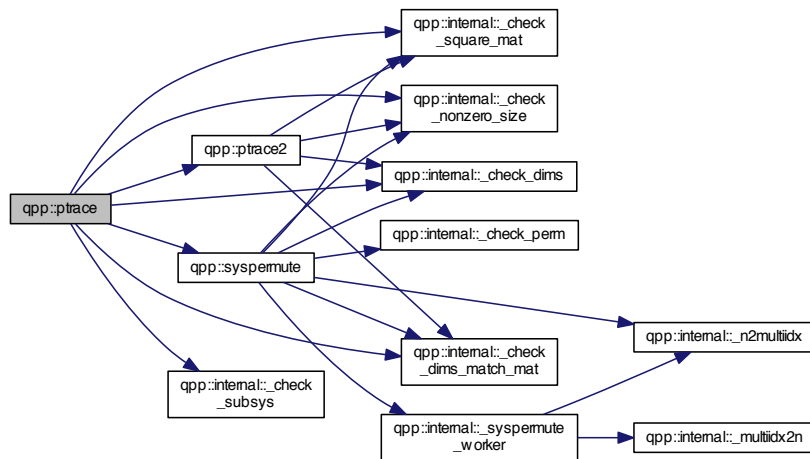


5.1.1.35 `template<typename Scalar> types::DynMat<Scalar> qpp::ptrace2 (const types::DynMat< Scalar> & A, const std::vector< size_t> dims)`

Here is the call graph for this function:

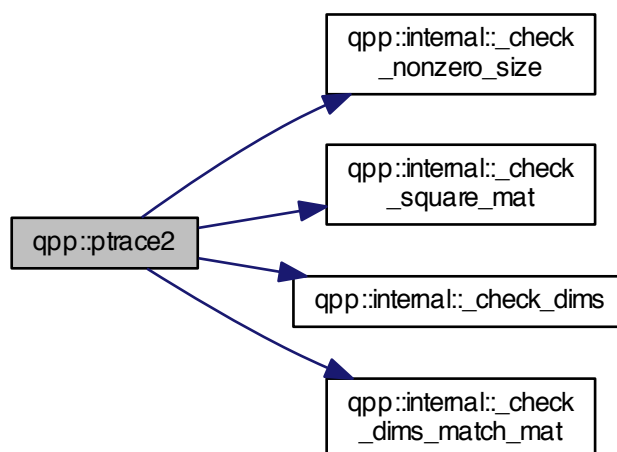

5.1.1.36 `template<typename Scalar> types::DynMat<Scalar> qpp::ptranspose (const types::DynMat< Scalar> & A, const std::vector< size_t> & subsys, const std::vector< size_t> & dims)`

Here is the call graph for this function:

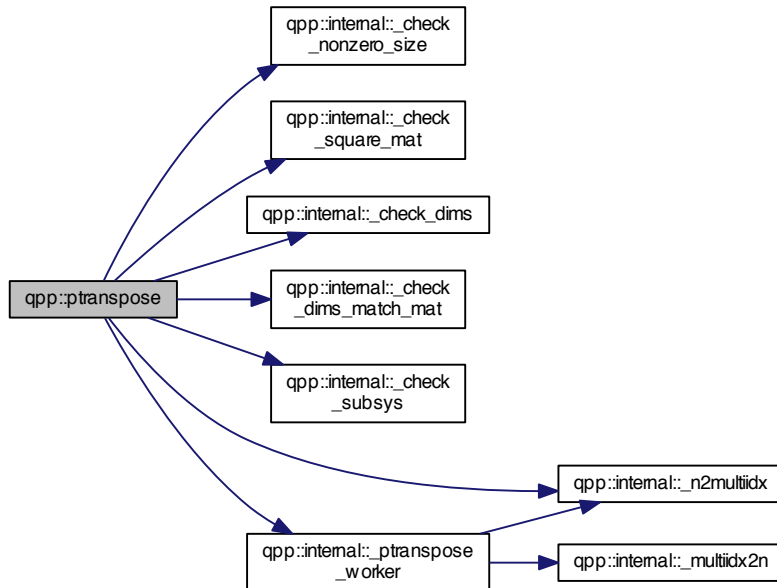

5.1.1.37 `template<typename Scalar> types::DynMat<Scalar> qpp::rand (size_t rows, size_t cols, double a = 0, double b = 1) [inline]`

5.1.1.38 `template<> types::DynMat<double> qpp::rand (size_t rows, size_t cols, double a, double b) [inline]`

5.1.1.39 `template<> types::DynMat<types::cplx> qpp::rand (size_t rows, size_t cols, double a, double b) [inline]`


5.1.1.40 `double qpp::rand (double a = 0, double b = 1) [inline]`

Here is the call graph for this function:




5.1.1.41 `types::cmat qpp::randH (size_t D) [inline]`

Here is the call graph for this function:



5.1.1.42 `types::cmat qpp::randket (size_t D) [inline]`

Here is the call graph for this function:

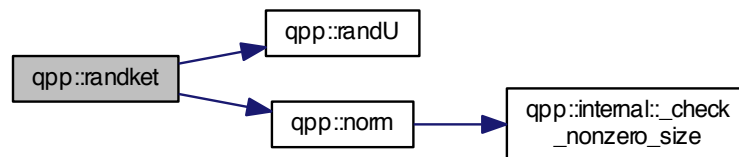

5.1.1.43 `template<typename Scalar > types::DynMat<Scalar> qpp::randn (size_t rows, size_t cols, double mean = 0, double sigma = 1) [inline]`

5.1.1.44 `template<> types::DynMat<double> qpp::randn (size_t rows, size_t cols, double mean, double sigma) [inline]`

Here is the call graph for this function:



5.1.1.45 `template<> types::DynMat<types::cplx> qpp::randn (size_t rows, size_t cols, double mean, double sigma)`
`[inline]`

Here is the call graph for this function:




5.1.1.46 `double qpp::randn (double mean = 0, double sigma = 1)` `[inline]`

Here is the call graph for this function:



5.1.1.47 `types::cmat qpp::randrho (size_t D)` `[inline]`


Here is the call graph for this function:

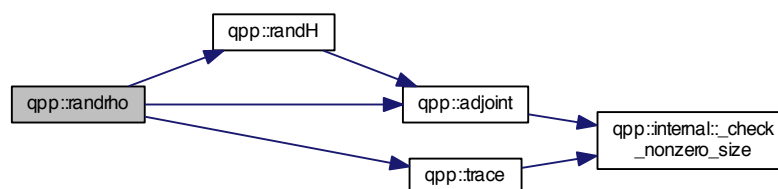

5.1.1.48 `types::cmat qpp::randU (size_t D)` `[inline]`


5.1.1.49 `template<typename Scalar > double qpp::renyi (const double alpha, const types::DynMat< Scalar > & A)`

Here is the call graph for this function:

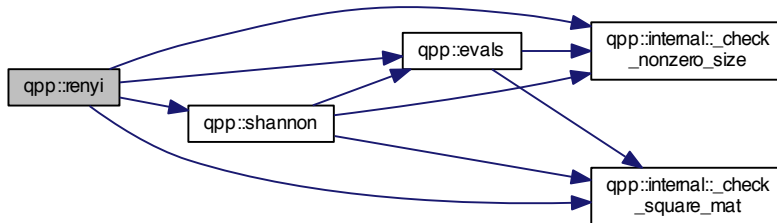


5.1.1.50 `template<typename Scalar > double qpp::renyi_inf (const types::DynMat< Scalar > & A)`

Here is the call graph for this function:

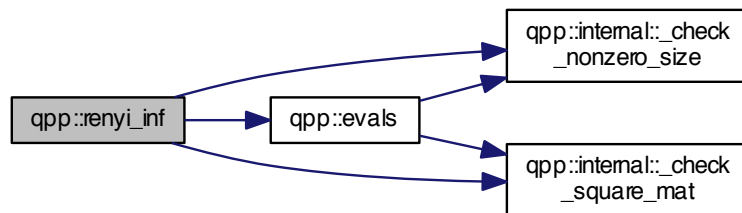


5.1.1.51 `template<typename Scalar > types::DynMat<Scalar> qpp::reshape (const types::DynMat< Scalar > & A, size_t rows, size_t cols)`

Here is the call graph for this function:



5.1.1.52 `template<typename Scalar > void qpp::save (const types::DynMat< Scalar > & A, const std::string & fname)`


Here is the call graph for this function:



5.1.1.53 `template<typename Scalar > void qpp::saveMATLABmatrix (const types::DynMat< Scalar > & A, const std::string & mat_file, const std::string & var_name, const std::string & mode)`


5.1.1.54 `template<> void qpp::saveMATLABmatrix (const types::DynMat< double > & A, const std::string & mat_file, const std::string & var_name, const std::string & mode)`

Here is the call graph for this function:




5.1.1.55 `template<> void qpp::saveMATLABmatrix (const types::DynMat< types::cplx > & A, const std::string & mat_file, const std::string & var_name, const std::string & mode)`

Here is the call graph for this function:




5.1.1.56 `template<typename Scalar > double qpp::shannon (const types::DynMat< Scalar > & A)`

Here is the call graph for this function:

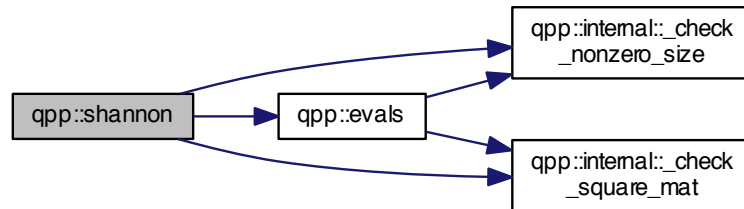


5.1.1.57 `template<typename Scalar > types::cmat qpp::sinm (const types::DynMat< Scalar > & A)`

Here is the call graph for this function:

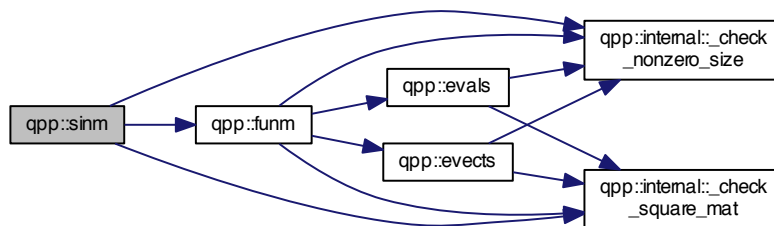


5.1.1.58 `template<typename Scalar > types::cmat qpp::sqrtm (const types::DynMat< Scalar > & A)`

Here is the call graph for this function:

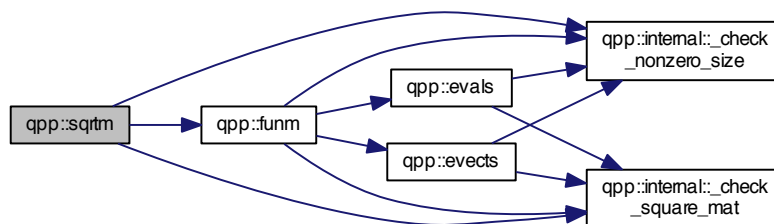


5.1.1.59 `template<typename Scalar > Scalar qpp::sum (const types::DynMat< Scalar > & A)`

Here is the call graph for this function:




5.1.1.60 `template<typename Scalar > types::DynMat<Scalar> qpp::syspermute (const types::DynMat< Scalar > & A, const std::vector< size_t > perm, const std::vector< size_t > & dims)`

Here is the call graph for this function:

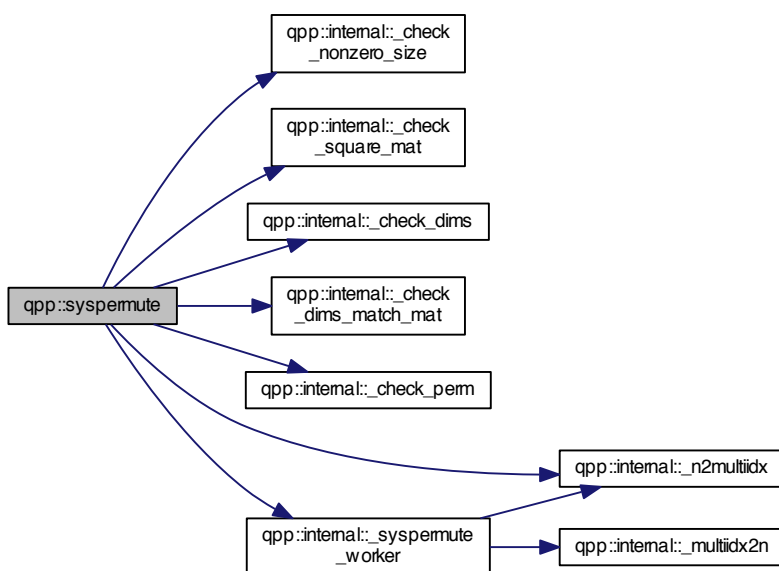


5.1.1.61 `template<typename Scalar > Scalar qpp::trace (const types::DynMat< Scalar > & A)`

Here is the call graph for this function:



5.1.1.62 `template<typename Scalar > types::DynMat<Scalar> qpp::transpose (const types::DynMat< Scalar > & A)`

Here is the call graph for this function:



5.2 qpp::ct Namespace Reference

Functions

- `types::cplx omega (size_t D)`

Variables

- `const double chop = 1e-10`
- `const types::cplx ii = { 0, 1 }`
- `const double pi = 3.141592653589793238462643383279502884`
- `const double ee = 2.718281828459045235360287471352662497`

5.2.1 Function Documentation

5.2.1.1 `types::cplx qpp::ct::omega (size_t D) [inline]`

5.2.2 Variable Documentation

5.2.2.1 `const double qpp::ct::chop = 1e-10`

5.2.2.2 `const double qpp::ct::ee = 2.718281828459045235360287471352662497`

5.2.2.3 `const types::cplx qpp::ct::ii = { 0, 1 }`

5.2.2.4 `const double qpp::ct::pi = 3.141592653589793238462643383279502884`

5.3 qpp::gt Namespace Reference

Functions

- `void _init_gates ()`
- `types::cmat Rtheta (double theta)`
- `types::cmat CU (const types::cmat &U)`
- `types::cmat Zd (size_t D)`
- `types::cmat Fd (size_t D)`
- `types::cmat Xd (size_t D)`
- `types::cmat CUd (const types::cmat &U)`
- `types::cmat TOF (8, 8)`

Variables

- `types::cmat H`
- `types::cmat Id2`
- `types::cmat X`
- `types::cmat Y`
- `types::cmat Z`
- `types::cmat S`
- `types::cmat T`
- `types::cmat CNOT`
- `types::cmat CP`
- `types::cmat TOF`


5.3.1 Function Documentation

5.3.1.1 `void qpp::gt::_init_gates () [inline]`

5.3.1.2 `types::cmat qpp::gt::CU (const types::cmat & U) [inline]`

5.3.1.3 `types::cmat qpp::gt::CUd (const types::cmat & U) [inline]`

Here is the call graph for this function:

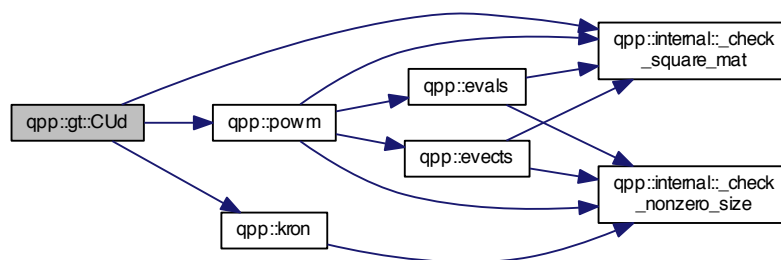

5.3.1.4 `types::cmat qpp::gt::Fd (size_t D) [inline]`

Here is the call graph for this function:



5.3.1.5 `types::cmat qpp::gt::Rtheta (double theta) [inline]`

5.3.1.6 `types::cmat qpp::gt::TOF (8, 8)`

5.3.1.7 `types::cmat qpp::gt::Xd (size_t D) [inline]`

Here is the call graph for this function:



5.3.1.8 `types::cmat qpp::gt::Zd (size_t D) [inline]`

Here is the call graph for this function:



5.3.2 Variable Documentation

5.3.2.1 `types::cmat qpp::gt::CNOT`

5.3.2.2 `types::cmat qpp::gt::CP`

5.3.2.3 `types::cmat qpp::gt::H`

5.3.2.4 `types::cmat qpp::gt::ld2`

5.3.2.5 `types::cmat qpp::gt::S`

5.3.2.6 `types::cmat qpp::gt::T`

5.3.2.7 `types::cmat qpp::gt::TOF`

5.3.2.8 `types::cmat qpp::gt::X`

5.3.2.9 `types::cmat qpp::gt::Y`

5.3.2.10 `types::cmat qpp::gt::Z`

5.4 qpp::internal Namespace Reference

Functions

- `void _n2multiidx (size_t n, size_t numdims, const size_t *dims, size_t *result)`
- `size_t _multiidx2n (const size_t *midx, size_t numdims, const size_t *dims)`
- `template<typename Scalar >`
`bool _check_square_mat (const types::DynMat< Scalar > &A)`
- `template<typename Scalar >`
`bool _check_vector (const types::DynMat< Scalar > &A)`
- `template<typename Scalar >`
`bool _check_row_vector (const types::DynMat< Scalar > &A)`
- `template<typename Scalar >`
`bool _check_col_vector (const types::DynMat< Scalar > &A)`
- `template<typename Scalar >`
`bool _check_nonzero_size (const types::DynMat< Scalar > &A)`
- `template<typename Scalar >`
`bool _check_dims_match_mat (const std::vector< size_t > &dims, const types::DynMat< Scalar > &A)`
- `bool _check_dims (const std::vector< size_t > &dims)`
- `bool _check_eq_dims (const std::vector< size_t > &dims, size_t dim)`
- `bool _check_subsys (const std::vector< size_t > &subsys, const std::vector< size_t > &dims)`
- `bool _check_perm (const std::vector< size_t > &perm, const std::vector< size_t > &dims)`
- `template<typename Scalar >`
`void _syspermute_worker (const size_t *midxcol, size_t numdims, const size_t *cdims, const size_t *cperm, size_t i, size_t j, size_t &iperm, size_t &jperm, const types::DynMat< Scalar > &A, types::DynMat< Scalar > &result)`
- `template<typename Scalar >`
`void _ptranspose_worker (const size_t *midxcol, size_t numdims, size_t numsubsys, const size_t *cdims, const size_t *csubsys, size_t i, size_t j, size_t &iperm, size_t &jperm, const types::DynMat< Scalar > &A, types::DynMat< Scalar > &result)`

5.4.1 Function Documentation

5.4.1.1 `template<typename Scalar > bool qpp::internal::_check_col_vector (const types::DynMat< Scalar > & A)`

5.4.1.2 `bool qpp::internal::_check_dims (const std::vector< size_t > & dims) [inline]`

5.4.1.3 `template<typename Scalar > bool qpp::internal::_check_dims_match_mat (const std::vector< size_t > & dims, const types::DynMat< Scalar > & A)`

5.4.1.4 `bool qpp::internal::_check_eq_dims (const std::vector< size_t > & dims, size_t dim)` `[inline]`

5.4.1.5 `template<typename Scalar > bool qpp::internal::_check_nonzero_size (const types::DynMat< Scalar > & A)`

5.4.1.6 `bool qpp::internal::_check_perm (const std::vector< size_t > & perm, const std::vector< size_t > & dims)` `[inline]`

5.4.1.7 `template<typename Scalar > bool qpp::internal::_check_row_vector (const types::DynMat< Scalar > & A)`

5.4.1.8 `template<typename Scalar > bool qpp::internal::_check_square_mat (const types::DynMat< Scalar > & A)`

5.4.1.9 `bool qpp::internal::_check_subsys (const std::vector< size_t > & subsys, const std::vector< size_t > & dims)` `[inline]`


5.4.1.10 `template<typename Scalar > bool qpp::internal::_check_vector (const types::DynMat< Scalar > & A)`

5.4.1.11 `size_t qpp::internal::_multiidx2n (const size_t * midx, size_t numdims, const size_t * dims)` `[inline]`

5.4.1.12 `void qpp::internal::_n2multiidx (size_t n, size_t numdims, const size_t * dims, size_t * result)` `[inline]`


5.4.1.13 `template<typename Scalar > void qpp::internal::_ptranspose_worker (const size_t * midxcol, size_t numdims, size_t numsubsys, const size_t * cdims, const size_t * csubsys, size_t i, size_t j, size_t & iperm, size_t & jperm, const types::DynMat< Scalar > & A, types::DynMat< Scalar > & result)` `[inline]`

Here is the call graph for this function:



5.4.1.14 `template<typename Scalar > void qpp::internal::_syspermute_worker (const size_t * midxcol, size_t numdims, const size_t * cdims, const size_t * cperm, size_t i, size_t j, size_t & iperm, size_t & jperm, const types::DynMat< Scalar > & A, types::DynMat< Scalar > & result) [inline]`

Here is the call graph for this function:

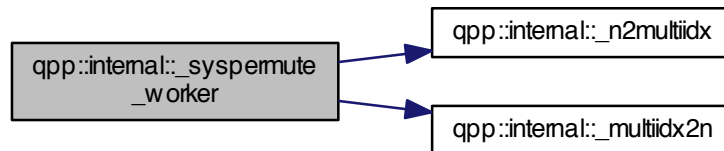

5.5 qpp::stat Namespace Reference

Classes

- class [NormalDistribution](#)
- class [UniformRealDistribution](#)
- class [DiscreteDistribution](#)
- class [DiscreteDistributionFromComplex](#)

Variables

- `std::random_device _rd`
- `std::mt19937 _rng`

5.5.1 Variable Documentation

5.5.1.1 `std::random_device qpp::stat::_rd`

5.5.1.2 `std::mt19937 qpp::stat::_rng`

5.6 qpp::types Namespace Reference

Typedefs

- `typedef std::complex< double > cplx`
- `typedef Eigen::MatrixXcd cmat`
- `typedef Eigen::MatrixXd dmat`
- `typedef Eigen::MatrixXf fmat`
- `typedef Eigen::MatrixXi imat`
- `template<typename Expression > using Expression2DynMat = Eigen::Matrix< typename Expression::Scalar, Eigen::Dynamic, Eigen::Dynamic >`
- `template<typename Scalar > using DynMat = Eigen::Matrix< Scalar, Eigen::Dynamic, Eigen::Dynamic >`

5.6.1 Typedef Documentation

5.6.1.1 `typedef Eigen::MatrixXcd qpp::types::cmat`

5.6.1.2 `typedef std::complex<double> qpp::types::cplx`

5.6.1.3 `typedef Eigen::MatrixXd qpp::types::dmat`

5.6.1.4 `template<typename Scalar > using qpp::types::DynMat = typedef Eigen::Matrix<Scalar, Eigen::Dynamic, Eigen::Dynamic>`

5.6.1.5 `template<typename Expression > using qpp::types::Expression2DynMat = typedef Eigen::Matrix<typename Expression::Scalar, Eigen::Dynamic, Eigen::Dynamic>`

5.6.1.6 `typedef Eigen::MatrixXf qpp::types::fmat`

5.6.1.7 `typedef Eigen::MatrixXi qpp::types::imat`

Chapter 6

Class Documentation

6.1 qpp::stat::DiscreteDistribution Class Reference

```
#include <stat.h>
```

Public Member Functions

- `template<typename InputIterator >`
`DiscreteDistribution` (`InputIterator first`, `InputIterator last`)
- `DiscreteDistribution` (`std::initializer_list< double > weights`)
- `DiscreteDistribution` (`std::vector< double > weights`)
- `size_t sample` ()
- `std::vector< double > probabilities` ()

Protected Attributes

- `std::discrete_distribution`
`< size_t > _d`

6.1.1 Constructor & Destructor Documentation

6.1.1.1 `template<typename InputIterator > qpp::stat::DiscreteDistribution::DiscreteDistribution (InputIterator first, InputIterator last)` `[inline]`

6.1.1.2 `qpp::stat::DiscreteDistribution::DiscreteDistribution (std::initializer_list< double > weights)` `[inline]`

6.1.1.3 `qpp::stat::DiscreteDistribution::DiscreteDistribution (std::vector< double > weights)` `[inline]`

6.1.2 Member Function Documentation

6.1.2.1 `std::vector<double> qpp::stat::DiscreteDistribution::probabilities ()` `[inline]`

6.1.2.2 `size_t qpp::stat::DiscreteDistribution::sample ()` `[inline]`

6.1.3 Member Data Documentation

6.1.3.1 `std::discrete_distribution<size_t> qpp::stat::DiscreteDistribution::_d` `[protected]`

The documentation for this class was generated from the following file:

- [include/stat.h](#)

6.2 qpp::stat::DiscreteDistributionFromComplex Class Reference

```
#include <stat.h>
```

Public Member Functions

- `template<typename InputIterator >`
`DiscreteDistributionFromComplex` (`InputIterator first`, `InputIterator last`)
- `DiscreteDistributionFromComplex` (`std::initializer_list< types::cplx > amplitudes`)
- `DiscreteDistributionFromComplex` (`std::vector< types::cplx > amplitudes`)
- `DiscreteDistributionFromComplex` (`const types::cmat &V`)
- `size_t sample` ()
- `std::vector< double > probabilities` ()

Protected Member Functions

- `template<typename InputIterator >`
`std::vector< double > cplx2amplitudes` (`InputIterator first`, `InputIterator last`)

Protected Attributes

- `std::discrete_distribution`
`< size_t > _d`

6.2.1 Constructor & Destructor Documentation


- 6.2.1.1 `template<typename InputIterator > qpp::stat::DiscreteDistributionFromComplex::DiscreteDistributionFromComplex (`
`InputIterator first, InputIterator last)` `[inline]`

Here is the call graph for this function:




6.2.1.2 `qpp::stat::DiscreteDistributionFromComplex::DiscreteDistributionFromComplex (std::initializer_list< types::cplx > amplitudes) [inline]`

Here is the call graph for this function:




6.2.1.3 `qpp::stat::DiscreteDistributionFromComplex::DiscreteDistributionFromComplex (std::vector< types::cplx > amplitudes) [inline]`

Here is the call graph for this function:



6.2.1.4 `qpp::stat::DiscreteDistributionFromComplex::DiscreteDistributionFromComplex (const types::cmat & V) [inline]`

Here is the call graph for this function:

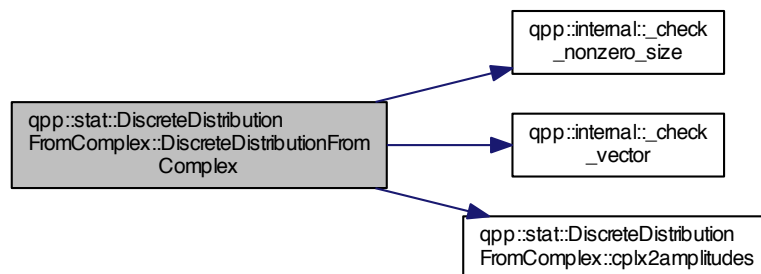

6.2.2 Member Function Documentation

6.2.2.1 `template<typename InputIterator > std::vector<double> qpp::stat::DiscreteDistributionFromComplex::cplx2amplitudes (InputIterator first, InputIterator last) [inline], [protected]`

6.2.2.2 `std::vector<double> qpp::stat::DiscreteDistributionFromComplex::probabilities () [inline]`

6.2.2.3 `size_t qpp::stat::DiscreteDistributionFromComplex::sample () [inline]`

6.2.3 Member Data Documentation

6.2.3.1 `std::discrete_distribution<size_t> qpp::stat::DiscreteDistributionFromComplex::_d [protected]`


The documentation for this class was generated from the following file:

- include/[stat.h](#)


6.3 qpp::Exception Class Reference

```
#include <exception.h>
```

Inheritance diagram for qpp::Exception:



Collaboration diagram for qpp::Exception:



Public Types

- enum [Type](#) {
[Type::UNKNOWN_EXCEPTION](#) = 0, [Type::MATRIX_NOT_CVECTOR](#), [Type::MATRIX_NOT_RVECTOR](#),
[Type::MATRIX_NOT_VECTOR](#),
[Type::MATRIX_NOT_SQUARE](#), [Type::MATRIX_ZERO_SIZE](#), [Type::DIMS_MISMATCH_MATRIX](#), [Type::DIMS_HAVE_ZERO](#),
[Type::DIMS_NOT_EQUAL](#), [Type::SUBSYS_MISMATCH_DIMS](#), [Type::PERM_MISMATCH_DIMS](#), [Type::NOT_QUBIT_GATE](#),
[Type::NOT_QUBIT_SUBSYS](#), [Type::OUT_OF_RANGE](#), [Type::UNDEFINED_TYPE](#), [Type::CUSTOM_EXCEPTION](#) }

Public Member Functions

- [Exception](#) (const std::string &where, const [Type](#) &type)
- [Exception](#) (const std::string &where, const std::string &custom)
- virtual const char * [what](#) () const noexcept override
- virtual [~Exception](#) () noexcept

Private Member Functions

- std::string [_construct_exception_msg](#) ()

Private Attributes

- std::string [_where](#)
- std::string [_msg](#)
- [Type](#) [_type](#)
- std::string [_custom](#)

6.3.1 Member Enumeration Documentation

6.3.1.1 enum qpp::Exception::Type [strong]


Enumerator

UNKNOWN_EXCEPTION
MATRIX_NOT_CVECTOR
MATRIX_NOT_RVECTOR
MATRIX_NOT_VECTOR
MATRIX_NOT_SQUARE
MATRIX_ZERO_SIZE
DIMS_MISMATCH_MATRIX
DIMS_HAVE_ZERO
DIMS_NOT_EQUAL
SUBSYS_MISMATCH_DIMS
PERM_MISMATCH_DIMS
NOT_QUBIT_GATE
NOT_QUBIT_SUBSYS
OUT_OF_RANGE
UNDEFINED_TYPE
CUSTOM_EXCEPTION

6.3.2 Constructor & Destructor Documentation


6.3.2.1 `qpp::Exception::Exception (const std::string & where, const Type & type)` `[inline]`

Here is the call graph for this function:



6.3.2.2 `qpp::Exception::Exception (const std::string & where, const std::string & custom)` `[inline]`

Here is the call graph for this function:



6.3.2.3 `virtual qpp::Exception::~~Exception ()` `[inline]`, `[virtual]`, `[noexcept]`

6.3.3 Member Function Documentation

6.3.3.1 `std::string qpp::Exception::_construct_exception_msg ()` `[inline]`, `[private]`

6.3.3.2 `virtual const char* qpp::Exception::what () const` `[inline]`, `[override]`, `[virtual]`, `[noexcept]`

6.3.4 Member Data Documentation

6.3.4.1 `std::string qpp::Exception::_custom` `[private]`

6.3.4.2 `std::string qpp::Exception::_msg` `[private]`

6.3.4.3 `Type qpp::Exception::_type` `[private]`

6.3.4.4 `std::string qpp::Exception::_where` `[private]`

The documentation for this class was generated from the following file:

- [include/exception.h](#)

6.4 qpp::stat::NormalDistribution Class Reference

```
#include <stat.h>
```

Public Member Functions

- [NormalDistribution](#) (double mean=0, double sigma=1)
- double [sample](#) ()

Protected Attributes

- std::normal_distribution [_d](#)

6.4.1 Constructor & Destructor Documentation

6.4.1.1 `qpp::stat::NormalDistribution::NormalDistribution (double mean = 0, double sigma = 1)` [inline]

6.4.2 Member Function Documentation

6.4.2.1 `double qpp::stat::NormalDistribution::sample ()` [inline]

6.4.3 Member Data Documentation

6.4.3.1 `std::normal_distribution qpp::stat::NormalDistribution::_d` [protected]

The documentation for this class was generated from the following file:

- include/[stat.h](#)

6.5 qpp::Timer Class Reference

```
#include <timer.h>
```

Public Member Functions

- [Timer](#) ()
- void [tic](#) ()
- void [toc](#) ()
- double [seconds](#) () const
- virtual [~Timer](#) ()=default

Protected Attributes

- std::chrono::high_resolution_clock::time_point [_start](#)
- std::chrono::high_resolution_clock::time_point [_end](#)

Friends

- std::ostream & [operator<<](#) (std::ostream &os, const [Timer](#) &rhs)

6.5.1 Constructor & Destructor Documentation

6.5.1.1 `qpp::Timer::Timer ()` `[inline]`

6.5.1.2 `virtual qpp::Timer::~~Timer ()` `[virtual],[default]`

6.5.2 Member Function Documentation

6.5.2.1 `double qpp::Timer::seconds () const` `[inline]`

6.5.2.2 `void qpp::Timer::tic ()` `[inline]`

6.5.2.3 `void qpp::Timer::toc ()` `[inline]`

6.5.3 Friends And Related Function Documentation

6.5.3.1 `std::ostream& operator<< (std::ostream & os, const Timer & rhs)` `[friend]`

6.5.4 Member Data Documentation

6.5.4.1 `std::chrono::high_resolution_clock::time_point qpp::Timer::_end` `[protected]`

6.5.4.2 `std::chrono::high_resolution_clock::time_point qpp::Timer::_start` `[protected]`

The documentation for this class was generated from the following file:

- `include/timer.h`

6.6 qpp::stat::UniformRealDistribution Class Reference

```
#include <stat.h>
```

Public Member Functions

- `UniformRealDistribution` (double *a*=0, double *b*=1)
- double `sample` ()

Protected Attributes

- `std::uniform_real_distribution _d`

6.6.1 Constructor & Destructor Documentation

6.6.1.1 `qpp::stat::UniformRealDistribution::UniformRealDistribution (double a = 0, double b = 1)` `[inline]`

6.6.2 Member Function Documentation

6.6.2.1 `double qpp::stat::UniformRealDistribution::sample ()` `[inline]`

6.6.3 Member Data Documentation

6.6.3.1 std::uniform_real_distribution qpp::stat::UniformRealDistribution::_d [protected]

The documentation for this class was generated from the following file:

- include/[stat.h](#)


Chapter 7

File Documentation


7.1 include/constants.h File Reference

```
#include "types.h"
```

Include dependency graph for constants.h:

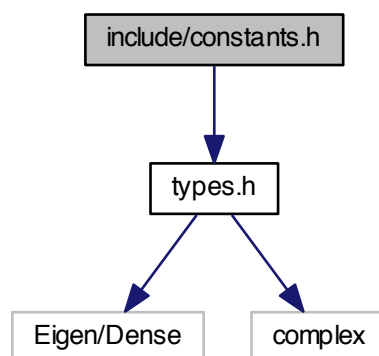

This graph shows which files directly or indirectly include this file:

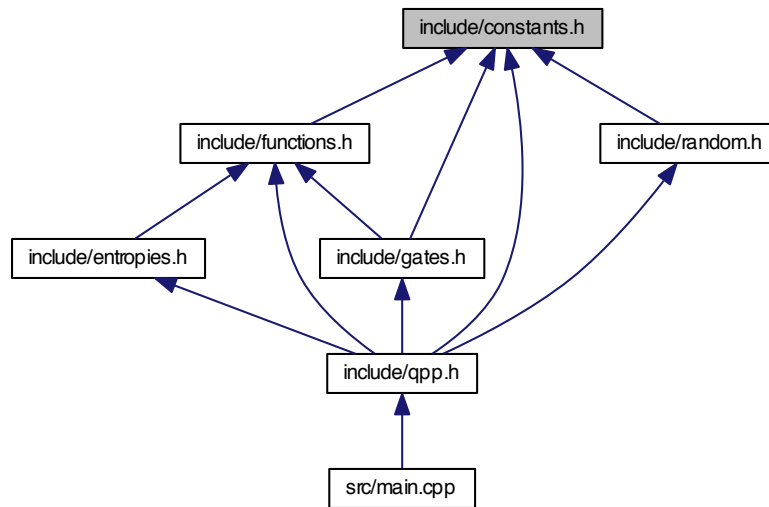

Namespaces

- [qpp](#)
- [qpp::ct](#)

Functions

- `types::cplx qpp::ct::omega (size_t D)`

Variables

- `const double qpp::ct::chop = 1e-10`
- `const types::cplx qpp::ct::ii = { 0, 1 }`
- `const double qpp::ct::pi = 3.141592653589793238462643383279502884`
- `const double qpp::ct::ee = 2.718281828459045235360287471352662497`


7.2 include/entropies.h File Reference

```


#include <cmath>
#include "types.h"
#include "functions.h"
#include "internal.h"
#include "exception.h"

```


Include dependency graph for entropies.h:

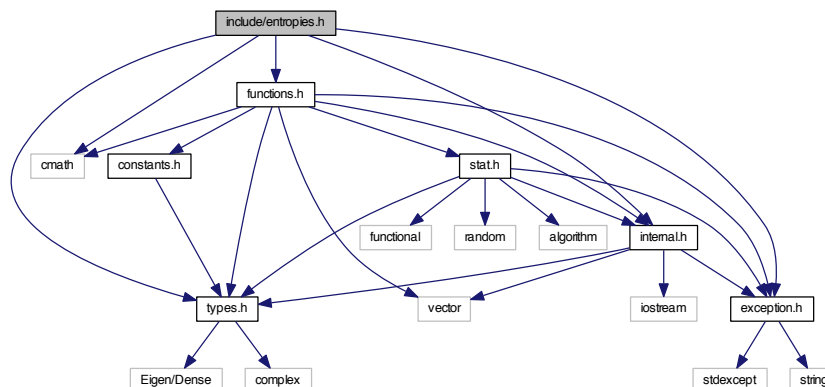

This graph shows which files directly or indirectly include this file:

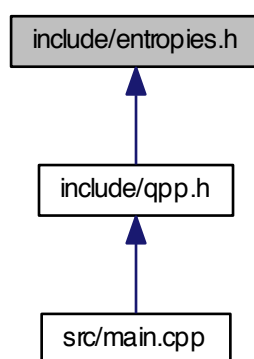

Namespaces

- [qpp](#)

Functions


- `template<typename Scalar >`
`double qpp::shannon (const types::DynMat< Scalar > &A)`
- `template<typename Scalar >`
`double qpp::renyi (const double alpha, const types::DynMat< Scalar > &A)`
- `template<typename Scalar >`
`double qpp::renyi_inf (const types::DynMat< Scalar > &A)`

7.3 include/exception.h File Reference


```
#include <stdexcept>
```

```
#include <string>
```

Include dependency graph for exception.h:

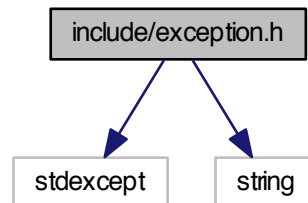

This graph shows which files directly or indirectly include this file:

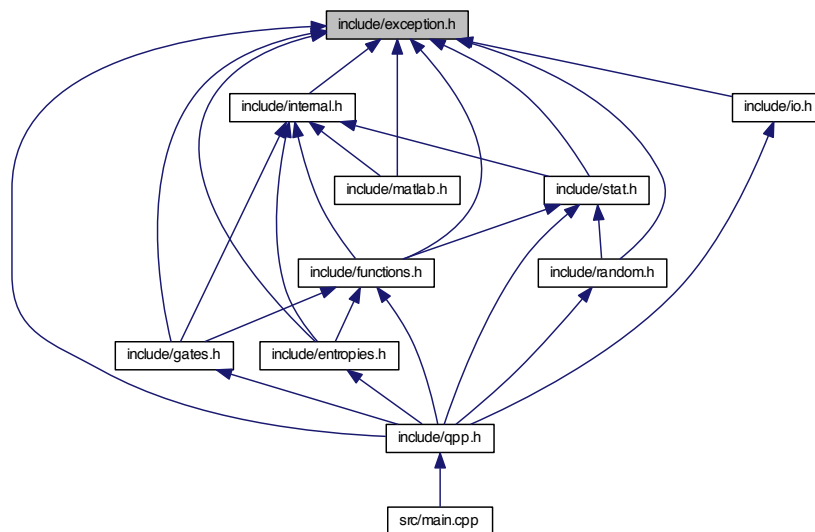

Classes

- class [qpp::Exception](#)


Namespaces

- [qpp](#)


7.4 include/functions.h File Reference

```
#include <vector>
#include <cmath>
#include "types.h"
#include "internal.h"
#include "exception.h"
#include "constants.h"
#include "stat.h"
```

Include dependency graph for functions.h:

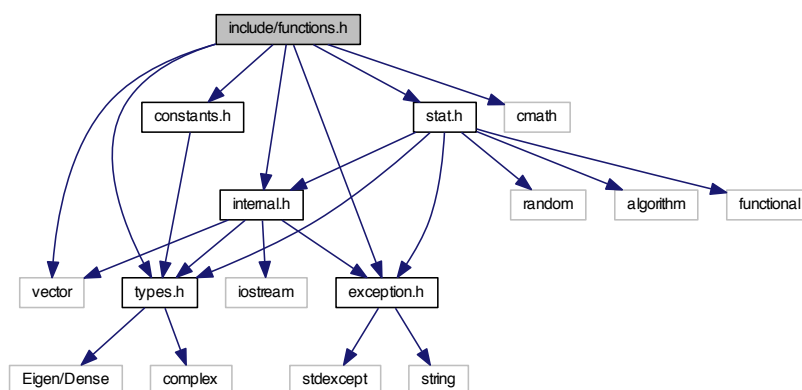

This graph shows which files directly or indirectly include this file:

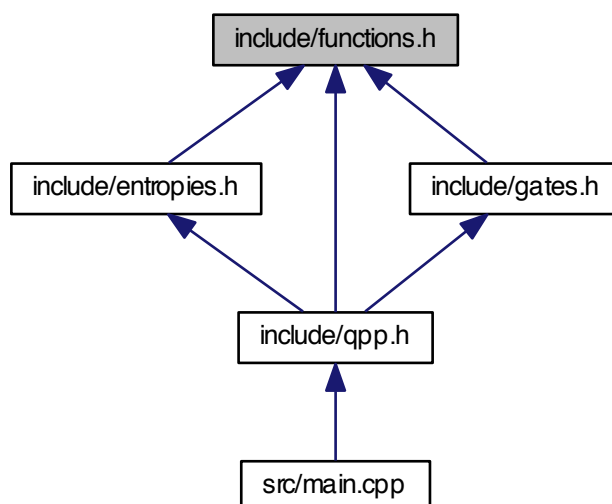

Namespaces

- [qpp](#)


Functions

- `template<typename Scalar >`
`types::DynMat< Scalar > qpp::transpose (const types::DynMat< Scalar > &A)`
- `template<typename Scalar >`
`types::DynMat< Scalar > qpp::conjugate (const types::DynMat< Scalar > &A)`
- `template<typename Scalar >`
`types::DynMat< Scalar > qpp::adjoint (const types::DynMat< Scalar > &A)`
- `template<typename Scalar >`
`Scalar qpp::trace (const types::DynMat< Scalar > &A)`
- `template<typename Scalar >`
`Scalar qpp::sum (const types::DynMat< Scalar > &A)`
- `template<typename Scalar >`
`double qpp::norm (const types::DynMat< Scalar > &A)`
- `template<typename Scalar >`
`types::cmat qpp::evals (const types::DynMat< Scalar > &A)`
- `template<typename Scalar >`
`types::cmat qpp::evecs (const types::DynMat< Scalar > &A)`
- `template<typename Scalar >`
`types::cmat qpp::hevals (const types::DynMat< Scalar > &A)`
- `template<typename Scalar >`
`types::cmat qpp::hevecs (const types::DynMat< Scalar > &A)`
- `template<typename Scalar >`
`types::cmat qpp::funm (const types::DynMat< Scalar > &A, types::cplx(*f)(const types::cplx &))`
- `template<typename Scalar >`
`types::cmat qpp::absm (const types::DynMat< Scalar > &A)`
- `template<typename Scalar >`
`types::cmat qpp::expm (const types::DynMat< Scalar > &A)`
- `template<typename Scalar >`
`types::cmat qpp::logm (const types::DynMat< Scalar > &A)`
- `template<typename Scalar >`
`types::cmat qpp::sqrtm (const types::DynMat< Scalar > &A)`
- `template<typename Scalar >`
`types::cmat qpp::sinm (const types::DynMat< Scalar > &A)`
- `template<typename Scalar >`
`types::cmat qpp::cosm (const types::DynMat< Scalar > &A)`
- `template<typename Scalar >`
`types::cmat qpp::powm (const types::DynMat< Scalar > &A, const types::cplx z)`
- `template<typename Scalar >`
`types::DynMat< Scalar > qpp::powm (const types::DynMat< Scalar > &A, size_t n)`
- `template<typename InputScalar, typename OutputScalar >`
`types::DynMat< OutputScalar > qpp::fun (const types::DynMat< InputScalar > &A, OutputScalar(*f)(const InputScalar &))`
- `template<typename Scalar >`
`types::DynMat< Scalar > qpp::kron (const types::DynMat< Scalar > &A, const types::DynMat< Scalar > &B)`
- `template<typename Scalar >`
`types::DynMat< Scalar > qpp::kronlist (const std::vector< types::DynMat< Scalar > > &list)`
- `template<typename Scalar >`
`types::DynMat< Scalar > qpp::kronpow (const types::DynMat< Scalar > &A, size_t n)`
- `template<typename Scalar >`
`types::DynMat< Scalar > qpp::reshape (const types::DynMat< Scalar > &A, size_t rows, size_t cols)`


- `template<typename Scalar >`
`types::DynMat< Scalar > qpp::syspermute (const types::DynMat< Scalar > &A, const std::vector< size_t > > perm, const std::vector< size_t > &dims)`
- `template<typename Scalar >`
`types::DynMat< Scalar > qpp::ptrace2 (const types::DynMat< Scalar > &A, const std::vector< size_t > > dims)`
- `template<typename Scalar >`
`types::DynMat< Scalar > qpp::ptrace (const types::DynMat< Scalar > &A, const std::vector< size_t > &subsys, const std::vector< size_t > &dims)`
- `template<typename Scalar >`
`types::DynMat< Scalar > qpp::ptranspose (const types::DynMat< Scalar > &A, const std::vector< size_t > &subsys, const std::vector< size_t > &dims)`
- `template<typename Scalar >`
`types::DynMat< Scalar > qpp::comm (const types::DynMat< Scalar > &A, const types::DynMat< Scalar > &B)`
- `template<typename Scalar >`
`types::DynMat< Scalar > qpp::anticomm (const types::DynMat< Scalar > &A, const types::DynMat< Scalar > &B)`
- `template<typename Scalar >`
`types::DynMat< Scalar > qpp::proj (const types::DynMat< Scalar > &V)`
- `template<typename Scalar >`
`types::DynMat< Scalar > qpp::dya (const types::DynMat< Scalar > &V)`

7.5 include/gates.h File Reference

```
#include "types.h"
#include "constants.h"
#include "functions.h"
#include "internal.h"
#include "exception.h"
Include dependency graph for gates.h:
```

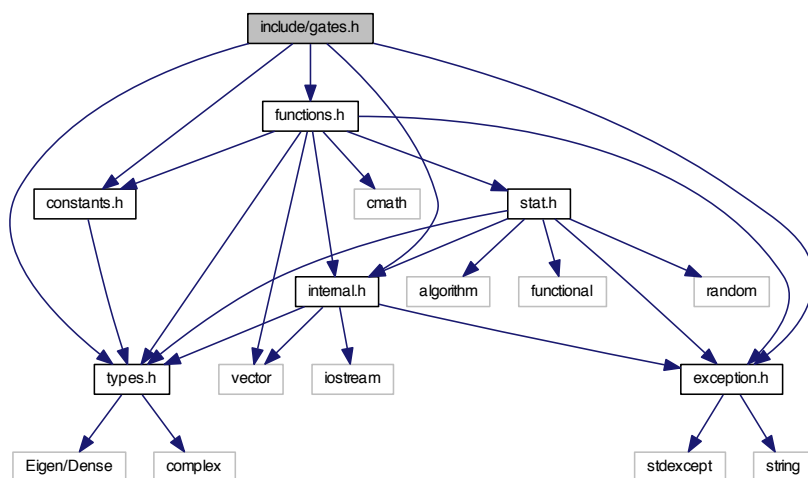

This graph shows which files directly or indirectly include this file:

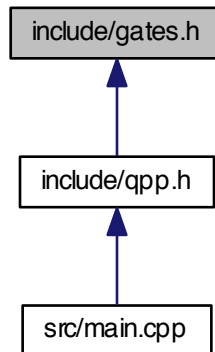

Namespaces

- [qpp](#)
- [qpp::gt](#)

Functions


- void [qpp::gt::_init_gates](#) ()
- types::cmat [qpp::gt::Rtheta](#) (double theta)
- types::cmat [qpp::gt::CU](#) (const types::cmat &U)
- types::cmat [qpp::gt::Zd](#) (size_t D)
- types::cmat [qpp::gt::Fd](#) (size_t D)
- types::cmat [qpp::gt::Xd](#) (size_t D)
- types::cmat [qpp::gt::CUd](#) (const types::cmat &U)

Variables


- types::cmat [qpp::gt::H](#)
- types::cmat [qpp::gt::Id2](#)
- types::cmat [qpp::gt::X](#)
- types::cmat [qpp::gt::Y](#)
- types::cmat [qpp::gt::Z](#)
- types::cmat [qpp::gt::S](#)
- types::cmat [qpp::gt::T](#)
- types::cmat [qpp::gt::CNOT](#)
- types::cmat [qpp::gt::CP](#)
- types::cmat [qpp::gt::TOF](#)

7.6 include/internal.h File Reference

```
#include <vector>
#include <iostream>
#include "types.h"
#include "exception.h"
Include dependency graph for internal.h:
```

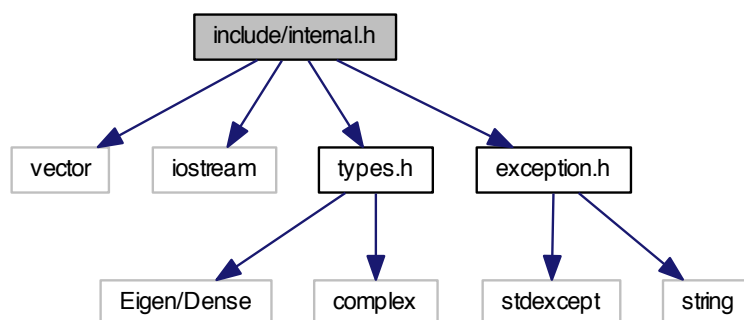

This graph shows which files directly or indirectly include this file:

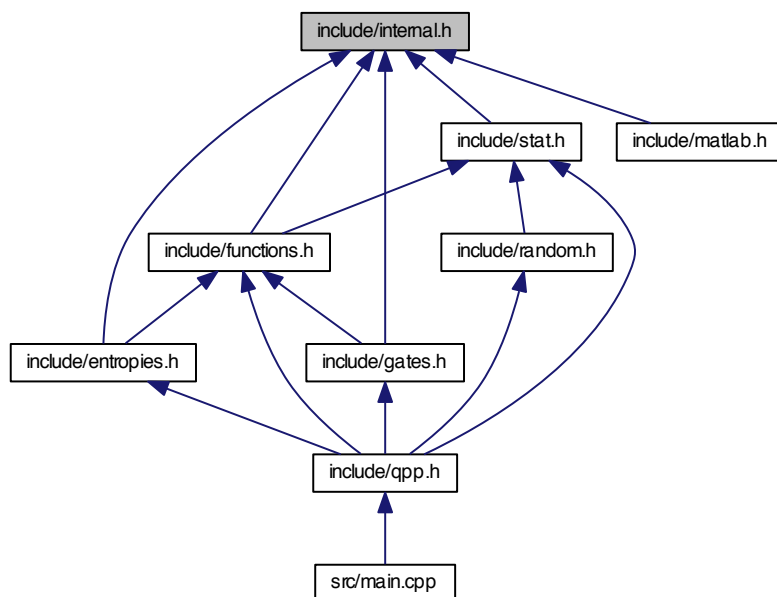

Namespaces


- `qpp`
- `qpp::internal`

Functions


- void `qpp::internal::_n2multiidx` (size_t n, size_t numdims, const size_t *dims, size_t *result)
- size_t `qpp::internal::_multiidx2n` (const size_t *midx, size_t numdims, const size_t *dims)
- template<typename Scalar >
bool `qpp::internal::_check_square_mat` (const types::DynMat< Scalar > &A)
- template<typename Scalar >
bool `qpp::internal::_check_vector` (const types::DynMat< Scalar > &A)
- template<typename Scalar >
bool `qpp::internal::_check_row_vector` (const types::DynMat< Scalar > &A)
- template<typename Scalar >
bool `qpp::internal::_check_col_vector` (const types::DynMat< Scalar > &A)
- template<typename Scalar >
bool `qpp::internal::_check_nonzero_size` (const types::DynMat< Scalar > &A)
- template<typename Scalar >
bool `qpp::internal::_check_dims_match_mat` (const std::vector< size_t > &dims, const types::DynMat< Scalar > &A)
- bool `qpp::internal::_check_dims` (const std::vector< size_t > &dims)
- bool `qpp::internal::_check_eq_dims` (const std::vector< size_t > &dims, size_t dim)
- bool `qpp::internal::_check_subsys` (const std::vector< size_t > &subsys, const std::vector< size_t > &dims)
- bool `qpp::internal::_check_perm` (const std::vector< size_t > &perm, const std::vector< size_t > &dims)
- template<typename Scalar >
void `qpp::internal::_syspermute_worker` (const size_t *midxcol, size_t numdims, const size_t *cdims, const size_t *cperm, size_t i, size_t j, size_t &iperm, size_t &jperm, const types::DynMat< Scalar > &A, types::DynMat< Scalar > &result)
- template<typename Scalar >
void `qpp::internal::_ptranspose_worker` (const size_t *midxcol, size_t numdims, size_t numsubsys, const size_t *cdims, const size_t *csubsys, size_t i, size_t j, size_t &iperm, size_t &jperm, const types::DynMat< Scalar > &A, types::DynMat< Scalar > &result)

7.7 include/io.h File Reference

```
#include <stdexcept>
#include <vector>
#include <iostream>
#include <fstream>
#include <iomanip>
#include "types.h"
#include "exception.h"
Include dependency graph for io.h:
```

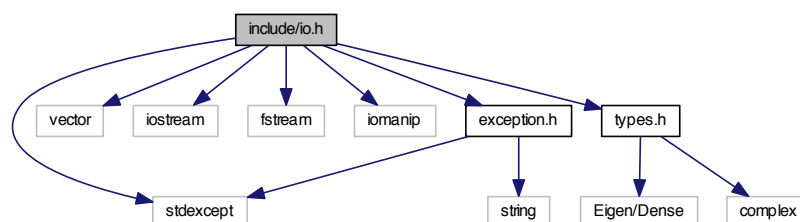

This graph shows which files directly or indirectly include this file:



Namespaces

- [qpp](#)

Functions

- `template<typename T >`
`void qpp::disp (const T &x, const std::string &separator=" ", std::ostream &os=std::cout)`
- `template<typename T >`
`void qpp::displn (const T &x, const std::string &separator=" ", std::ostream &os=std::cout)`
- `template<typename Scalar >`
`void qpp::disp (const types::DynMat< Scalar > &A, double chop=ct::chop, std::ostream &os=std::cout)`
- `template<typename Scalar >`
`void qpp::displn (const types::DynMat< Scalar > &A, double chop=ct::chop, std::ostream &os=std::cout)`
- `void qpp::disp (const types::cplx c, double chop=ct::chop, std::ostream &os=std::cout)`
- `void qpp::displn (const types::cplx c, double chop=ct::chop, std::ostream &os=std::cout)`
- `template<typename Scalar >`
`void qpp::save (const types::DynMat< Scalar > &A, const std::string &fname)`
- `template<typename Scalar >`
`types::DynMat< Scalar > qpp::load (const std::string &fname)`


7.8 include/matlab.h File Reference

```

#include <Eigen/Dense>
#include <string>
#include <stdexcept>
#include "types.h"
#include "internal.h"
#include "exception.h"
#include "mat.h"
#include "mex.h"

```

Include dependency graph for matlab.h:

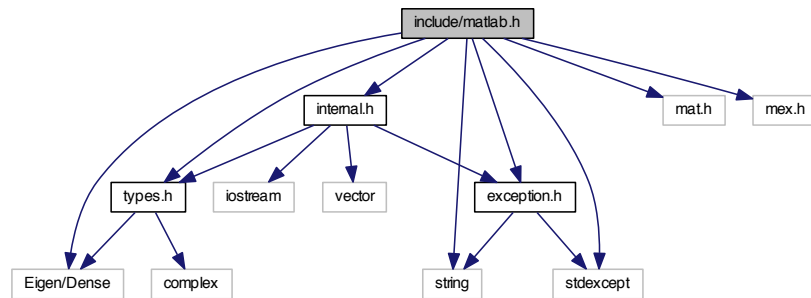

Namespaces

- [qpp](#)

Functions

- `template<typename Scalar >`
`types::DynMat< Scalar > qpp::loadMATLABmatrix (const std::string &mat_file, const std::string &var_name)`
- `template<>`
`types::DynMat< double > qpp::loadMATLABmatrix (const std::string &mat_file, const std::string &var_name)`
- `template<>`
`types::DynMat< types::cplx > qpp::loadMATLABmatrix (const std::string &mat_file, const std::string &var_name)`
- `template<typename Scalar >`
`void qpp::saveMATLABmatrix (const types::DynMat< Scalar > &A, const std::string &mat_file, const std::string &var_name, const std::string &mode)`
- `template<>`
`void qpp::saveMATLABmatrix (const types::DynMat< double > &A, const std::string &mat_file, const std::string &var_name, const std::string &mode)`
- `template<>`
`void qpp::saveMATLABmatrix (const types::DynMat< types::cplx > &A, const std::string &mat_file, const std::string &var_name, const std::string &mode)`


7.9 include/qpp.h File Reference

```


#include <cstdlib>
#include "types.h"
#include "constants.h"
#include "gates.h"
#include "stat.h"
#include "functions.h"
#include "random.h"
#include "entropies.h"
#include "io.h"
#include "timer.h"
#include "exception.h"

```

Include dependency graph for qpp.h:

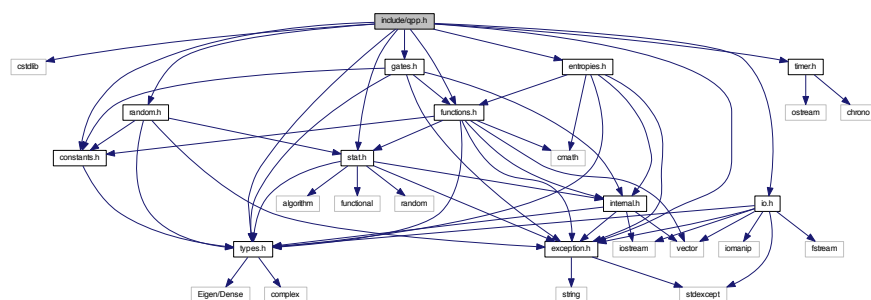

This graph shows which files directly or indirectly include this file:



Namespaces

- [qpp](#)
- [qpp::gt](#)


Functions

- [types::cmat](#) [qpp::gt::TOF](#) (8, 8)
- [int](#) [qpp::_init](#) ()


7.10 include/random.h File Reference

```
#include "types.h"
#include "stat.h"
#include "constants.h"
#include "exception.h"
```

Include dependency graph for random.h:

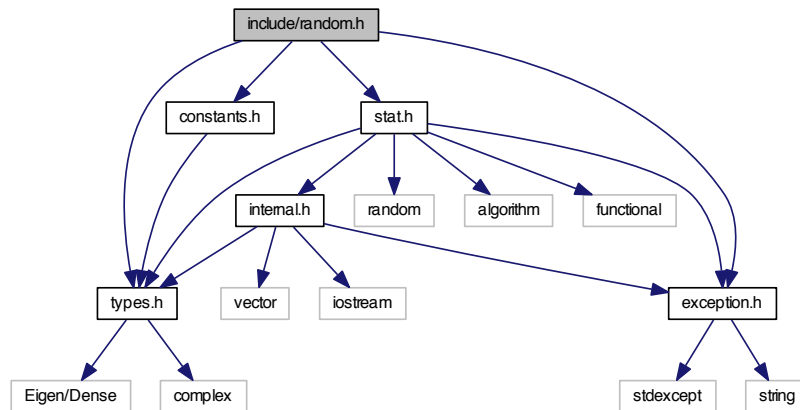

This graph shows which files directly or indirectly include this file:

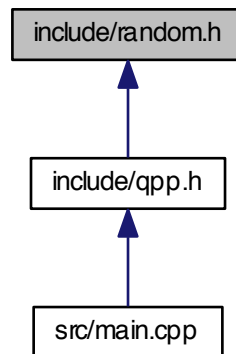

Namespaces

- [qpp](#)


Functions

- `template<typename Scalar >`
`types::DynMat< Scalar > qpp::rand (size_t rows, size_t cols, double a=0, double b=1)`
- `template<>`
`types::DynMat< double > qpp::rand (size_t rows, size_t cols, double a, double b)`
- `template<>`
`types::DynMat< types::cplx > qpp::rand (size_t rows, size_t cols, double a, double b)`
- `double qpp::rand (double a=0, double b=1)`


- `template<typename Scalar >`
`types::DynMat< Scalar > qpp::randn (size_t rows, size_t cols, double mean=0, double sigma=1)`
- `template<>`
`types::DynMat< double > qpp::randn (size_t rows, size_t cols, double mean, double sigma)`
- `template<>`
`types::DynMat< types::cplx > qpp::randn (size_t rows, size_t cols, double mean, double sigma)`
- `double qpp::randn (double mean=0, double sigma=1)`
- `types::cmat qpp::randU (size_t D)`
- `types::cmat qpp::randH (size_t D)`
- `types::cmat qpp::randket (size_t D)`
- `types::cmat qpp::randrho (size_t D)`

7.11 include/stat.h File Reference

```
#include <random>
#include <algorithm>
#include <functional>
#include "types.h"
#include "internal.h"
#include "exception.h"
Include dependency graph for stat.h:
```

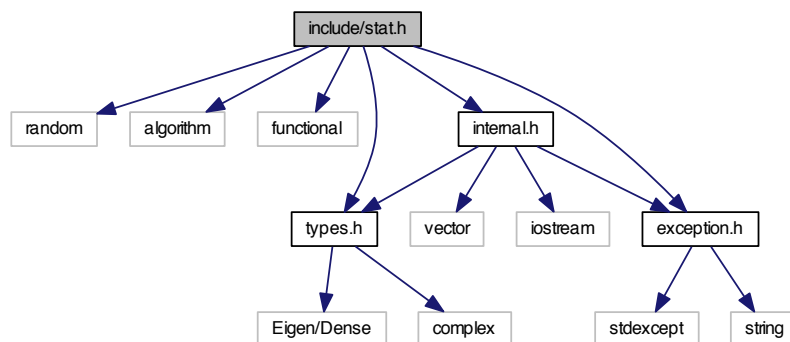

This graph shows which files directly or indirectly include this file:

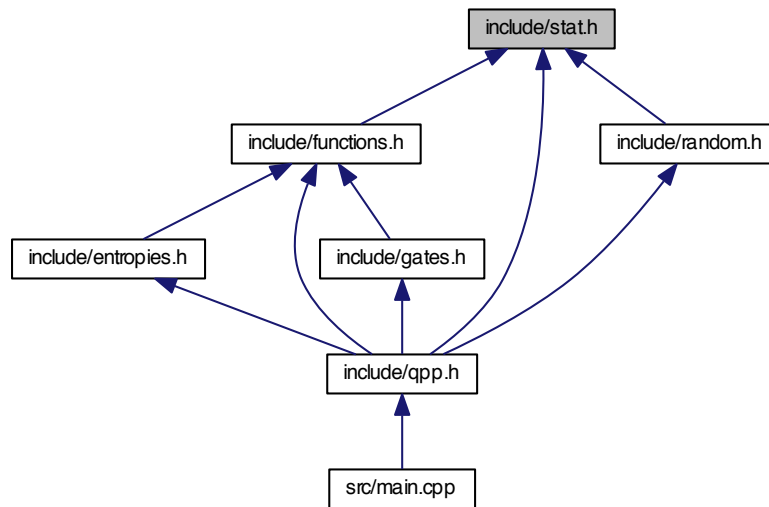

Classes

- class [qpp::stat::NormalDistribution](#)
- class [qpp::stat::UniformRealDistribution](#)
- class [qpp::stat::DiscreteDistribution](#)
- class [qpp::stat::DiscreteDistributionFromComplex](#)

Namespaces

- [qpp](#)
- [qpp::stat](#)


Variables

- `std::random_device` [qpp::stat::_rd](#)
- `std::mt19937` [qpp::stat::_rng](#)


7.12 include/timer.h File Reference

```
#include <ostream>
#include <chrono>
```

Include dependency graph for timer.h:



This graph shows which files directly or indirectly include this file:

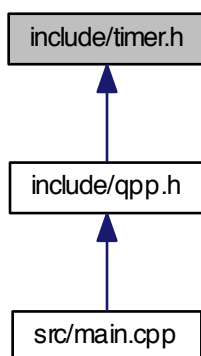

Classes

- class `qpp::Timer`


Namespaces

- `qpp`


7.13 include/types.h File Reference

```
#include <Eigen/Dense>
#include <complex>
```

Include dependency graph for types.h:

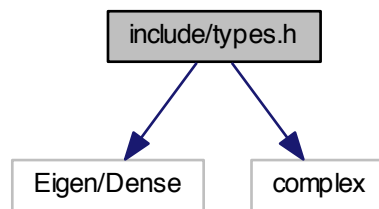

This graph shows which files directly or indirectly include this file:

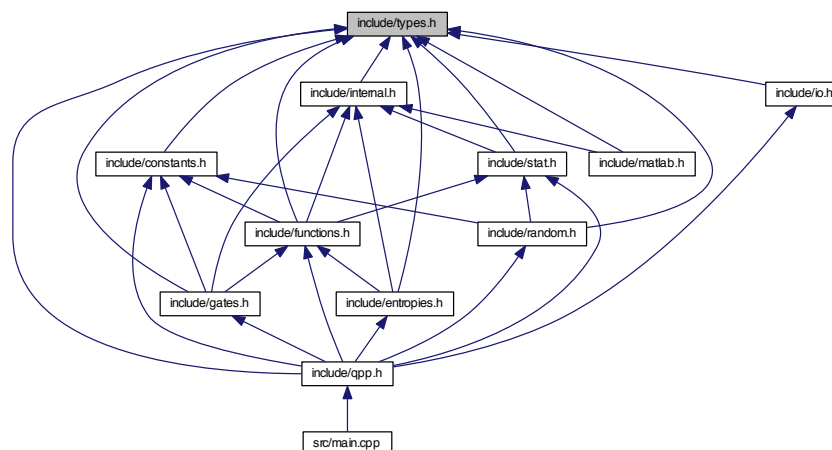

Namespaces

- [qpp](#)
- [qpp::types](#)


Typedefs

- `typedef std::complex< double > qpp::types::cplx`
- `typedef Eigen::MatrixXcd qpp::types::cmat`
- `typedef Eigen::MatrixXd qpp::types::dmat`
- `typedef Eigen::MatrixXf qpp::types::fmat`
- `typedef Eigen::MatrixXi qpp::types::imat`
- `template<typename Expression >`
`using qpp::types::Expression2DynMat = Eigen::Matrix< typename Expression::Scalar, Eigen::Dynamic, Eigen::Dynamic >`
- `template<typename Scalar >`
`using qpp::types::DynMat = Eigen::Matrix< Scalar, Eigen::Dynamic, Eigen::Dynamic >`

7.14 src/main.cpp File Reference

```
#include "qpp.h"
```

Include dependency graph for main.cpp:

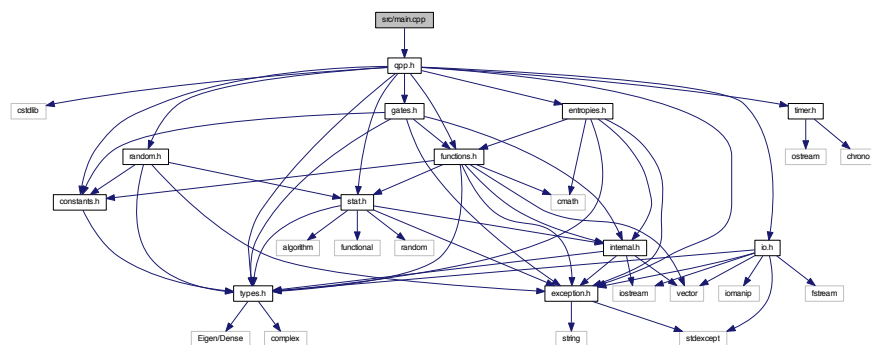

Functions

- `int main ()`

7.14.1 Function Documentation

7.14.1.1 `int main ()`

Here is the call graph for this function:

