

qpp  
0.1

Generated by Doxygen 1.8.5

Mon Apr 14 2014 04:11:40



# Contents

<b>1</b>	<b>Namespace Index</b>	<b>1</b>
1.1	Namespace List . . . . .	1
<b>2</b>	<b>Hierarchical Index</b>	<b>3</b>
2.1	Class Hierarchy . . . . .	3
<b>3</b>	<b>Class Index</b>	<b>5</b>
3.1	Class List . . . . .	5
<b>4</b>	<b>File Index</b>	<b>7</b>
4.1	File List . . . . .	7
<b>5</b>	<b>Namespace Documentation</b>	<b>9</b>
5.1	qpp Namespace Reference . . . . .	9
5.1.1	Function Documentation . . . . .	13
5.1.1.1	absm . . . . .	13
5.1.1.2	adjoint . . . . .	13
5.1.1.3	anticomm . . . . .	14
5.1.1.4	channel . . . . .	14
5.1.1.5	choi . . . . .	15
5.1.1.6	choi2kraus . . . . .	15
5.1.1.7	comm . . . . .	16
5.1.1.8	conjugate . . . . .	16
5.1.1.9	cosm . . . . .	16
5.1.1.10	det . . . . .	17
5.1.1.11	disp . . . . .	17
5.1.1.12	disp . . . . .	17
5.1.1.13	disp . . . . .	17
5.1.1.14	disp . . . . .	17
5.1.1.15	displn . . . . .	17
5.1.1.16	displn . . . . .	18
5.1.1.17	displn . . . . .	18
5.1.1.18	displn . . . . .	18

5.1.1.19	entanglement	19
5.1.1.20	evals	19
5.1.1.21	evects	20
5.1.1.22	expandout	20
5.1.1.23	expm	21
5.1.1.24	fun	21
5.1.1.25	funm	21
5.1.1.26	gconcurrency	22
5.1.1.27	grams	23
5.1.1.28	grams	23
5.1.1.29	hevals	24
5.1.1.30	hevects	24
5.1.1.31	kron	24
5.1.1.32	kronlist	25
5.1.1.33	kronpow	25
5.1.1.34	load	25
5.1.1.35	loadMATLABmatrix	25
5.1.1.36	loadMATLABmatrix	25
5.1.1.37	loadMATLABmatrix	25
5.1.1.38	logdet	26
5.1.1.39	logm	26
5.1.1.40	mket	26
5.1.1.41	mket	27
5.1.1.42	mket	27
5.1.1.43	multiidx2n	27
5.1.1.44	mutualinfo	28
5.1.1.45	n2multiidx	28
5.1.1.46	norm	29
5.1.1.47	powm	29
5.1.1.48	proj	30
5.1.1.49	ptrace	30
5.1.1.50	ptrace2	31
5.1.1.51	ptranspose	31
5.1.1.52	rand	32
5.1.1.53	rand	32
5.1.1.54	rand	32
5.1.1.55	rand	32
5.1.1.56	randH	32
5.1.1.57	randket	32
5.1.1.58	randkraus	33

5.1.1.59	randn	33
5.1.1.60	randn	33
5.1.1.61	randn	33
5.1.1.62	randn	33
5.1.1.63	randrho	34
5.1.1.64	randU	34
5.1.1.65	randV	34
5.1.1.66	renyi	34
5.1.1.67	renyi_inf	35
5.1.1.68	reshape	35
5.1.1.69	save	35
5.1.1.70	saveMATLABmatrix	35
5.1.1.71	saveMATLABmatrix	36
5.1.1.72	saveMATLABmatrix	36
5.1.1.73	schmidtcoeff	36
5.1.1.74	schmidtprob	37
5.1.1.75	schmidtU	37
5.1.1.76	schmidtV	38
5.1.1.77	shannon	38
5.1.1.78	sinm	39
5.1.1.79	spectralpowm	39
5.1.1.80	sqrtm	39
5.1.1.81	sum	40
5.1.1.82	super	40
5.1.1.83	syspermute	41
5.1.1.84	trace	41
5.1.1.85	transpose	42
5.1.1.86	tsallis	42
5.1.2	Variable Documentation	42
5.1.2.1	gt	42
5.1.2.2	rdevs	42
5.2	qpp::ct Namespace Reference	42
5.2.1	Function Documentation	43
5.2.1.1	omega	43
5.2.2	Variable Documentation	43
5.2.2.1	chop	43
5.2.2.2	ee	43
5.2.2.3	eps	43
5.2.2.4	ii	43
5.2.2.5	pi	43

5.3	qpp::internal Namespace Reference	43
5.3.1	Function Documentation	44
5.3.1.1	_check_col_vector	44
5.3.1.2	_check_dims	44
5.3.1.3	_check_dims_match_cvect	44
5.3.1.4	_check_dims_match_mat	44
5.3.1.5	_check_dims_match_rvect	44
5.3.1.6	_check_eq_dims	44
5.3.1.7	_check_nonzero_size	44
5.3.1.8	_check_perm	44
5.3.1.9	_check_row_vector	44
5.3.1.10	_check_square_mat	44
5.3.1.11	_check_subsys	44
5.3.1.12	_check_vector	44
5.3.1.13	_multiidx2n	44
5.3.1.14	_n2multiidx	44
5.3.1.15	_ptranspose_worker	44
5.3.1.16	_syspermute_worker	45
5.4	qpp::types Namespace Reference	45
5.4.1	Typedef Documentation	45
5.4.1.1	bra	45
5.4.1.2	cmat	45
5.4.1.3	cplx	45
5.4.1.4	dmat	45
5.4.1.5	DynMat	45
5.4.1.6	fmat	45
5.4.1.7	imat	45
5.4.1.8	ket	45
<b>6</b>	<b>Class Documentation</b>	<b>47</b>
6.1	qpp::DiscreteDistribution Class Reference	47
6.1.1	Constructor & Destructor Documentation	47
6.1.1.1	DiscreteDistribution	47
6.1.1.2	DiscreteDistribution	47
6.1.1.3	DiscreteDistribution	47
6.1.2	Member Function Documentation	47
6.1.2.1	probabilities	47
6.1.2.2	sample	48
6.1.3	Member Data Documentation	48
6.1.3.1	_d	48

6.2	<a href="#">qpp::DiscreteDistributionAbsSquare Class Reference</a>	48
6.2.1	<a href="#">Constructor &amp; Destructor Documentation</a>	48
6.2.1.1	<a href="#">DiscreteDistributionAbsSquare</a>	49
6.2.1.2	<a href="#">DiscreteDistributionAbsSquare</a>	49
6.2.1.3	<a href="#">DiscreteDistributionAbsSquare</a>	49
6.2.1.4	<a href="#">DiscreteDistributionAbsSquare</a>	50
6.2.2	<a href="#">Member Function Documentation</a>	50
6.2.2.1	<a href="#">cplx2weights</a>	50
6.2.2.2	<a href="#">probabilities</a>	50
6.2.2.3	<a href="#">sample</a>	50
6.2.3	<a href="#">Member Data Documentation</a>	50
6.2.3.1	<a href="#">_d</a>	50
6.3	<a href="#">qpp::Exception Class Reference</a>	50
6.3.1	<a href="#">Member Enumeration Documentation</a>	52
6.3.1.1	<a href="#">Type</a>	52
6.3.2	<a href="#">Constructor &amp; Destructor Documentation</a>	53
6.3.2.1	<a href="#">Exception</a>	53
6.3.2.2	<a href="#">Exception</a>	53
6.3.2.3	<a href="#">~Exception</a>	53
6.3.3	<a href="#">Member Function Documentation</a>	53
6.3.3.1	<a href="#">_construct_exception_msg</a>	53
6.3.3.2	<a href="#">what</a>	53
6.3.4	<a href="#">Member Data Documentation</a>	53
6.3.4.1	<a href="#">_custom</a>	53
6.3.4.2	<a href="#">_msg</a>	53
6.3.4.3	<a href="#">_type</a>	53
6.3.4.4	<a href="#">_where</a>	53
6.4	<a href="#">qpp::Gates Class Reference</a>	54
6.4.1	<a href="#">Constructor &amp; Destructor Documentation</a>	55
6.4.1.1	<a href="#">Gates</a>	55
6.4.1.2	<a href="#">Gates</a>	55
6.4.1.3	<a href="#">~Gates</a>	55
6.4.2	<a href="#">Member Function Documentation</a>	55
6.4.2.1	<a href="#">CTRL</a>	55
6.4.2.2	<a href="#">Fd</a>	56
6.4.2.3	<a href="#">getInstance</a>	56
6.4.2.4	<a href="#">Id</a>	56
6.4.2.5	<a href="#">operator=</a>	56
6.4.2.6	<a href="#">Rtheta</a>	56
6.4.2.7	<a href="#">Xd</a>	56

6.4.2.8	Zd	56
6.4.3	Member Data Documentation	57
6.4.3.1	b00	57
6.4.3.2	b01	57
6.4.3.3	b10	57
6.4.3.4	b11	57
6.4.3.5	CNOTab	57
6.4.3.6	CNOTba	57
6.4.3.7	CS	57
6.4.3.8	CZ	57
6.4.3.9	FRED	57
6.4.3.10	GHZ	57
6.4.3.11	H	57
6.4.3.12	Id2	57
6.4.3.13	pb00	57
6.4.3.14	pb01	57
6.4.3.15	pb10	57
6.4.3.16	pb11	57
6.4.3.17	pGHZ	57
6.4.3.18	pW	57
6.4.3.19	px0	57
6.4.3.20	px1	57
6.4.3.21	py0	57
6.4.3.22	py1	57
6.4.3.23	pz0	57
6.4.3.24	pz1	57
6.4.3.25	S	57
6.4.3.26	SWAP	57
6.4.3.27	T	57
6.4.3.28	TOF	58
6.4.3.29	W	58
6.4.3.30	X	58
6.4.3.31	x0	58
6.4.3.32	x1	58
6.4.3.33	Y	58
6.4.3.34	y0	58
6.4.3.35	y1	58
6.4.3.36	Z	58
6.4.3.37	z0	58
6.4.3.38	z1	58



6.5	qpp::NormalDistribution Class Reference . . . . .	58
6.5.1	Constructor & Destructor Documentation . . . . .	58
6.5.1.1	NormalDistribution . . . . .	58
6.5.2	Member Function Documentation . . . . .	58
6.5.2.1	sample . . . . .	59
6.5.3	Member Data Documentation . . . . .	59
6.5.3.1	_d . . . . .	59
6.6	qpp::Qudit Class Reference . . . . .	59
6.6.1	Constructor & Destructor Documentation . . . . .	59
6.6.1.1	Qudit . . . . .	60
6.6.1.2	~Qudit . . . . .	60
6.6.2	Member Function Documentation . . . . .	60
6.6.2.1	getD . . . . .	60
6.6.2.2	getRho . . . . .	60
6.6.2.3	measure . . . . .	60
6.6.2.4	measure . . . . .	61
6.6.3	Member Data Documentation . . . . .	61
6.6.3.1	_D . . . . .	61
6.6.3.2	_rho . . . . .	61
6.7	qpp::RandomDevices Class Reference . . . . .	61
6.7.1	Constructor & Destructor Documentation . . . . .	62
6.7.1.1	RandomDevices . . . . .	62
6.7.1.2	RandomDevices . . . . .	62
6.7.1.3	~RandomDevices . . . . .	62
6.7.2	Member Function Documentation . . . . .	62
6.7.2.1	getInstance . . . . .	62
6.7.2.2	operator= . . . . .	62
6.7.3	Member Data Documentation . . . . .	62
6.7.3.1	_rd . . . . .	62
6.7.3.2	_rng . . . . .	62
6.8	qpp::Timer Class Reference . . . . .	62
6.8.1	Constructor & Destructor Documentation . . . . .	62
6.8.1.1	Timer . . . . .	62
6.8.1.2	~Timer . . . . .	62
6.8.2	Member Function Documentation . . . . .	63
6.8.2.1	seconds . . . . .	63
6.8.2.2	tic . . . . .	63
6.8.2.3	toc . . . . .	63
6.8.3	Friends And Related Function Documentation . . . . .	63
6.8.3.1	operator<< . . . . .	63

6.8.4	Member Data Documentation . . . . .	63
6.8.4.1	_end . . . . .	63
6.8.4.2	_start . . . . .	63
6.9	qpp::UniformRealDistribution Class Reference . . . . .	63
6.9.1	Constructor & Destructor Documentation . . . . .	63
6.9.1.1	UniformRealDistribution . . . . .	63
6.9.2	Member Function Documentation . . . . .	63
6.9.2.1	sample . . . . .	64
6.9.3	Member Data Documentation . . . . .	64
6.9.3.1	_d . . . . .	64
<b>7</b>	<b>File Documentation</b>	<b>65</b>
7.1	include/channels.h File Reference . . . . .	65
7.2	include/classes/exception.h File Reference . . . . .	66
7.3	include/classes/gates.h File Reference . . . . .	67
7.4	include/classes/qudit.h File Reference . . . . .	68
7.5	include/classes/randevs.h File Reference . . . . .	69
7.6	include/classes/stat.h File Reference . . . . .	70
7.7	include/classes/timer.h File Reference . . . . .	71
7.8	include/constants.h File Reference . . . . .	72
7.9	include/entanglement.h File Reference . . . . .	74
7.10	include/entropies.h File Reference . . . . .	75
7.11	include/functions.h File Reference . . . . .	76
7.12	include/internal.h File Reference . . . . .	79
7.13	include/io.h File Reference . . . . .	80
7.14	include/matlab.h File Reference . . . . .	82
7.15	include/qpp.h File Reference . . . . .	83
7.16	include/random.h File Reference . . . . .	83
7.17	include/types.h File Reference . . . . .	85

# Chapter 1

## Namespace Index

### 1.1 Namespace List

Here is a list of all namespaces with brief descriptions:

<a href="#">qpp</a>	9
<a href="#">qpp::ct</a>	42
<a href="#">qpp::internal</a>	43
<a href="#">qpp::types</a>	45



## Chapter 2

# Hierarchical Index

### 2.1 Class Hierarchy

This inheritance list is sorted roughly, but not completely, alphabetically:

qpp::DiscreteDistribution . . . . .	47
qpp::DiscreteDistributionAbsSquare . . . . .	48
exception	
qpp::Exception . . . . .	50
qpp::Gates . . . . .	54
qpp::NormalDistribution . . . . .	58
qpp::Qudit . . . . .	59
qpp::RandomDevices . . . . .	61
qpp::Timer . . . . .	62
qpp::UniformRealDistribution . . . . .	63



## Chapter 3

# Class Index

### 3.1 Class List

Here are the classes, structs, unions and interfaces with brief descriptions:

<a href="#">qpp::DiscreteDistribution</a>	47
<a href="#">qpp::DiscreteDistributionAbsSquare</a>	48
<a href="#">qpp::Exception</a>	50
<a href="#">qpp::Gates</a>	54
<a href="#">qpp::NormalDistribution</a>	58
<a href="#">qpp::Qudit</a>	59
<a href="#">qpp::RandomDevices</a>	61
<a href="#">qpp::Timer</a>	62
<a href="#">qpp::UniformRealDistribution</a>	63





## Chapter 4

# File Index

### 4.1 File List

Here is a list of all files with brief descriptions:

include/channels.h	65
include/constants.h	72
include/entanglement.h	74
include/entropies.h	75
include/functions.h	76
include/internal.h	79
include/io.h	80
include/matlab.h	82
include/qpp.h	83
include/random.h	83
include/types.h	85
include/classes/exception.h	66
include/classes/gates.h	67
include/classes/qudit.h	68
include/classes/randevs.h	69
include/classes/stat.h	70
include/classes/timer.h	71



## Chapter 5

# Namespace Documentation

### 5.1 qpp Namespace Reference

#### Namespaces

- [ct](#)
- [internal](#)
- [types](#)

#### Classes

- class [Exception](#)
- class [Gates](#)
- class [Qudit](#)
- class [RandomDevices](#)
- class [NormalDistribution](#)
- class [UniformRealDistribution](#)
- class [DiscreteDistribution](#)
- class [DiscreteDistributionAbsSquare](#)
- class [Timer](#)

#### Functions

- [types::cmat channel](#) (const [types::cmat](#) &rho, const std::vector< [types::cmat](#) > &Ks)
- [types::cmat super](#) (const std::vector< [types::cmat](#) > &Ks)
- [types::cmat choi](#) (const std::vector< [types::cmat](#) > &Ks)
- std::vector< [types::cmat](#) > [choi2kraus](#) (const [types::cmat](#) &A)
- template<typename Derived >  
[types::cmat schmidtcoeff](#) (const Eigen::MatrixBase< Derived > &A, const std::vector< size\_t > &dims)
- template<typename Derived >  
[types::cmat schmidtU](#) (const Eigen::MatrixBase< Derived > &A, const std::vector< size\_t > &dims)
- template<typename Derived >  
[types::cmat schmidtV](#) (const Eigen::MatrixBase< Derived > &A, const std::vector< size\_t > &dims)
- template<typename Derived >  
[types::cmat schmidtprob](#) (const Eigen::MatrixBase< Derived > &A, const std::vector< size\_t > &dims)
- template<typename Derived >  
double [entanglement](#) (const Eigen::MatrixBase< Derived > &A, const std::vector< size\_t > &dims)
- template<typename Derived >  
double [gconcurrency](#) (const Eigen::MatrixBase< Derived > &A)

- `template<typename Derived >`  
`double shannon (const Eigen::MatrixBase< Derived > &A)`
- `template<typename Derived >`  
`double renyi (const double alpha, const Eigen::MatrixBase< Derived > &A)`
- `template<typename Derived >`  
`double renyi_inf (const Eigen::MatrixBase< Derived > &A)`
- `template<typename Derived >`  
`double tsallis (const double alpha, const Eigen::MatrixBase< Derived > &A)`
- `template<typename Derived >`  
`double mutualinfo (const Eigen::MatrixBase< Derived > &A, const std::vector< size_t > &subsys, const std::vector< size_t > &dims)`
- `template<typename Derived >`  
`types::DynMat< typename`  
`Derived::Scalar > transpose (const Eigen::MatrixBase< Derived > &A)`
- `template<typename Derived >`  
`types::DynMat< typename`  
`Derived::Scalar > conjugate (const Eigen::MatrixBase< Derived > &A)`
- `template<typename Derived >`  
`types::DynMat< typename`  
`Derived::Scalar > adjoint (const Eigen::MatrixBase< Derived > &A)`
- `template<typename Derived >`  
`Derived::Scalar trace (const Eigen::MatrixBase< Derived > &A)`
- `template<typename Derived >`  
`Derived::Scalar det (const Eigen::MatrixBase< Derived > &A)`
- `template<typename Derived >`  
`Derived::Scalar logdet (const Eigen::MatrixBase< Derived > &A)`
- `template<typename Derived >`  
`Derived::Scalar sum (const Eigen::MatrixBase< Derived > &A)`
- `template<typename Derived >`  
`double norm (const Eigen::MatrixBase< Derived > &A)`
- `template<typename Derived >`  
`types::cmat evals (const Eigen::MatrixBase< Derived > &A)`
- `template<typename Derived >`  
`types::cmat evecs (const Eigen::MatrixBase< Derived > &A)`
- `template<typename Derived >`  
`types::cmat hevals (const Eigen::MatrixBase< Derived > &A)`
- `template<typename Derived >`  
`types::cmat hevecs (const Eigen::MatrixBase< Derived > &A)`
- `template<typename Derived >`  
`types::cmat funm (const Eigen::MatrixBase< Derived > &A, types::cplx(*f)(const types::cplx &))`
- `template<typename Derived >`  
`types::cmat sqrtm (const Eigen::MatrixBase< Derived > &A)`
- `template<typename Derived >`  
`types::cmat absm (const Eigen::MatrixBase< Derived > &A)`
- `template<typename Derived >`  
`types::cmat expm (const Eigen::MatrixBase< Derived > &A)`
- `template<typename Derived >`  
`types::cmat logm (const Eigen::MatrixBase< Derived > &A)`
- `template<typename Derived >`  
`types::cmat sinm (const Eigen::MatrixBase< Derived > &A)`
- `template<typename Derived >`  
`types::cmat cosm (const Eigen::MatrixBase< Derived > &A)`
- `template<typename Derived >`  
`types::cmat spectralpowm (const Eigen::MatrixBase< Derived > &A, const types::cplx z)`
- `template<typename Derived >`  
`types::DynMat< typename`  
`Derived::Scalar > powm (const Eigen::MatrixBase< Derived > &A, size_t n)`

- `template<typename OutputScalar , typename Derived >`  
`types::DynMat< OutputScalar > fun (const Eigen::MatrixBase< Derived > &A, OutputScalar(*f)(const type-`  
`name Derived::Scalar &))`
- `template<typename Derived1 , typename Derived2 >`  
`types::DynMat< typename`  
`Derived1::Scalar > kron (const Eigen::MatrixBase< Derived1 > &A, const Eigen::MatrixBase< Derived2 >`  
`&B)`
- `template<typename Derived >`  
`types::DynMat< typename`  
`Derived::Scalar > kronlist (const std::vector< types::DynMat< typename Derived::Scalar > > &As)`
- `template<typename Derived >`  
`types::DynMat< typename`  
`Derived::Scalar > kronpow (const Eigen::MatrixBase< Derived > &A, size_t n)`
- `template<typename Derived >`  
`types::DynMat< typename`  
`Derived::Scalar > reshape (const Eigen::MatrixBase< Derived > &A, size_t rows, size_t cols)`
- `template<typename Derived >`  
`types::DynMat< typename`  
`Derived::Scalar > syspermute (const Eigen::MatrixBase< Derived > &A, const std::vector< size_t > &perm,`  
`const std::vector< size_t > &dims)`
- `template<typename Derived >`  
`types::DynMat< typename`  
`Derived::Scalar > ptrace2 (const Eigen::MatrixBase< Derived > &A, const std::vector< size_t > &dims)`
- `template<typename Derived >`  
`types::DynMat< typename`  
`Derived::Scalar > ptrace (const Eigen::MatrixBase< Derived > &A, const std::vector< size_t > &subsys,`  
`const std::vector< size_t > &dims)`
- `template<typename Derived >`  
`types::DynMat< typename`  
`Derived::Scalar > ptranspose (const Eigen::MatrixBase< Derived > &A, const std::vector< size_t > &sub-`  
`sys, const std::vector< size_t > &dims)`
- `template<typename Derived1 , typename Derived2 >`  
`types::DynMat< typename`  
`Derived1::Scalar > comm (const Eigen::MatrixBase< Derived1 > &A, const Eigen::MatrixBase< Derived2`  
`> &B)`
- `template<typename Derived1 , typename Derived2 >`  
`types::DynMat< typename`  
`Derived1::Scalar > anticomm (const Eigen::MatrixBase< Derived1 > &A, const Eigen::MatrixBase< De-`  
`derived2 > &B)`
- `template<typename Derived >`  
`types::DynMat< typename`  
`Derived::Scalar > proj (const Eigen::MatrixBase< Derived > &V)`
- `template<typename Derived >`  
`types::DynMat< typename`  
`Derived::Scalar > expandout (const Eigen::MatrixBase< Derived > &A, size_t pos, const std::vector< size_t`  
`> &dims)`
- `template<typename Derived >`  
`types::DynMat< typename`  
`Derived::Scalar > grams (const std::vector< types::DynMat< typename Derived::Scalar > > &Vs)`
- `template<typename Derived >`  
`types::DynMat< typename`  
`Derived::Scalar > grams (const Eigen::MatrixBase< Derived > &A)`
- `std::vector< size_t > n2multiidx (size_t n, const std::vector< size_t > &dims)`
- `size_t multiidx2n (const std::vector< size_t > &midx, const std::vector< size_t > &dims)`
- `types::ket mket (const std::vector< size_t > &mask)`
- `types::ket mket (const std::vector< size_t > &mask, const std::vector< size_t > &dims)`
- `types::ket mket (const std::vector< size_t > &mask, size_t d)`

- `template<typename T >`  
`void disp (const T &x, const std::string &separator, const std::string &start="["`, const std::string &end=""]",  
`std::ostream &os=std::cout)`
- `template<typename T >`  
`void displn (const T &x, const std::string &separator, const std::string &start="["`, const std::string &end=""]",  
`std::ostream &os=std::cout)`
- `template<typename T >`  
`void disp (const T *x, const size_t n, const std::string &separator, const std::string &start="["`, const std::string  
&end=""]", `std::ostream &os=std::cout)`
- `template<typename T >`  
`void displn (const T *x, const size_t n, const std::string &separator, const std::string &start="["`, const std-  
::string &end=""]", `std::ostream &os=std::cout)`
- `template<typename Derived >`  
`void disp (const Eigen::MatrixBase< Derived > &A, double chop=ct::chop, std::ostream &os=std::cout)`
- `template<typename Derived >`  
`void displn (const Eigen::MatrixBase< Derived > &A, double chop=ct::chop, std::ostream &os=std::cout)`
- `void disp (const types::cplx c, double chop=ct::chop, std::ostream &os=std::cout)`
- `void displn (const types::cplx c, double chop=ct::chop, std::ostream &os=std::cout)`
- `template<typename Derived >`  
`void save (const Eigen::MatrixBase< Derived > &A, const std::string &fname)`
- `template<typename Derived >`  
`types::DynMat< typename`  
`Derived::Scalar > load (const std::string &fname)`
- `template<typename Derived >`  
`Derived loadMATLABmatrix (const std::string &mat_file, const std::string &var_name)`
- `template<>`  
`types::dmat loadMATLABmatrix (const std::string &mat_file, const std::string &var_name)`
- `template<>`  
`types::cmat loadMATLABmatrix (const std::string &mat_file, const std::string &var_name)`
- `template<typename Derived >`  
`void saveMATLABmatrix (const Eigen::MatrixBase< Derived > &A, const std::string &mat_file, const std-  
::string &var_name, const std::string &mode)`
- `template<>`  
`void saveMATLABmatrix (const Eigen::MatrixBase< typename types::dmat > &A, const std::string &mat_file,  
const std::string &var_name, const std::string &mode)`
- `template<>`  
`void saveMATLABmatrix (const Eigen::MatrixBase< typename types::cmat > &A, const std::string &mat_file,  
const std::string &var_name, const std::string &mode)`
- `template<typename Derived >`  
`Derived rand (size_t rows, size_t cols, double a=0, double b=1)`
- `template<>`  
`types::dmat rand (size_t rows, size_t cols, double a, double b)`
- `template<>`  
`types::cmat rand (size_t rows, size_t cols, double a, double b)`
- `double rand (double a=0, double b=1)`
- `template<typename Derived >`  
`Derived randn (size_t rows, size_t cols, double mean=0, double sigma=1)`
- `template<>`  
`types::dmat randn (size_t rows, size_t cols, double mean, double sigma)`
- `template<>`  
`types::cmat randn (size_t rows, size_t cols, double mean, double sigma)`
- `double randn (double mean=0, double sigma=1)`
- `types::cmat randU (size_t D)`
- `types::cmat randV (size_t Din, size_t Dout)`
- `std::vector< types::cmat > randkraus (size_t n, size_t D)`
- `types::cmat randH (size_t D)`
- `types::ket randket (size_t D)`
- `types::cmat randrho (size_t D)`


## Variables

- `RandomDevices` & `rdevs` = `RandomDevices::getInstance()`
- `const Gates` & `gt` = `Gates::getInstance()`

## 5.1.1 Function Documentation


5.1.1.1 `template<typename Derived > types::cmat qpp::absm ( const Eigen::MatrixBase< Derived > & A )`

Here is the call graph for this function:

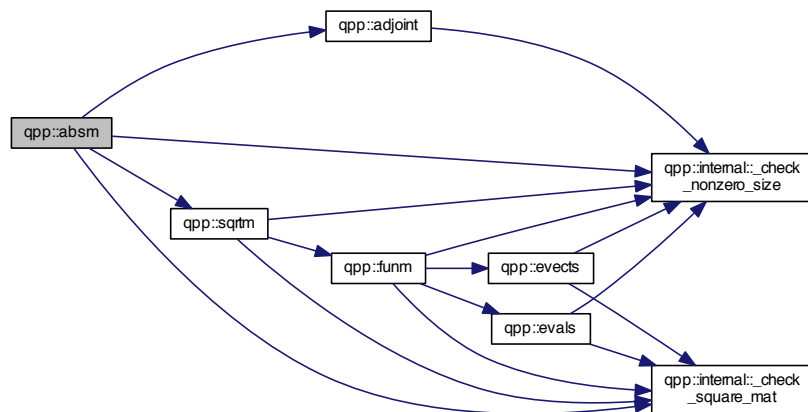

5.1.1.2 `template<typename Derived > types::DynMat<typename Derived::Scalar> qpp::adjoint ( const Eigen::MatrixBase< Derived > & A )`

Here is the call graph for this function:




5.1.1.3 `template<typename Derived1 , typename Derived2 > types::DynMat<typename Derived1::Scalar> qpp::anticomm ( const Eigen::MatrixBase< Derived1 > & A, const Eigen::MatrixBase< Derived2 > & B )`

Here is the call graph for this function:



5.1.1.4 `types::cmat qpp::channel ( const types::cmat & rho, const std::vector< types::cmat > & Ks )`

Here is the call graph for this function:

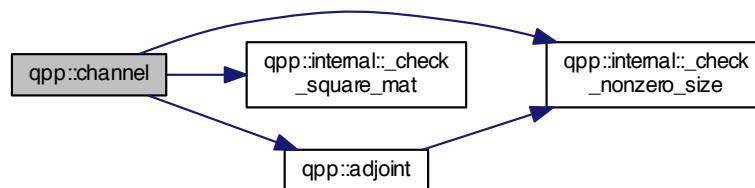




#### 5.1.1.5 `types::cmat qpp::choi ( const std::vector< types::cmat > & Ks )`

Here is the call graph for this function:



#### 5.1.1.6 `std::vector<types::cmat> qpp::choi2kraus ( const types::cmat & A )`

Here is the call graph for this function:

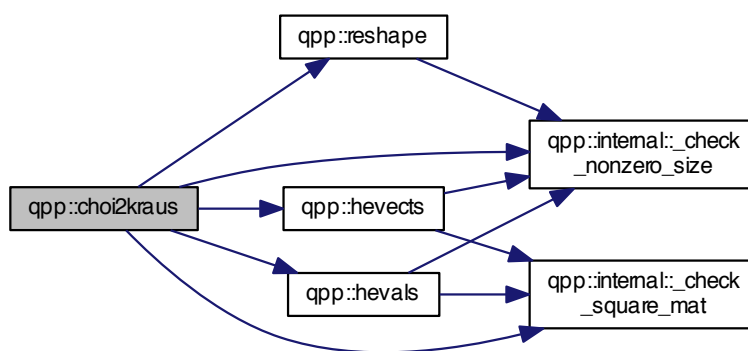

5.1.1.7 `template<typename Derived1 , typename Derived2 > types::DynMat<typename Derived1::Scalar> qpp::comm ( const Eigen::MatrixBase< Derived1 > & A, const Eigen::MatrixBase< Derived2 > & B )`

Here is the call graph for this function:




5.1.1.8 `template<typename Derived > types::DynMat<typename Derived::Scalar> qpp::conjugate ( const Eigen::MatrixBase< Derived > & A )`

Here is the call graph for this function:




5.1.1.9 `template<typename Derived > types::cmat qpp::cosm ( const Eigen::MatrixBase< Derived > & A )`

Here is the call graph for this function:

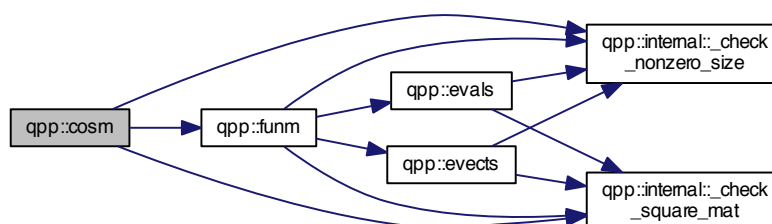

5.1.1.10 `template<typename Derived > Derived::Scalar qpp::det ( const Eigen::MatrixBase< Derived > & A )`

Here is the call graph for this function:



5.1.1.11 `template<typename T > void qpp::disp ( const T & x, const std::string & separator, const std::string & start = " [ ", const std::string & end = " ] ", std::ostream & os = std::cout )`

5.1.1.12 `template<typename T > void qpp::disp ( const T * x, const size_t n, const std::string & separator, const std::string & start = " [ ", const std::string & end = " ] ", std::ostream & os = std::cout )`

5.1.1.13 `template<typename Derived > void qpp::disp ( const Eigen::MatrixBase< Derived > & A, double chop = ct::chop, std::ostream & os = std::cout )`

5.1.1.14 `void qpp::disp ( const types::cplx c, double chop = ct::chop, std::ostream & os = std::cout )`

Here is the call graph for this function:



5.1.1.15 `template<typename T > void qpp::displn ( const T & x, const std::string & separator, const std::string & start = " [ ", const std::string & end = " ] ", std::ostream & os = std::cout )`

Here is the call graph for this function:



5.1.1.16 `template<typename T> void qpp::displn ( const T * x, const size_t n, const std::string & separator, const std::string & start = " [", const std::string & end = " ] ", std::ostream & os = std::cout )`

Here is the call graph for this function:



5.1.1.17 `template<typename Derived> void qpp::displn ( const Eigen::MatrixBase< Derived> & A, double chop = ct::chop, std::ostream & os = std::cout )`

Here is the call graph for this function:




5.1.1.18 `void qpp::displn ( const types::cplx c, double chop = ct::chop, std::ostream & os = std::cout )`

Here is the call graph for this function:




5.1.1.19 `template<typename Derived> double qpp::entanglement ( const Eigen::MatrixBase< Derived> & A, const std::vector< size_t> & dims )`

Here is the call graph for this function:

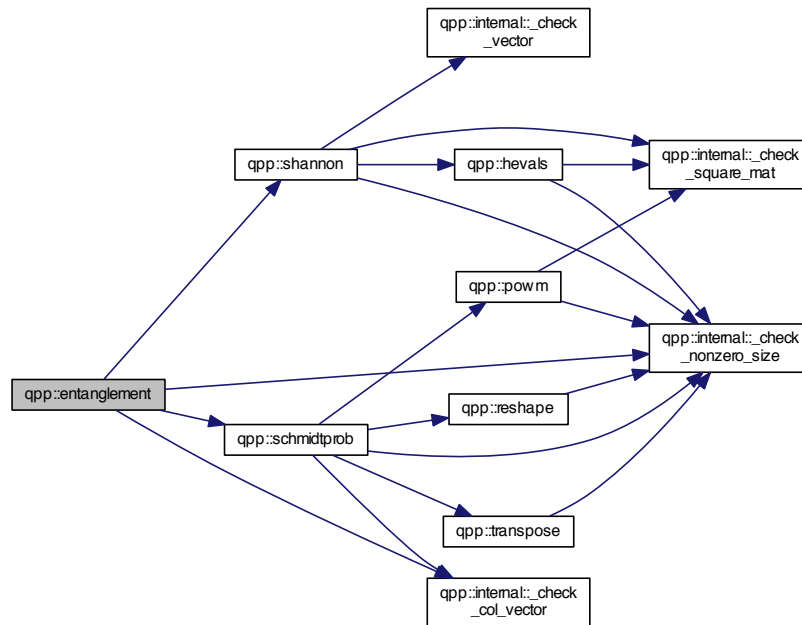


5.1.1.20 `template<typename Derived> types::cmat qpp::evals ( const Eigen::MatrixBase< Derived> & A )`

Here is the call graph for this function:

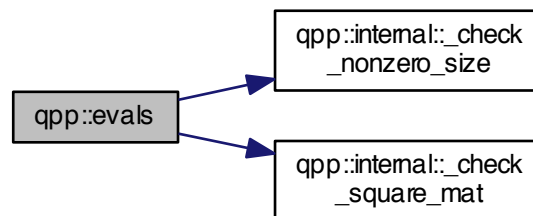


5.1.1.21 `template<typename Derived> types::cmat qpp::evecs ( const Eigen::MatrixBase< Derived> & A )`

Here is the call graph for this function:

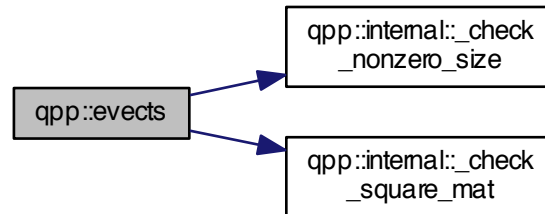


5.1.1.22 `template<typename Derived> types::DynMat<typename Derived::Scalar> qpp::expandout ( const Eigen::MatrixBase< Derived> & A, size_t pos, const std::vector< size_t> & dims )`

Here is the call graph for this function:

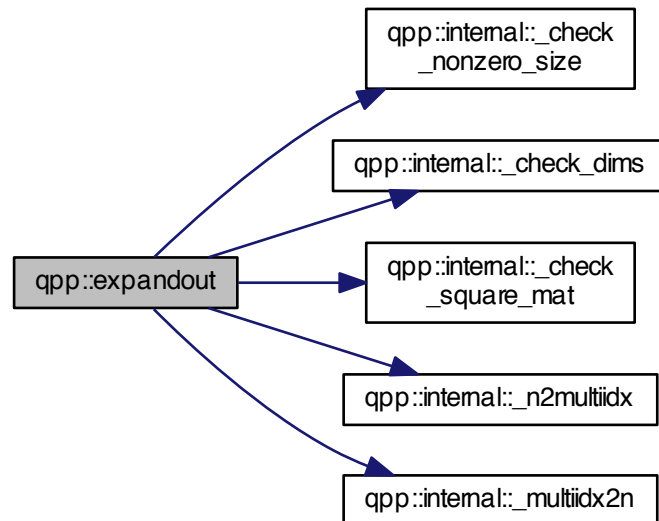


5.1.1.23 `template<typename Derived> types::cmat qpp::expm ( const Eigen::MatrixBase< Derived> & A )`

Here is the call graph for this function:

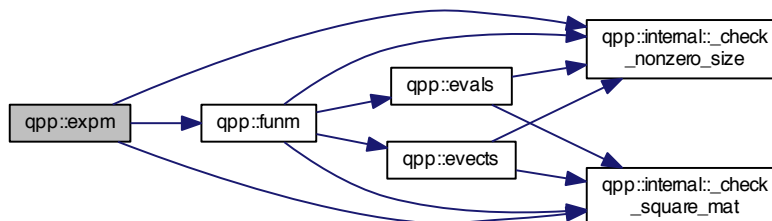

5.1.1.24 `template<typename OutputScalar, typename Derived> types::DynMat<OutputScalar> qpp::fun ( const Eigen::MatrixBase< Derived> & A, OutputScalar*)(const typename Derived::Scalar &) f )`

Here is the call graph for this function:



5.1.1.25 `template<typename Derived> types::cmat qpp::funm ( const Eigen::MatrixBase< Derived> & A, types::cplx*)(const types::cplx &) f )`


#### Parameters

<i>A</i>	input matrix
<i>f</i>	function pointer

Returns


[types::cmat](#)

Here is the call graph for this function:

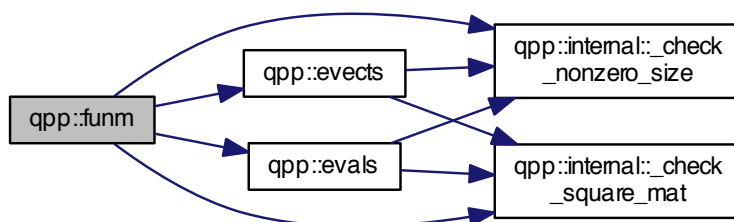

5.1.1.26 `template<typename Derived> double qpp::gconcurrency ( const Eigen::MatrixBase< Derived> & A )`


Here is the call graph for this function:

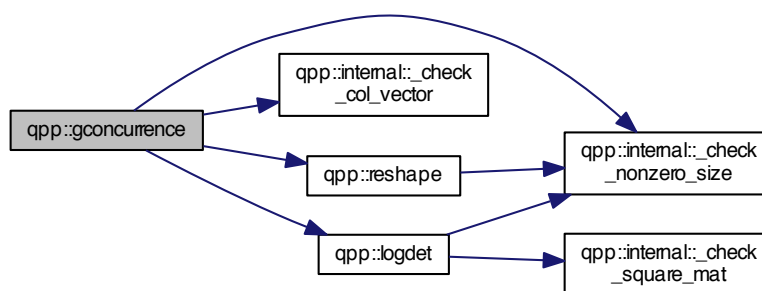




5.1.1.27 `template<typename Derived> types::DynMat<typename Derived::Scalar> qpp::grams ( const std::vector< types::DynMat< typename Derived::Scalar> > & Vs )`

Here is the call graph for this function:

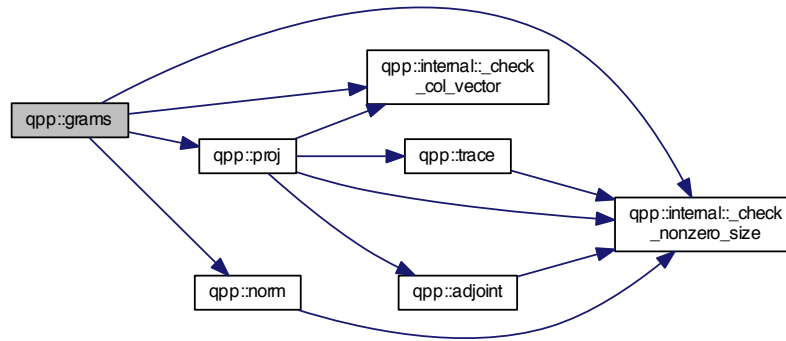


5.1.1.28 `template<typename Derived> types::DynMat<typename Derived::Scalar> qpp::grams ( const Eigen::MatrixBase< Derived> & A )`

Here is the call graph for this function:




5.1.1.29 `template<typename Derived> types::cmat qpp::hevals ( const Eigen::MatrixBase< Derived > & A )`

Here is the call graph for this function:

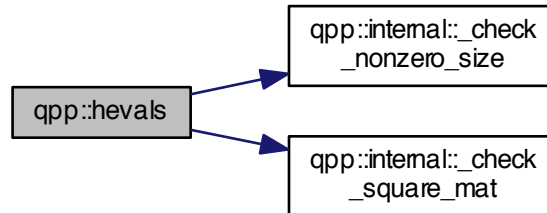


5.1.1.30 `template<typename Derived> types::cmat qpp::hevects ( const Eigen::MatrixBase< Derived > & A )`

Here is the call graph for this function:

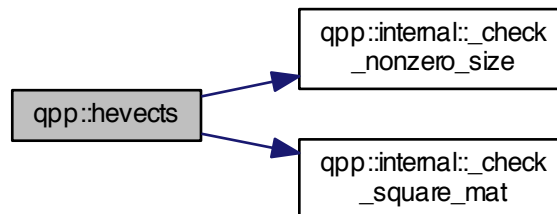

5.1.1.31 `template<typename Derived1, typename Derived2> types::DynMat<typename Derived1::Scalar> qpp::kron ( const Eigen::MatrixBase< Derived1 > & A, const Eigen::MatrixBase< Derived2 > & B )`

Here is the call graph for this function:



5.1.1.32 `template<typename Derived> types::DynMat<typename Derived::Scalar> qpp::kronlist ( const std::vector< types::DynMat< typename Derived::Scalar> > & As )`

Here is the call graph for this function:



5.1.1.33 `template<typename Derived> types::DynMat<typename Derived::Scalar> qpp::kronpow ( const Eigen::MatrixBase< Derived> & A, size_t n )`

Here is the call graph for this function:



5.1.1.34 `template<typename Derived> types::DynMat<typename Derived::Scalar> qpp::load ( const std::string & fname )`


5.1.1.35 `template<typename Derived> Derived qpp::loadMATLABmatrix ( const std::string & mat_file, const std::string & var_name )`

5.1.1.36 `template<> types::dmat qpp::loadMATLABmatrix ( const std::string & mat_file, const std::string & var_name )`

5.1.1.37 `template<> types::cmat qpp::loadMATLABmatrix ( const std::string & mat_file, const std::string & var_name )`


5.1.1.38 `template<typename Derived> Derived::Scalar qpp::logdet ( const Eigen::MatrixBase< Derived> & A )`

Here is the call graph for this function:

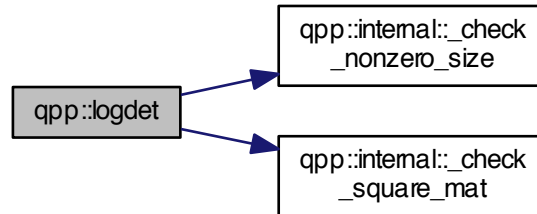


5.1.1.39 `template<typename Derived> types::cmat qpp::logm ( const Eigen::MatrixBase< Derived> & A )`

Here is the call graph for this function:

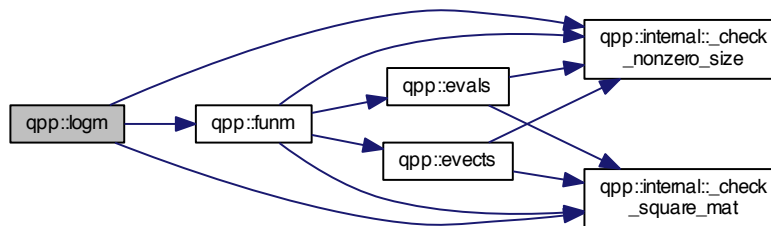


5.1.1.40 `types::ket qpp::mket ( const std::vector< size_t> & mask )`

Here is the call graph for this function:




#### 5.1.1.41 `types::ket qpp::mket ( const std::vector< size_t > & mask, const std::vector< size_t > & dims )`

Here is the call graph for this function:



#### 5.1.1.42 `types::ket qpp::mket ( const std::vector< size_t > & mask, size_t d )`

Here is the call graph for this function:




#### 5.1.1.43 `size_t qpp::multidx2n ( const std::vector< size_t > & midx, const std::vector< size_t > & dims )`

Here is the call graph for this function:



5.1.1.44 `template<typename Derived> double qpp::mutualinfo ( const Eigen::MatrixBase< Derived> & A, const std::vector< size_t> & subsys, const std::vector< size_t> & dims )`

Here is the call graph for this function:

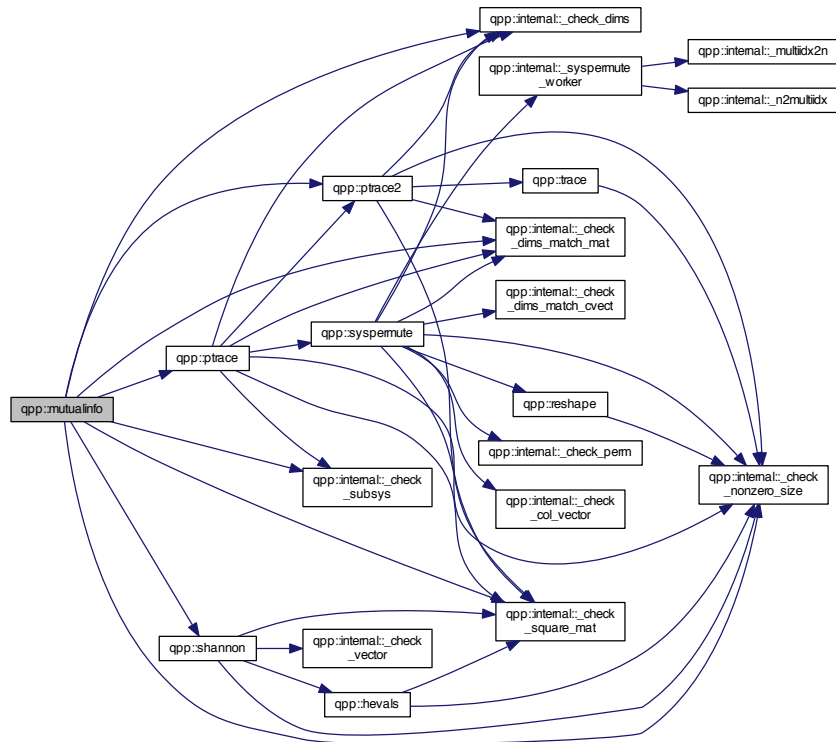


5.1.1.45 `std::vector<size_t> qpp::n2multidx ( size_t n, const std::vector< size_t> & dims )`

Here is the call graph for this function:




5.1.1.46 `template<typename Derived> double qpp::norm ( const Eigen::MatrixBase< Derived> & A )`

Here is the call graph for this function:




5.1.1.47 `template<typename Derived> types::DynMat<typename Derived::Scalar> qpp::powm ( const Eigen::MatrixBase< Derived> & A, size_t n )`

Here is the call graph for this function:

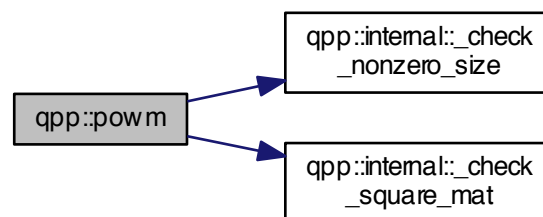


5.1.1.48 `template<typename Derived > types::DynMat<typename Derived::Scalar> qpp::proj ( const Eigen::MatrixBase<Derived > & V )`

Here is the call graph for this function:

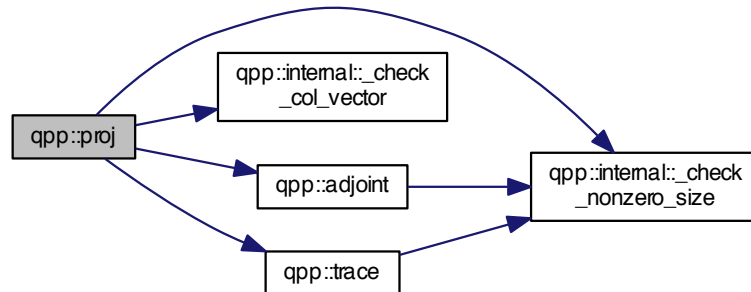

5.1.1.49 `template<typename Derived > types::DynMat<typename Derived::Scalar> qpp::ptrace ( const Eigen::MatrixBase<Derived > & A, const std::vector<size_t> & subsys, const std::vector<size_t> & dims )`


Here is the call graph for this function:

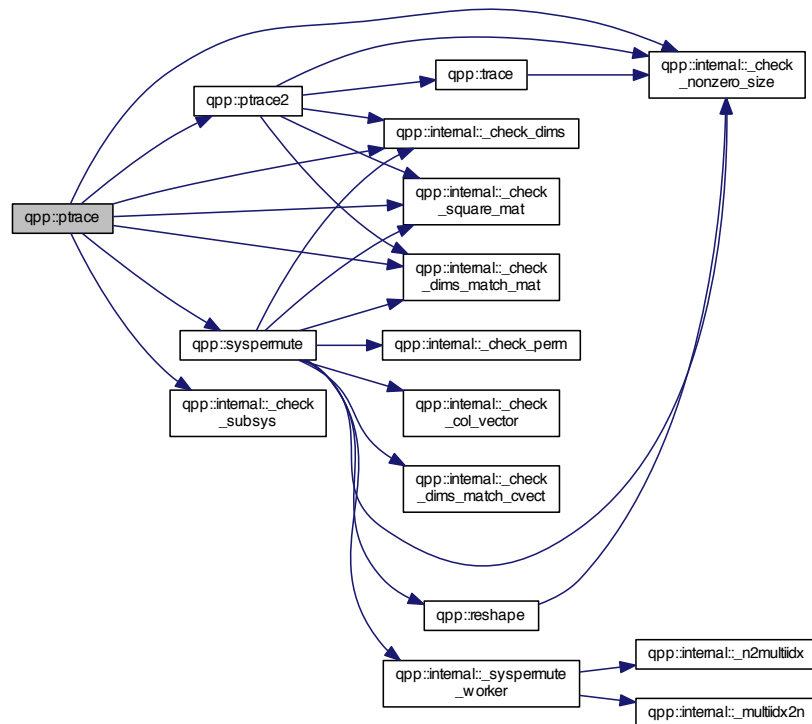




5.1.1.50 `template<typename Derived> types::DynMat<typename Derived::Scalar> qpp::ptrace2 ( const Eigen::MatrixBase< Derived> & A, const std::vector< size_t> & dims )`

Here is the call graph for this function:

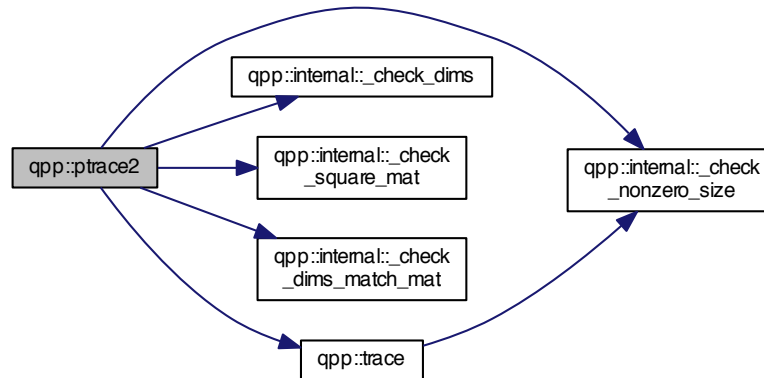

5.1.1.51 `template<typename Derived> types::DynMat<typename Derived::Scalar> qpp::ptrtranspose ( const Eigen::MatrixBase< Derived> & A, const std::vector< size_t> & subsys, const std::vector< size_t> & dims )`

Here is the call graph for this function:

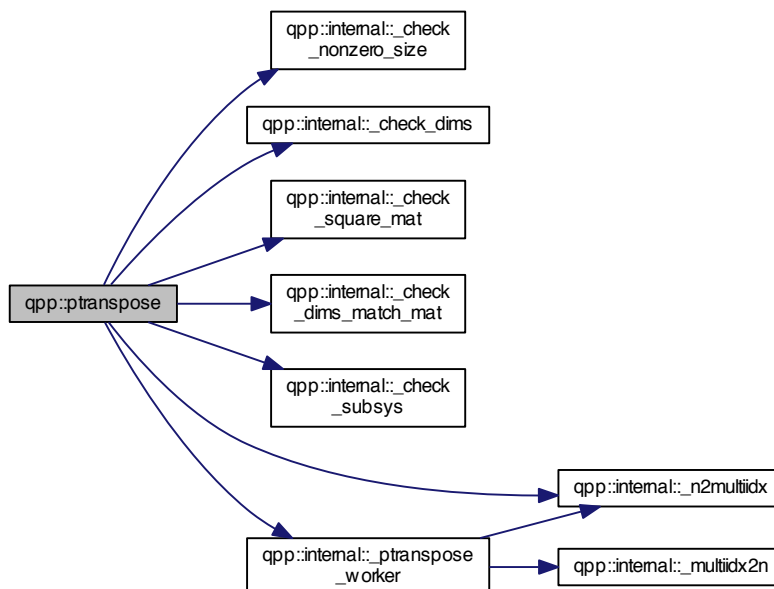


5.1.1.52 `template<typename Derived > Derived qpp::rand ( size_t rows, size_t cols, double a = 0, double b = 1 )`

5.1.1.53 `template<> types::dmat qpp::rand ( size_t rows, size_t cols, double a, double b )`

5.1.1.54 `template<> types::cmat qpp::rand ( size_t rows, size_t cols, double a, double b )`


5.1.1.55 `double qpp::rand ( double a = 0, double b = 1 )`

Here is the call graph for this function:




5.1.1.56 `types::cmat qpp::randH ( size_t D )`

Here is the call graph for this function:




5.1.1.57 `types::ket qpp::randket ( size_t D )`

Here is the call graph for this function:

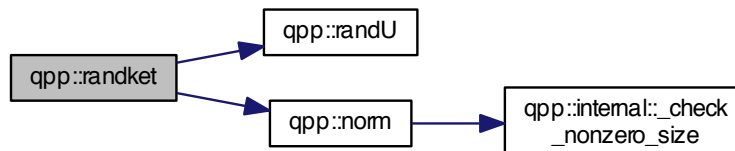

5.1.1.58 `std::vector<types::cmat> qpp::randkraus ( size_t n, size_t D )`


Here is the call graph for this function:

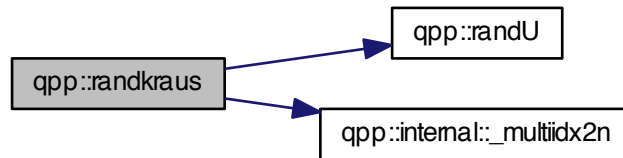

5.1.1.59 `template<typename Derived > Derived qpp::randn ( size_t rows, size_t cols, double mean = 0, double sigma = 1 )`

5.1.1.60 `template<> types::dmat qpp::randn ( size_t rows, size_t cols, double mean, double sigma )`


Here is the call graph for this function:



5.1.1.61 `template<> types::cmat qpp::randn ( size_t rows, size_t cols, double mean, double sigma )`


5.1.1.62 `double qpp::randn ( double mean = 0, double sigma = 1 )`

Here is the call graph for this function:



#### 5.1.1.63 `types::cmat qpp::randrho ( size_t D )`

Here is the call graph for this function:

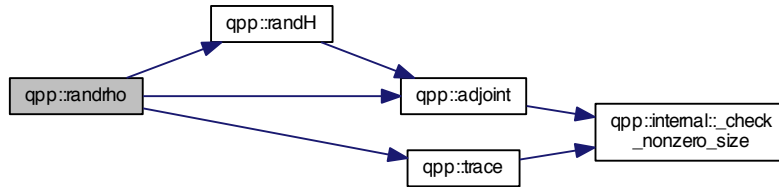

#### 5.1.1.64 `types::cmat qpp::randU ( size_t D )`


#### 5.1.1.65 `types::cmat qpp::randV ( size_t Din, size_t Dout )`

Here is the call graph for this function:




#### 5.1.1.66 `template<typename Derived> double qpp::renyi ( const double alpha, const Eigen::MatrixBase< Derived > & A )`

Here is the call graph for this function:

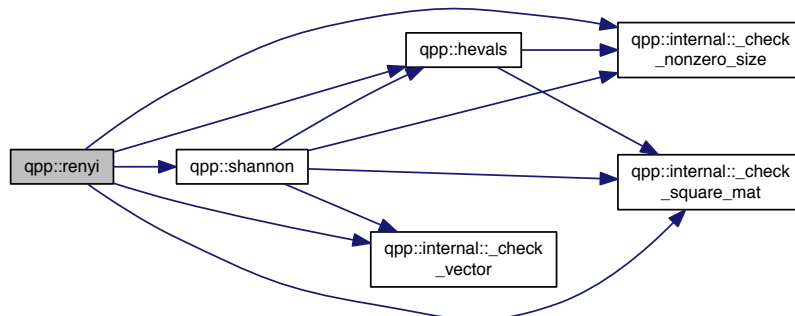


5.1.1.67 `template<typename Derived> double qpp::renyi_inf ( const Eigen::MatrixBase< Derived> & A )`

Here is the call graph for this function:

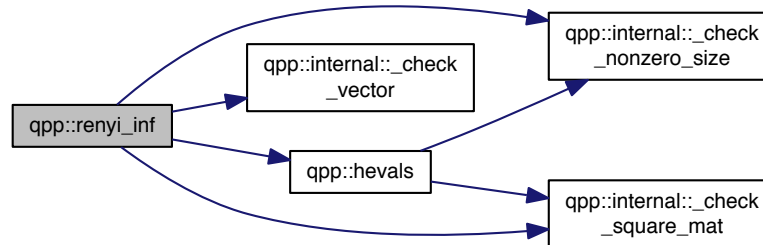


5.1.1.68 `template<typename Derived> types::DynMat<typename Derived::Scalar> qpp::reshape ( const Eigen::MatrixBase< Derived> & A, size_t rows, size_t cols )`

Here is the call graph for this function:



5.1.1.69 `template<typename Derived> void qpp::save ( const Eigen::MatrixBase< Derived> & A, const std::string & fname )`


Here is the call graph for this function:



5.1.1.70 `template<typename Derived> void qpp::saveMATLABmatrix ( const Eigen::MatrixBase< Derived> & A, const std::string & mat_file, const std::string & var_name, const std::string & mode )`


5.1.1.71 `template<> void qpp::saveMATLABmatrix ( const Eigen::MatrixBase< typename types::dmat > & A, const std::string & mat_file, const std::string & var_name, const std::string & mode )`

Here is the call graph for this function:




5.1.1.72 `template<> void qpp::saveMATLABmatrix ( const Eigen::MatrixBase< typename types::cmat > & A, const std::string & mat_file, const std::string & var_name, const std::string & mode )`

Here is the call graph for this function:




5.1.1.73 `template<typename Derived> types::cmat qpp::schmidtcoeff ( const Eigen::MatrixBase< Derived > & A, const std::vector< size_t > & dims )`

Here is the call graph for this function:

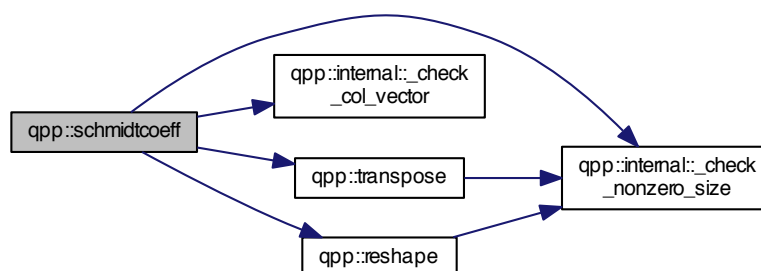


5.1.1.74 `template<typename Derived> types::cmat qpp::schmidtprob ( const Eigen::MatrixBase< Derived> & A, const std::vector< size_t> & dims )`

Here is the call graph for this function:

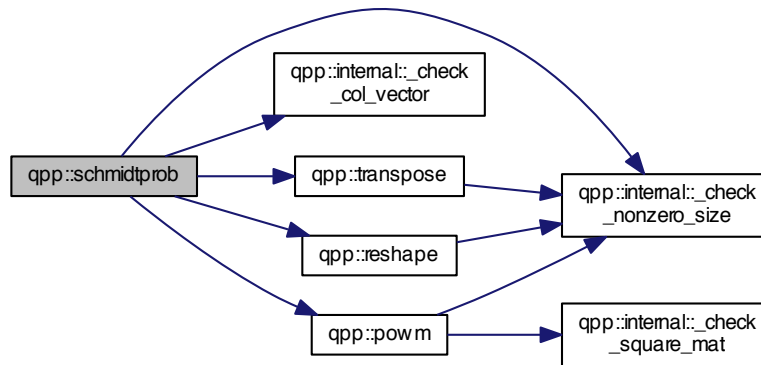


5.1.1.75 `template<typename Derived> types::cmat qpp::schmidtU ( const Eigen::MatrixBase< Derived> & A, const std::vector< size_t> & dims )`

Here is the call graph for this function:

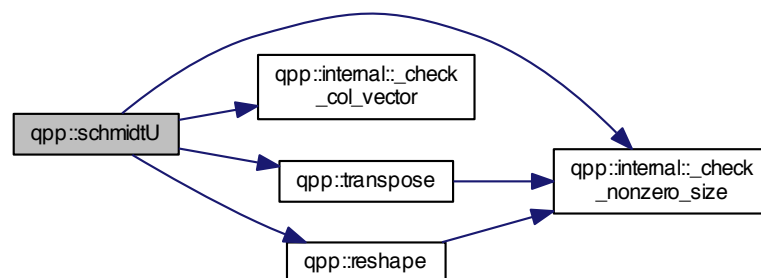


5.1.1.76 `template<typename Derived> types::cmat qpp::schmidtV ( const Eigen::MatrixBase< Derived> & A, const std::vector< size_t> & dims )`

Here is the call graph for this function:

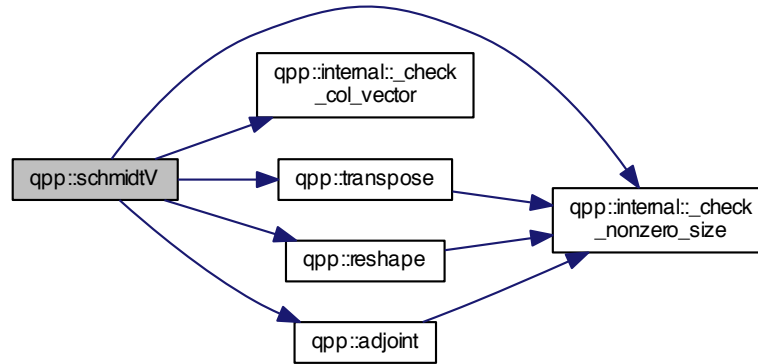

5.1.1.77 `template<typename Derived> double qpp::shannon ( const Eigen::MatrixBase< Derived> & A )`


Here is the call graph for this function:

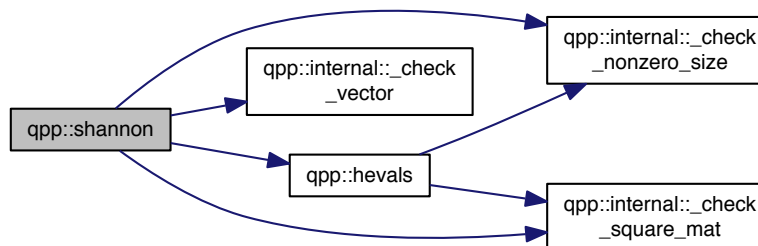




5.1.1.78 `template<typename Derived> types::cmat qpp::sinm ( const Eigen::MatrixBase< Derived > & A )`

Here is the call graph for this function:

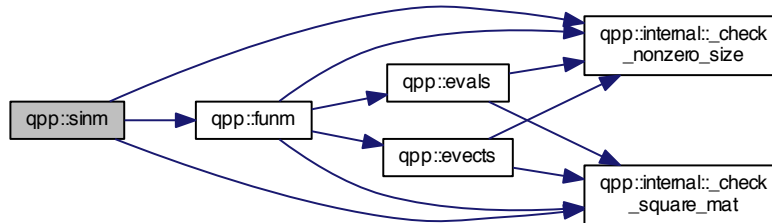


5.1.1.79 `template<typename Derived> types::cmat qpp::spectralpowm ( const Eigen::MatrixBase< Derived > & A, const types::cplx z )`

Here is the call graph for this function:

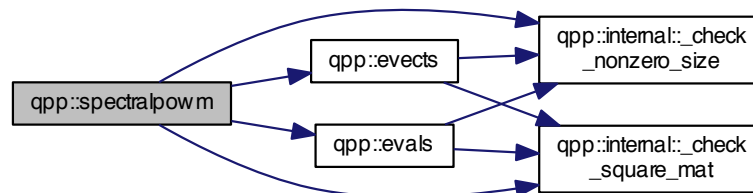


5.1.1.80 `template<typename Derived> types::cmat qpp::sqrtm ( const Eigen::MatrixBase< Derived > & A )`

Here is the call graph for this function:

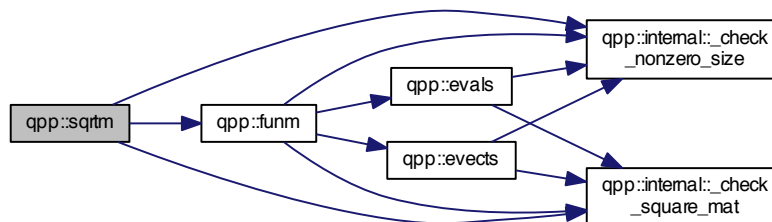


5.1.1.81 `template<typename Derived > Derived::Scalar qpp::sum ( const Eigen::MatrixBase< Derived > & A )`

Here is the call graph for this function:




5.1.1.82 `types::cmat qpp::super ( const std::vector< types::cmat > & Ks )`

Here is the call graph for this function:

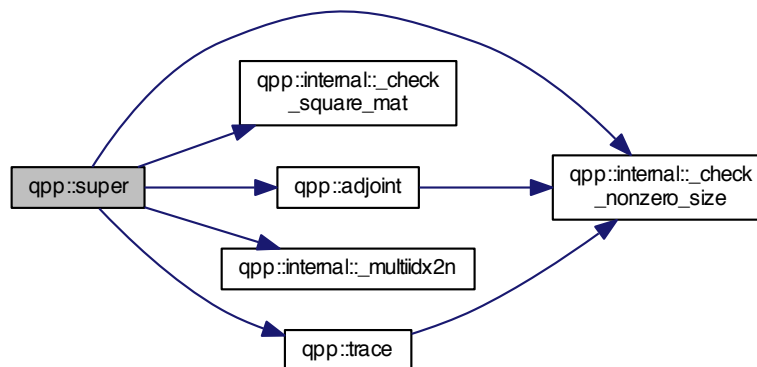


5.1.1.83 `template<typename Derived> types::DynMat<typename Derived::Scalar> qpp::syspermute ( const Eigen::MatrixBase< Derived> & A, const std::vector< size_t> & perm, const std::vector< size_t> & dims )`

Here is the call graph for this function:

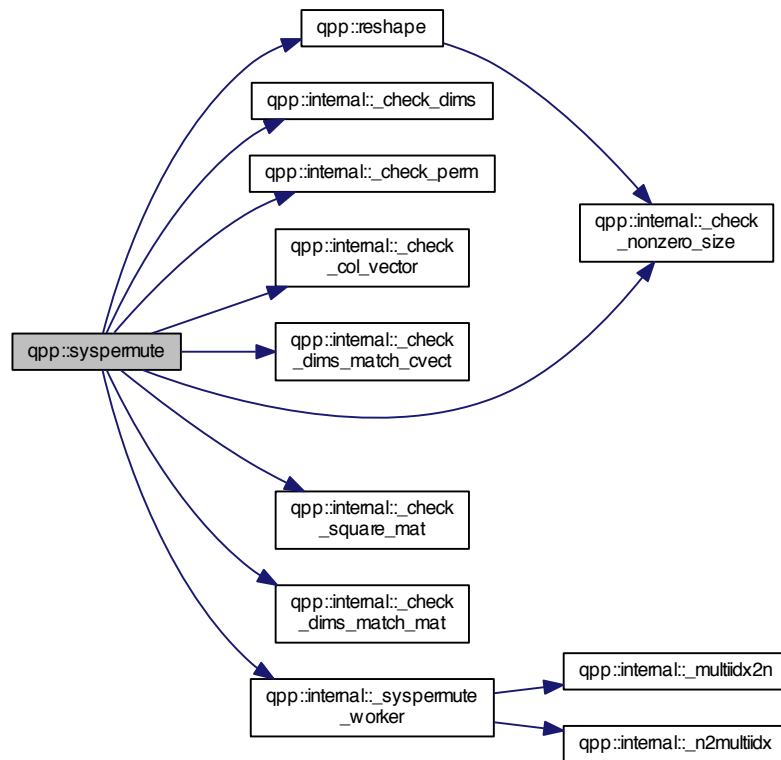


5.1.1.84 `template<typename Derived> Derived::Scalar qpp::trace ( const Eigen::MatrixBase< Derived> & A )`

Here is the call graph for this function:




5.1.1.85 `template<typename Derived> types::DynMat<typename Derived::Scalar> qpp::transpose ( const Eigen::MatrixBase< Derived> & A )`

Here is the call graph for this function:



5.1.1.86 `template<typename Derived> double qpp::tsallis ( const double alpha, const Eigen::MatrixBase< Derived> & A )`

Here is the call graph for this function:

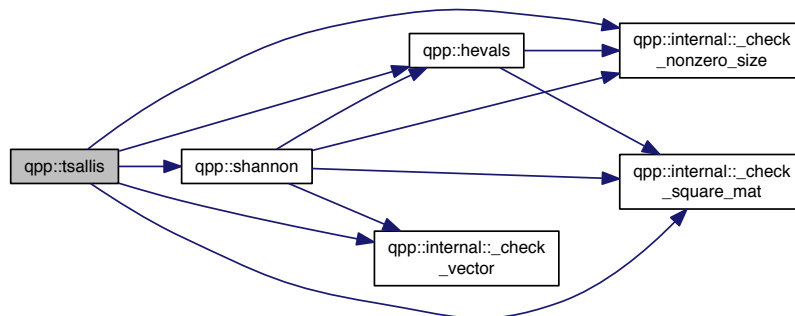

## 5.1.2 Variable Documentation

5.1.2.1 `const Gates& qpp::gt = Gates::getInstance()`

5.1.2.2 `RandomDevices& qpp::rdevs = RandomDevices::getInstance()`

## 5.2 qpp::ct Namespace Reference

### Functions

- `std::complex< double> omega (size_t D)`

### Variables

- `const double chop = 1e-10`
- `const double eps = 1e-12`
- `const std::complex< double> ii = { 0, 1 }`

- const double `pi` = 3.141592653589793238462643383279502884
- const double `ee` = 2.718281828459045235360287471352662497

### 5.2.1 Function Documentation

5.2.1.1 `std::complex<double> qpp::ct::omega ( size_t D )`

### 5.2.2 Variable Documentation

5.2.2.1 `const double qpp::ct::chop = 1e-10`

5.2.2.2 `const double qpp::ct::ee = 2.718281828459045235360287471352662497`

5.2.2.3 `const double qpp::ct::eps = 1e-12`

5.2.2.4 `const std::complex<double> qpp::ct::ii = { 0, 1 }`

5.2.2.5 `const double qpp::ct::pi = 3.141592653589793238462643383279502884`

## 5.3 qpp::internal Namespace Reference

### Functions

- void `_n2multiidx` (size\_t n, size\_t numdims, const size\_t \*dims, size\_t \*result)
- size\_t `_multiidx2n` (const size\_t \*midx, size\_t numdims, const size\_t \*dims)
- template<typename Derived >  
bool `_check_square_mat` (const Eigen::MatrixBase< Derived > &A)
- template<typename Derived >  
bool `_check_vector` (const Eigen::MatrixBase< Derived > &A)
- template<typename Derived >  
bool `_check_row_vector` (const Eigen::MatrixBase< Derived > &A)
- template<typename Derived >  
bool `_check_col_vector` (const Eigen::MatrixBase< Derived > &A)
- template<typename T >  
bool `_check_nonzero_size` (const T &x)
- bool `_check_dims` (const std::vector< size\_t > &dims)
- template<typename Derived >  
bool `_check_dims_match_mat` (const std::vector< size\_t > &dims, const Eigen::MatrixBase< Derived > &A)
- template<typename Derived >  
bool `_check_dims_match_cvect` (const std::vector< size\_t > &dims, const Eigen::MatrixBase< Derived > &V)
- template<typename Derived >  
bool `_check_dims_match_rvect` (const std::vector< size\_t > &dims, const Eigen::MatrixBase< Derived > &V)
- bool `_check_eq_dims` (const std::vector< size\_t > &dims, size\_t dim)
- bool `_check_subsys` (const std::vector< size\_t > &subsys, const std::vector< size\_t > &dims)
- bool `_check_perm` (const std::vector< size\_t > &perm, const std::vector< size\_t > &dims)
- template<typename Scalar >  
void `_syspermute_worker` (size\_t numdims, const size\_t \*cdims, const size\_t \*cperm, size\_t i, size\_t &iperm, const types::DynMat< Scalar > &V, types::DynMat< Scalar > &result)
- template<typename Scalar >  
void `_ptranspose_worker` (const size\_t \*midxcol, size\_t numdims, size\_t numsubsys, const size\_t \*cdims, const size\_t \*csubsys, size\_t i, size\_t j, size\_t &iperm, size\_t &jperm, const types::DynMat< Scalar > &A, types::DynMat< Scalar > &result)

### 5.3.1 Function Documentation

5.3.1.1 `template<typename Derived > bool qpp::internal::_check_col_vector ( const Eigen::MatrixBase< Derived > & A )`

5.3.1.2 `bool qpp::internal::_check_dims ( const std::vector< size_t > & dims )`

5.3.1.3 `template<typename Derived > bool qpp::internal::_check_dims_match_cvect ( const std::vector< size_t > & dims, const Eigen::MatrixBase< Derived > & V )`

5.3.1.4 `template<typename Derived > bool qpp::internal::_check_dims_match_mat ( const std::vector< size_t > & dims, const Eigen::MatrixBase< Derived > & A )`

5.3.1.5 `template<typename Derived > bool qpp::internal::_check_dims_match_rvect ( const std::vector< size_t > & dims, const Eigen::MatrixBase< Derived > & V )`

5.3.1.6 `bool qpp::internal::_check_eq_dims ( const std::vector< size_t > & dims, size_t dim )`

5.3.1.7 `template<typename T > bool qpp::internal::_check_nonzero_size ( const T & x )`

5.3.1.8 `bool qpp::internal::_check_perm ( const std::vector< size_t > & perm, const std::vector< size_t > & dims )`

5.3.1.9 `template<typename Derived > bool qpp::internal::_check_row_vector ( const Eigen::MatrixBase< Derived > & A )`

5.3.1.10 `template<typename Derived > bool qpp::internal::_check_square_mat ( const Eigen::MatrixBase< Derived > & A )`

5.3.1.11 `bool qpp::internal::_check_subsys ( const std::vector< size_t > & subsys, const std::vector< size_t > & dims )`


5.3.1.12 `template<typename Derived > bool qpp::internal::_check_vector ( const Eigen::MatrixBase< Derived > & A )`

5.3.1.13 `size_t qpp::internal::_multiidx2n ( const size_t * midx, size_t numdims, const size_t * dims )`

5.3.1.14 `void qpp::internal::_n2multiidx ( size_t n, size_t numdims, const size_t * dims, size_t * result )`


5.3.1.15 `template<typename Scalar > void qpp::internal::_pttranspose_worker ( const size_t * midxcoll, size_t numdims, size_t numsubsys, const size_t * cdims, const size_t * csubsys, size_t i, size_t j, size_t iperm, size_t jperm, const types::DynMat< Scalar > & A, types::DynMat< Scalar > & result )`

Here is the call graph for this function:

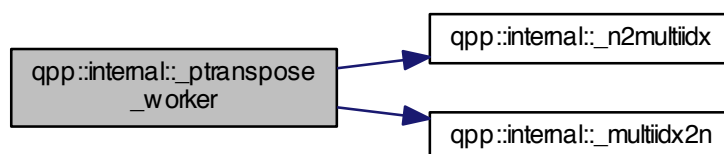

5.3.1.16 `template<typename Scalar > void qpp::internal::_syspermute_worker ( size_t numdims, const size_t * cdims, const size_t * cperm, size_t i, size_t & iperm, const types::DynMat< Scalar > & V, types::DynMat< Scalar > & result )`

Here is the call graph for this function:

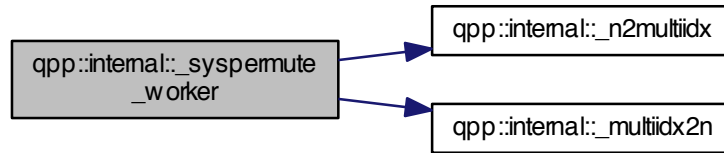

## 5.4 qpp::types Namespace Reference

### Typedefs

- `typedef std::complex< double > cplx`
- `typedef Eigen::MatrixXcd cmat`
- `typedef Eigen::MatrixXd dmat`
- `typedef Eigen::MatrixXf fmat`
- `typedef Eigen::MatrixXi imat`
- `typedef Eigen::Matrix< cplx, Eigen::Dynamic, 1 > ket`
- `typedef Eigen::Matrix< cplx, 1, Eigen::Dynamic > bra`
- `template<typename Scalar > using DynMat = Eigen::Matrix< Scalar, Eigen::Dynamic, Eigen::Dynamic >`

### 5.4.1 Typedef Documentation

5.4.1.1 `typedef Eigen::Matrix<cplx, 1, Eigen::Dynamic> qpp::types::bra`

5.4.1.2 `typedef Eigen::MatrixXcd qpp::types::cmat`

5.4.1.3 `typedef std::complex<double> qpp::types::cplx`

5.4.1.4 `typedef Eigen::MatrixXd qpp::types::dmat`

5.4.1.5 `template<typename Scalar > using qpp::types::DynMat = typedef Eigen::Matrix<Scalar, Eigen::Dynamic, Eigen::Dynamic>`

5.4.1.6 `typedef Eigen::MatrixXf qpp::types::fmat`

5.4.1.7 `typedef Eigen::MatrixXi qpp::types::imat`

5.4.1.8 `typedef Eigen::Matrix<cplx, Eigen::Dynamic, 1> qpp::types::ket`





## Chapter 6

# Class Documentation

### 6.1 qpp::DiscreteDistribution Class Reference

```
#include <stat.h>
```

#### Public Member Functions

- `template<typename InputIterator >`  
`DiscreteDistribution` (InputIterator first, InputIterator last)
- `DiscreteDistribution` (std::initializer\_list< double > weights)
- `DiscreteDistribution` (std::vector< double > weights)
- `size_t sample ()`
- `std::vector< double > probabilities ()`

#### Protected Attributes

- `std::discrete_distribution`  
`< size_t > _d`

#### 6.1.1 Constructor & Destructor Documentation

6.1.1.1 `template<typename InputIterator > qpp::DiscreteDistribution::DiscreteDistribution ( InputIterator first, InputIterator last )` [inline]

6.1.1.2 `qpp::DiscreteDistribution::DiscreteDistribution ( std::initializer_list< double > weights )` [inline]


6.1.1.3 `qpp::DiscreteDistribution::DiscreteDistribution ( std::vector< double > weights )` [inline]

#### 6.1.2 Member Function Documentation

6.1.2.1 `std::vector<double> qpp::DiscreteDistribution::probabilities ( )` [inline]

### 6.1.2.2 `size_t qpp::DiscreteDistribution::sample ( ) [inline]`

Here is the call graph for this function:



## 6.1.3 Member Data Documentation

### 6.1.3.1 `std::discrete_distribution<size_t> qpp::DiscreteDistribution::_d [protected]`

The documentation for this class was generated from the following file:

- [include/classes/stat.h](#)

## 6.2 `qpp::DiscreteDistributionAbsSquare` Class Reference

```
#include <stat.h>
```

### Public Member Functions

- `template<typename InputIterator >`  
`DiscreteDistributionAbsSquare` (InputIterator first, InputIterator last)
- `DiscreteDistributionAbsSquare` (std::initializer\_list< [types::cplx](#) > amplitudes)
- `DiscreteDistributionAbsSquare` (std::vector< [types::cplx](#) > amplitudes)
- `DiscreteDistributionAbsSquare` (const [types::cmat](#) &V)
- `size_t sample ()`
- `std::vector< double > probabilities ()`

### Protected Member Functions

- `template<typename InputIterator >`  
`std::vector< double > cplx2weights` (InputIterator first, InputIterator last)


### Protected Attributes

- `std::discrete_distribution`  
`< size_t > _d`

### 6.2.1 Constructor & Destructor Documentation


6.2.1.1 `template<typename InputIterator> qpp::DiscreteDistributionAbsSquare::DiscreteDistributionAbsSquare ( InputIterator first, InputIterator last ) [inline]`

Here is the call graph for this function:

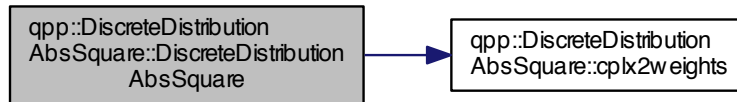


6.2.1.2 `qpp::DiscreteDistributionAbsSquare::DiscreteDistributionAbsSquare ( std::initializer_list< types::cplx > amplitudes ) [inline]`

Here is the call graph for this function:

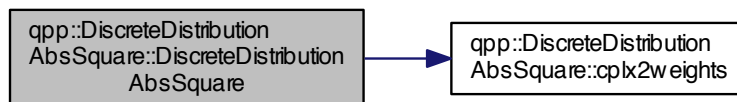


6.2.1.3 `qpp::DiscreteDistributionAbsSquare::DiscreteDistributionAbsSquare ( std::vector< types::cplx > amplitudes ) [inline]`

Here is the call graph for this function:



6.2.1.4 `qpp::DiscreteDistributionAbsSquare::DiscreteDistributionAbsSquare ( const types::cmat & V ) [inline]`

Here is the call graph for this function:

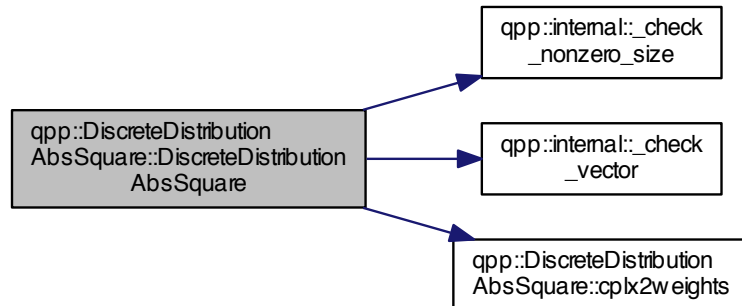


## 6.2.2 Member Function Documentation

6.2.2.1 `template<typename InputIterator> std::vector<double> qpp::DiscreteDistributionAbsSquare::cplx2weights ( InputIterator first, InputIterator last ) [inline],[protected]`

6.2.2.2 `std::vector<double> qpp::DiscreteDistributionAbsSquare::probabilities ( ) [inline]`

6.2.2.3 `size_t qpp::DiscreteDistributionAbsSquare::sample ( ) [inline]`

Here is the call graph for this function:



## 6.2.3 Member Data Documentation

6.2.3.1 `std::discrete_distribution<size_t> qpp::DiscreteDistributionAbsSquare::_d [protected]`


The documentation for this class was generated from the following file:

- [include/classes/stat.h](#)


## 6.3 qpp::Exception Class Reference

```
#include <exception.h>
```

Inheritance diagram for qpp::Exception:



Collaboration diagram for qpp::Exception:



## Public Types

- enum `Type` {  
`Type::UNKNOWN_EXCEPTION = 1`, `Type::ZERO_SIZE`, `Type::MATRIX_NOT_SQUARE`, `Type::MATRIX_NOT_CVECTOR`,  
`Type::MATRIX_NOT_RVECTOR`, `Type::MATRIX_NOT_VECTOR`, `Type::MATRIX_NOT_SQUARE_OR_CVECTOR`, `Type::MATRIX_NOT_SQUARE_OR_RVECTOR`,  
`Type::MATRIX_NOT_SQUARE_OR_VECTOR`, `Type::DIMS_INVALID`, `Type::DIMS_NOT_EQUAL`, `Type::DIMS_MISMATCH_MATRIX`,  
`Type::DIMS_MISMATCH_CVECTOR`, `Type::DIMS_MISMATCH_RVECTOR`, `Type::DIMS_MISMATCH_VECTOR`, `Type::SUBSYS_MISMATCH_DIMS`,  
`Type::PERM_MISMATCH_DIMS`, `Type::NOT_QUBIT_GATE`, `Type::NOT_QUBIT_SUBSYS`, `Type::NOT_BIPARTITE`,  
`Type::OUT_OF_RANGE`, `Type::UNDEFINED_TYPE`, `Type::TYPE_MISMATCH`, `Type::CUSTOM_EXCEPTION` }

## Public Member Functions

- `Exception` (const std::string &where, const `Type` &type)
- `Exception` (const std::string &where, const std::string &custom)
- virtual const char \* `what` () const noexcept override
- virtual `~Exception` () noexcept

## Private Member Functions

- `std::string _construct_exception_msg ()`

## Private Attributes

- `std::string _where`
- `std::string _msg`
- `Type _type`
- `std::string _custom`

## 6.3.1 Member Enumeration Documentation

6.3.1.1 `enum qpp::Exception::Type` `[strong]`


Enumerator

***UNKNOWN\_EXCEPTION***  
***ZERO\_SIZE***  
***MATRIX\_NOT\_SQUARE***  
***MATRIX\_NOT\_CVECTOR***  
***MATRIX\_NOT\_RVECTOR***  
***MATRIX\_NOT\_VECTOR***  
***MATRIX\_NOT\_SQUARE\_OR\_CVECTOR***  
***MATRIX\_NOT\_SQUARE\_OR\_RVECTOR***  
***MATRIX\_NOT\_SQUARE\_OR\_VECTOR***  
***DIMS\_INVALID***  
***DIMS\_NOT\_EQUAL***  
***DIMS\_MISMATCH\_MATRIX***  
***DIMS\_MISMATCH\_CVECTOR***  
***DIMS\_MISMATCH\_RVECTOR***  
***DIMS\_MISMATCH\_VECTOR***  
***SUBSYS\_MISMATCH\_DIMS***  
***PERM\_MISMATCH\_DIMS***  
***NOT\_QUBIT\_GATE***  
***NOT\_QUBIT\_SUBSYS***  
***NOT\_BIPARTITE***  
***OUT\_OF\_RANGE***  
***UNDEFINED\_TYPE***  
***TYPE\_MISMATCH***  
***CUSTOM\_EXCEPTION***

### 6.3.2 Constructor & Destructor Documentation


6.3.2.1 `qpp::Exception::Exception ( const std::string & where, const Type & type )` `[inline]`

Here is the call graph for this function:



6.3.2.2 `qpp::Exception::Exception ( const std::string & where, const std::string & custom )` `[inline]`

Here is the call graph for this function:



6.3.2.3 `virtual qpp::Exception::~~Exception ( )` `[inline]`, `[virtual]`, `[noexcept]`

### 6.3.3 Member Function Documentation

6.3.3.1 `std::string qpp::Exception::_construct_exception_msg ( )` `[inline]`, `[private]`

6.3.3.2 `virtual const char* qpp::Exception::what ( ) const` `[inline]`, `[override]`, `[virtual]`, `[noexcept]`

### 6.3.4 Member Data Documentation

6.3.4.1 `std::string qpp::Exception::_custom` `[private]`

6.3.4.2 `std::string qpp::Exception::_msg` `[private]`

6.3.4.3 `Type qpp::Exception::_type` `[private]`

6.3.4.4 `std::string qpp::Exception::_where` `[private]`

The documentation for this class was generated from the following file:

- [include/classes/exception.h](#)

## 6.4 qpp::Gates Class Reference

```
#include <gates.h>
```

### Public Member Functions

- [Gates](#) (const [Gates](#) &)=delete
- [Gates](#) & [operator=](#) (const [Gates](#) &)=delete
- virtual [~Gates](#) ()=default
- [types::cmat Rtheta](#) (double theta) const
- [types::cmat Id](#) (size\_t D) const
- [types::cmat Zd](#) (size\_t D) const
- [types::cmat Fd](#) (size\_t D) const
- [types::cmat Xd](#) (size\_t D) const
- [types::cmat CTRL](#) (const [types::cmat](#) &A, const std::vector< size\_t > &ctrl, const std::vector< size\_t > &gate, size\_t n, size\_t D=2) const

### Static Public Member Functions

- static const [Gates](#) & [getInstance](#) ()

### Public Attributes

- [types::cmat Id2](#)
- [types::cmat H](#)
- [types::cmat X](#)
- [types::cmat Y](#)
- [types::cmat Z](#)
- [types::cmat S](#)
- [types::cmat T](#)
- [types::cmat CNOTab](#)
- [types::cmat CZ](#)
- [types::cmat CS](#)
- [types::cmat CNOTba](#)
- [types::cmat SWAP](#)
- [types::cmat TOF](#)
- [types::cmat FRED](#)
- [types::ket x0](#)
- [types::ket x1](#)
- [types::ket y0](#)
- [types::ket y1](#)
- [types::ket z0](#)
- [types::ket z1](#)
- [types::cmat px0](#)
- [types::cmat px1](#)
- [types::cmat py0](#)
- [types::cmat py1](#)
- [types::cmat pz0](#)
- [types::cmat pz1](#)
- [types::ket b00](#)
- [types::ket b01](#)
- [types::ket b10](#)
- [types::ket b11](#)



- [types::cmat pb00](#)
- [types::cmat pb01](#)
- [types::cmat pb10](#)
- [types::cmat pb11](#)
- [types::ket GHZ](#)
- [types::ket W](#)
- [types::cmat pGHZ](#)
- [types::cmat pW](#)

## Private Member Functions

- [Gates \(\)](#)

### 6.4.1 Constructor & Destructor Documentation

6.4.1.1 `qpp::Gates::Gates ( )` `[inline]`, `[private]`


6.4.1.2 `qpp::Gates::Gates ( const Gates & )` `[delete]`

6.4.1.3 `virtual qpp::Gates::~~Gates ( )` `[virtual]`, `[default]`

### 6.4.2 Member Function Documentation

6.4.2.1 `types::cmat qpp::Gates::CTRL ( const types::cmat & A, const std::vector< size_t > & ctrl, const std::vector< size_t > & gate, size_t n, size_t D = 2 ) const` `[inline]`

Here is the call graph for this function:

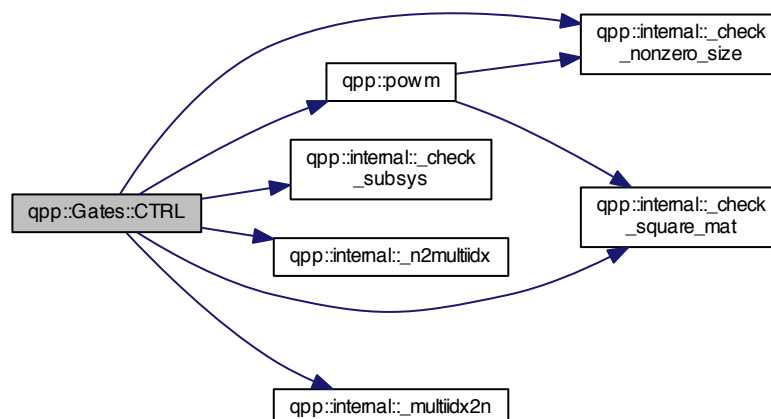

6.4.2.2 `types::cmat qpp::Gates::Fd ( size_t D ) const` `[inline]`

Here is the call graph for this function:



6.4.2.3 `static const Gates& qpp::Gates::getInstance ( )` `[inline]`, `[static]`


6.4.2.4 `types::cmat qpp::Gates::ld ( size_t D ) const` `[inline]`

6.4.2.5 `Gates& qpp::Gates::operator= ( const Gates & )` `[delete]`

6.4.2.6 `types::cmat qpp::Gates::Rtheta ( double theta ) const` `[inline]`

6.4.2.7 `types::cmat qpp::Gates::Xd ( size_t D ) const` `[inline]`

Here is the call graph for this function:



6.4.2.8 `types::cmat qpp::Gates::Zd ( size_t D ) const` `[inline]`

Here is the call graph for this function:



### 6.4.3 Member Data Documentation

6.4.3.1 `types::ket qpp::Gates::b00`

6.4.3.2 `types::ket qpp::Gates::b01`

6.4.3.3 `types::ket qpp::Gates::b10`

6.4.3.4 `types::ket qpp::Gates::b11`

6.4.3.5 `types::cmat qpp::Gates::CNOTab`

6.4.3.6 `types::cmat qpp::Gates::CNOTba`

6.4.3.7 `types::cmat qpp::Gates::CS`

6.4.3.8 `types::cmat qpp::Gates::CZ`

6.4.3.9 `types::cmat qpp::Gates::FRED`

6.4.3.10 `types::ket qpp::Gates::GHZ`

6.4.3.11 `types::cmat qpp::Gates::H`

6.4.3.12 `types::cmat qpp::Gates::Id2`

6.4.3.13 `types::cmat qpp::Gates::pb00`

6.4.3.14 `types::cmat qpp::Gates::pb01`

6.4.3.15 `types::cmat qpp::Gates::pb10`

6.4.3.16 `types::cmat qpp::Gates::pb11`

6.4.3.17 `types::cmat qpp::Gates::pGHZ`

6.4.3.18 `types::cmat qpp::Gates::pW`

6.4.3.19 `types::cmat qpp::Gates::px0`

6.4.3.20 `types::cmat qpp::Gates::px1`

6.4.3.21 `types::cmat qpp::Gates::py0`

6.4.3.22 `types::cmat qpp::Gates::py1`

6.4.3.23 `types::cmat qpp::Gates::pz0`

6.4.3.24 `types::cmat qpp::Gates::pz1`

6.4.3.25 `types::cmat qpp::Gates::S`

6.4.3.26 `types::cmat qpp::Gates::SWAP`

6.4.3.27 `types::cmat qpp::Gates::T`

6.4.3.28 `types::cmat qpp::Gates::TOF`

6.4.3.29 `types::ket qpp::Gates::W`

6.4.3.30 `types::cmat qpp::Gates::X`

6.4.3.31 `types::ket qpp::Gates::x0`

6.4.3.32 `types::ket qpp::Gates::x1`

6.4.3.33 `types::cmat qpp::Gates::Y`

6.4.3.34 `types::ket qpp::Gates::y0`

6.4.3.35 `types::ket qpp::Gates::y1`

6.4.3.36 `types::cmat qpp::Gates::Z`

6.4.3.37 `types::ket qpp::Gates::z0`

6.4.3.38 `types::ket qpp::Gates::z1`

The documentation for this class was generated from the following file:

- [include/classes/gates.h](#)

## 6.5 qpp::NormalDistribution Class Reference

```
#include <stat.h>
```

### Public Member Functions

- [NormalDistribution](#) (double mean=0, double sigma=1)
- double [sample](#) ()

### Protected Attributes

- `std::normal_distribution _d`


### 6.5.1 Constructor & Destructor Documentation

6.5.1.1 `qpp::NormalDistribution::NormalDistribution ( double mean = 0, double sigma = 1 )` `[inline]`

### 6.5.2 Member Function Documentation

#### 6.5.2.1 double qpp::NormalDistribution::sample ( ) [inline]

Here is the call graph for this function:



### 6.5.3 Member Data Documentation

#### 6.5.3.1 std::normal\_distribution qpp::NormalDistribution::\_d [protected]

The documentation for this class was generated from the following file:

- include/classes/stat.h

## 6.6 qpp::Qudit Class Reference

```
#include <qudit.h>
```

### Public Member Functions

- [Qudit](#) (const [types::cmat](#) &rho=[Gates::getInstance\(\)](#).pz0)
- size\_t [measure](#) (const [types::cmat](#) &U, bool destructive=false)
- size\_t [measure](#) (bool destructive=false)
- [types::cmat](#) [getRho](#) () const
- size\_t [getD](#) () const
- virtual [~Qudit](#) ()=default


### Private Attributes

- [types::cmat](#) [\\_rho](#)
- size\_t [\\_D](#)

#### 6.6.1 Constructor & Destructor Documentation

6.6.1.1 `qpp::Qudit::Qudit ( const types::cmat & rho = Gates::getInstance ().pz0 ) [inline]`

Here is the call graph for this function:

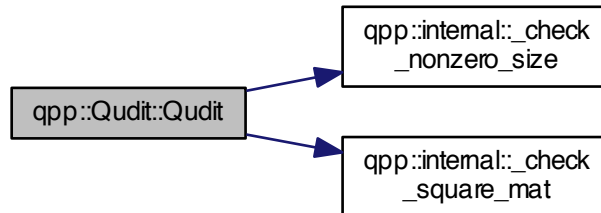

6.6.1.2 `virtual qpp::Qudit::~~Qudit ( ) [virtual],[default]`


## 6.6.2 Member Function Documentation

6.6.2.1 `size_t qpp::Qudit::getD ( ) const [inline]`

6.6.2.2 `types::cmat qpp::Qudit::getRho ( ) const [inline]`


6.6.2.3 `size_t qpp::Qudit::measure ( const types::cmat & U, bool destructive = false ) [inline]`

Here is the call graph for this function:

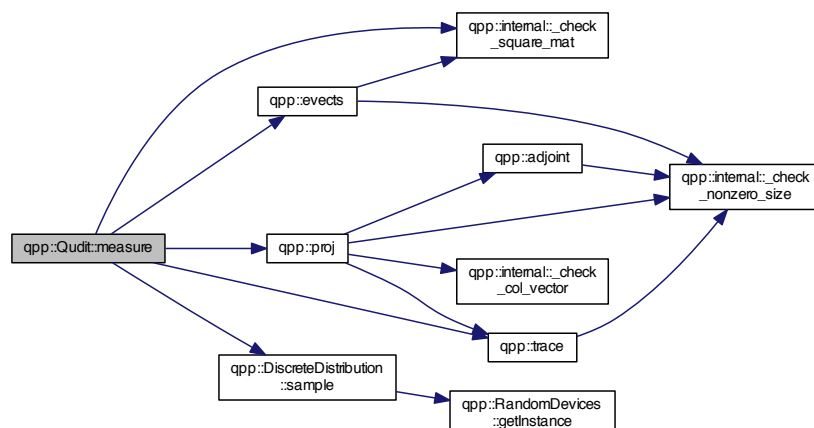

#### 6.6.2.4 `size_t qpp::Qudit::measure ( bool destructive = false ) [inline]`

Here is the call graph for this function:

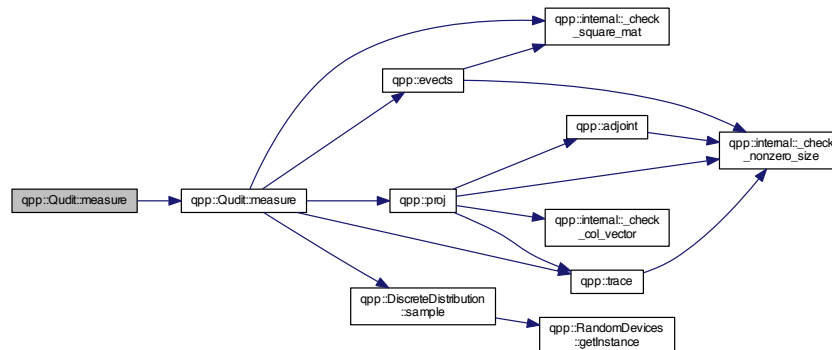

### 6.6.3 Member Data Documentation

#### 6.6.3.1 `size_t qpp::Qudit::_D [private]`

#### 6.6.3.2 `types::cmat qpp::Qudit::_rho [private]`

The documentation for this class was generated from the following file:

- [include/classes/qudit.h](#)

## 6.7 qpp::RandomDevices Class Reference

```
#include <randevs.h>
```

### Public Member Functions

- [RandomDevices](#) (const [RandomDevices](#) &)=delete
- [RandomDevices](#) & operator= (const [RandomDevices](#) &)=delete
- virtual [~RandomDevices](#) ()=default

### Static Public Member Functions

- static [RandomDevices](#) & [getInstance](#) ()

### Public Attributes

- `std::random_device` [\\_rd](#)
- `std::mt19937` [\\_rng](#)

### Private Member Functions

- [RandomDevices](#) ()

### 6.7.1 Constructor & Destructor Documentation

6.7.1.1 `qpp::RandomDevices::RandomDevices ( ) [inline],[private]`

6.7.1.2 `qpp::RandomDevices::RandomDevices ( const RandomDevices & ) [delete]`

6.7.1.3 `virtual qpp::RandomDevices::~~RandomDevices ( ) [virtual],[default]`

### 6.7.2 Member Function Documentation

6.7.2.1 `static RandomDevices& qpp::RandomDevices::getInstance ( ) [inline],[static]`

6.7.2.2 `RandomDevices& qpp::RandomDevices::operator= ( const RandomDevices & ) [delete]`

### 6.7.3 Member Data Documentation

6.7.3.1 `std::random_device qpp::RandomDevices::_rd`

6.7.3.2 `std::mt19937 qpp::RandomDevices::_rng`

The documentation for this class was generated from the following file:

- [include/classes/randevs.h](#)

## 6.8 qpp::Timer Class Reference

```
#include <timer.h>
```

### Public Member Functions

- [Timer](#) ()
- void [tic](#) ()
- void [toc](#) ()
- double [seconds](#) () const
- virtual [~Timer](#) ()=default

### Protected Attributes

- `std::chrono::high_resolution_clock::time_point` [\\_start](#)
- `std::chrono::high_resolution_clock::time_point` [\\_end](#)

### Friends

- `std::ostream & operator<< (std::ostream &os, const Timer &rhs)`

### 6.8.1 Constructor & Destructor Documentation

6.8.1.1 `qpp::Timer::Timer ( ) [inline]`

6.8.1.2 `virtual qpp::Timer::~~Timer ( ) [virtual],[default]`



## 6.8.2 Member Function Documentation

6.8.2.1 `double qpp::Timer::seconds ( ) const` `[inline]`

6.8.2.2 `void qpp::Timer::tic ( )` `[inline]`

6.8.2.3 `void qpp::Timer::toc ( )` `[inline]`

## 6.8.3 Friends And Related Function Documentation

6.8.3.1 `std::ostream& operator<< ( std::ostream & os, const Timer & rhs )` `[friend]`

## 6.8.4 Member Data Documentation

6.8.4.1 `std::chrono::high_resolution_clock::time_point qpp::Timer::_end` `[protected]`

6.8.4.2 `std::chrono::high_resolution_clock::time_point qpp::Timer::_start` `[protected]`

The documentation for this class was generated from the following file:

- [include/classes/timer.h](#)

## 6.9 qpp::UniformRealDistribution Class Reference

```
#include <stat.h>
```

### Public Member Functions

- [UniformRealDistribution](#) (double *a*=0, double *b*=1)
- double [sample](#) ()

### Protected Attributes

- `std::uniform_real_distribution _d`


## 6.9.1 Constructor & Destructor Documentation

6.9.1.1 `qpp::UniformRealDistribution::UniformRealDistribution ( double a = 0, double b = 1 )` `[inline]`

## 6.9.2 Member Function Documentation

#### 6.9.2.1 `double qpp::UniformRealDistribution::sample ( ) [inline]`

Here is the call graph for this function:



### 6.9.3 Member Data Documentation

#### 6.9.3.1 `std::uniform_real_distribution qpp::UniformRealDistribution::_d [protected]`

The documentation for this class was generated from the following file:

- `include/classes/stat.h`


## Chapter 7

# File Documentation


### 7.1 include/channels.h File Reference

```
#include <cmath>
#include <vector>
#include "constants.h"
#include "functions.h"
#include "internal.h"
#include "types.h"
#include "classes/exception.h"
```

Include dependency graph for channels.h:

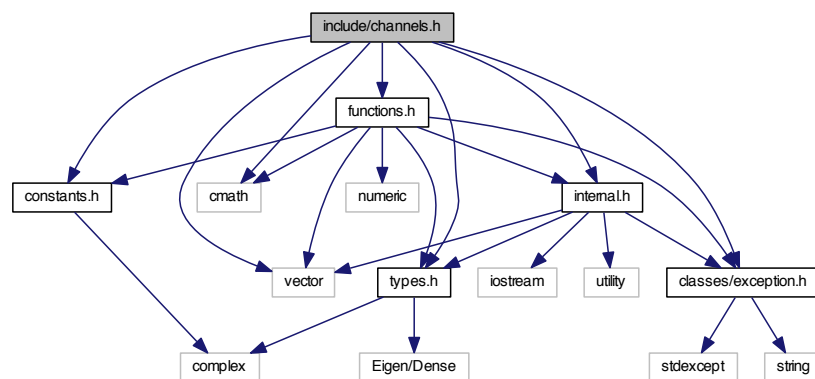

This graph shows which files directly or indirectly include this file:

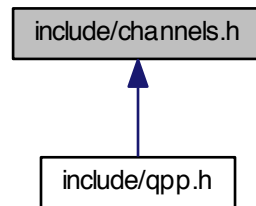

## Namespaces

- [qpp](#)

## Functions


- `types::cmat` [qpp::channel](#) (`const types::cmat &rho`, `const std::vector< types::cmat > &Ks`)
- `types::cmat` [qpp::super](#) (`const std::vector< types::cmat > &Ks`)
- `types::cmat` [qpp::choi](#) (`const std::vector< types::cmat > &Ks`)
- `std::vector< types::cmat >` [qpp::choi2kraus](#) (`const types::cmat &A`)

## 7.2 include/classes/exception.h File Reference


```
#include <stdexcept>
```

```
#include <string>
```

Include dependency graph for exception.h:

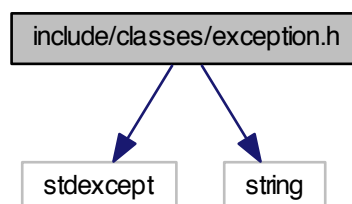

This graph shows which files directly or indirectly include this file:

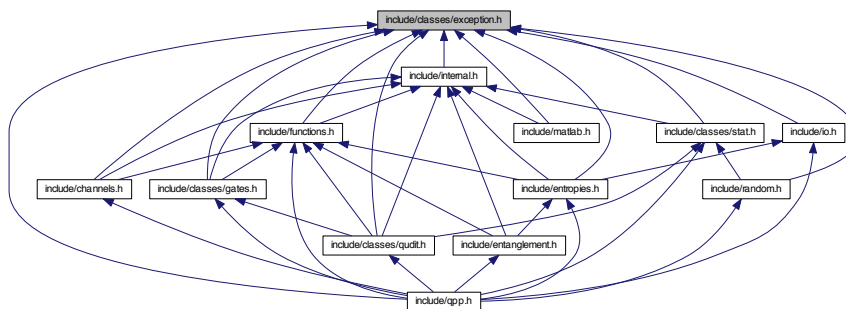

## Classes


- class `qpp::Exception`

## Namespaces


- `qpp`

## 7.3 include/classes/gates.h File Reference

```
#include "constants.h"
#include "functions.h"
#include "exception.h"
#include "internal.h"
#include "types.h"
Include dependency graph for gates.h:
```

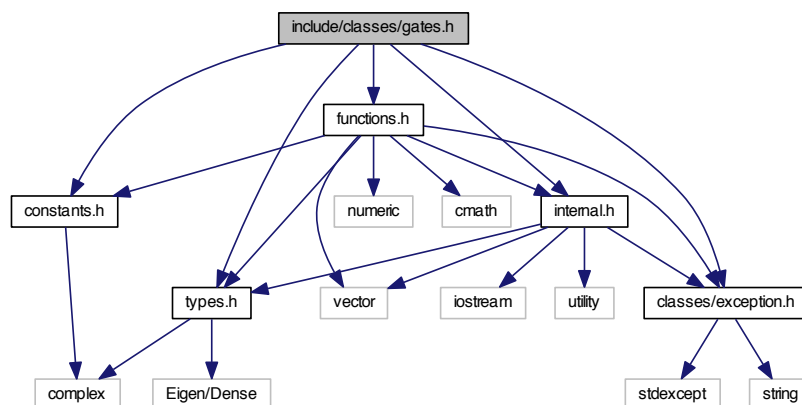

This graph shows which files directly or indirectly include this file:

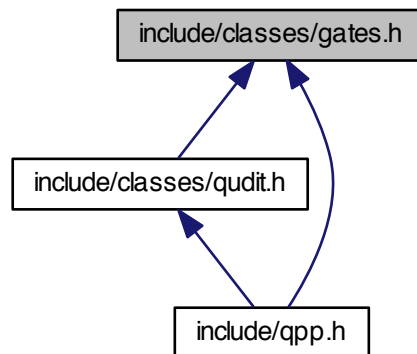

## Classes


- class [qpp::Gates](#)

## Namespaces


- [qpp](#)

## 7.4 include/classes/qudit.h File Reference

```
#include "exception.h"
#include "functions.h"
#include "gates.h"
#include "internal.h"
#include "types.h"
#include "classes/stat.h"
Include dependency graph for qudit.h:
```

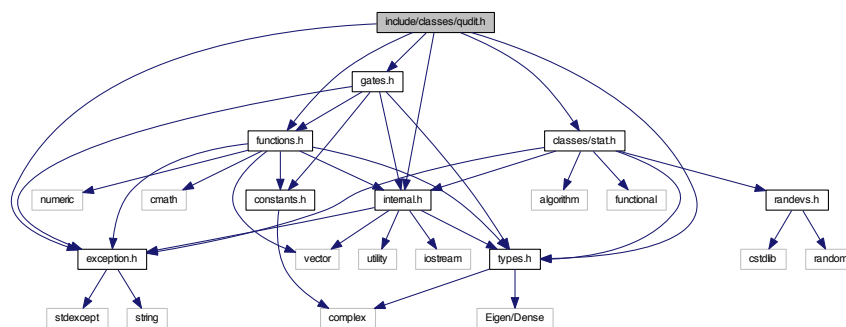

This graph shows which files directly or indirectly include this file:



## Classes

- class [qpp::Qudit](#)

## Namespaces


- [qpp](#)

## 7.5 include/classes/randevs.h File Reference


```
#include <cstdlib>
```

```
#include <random>
```

Include dependency graph for randevs.h:



This graph shows which files directly or indirectly include this file:

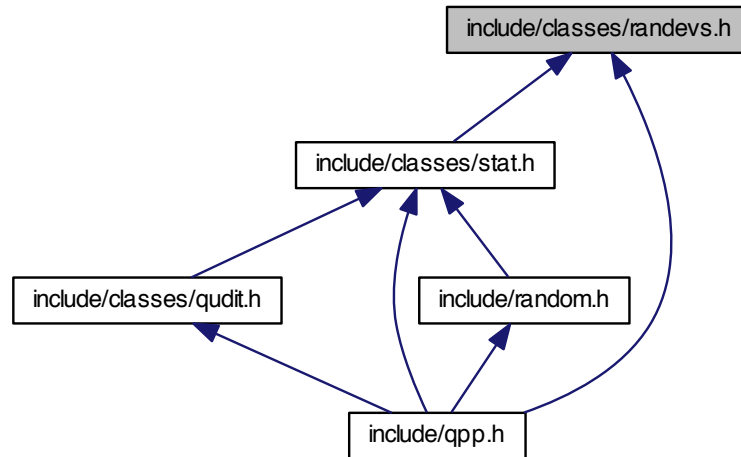

## Classes

- class [qpp::RandomDevices](#)

## Namespaces


- [qpp](#)

## 7.6 include/classes/stat.h File Reference


```
#include <algorithm>
#include <functional>
#include "exception.h"
#include "internal.h"
#include "randevs.h"
#include "types.h"
```



Include dependency graph for stat.h:

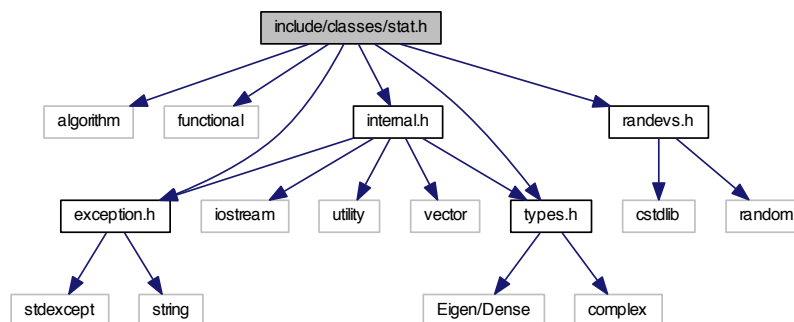

This graph shows which files directly or indirectly include this file:

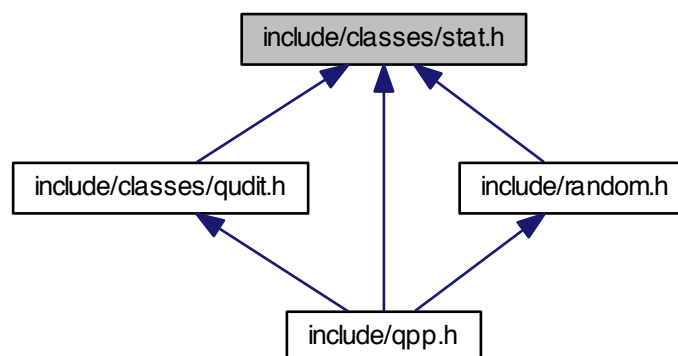

## Classes

- class `qpp::NormalDistribution`
- class `qpp::UniformRealDistribution`
- class `qpp::DiscreteDistribution`
- class `qpp::DiscreteDistributionAbsSquare`

## Namespaces


- `qpp`

## 7.7 include/classes/timer.h File Reference


```
#include <chrono>
```

```
#include <ostream>
```

Include dependency graph for timer.h:



This graph shows which files directly or indirectly include this file:



## Classes

- class [qpp::Timer](#)


## Namespaces

- [qpp](#)


## 7.8 include/constants.h File Reference

```
#include <complex>
```

Include dependency graph for constants.h:



This graph shows which files directly or indirectly include this file:

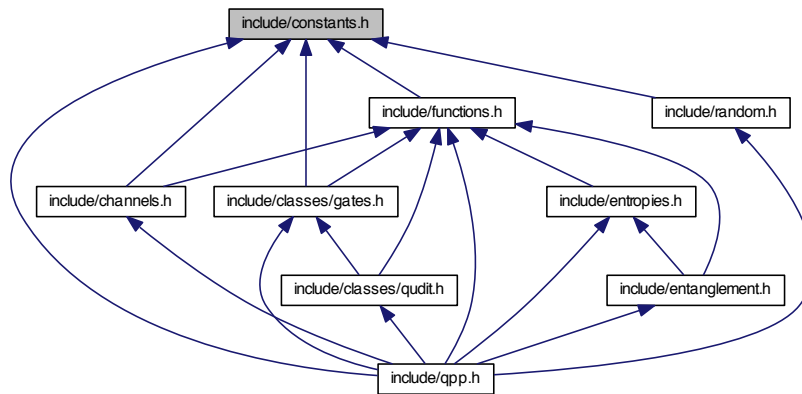

## Namespaces

- [qpp](#)
- [qpp::ct](#)

## Functions

- `std::complex< double > qpp::ct::omega (size_t D)`


## Variables

- `const double qpp::ct::chop = 1e-10`
- `const double qpp::ct::eps = 1e-12`
- `const std::complex< double > qpp::ct::ii = { 0, 1 }`
- `const double qpp::ct::pi = 3.141592653589793238462643383279502884`
- `const double qpp::ct::ee = 2.718281828459045235360287471352662497`


## 7.9 include/entanglement.h File Reference

```
#include <Eigen/SVD>
#include "entropies.h"
#include "functions.h"
#include "internal.h"
#include "types.h"
```

Include dependency graph for entanglement.h:

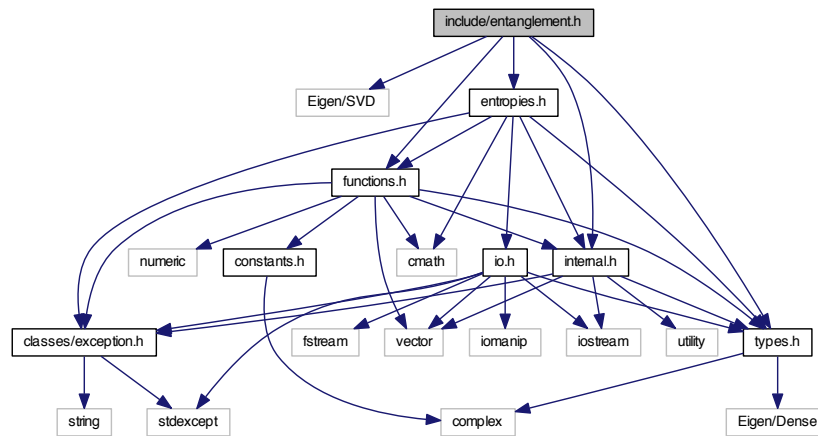

This graph shows which files directly or indirectly include this file:

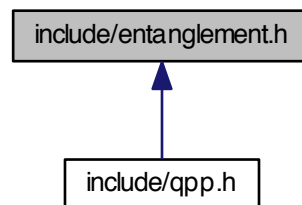

### Namespaces

- [qpp](#)


### Functions

- `template<typename Derived >`  
`types::cmat qpp::schmidtcoeff (const Eigen::MatrixBase< Derived > &A, const std::vector< size_t > &dims)`
- `template<typename Derived >`  
`types::cmat qpp::schmidtU (const Eigen::MatrixBase< Derived > &A, const std::vector< size_t > &dims)`


- `template<typename Derived >`  
`types::cmat qpp::schmidtV (const Eigen::MatrixBase< Derived > &A, const std::vector< size_t > &dims)`
- `template<typename Derived >`  
`types::cmat qpp::schmidtprob (const Eigen::MatrixBase< Derived > &A, const std::vector< size_t > &dims)`
- `template<typename Derived >`  
`double qpp::entanglement (const Eigen::MatrixBase< Derived > &A, const std::vector< size_t > &dims)`
- `template<typename Derived >`  
`double qpp::gconcurrence (const Eigen::MatrixBase< Derived > &A)`

## 7.10 include/entropies.h File Reference

```
#include <cmath>
#include "functions.h"
#include "internal.h"
#include "types.h"
#include "classes/exception.h"
#include "io.h"
Include dependency graph for entropies.h:
```

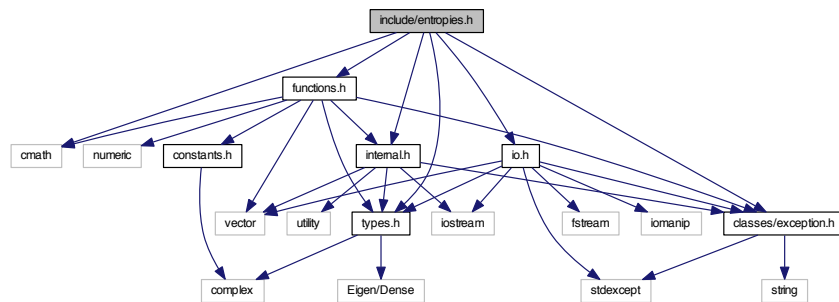

This graph shows which files directly or indirectly include this file:

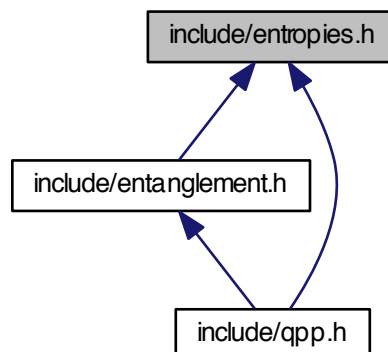

## Namespaces

- [qpp](#)


## Functions

- `template<typename Derived >`  
`double qpp::shannon (const Eigen::MatrixBase< Derived > &A)`
- `template<typename Derived >`  
`double qpp::renyi (const double alpha, const Eigen::MatrixBase< Derived > &A)`
- `template<typename Derived >`  
`double qpp::renyi\_inf (const Eigen::MatrixBase< Derived > &A)`
- `template<typename Derived >`  
`double qpp::tsallis (const double alpha, const Eigen::MatrixBase< Derived > &A)`
- `template<typename Derived >`  
`double qpp::mutualinfo (const Eigen::MatrixBase< Derived > &A, const std::vector< size_t > &subsys, const std::vector< size_t > &dims)`


## 7.11 include/functions.h File Reference

```
#include <cmath>
#include <numeric>
#include <vector>
#include "constants.h"
#include "internal.h"
#include "types.h"
#include "classes/exception.h"
```

Include dependency graph for functions.h:

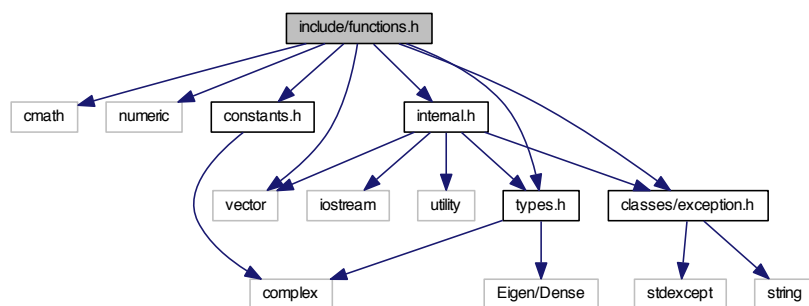

This graph shows which files directly or indirectly include this file:

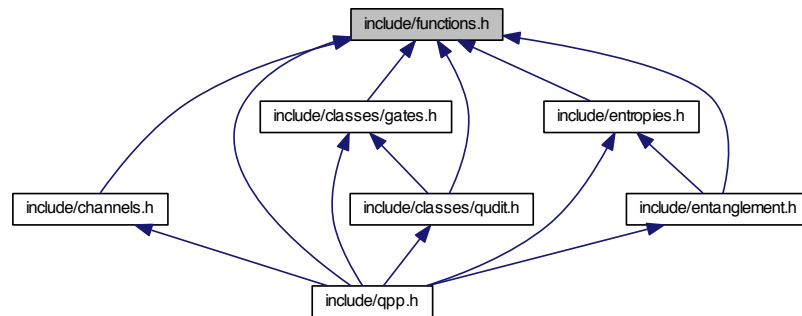

## Namespaces

- [qpp](#)

## Functions

- `template<typename Derived >`  
`types::DynMat< typename`  
`Derived::Scalar > qpp::transpose (const Eigen::MatrixBase< Derived > &A)`
- `template<typename Derived >`  
`types::DynMat< typename`  
`Derived::Scalar > qpp::conjugate (const Eigen::MatrixBase< Derived > &A)`
- `template<typename Derived >`  
`types::DynMat< typename`  
`Derived::Scalar > qpp::adjoint (const Eigen::MatrixBase< Derived > &A)`
- `template<typename Derived >`  
`Derived::Scalar qpp::trace (const Eigen::MatrixBase< Derived > &A)`
- `template<typename Derived >`  
`Derived::Scalar qpp::det (const Eigen::MatrixBase< Derived > &A)`
- `template<typename Derived >`  
`Derived::Scalar qpp::logdet (const Eigen::MatrixBase< Derived > &A)`
- `template<typename Derived >`  
`Derived::Scalar qpp::sum (const Eigen::MatrixBase< Derived > &A)`
- `template<typename Derived >`  
`double qpp::norm (const Eigen::MatrixBase< Derived > &A)`
- `template<typename Derived >`  
`types::cmat qpp::evals (const Eigen::MatrixBase< Derived > &A)`
- `template<typename Derived >`  
`types::cmat qpp::evecs (const Eigen::MatrixBase< Derived > &A)`
- `template<typename Derived >`  
`types::cmat qpp::hevals (const Eigen::MatrixBase< Derived > &A)`
- `template<typename Derived >`  
`types::cmat qpp::hevecs (const Eigen::MatrixBase< Derived > &A)`
- `template<typename Derived >`  
`types::cmat qpp::funm (const Eigen::MatrixBase< Derived > &A, types::cplx(*f)(const types::cplx &))`
- `template<typename Derived >`  
`types::cmat qpp::sqrtm (const Eigen::MatrixBase< Derived > &A)`


- `template<typename Derived >`  
`types::cmat qpp::absm (const Eigen::MatrixBase< Derived > &A)`
- `template<typename Derived >`  
`types::cmat qpp::expm (const Eigen::MatrixBase< Derived > &A)`
- `template<typename Derived >`  
`types::cmat qpp::logm (const Eigen::MatrixBase< Derived > &A)`
- `template<typename Derived >`  
`types::cmat qpp::sinm (const Eigen::MatrixBase< Derived > &A)`
- `template<typename Derived >`  
`types::cmat qpp::cosm (const Eigen::MatrixBase< Derived > &A)`
- `template<typename Derived >`  
`types::cmat qpp::spectralpwm (const Eigen::MatrixBase< Derived > &A, const types::cplx z)`
- `template<typename Derived >`  
`types::DynMat< typename`  
`Derived::Scalar > qpp::pwm (const Eigen::MatrixBase< Derived > &A, size_t n)`
- `template<typename OutputScalar , typename Derived >`  
`types::DynMat< OutputScalar > qpp::fun (const Eigen::MatrixBase< Derived > &A, OutputScalar(*) (const`  
`typename Derived::Scalar &))`
- `template<typename Derived1 , typename Derived2 >`  
`types::DynMat< typename`  
`Derived1::Scalar > qpp::kron (const Eigen::MatrixBase< Derived1 > &A, const Eigen::MatrixBase< De-`  
`derived2 > &B)`
- `template<typename Derived >`  
`types::DynMat< typename`  
`Derived::Scalar > qpp::kronlist (const std::vector< types::DynMat< typename Derived::Scalar > > &As)`
- `template<typename Derived >`  
`types::DynMat< typename`  
`Derived::Scalar > qpp::kronpow (const Eigen::MatrixBase< Derived > &A, size_t n)`
- `template<typename Derived >`  
`types::DynMat< typename`  
`Derived::Scalar > qpp::reshape (const Eigen::MatrixBase< Derived > &A, size_t rows, size_t cols)`
- `template<typename Derived >`  
`types::DynMat< typename`  
`Derived::Scalar > qpp::syspermute (const Eigen::MatrixBase< Derived > &A, const std::vector< size_t >`  
`&perm, const std::vector< size_t > &dims)`
- `template<typename Derived >`  
`types::DynMat< typename`  
`Derived::Scalar > qpp::ptrace2 (const Eigen::MatrixBase< Derived > &A, const std::vector< size_t >`  
`&dims)`
- `template<typename Derived >`  
`types::DynMat< typename`  
`Derived::Scalar > qpp::ptrace (const Eigen::MatrixBase< Derived > &A, const std::vector< size_t > &sub-`  
`sys, const std::vector< size_t > &dims)`
- `template<typename Derived >`  
`types::DynMat< typename`  
`Derived::Scalar > qpp::ptranspose (const Eigen::MatrixBase< Derived > &A, const std::vector< size_t >`  
`&subsys, const std::vector< size_t > &dims)`
- `template<typename Derived1 , typename Derived2 >`  
`types::DynMat< typename`  
`Derived1::Scalar > qpp::comm (const Eigen::MatrixBase< Derived1 > &A, const Eigen::MatrixBase< De-`  
`derived2 > &B)`
- `template<typename Derived1 , typename Derived2 >`  
`types::DynMat< typename`  
`Derived1::Scalar > qpp::anticomm (const Eigen::MatrixBase< Derived1 > &A, const Eigen::MatrixBase<`  
`Derived2 > &B)`
- `template<typename Derived >`  
`types::DynMat< typename`  
`Derived::Scalar > qpp::proj (const Eigen::MatrixBase< Derived > &V)`




- `template<typename Derived >`  
`types::DynMat< typename`  
`Derived::Scalar > qpp::expandout (const Eigen::MatrixBase< Derived > &A, size_t pos, const std::vector<`  
`size_t > &dims)`
- `template<typename Derived >`  
`types::DynMat< typename`  
`Derived::Scalar > qpp::grams (const std::vector< types::DynMat< typename Derived::Scalar > > &Vs)`
- `template<typename Derived >`  
`types::DynMat< typename`  
`Derived::Scalar > qpp::grams (const Eigen::MatrixBase< Derived > &A)`
- `std::vector< size_t > qpp::n2multiidx (size_t n, const std::vector< size_t > &dims)`
- `size_t qpp::multiidx2n (const std::vector< size_t > &midx, const std::vector< size_t > &dims)`
- `types::ket qpp::mket (const std::vector< size_t > &mask)`
- `types::ket qpp::mket (const std::vector< size_t > &mask, const std::vector< size_t > &dims)`
- `types::ket qpp::mket (const std::vector< size_t > &mask, size_t d)`

## 7.12 include/internal.h File Reference

```
#include <iostream>
#include <utility>
#include <vector>
#include "types.h"
#include "classes/exception.h"
Include dependency graph for internal.h:
```

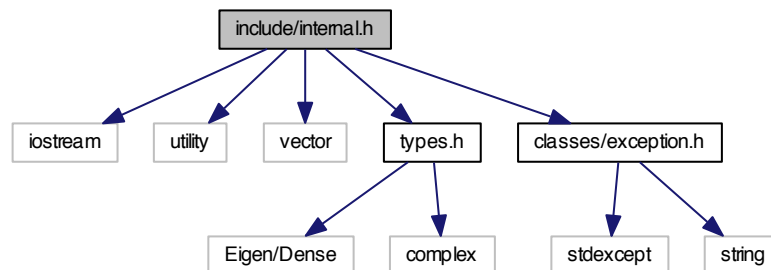

This graph shows which files directly or indirectly include this file:

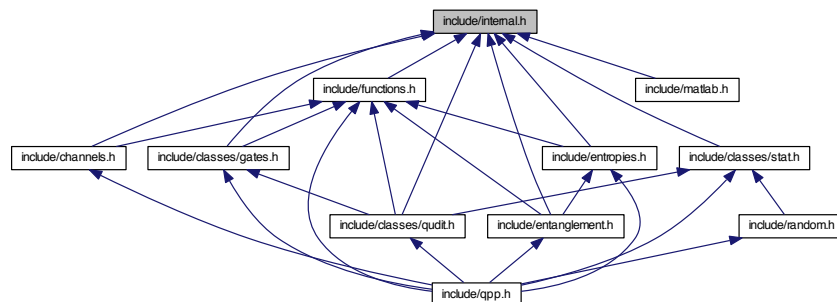

## Namespaces

- [qpp](#)
- [qpp::internal](#)


## Functions

- void [qpp::internal::\\_n2multiidx](#) (size\_t n, size\_t numdims, const size\_t \*dims, size\_t \*result)
- size\_t [qpp::internal::\\_multiidx2n](#) (const size\_t \*midx, size\_t numdims, const size\_t \*dims)
- template<typename Derived >  
bool [qpp::internal::\\_check\\_square\\_mat](#) (const Eigen::MatrixBase< Derived > &A)
- template<typename Derived >  
bool [qpp::internal::\\_check\\_vector](#) (const Eigen::MatrixBase< Derived > &A)
- template<typename Derived >  
bool [qpp::internal::\\_check\\_row\\_vector](#) (const Eigen::MatrixBase< Derived > &A)
- template<typename Derived >  
bool [qpp::internal::\\_check\\_col\\_vector](#) (const Eigen::MatrixBase< Derived > &A)
- template<typename T >  
bool [qpp::internal::\\_check\\_nonzero\\_size](#) (const T &x)
- bool [qpp::internal::\\_check\\_dims](#) (const std::vector< size\_t > &dims)
- template<typename Derived >  
bool [qpp::internal::\\_check\\_dims\\_match\\_mat](#) (const std::vector< size\_t > &dims, const Eigen::MatrixBase< Derived > &A)
- template<typename Derived >  
bool [qpp::internal::\\_check\\_dims\\_match\\_cvect](#) (const std::vector< size\_t > &dims, const Eigen::MatrixBase< Derived > &V)
- template<typename Derived >  
bool [qpp::internal::\\_check\\_dims\\_match\\_rvect](#) (const std::vector< size\_t > &dims, const Eigen::MatrixBase< Derived > &V)
- bool [qpp::internal::\\_check\\_eq\\_dims](#) (const std::vector< size\_t > &dims, size\_t dim)
- bool [qpp::internal::\\_check\\_subsys](#) (const std::vector< size\_t > &subsys, const std::vector< size\_t > &dims)
- bool [qpp::internal::\\_check\\_perm](#) (const std::vector< size\_t > &perm, const std::vector< size\_t > &dims)
- template<typename Scalar >  
void [qpp::internal::\\_syspermute\\_worker](#) (size\_t numdims, const size\_t \*cdims, const size\_t \*cperm, size\_t i, size\_t &iperm, const types::DynMat< Scalar > &V, types::DynMat< Scalar > &result)
- template<typename Scalar >  
void [qpp::internal::\\_ptranspose\\_worker](#) (const size\_t \*midxcoll, size\_t numdims, size\_t numsubsys, const size\_t \*cdims, const size\_t \*csubsys, size\_t i, size\_t j, size\_t &iperm, size\_t &jperm, const types::DynMat< Scalar > &A, types::DynMat< Scalar > &result)


## 7.13 include/io.h File Reference

```
#include <fstream>
#include <iomanip>
#include <iostream>
#include <stdexcept>
#include <vector>
#include "types.h"
#include "classes/exception.h"
```

Include dependency graph for io.h:

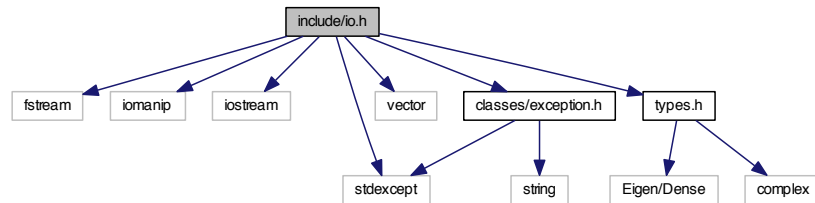

This graph shows which files directly or indirectly include this file:

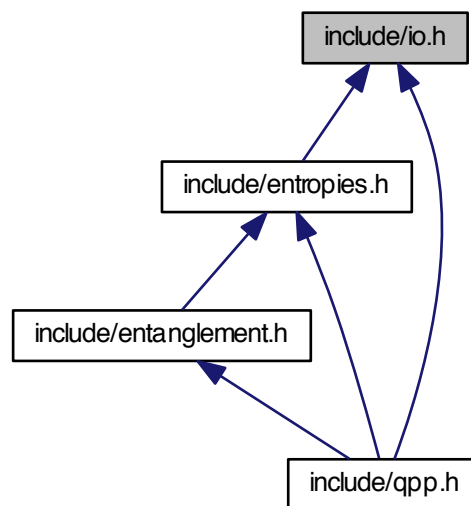

## Namespaces

- [qpp](#)

## Functions


- `template<typename T >`  
`void qpp::disp (const T &x, const std::string &separator, const std::string &start="[", const std::string &end="]", std::ostream &os=std::cout)`
- `template<typename T >`  
`void qpp::displn (const T &x, const std::string &separator, const std::string &start="[", const std::string &end="]", std::ostream &os=std::cout)`
- `template<typename T >`  
`void qpp::disp (const T *x, const size_t n, const std::string &separator, const std::string &start="[", const std::string &end="]", std::ostream &os=std::cout)`

- `template<typename T >`  
`void qpp::displn (const T *x, const size_t n, const std::string &separator, const std::string &start="[" , const std::string &end="]", std::ostream &os=std::cout)`
- `template<typename Derived >`  
`void qpp::disp (const Eigen::MatrixBase< Derived > &A, double chop=ct::chop, std::ostream &os=std::cout)`
- `template<typename Derived >`  
`void qpp::displn (const Eigen::MatrixBase< Derived > &A, double chop=ct::chop, std::ostream &os=std::cout)`
- `void qpp::disp (const types::cplx c, double chop=ct::chop, std::ostream &os=std::cout)`
- `void qpp::displn (const types::cplx c, double chop=ct::chop, std::ostream &os=std::cout)`
- `template<typename Derived >`  
`void qpp::save (const Eigen::MatrixBase< Derived > &A, const std::string &fname)`
- `template<typename Derived >`  
`types::DynMat< typename`  
`Derived::Scalar > qpp::load (const std::string &fname)`

## 7.14 include/matlab.h File Reference

```
#include <Eigen/Dense>
#include <stdexcept>
#include <string>
#include "internal.h"
#include "types.h"
#include "classes/exception.h"
#include "mat.h"
#include "mex.h"
```

Include dependency graph for matlab.h:

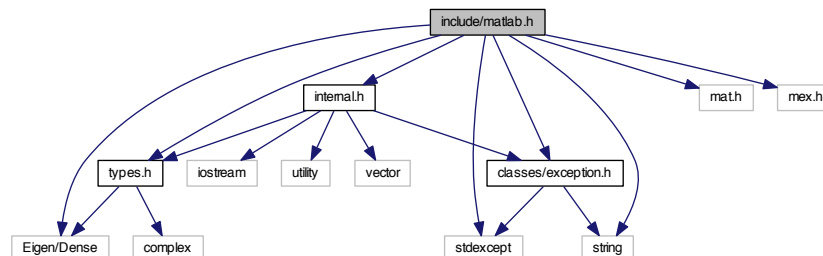

## Namespaces

- [qpp](#)

## Functions


- `template<typename Derived >`  
`Derived qpp::loadMATLABmatrix (const std::string &mat_file, const std::string &var_name)`
- `template<>`  
`types::dmat qpp::loadMATLABmatrix (const std::string &mat_file, const std::string &var_name)`
- `template<>`  
`types::cmat qpp::loadMATLABmatrix (const std::string &mat_file, const std::string &var_name)`
- `template<typename Derived >`  
`void qpp::saveMATLABmatrix (const Eigen::MatrixBase< Derived > &A, const std::string &mat_file, const std::string &var_name, const std::string &mode)`

- `template<>`  
`void qpp::saveMATLABmatrix (const Eigen::MatrixBase< typename types::dmat > &A, const std::string &mat_file, const std::string &var_name, const std::string &mode)`
- `template<>`  
`void qpp::saveMATLABmatrix (const Eigen::MatrixBase< typename types::cmat > &A, const std::string &mat_file, const std::string &var_name, const std::string &mode)`

## 7.15 include/qpp.h File Reference

```
#include "channels.h"
#include "constants.h"
#include "entanglement.h"
#include "entropies.h"
#include "functions.h"
#include "io.h"
#include "random.h"
#include "types.h"
#include "classes/exception.h"
#include "classes/gates.h"
#include "classes/qudit.h"
#include "classes/randevs.h"
#include "classes/stat.h"
#include "classes/timer.h"
```

Include dependency graph for qpp.h:

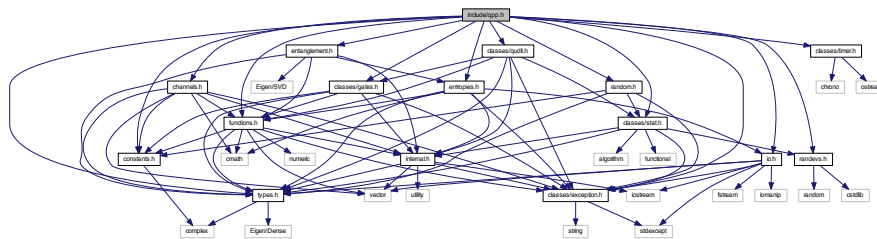

## Namespaces

- `qpp`


## Variables

- `RandomDevices & qpp::rdevs = RandomDevices::getInstance()`
- `const Gates & qpp::gt = Gates::getInstance()`


## 7.16 include/random.h File Reference

```
#include "constants.h"
#include "types.h"
#include "classes/exception.h"
#include "classes/stat.h"
```

Include dependency graph for random.h:

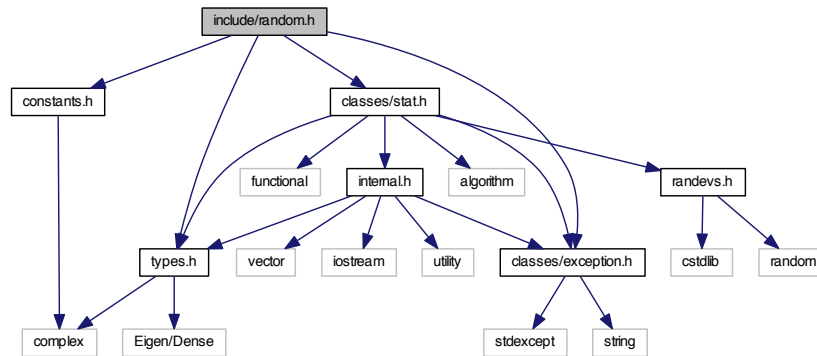

This graph shows which files directly or indirectly include this file:



## Namespaces

- [qpp](#)

## Functions

- `template<typename Derived >`  
Derived [qpp::rand](#) (size\_t rows, size\_t cols, double a=0, double b=1)
- `template<>`  
`types::dmat` [qpp::rand](#) (size\_t rows, size\_t cols, double a, double b)
- `template<>`  
`types::cmat` [qpp::rand](#) (size\_t rows, size\_t cols, double a, double b)
- `double` [qpp::rand](#) (double a=0, double b=1)
- `template<typename Derived >`  
Derived [qpp::randn](#) (size\_t rows, size\_t cols, double mean=0, double sigma=1)
- `template<>`  
`types::dmat` [qpp::randn](#) (size\_t rows, size\_t cols, double mean, double sigma)
- `template<>`  
`types::cmat` [qpp::randn](#) (size\_t rows, size\_t cols, double mean, double sigma)
- `double` [qpp::randn](#) (double mean=0, double sigma=1)


- `types::cmat` [qpp::randU](#) (size\_t D)
- `types::cmat` [qpp::randV](#) (size\_t Din, size\_t Dout)
- `std::vector< types::cmat >` [qpp::randkraus](#) (size\_t n, size\_t D)
- `types::cmat` [qpp::randH](#) (size\_t D)
- `types::ket` [qpp::randket](#) (size\_t D)
- `types::cmat` [qpp::randrho](#) (size\_t D)

## 7.17 include/types.h File Reference


```
#include <Eigen/Dense>
```

```
#include <complex>
```

Include dependency graph for types.h:

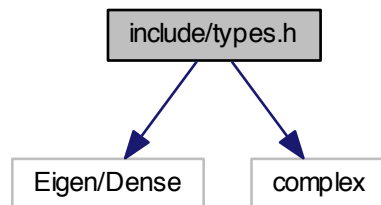

This graph shows which files directly or indirectly include this file:

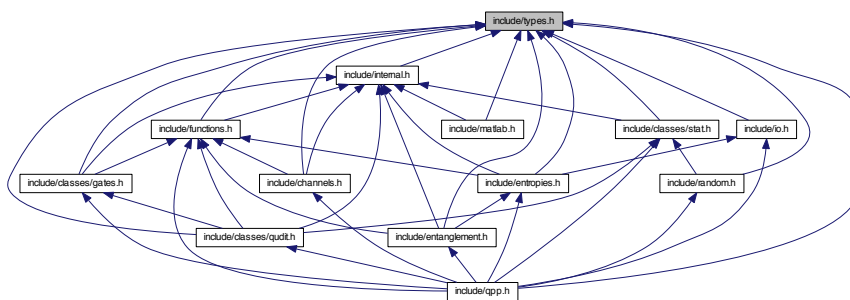

### Namespaces

- [qpp](#)
- [qpp::types](#)

### Typedefs

- `typedef std::complex< double >` [qpp::types::cplx](#)
- `typedef Eigen::MatrixXcd` [qpp::types::cmat](#)
- `typedef Eigen::MatrixXd` [qpp::types::dmat](#)

- typedef Eigen::MatrixXf [qpp::types::fmat](#)
- typedef Eigen::MatrixXi [qpp::types::imat](#)
- typedef Eigen::Matrix< cplx,  
Eigen::Dynamic, 1 > [qpp::types::ket](#)
- typedef Eigen::Matrix< cplx,  
1, Eigen::Dynamic > [qpp::types::bra](#)
- template<typename Scalar >  
using [qpp::types::DynMat](#) = Eigen::Matrix< Scalar, Eigen::Dynamic, Eigen::Dynamic >