

Exploring Youth NEET

2025-12-01

R Markdown

```
#Setting the working directory, loading all necessary libraries and data
```

```
library(sf)
```

```
## Linking to GEOS 3.13.0, GDAL 3.8.5, PROJ 9.5.1; sf_use_s2() is TRUE
```

```
library(rnaturalearth)
```

```
library(rnaturalearthdata)
```

```
##
```

```
## Attaching package: 'rnaturalearthdata'
```

```
## The following object is masked from 'package:rnaturalearth':
```

```
##
```

```
##      countries110
```

```
library(tidyverse)
```

```
## -- Attaching core tidyverse packages ----- tidyverse 2.0.0 --
```

```
## v dplyr      1.1.4      v readr      2.1.6
```

```
## v forcats    1.0.1      v stringr    1.6.0
```

```
## v ggplot2    4.0.1      v tibble     3.3.0
```

```
## v lubridate  1.9.4      v tidyr      1.3.1
```

```
## v purrr      1.2.0
```

```
## -- Conflicts ----- tidyverse_conflicts() --
```

```
## x dplyr::filter() masks stats::filter()
```

```
## x dplyr::lag()     masks stats::lag()
```

```
## i Use the conflicted package (<http://conflicted.r-lib.org/>) to force all conflicts to become errors
```

```
library(dplyr)
```

```
setwd("~/Desktop/Uni/Intro to Data Science/Group project")
```

```
youth_neet <- read_csv("data sets/Youth_not_in_education_employment_training_with_continent.csv")
```

```
## Rows: 1908 Columns: 5
## -- Column specification -----
## Delimiter: ","
## chr (3): Entity, Code, Continent
## dbl (2): Year, Share.of.youth.not.in.education..employment.or.training..tota...
##
## i Use 'spec()' to retrieve the full column specification for this data.
## i Specify the column types or set 'show_col_types = FALSE' to quiet this message.
```

```
head(youth_neet)
```

```
## # A tibble: 6 x 5
##   Entity      Code   Year Share.of.youth.not.in.education..employemen~1 Continent
##   <chr>      <chr> <dbl>                <dbl> <chr>
## 1 Afghanistan AFG    2014                35.1 Asia
## 2 Afghanistan AFG    2017                42.8 Asia
## 3 Afghanistan AFG    2020                53.8 Asia
## 4 Afghanistan AFG    2021                62.8 Asia
## 5 Albania     ALB    2002                41.8 Europe
## 6 Albania     ALB    2005                35.2 Europe
## # i abbreviated name:
## #   1: Share.of.youth.not.in.education..employment.or.training..total....of.youth.population.
```

```
avg_NEET_by_continent_year <- youth_neet %>%
  group_by(Continent, Year) %>%
  summarise(
    avg_NEET = mean(Share.of.youth.not.in.education..employment.or.training..total....of.youth.population.
                    na.rm = TRUE)
  )
```

```
## 'summarise()' has grouped output by 'Continent'. You can override using the
## '.groups' argument.
```

```
head(avg_NEET_by_continent_year)
```

```
## # A tibble: 6 x 3
## # Groups:   Continent [1]
##   Continent Year avg_NEET
##   <chr>      <dbl>    <dbl>
## 1 Africa    1991      21.3
## 2 Africa    1994      25.1
## 3 Africa    1996      43.4
## 4 Africa    1999      32.4
## 5 Africa    2000      31.1
## 6 Africa    2001      26.9
```

```
youth_neet2 <- read_csv("data sets/Youth_neet_final.csv")
```

```
## Rows: 1908 Columns: 6
## -- Column specification -----
## Delimiter: ","
```

```
## chr (3): Entity, Code, Continent
## dbl (3): Year, Share.of.youth.not.in.education..employment.or.training..tota...
##
## i Use 'spec()' to retrieve the full column specification for this data.
## i Specify the column types or set 'show_col_types = FALSE' to quiet this message.
```

```
head(youth_neet2)
```

```
## # A tibble: 6 x 6
##   Entity      Code   Year Share.of.youth.not.in.education..~1 pop_15_24 Continent
##   <chr>      <chr> <dbl>          <dbl>      <dbl> <chr>
## 1 Afghanistan AFG    2014          35.1    6914571 Asia
## 2 Afghanistan AFG    2017          42.8    7704034 Asia
## 3 Afghanistan AFG    2020          53.8    8444268 Asia
## 4 Afghanistan AFG    2021          62.8    8621571 Asia
## 5 Albania      ALB    2002          41.8     548992 Europe
## 6 Albania      ALB    2005          35.2     546133 Europe
## # i abbreviated name:
## # 1: Share.of.youth.not.in.education..employment.or.training..total....of.youth.population.
```

```
colnames(youth_neet2)
```

```
## [1] "Entity"
## [2] "Code"
## [3] "Year"
## [4] "Share.of.youth.not.in.education..employment.or.training..total....of.youth.population."
## [5] "pop_15_24"
## [6] "Continent"
```

```
youth_neet2 <- youth_neet2 %>%
  rename(
    NEET = "Share.of.youth.not.in.education..employment.or.training..total....of.youth.population.",
    population = "pop_15_24"
  )
head(youth_neet2)
```

```
## # A tibble: 6 x 6
##   Entity      Code   Year NEET population Continent
##   <chr>      <chr> <dbl> <dbl>      <dbl> <chr>
## 1 Afghanistan AFG    2014  35.1    6914571 Asia
## 2 Afghanistan AFG    2017  42.8    7704034 Asia
## 3 Afghanistan AFG    2020  53.8    8444268 Asia
## 4 Afghanistan AFG    2021  62.8    8621571 Asia
## 5 Albania      ALB    2002  41.8     548992 Europe
## 6 Albania      ALB    2005  35.2     546133 Europe
```

```
continent_summary <- youth_neet2 %>%
  filter(!is.na(Continent), !is.na(NEET)) %>%
  group_by(Continent) %>%
  summarise(
    mean_neet = mean(NEET, na.rm = TRUE),
```

```

median_neet = median(NEET, na.rm = TRUE),
min_neet    = min(NEET, na.rm = TRUE),
max_neet    = max(NEET, na.rm = TRUE),
sd_neet     = sd(NEET, na.rm = TRUE),
iqr_neet    = IQR(NEET, na.rm = TRUE),
n_countries = n_distinct(Entity),
weighted_mean = sum(NEET * population, na.rm = TRUE) /
                sum(population, na.rm = TRUE)
)
continent_summary

```

```

## # A tibble: 6 x 9
##   Continent mean_neet median_neet min_neet max_neet sd_neet iqr_neet n_countries
##   <chr>      <dbl>      <dbl>    <dbl>    <dbl>  <dbl>  <dbl>      <int>
## 1 Africa      25.8        26.9      3.79     68.7    9.04   11.3        45
## 2 Asia        21.4        21.4      2.97     62.8   11.0   17.9        39
## 3 Europe      13.1        11.5      0.38     41.8    6.73    8.37        41
## 4 North Am~   20.6        19.9      5.06     52.0    6.50   10.8        19
## 5 Oceania     21.5        14.0      7.04     52.0   12.7   19.6        15
## 6 South Am~   19.6        19.2      9.18     46.4    4.83    4.12        12
## # i 1 more variable: weighted_mean <dbl>


```

```

# Boxplot of Neet by continent
ggplot(youth_neet2 %>% filter(!is.na(Continent)),
       aes(x = Continent, y = NEET, fill = Continent)) +
  geom_boxplot() +
  labs(
    title = "Distribution of NEET Rates by Continent",
    x = "Continent",
    y = "NEET (% of youth 15-24)"
  ) +
  theme_minimal() +
  theme(
    legend.position = "none",
    plot.title = element_text(hjust = 0.5, face = "bold")
  )

```

Distribution of NEET Rates by Continent

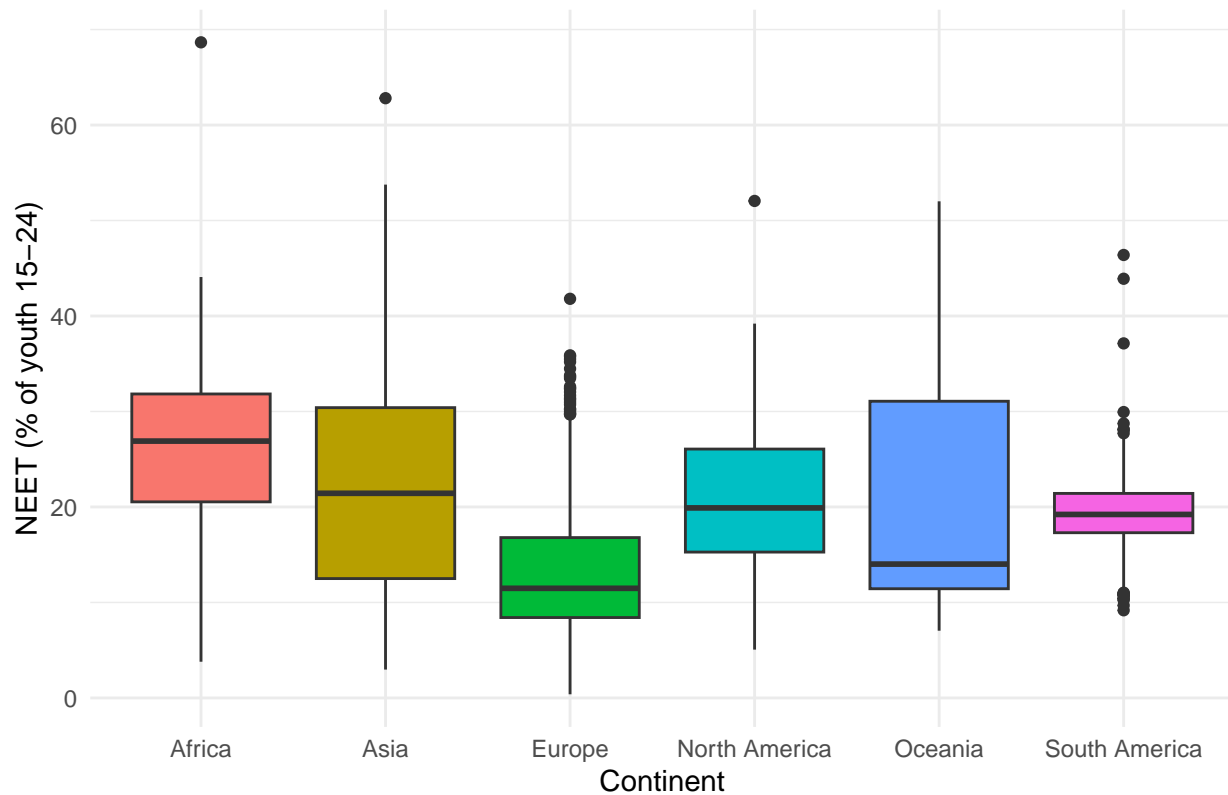

```
neet_weighted <- youth_neet2 %>%
  group_by(Continent, Year) %>%
  summarise(
    weighted_NEET = weighted.mean(NEET, population, na.rm = TRUE),
    total_population = sum(population, na.rm = TRUE),
  )
```

'summarise()' has grouped output by 'Continent'. You can override using the
'.groups' argument.

```
neet_weighted
```

```
## # A tibble: 217 x 4
## # Groups:   Continent [7]
##   Continent Year weighted_NEET total_population
##   <chr>      <dbl>      <dbl>      <dbl>
## 1 Africa    1991         21.3      3173483
## 2 Africa    1994         25.1      326596
## 3 Africa    1996         43.4      330806
## 4 Africa    1999         32.4     6357672
## 5 Africa    2000         31.4     13976220
## 6 Africa    2001         25.4     17649356
## 7 Africa    2002         34.1     12313110
## 8 Africa    2003         35.1     11960519
## 9 Africa    2004         34.3     14836139
```

```
## 10 Africa      2005      21.9      41364523
## # i 207 more rows
```

```
colnames(youth_neet2)
```


```
## [1] "Entity"      "Code"        "Year"        "NEET"        "population"
## [6] "Continent"
```

```
neet_plot_data <- avg_NEET_by_continent_year %>%
  filter(Year >= 2015, Year <= 2020) %>%
  filter(!is.na(Continent)) # <-- Remove NA continent

ggplot(neet_plot_data, aes(x = Year, y = avg_NEET, color = Continent)) +
  geom_line(size = 1) +
  geom_point(size = 0.5) +
  labs(
    title = "Average NEET Rate by Continent (2015-2020)",
    x = "Year",
    y = "Average NEET (% of youth 15-24)",
    color = "Continent"
  ) +
  theme_minimal()
```


```
## Warning: Using 'size' aesthetic for lines was deprecated in ggplot2 3.4.0.
## i Please use 'linewidth' instead.
## This warning is displayed once every 8 hours.
## Call 'lifecycle::last_lifecycle_warnings()' to see where this warning was
## generated.
```

Average NEET Rate by Continent (2015–2020)

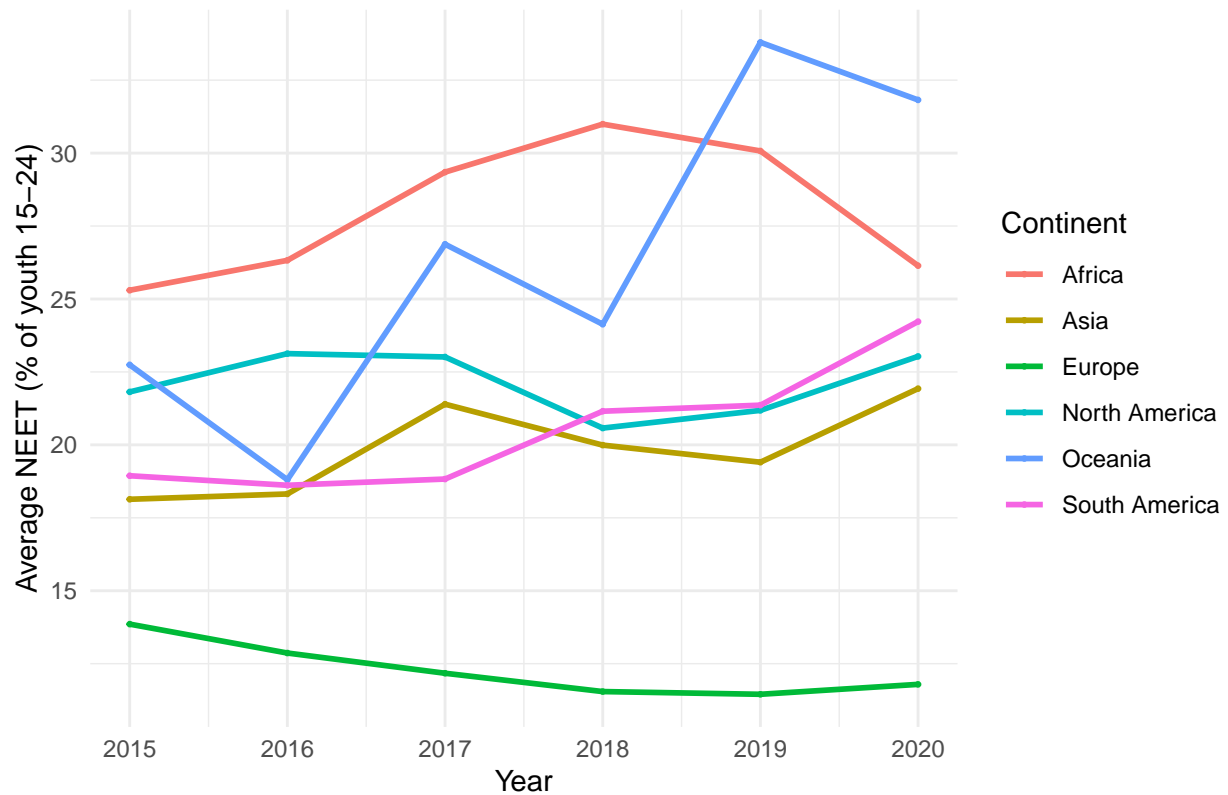

```
ggplot(neet_weighted %>% filter(Year >= 2015, Year <= 2020) %>%
  filter(!is.na(Continent)) ,
  aes(x = Year, y = weighted_NEET, color = Continent)) +
  geom_line(size = 1) +
  labs(
    title = "Weighted Average NEET Rate Over Time by Continent (2015-2020)",
    x = "Year",
    y = "Average NEET (%)"
  ) +
  theme_minimal()
```

Weighted Average NEET Rate Over Time by Continent (2015–2020)

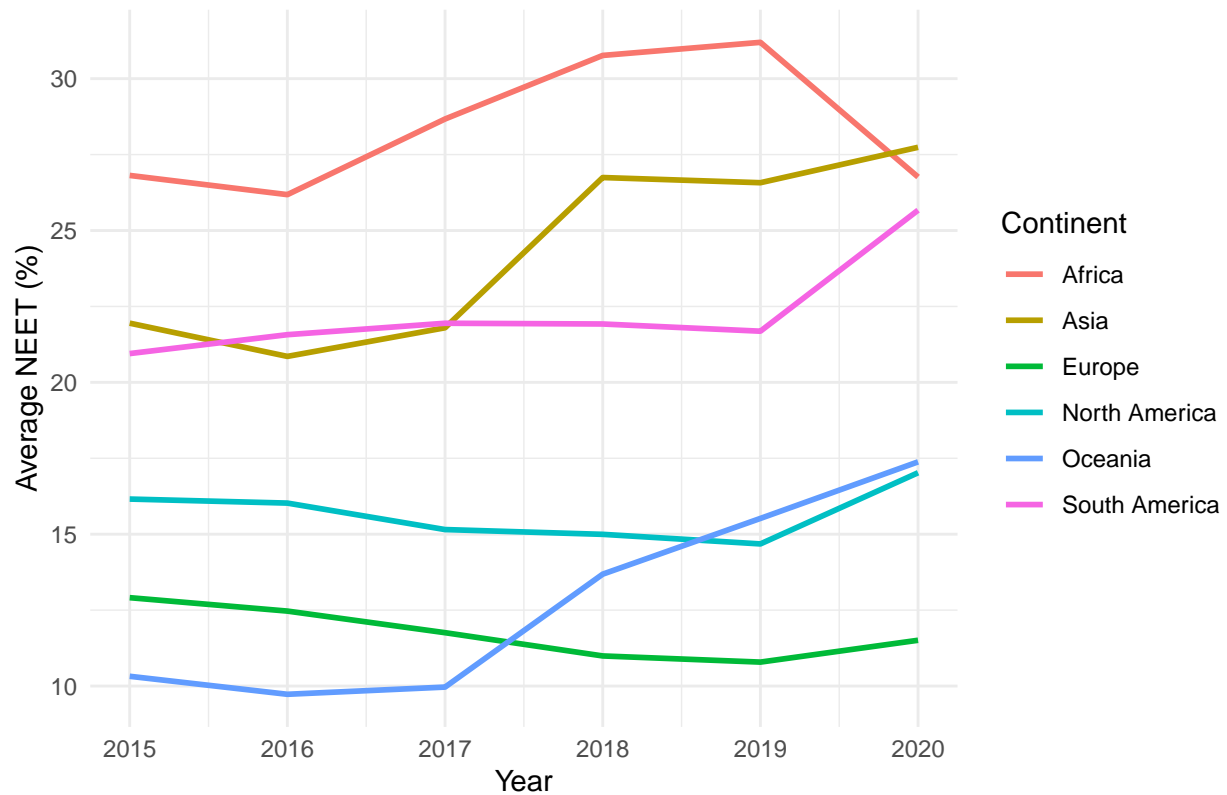

```
neet_change_continent <- avg_NEET_by_continent_year %>%
  filter(!is.na(Continent),
         Year >= 2010, Year <= 2020) %>%           # keep only 2010-2020
  group_by(Continent) %>%
  summarise(
    avg_2010_2015 = mean(avg_NEET[Year >= 2010 & Year <= 2015], na.rm = TRUE),
    neet_2020 = avg_NEET[Year == 2020][1],          # NEET value in 2020
    .groups = "drop"
  ) %>%
  mutate(
    percentage_point_change = neet_2020 - avg_2010_2015
  )

head(neet_change_continent)
```

```
## # A tibble: 6 x 4
##   Continent      avg_2010_2015 neet_2020 percentage_point_change
##   <chr>          <dbl>      <dbl>                <dbl>
## 1 Africa          22.4        26.1                 3.73
## 2 Asia            19.2        21.9                 2.72
## 3 Europe          14.2        11.8                -2.39
## 4 North America   22.1        23.0                 0.939
## 5 Oceania         18.9        31.8                12.9
## 6 South America   18.1        24.2                 6.17
```



```

# Load world map as an sf object
world <- ne_countries(scale = "medium", returnclass = "sf") %>%
  select(name, continent, geometry)

# Keep only the 6 continents we care about
world <- world %>%
  filter(continent %in% c("Africa", "Asia", "Europe",
                        "North America", "South America", "Oceania"))

# Join NEET % change data to every country by continent
world_neet <- world %>%
  left_join(neet_change_continent,
            by = c("continent" = "Continent"))

ggplot(world_neet) +
  geom_sf(aes(fill = percentage_point_change), color = "grey30", size = 0.1) +
  scale_fill_gradient2(
    low = "steelblue",
    mid = "white",
    high = "firebrick",
    midpoint = 0,
    name = "Percentage \nPoint Difference"
  ) +
  labs(
    title = "Percentage Point Difference in Average NEET Rates (2015-2020)",
    subtitle = "Colour shows change in continental averages"
  ) +
  theme_minimal() +
  theme(
    axis.text = element_blank(),
    panel.grid = element_blank()
  )

```

Percentage Point Difference in Average NEET Rates (2015–2020)

Colour shows change in continental averages

