OPEN TRACE FORMAT 2
USER MANUAL

2.0 (revision 4365)

OTF2
Open Trace Format 2

Sun May 22 2016 17:33:37
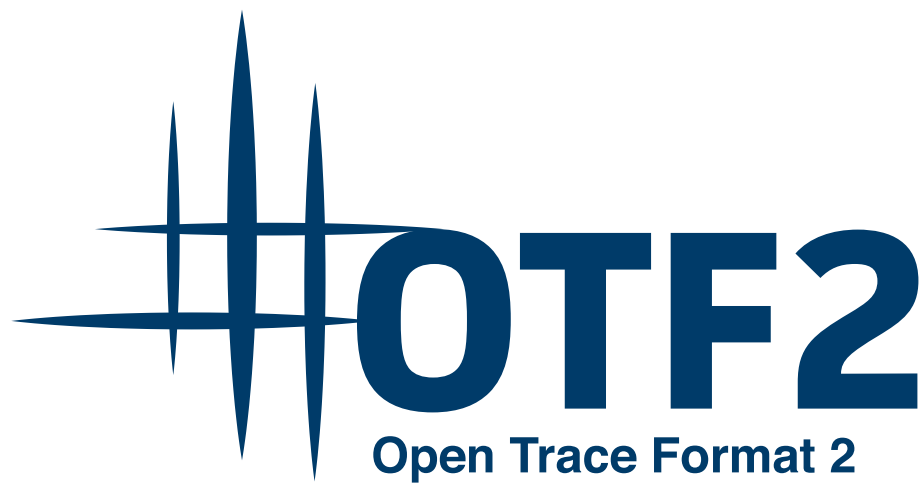
OTF2 LICENSE AGREEMENT

Contents

Chapter 1

Open Trace Format 2

1.1   Introduction

The OTF2 library provides an interface to write and read trace data.

OTF2 is developed within the Score-P project. The Score-P project is funded by the German Federal Ministry of Education and Research. OTF2 is available under the BSD open source license that allows free usage for academic and commercial applications.

1.2   Get started

OTF2 records

Usage of OTF2 tools

Appendices

Appendix A

OTF2 INSTALL

For generic installation instructions see below.
When building for an Intel MIC platform, carefully follow the
platform-specific instructions below.

Configuration of OTF2
****

'configure' configures OTF2 to adapt to many kinds of systems.

Usage: ./configure [OPTION]... [VAR=VALUE]...

To assign environment variables (e.g., CC, CFLAGS...), specify them as
VAR=VALUE. See below for descriptions of some of the useful variables.

Defaults for the options are specified in brackets.

```
Configuration:
  -h, --help              display this help and exit
      --help=short        display options specific to this package
      --help=recursive    display the short help of all the included packages
  -V, --version           display version information and exit
  -q, --quiet, --silent   do not print 'checking ...' messages
      --cache-file=FILE   cache test results in FILE [disabled]
  -C, --config-cache      alias for '--cache-file=config.cache'
  -n, --no-create         do not create output files
      --srcdir=DIR        find the sources in DIR [configure dir or '..']

Installation directories:
  --prefix=PREFIX         install architecture-independent files in PREFIX
                          [/opt/otf2]
  --exec-prefix=EPREFIX   install architecture-dependent files in EPREFIX
                          [PREFIX]
```

By default, 'make install' will install all the files in
'/opt/otf2/bin', '/opt/otf2/lib' etc. You can specify
an installation prefix other than '/opt/otf2' using '--prefix',
for instance '--prefix=$HOME'.

For better control, use the options below.

```
Fine tuning of the installation directories:
  --bindir=DIR            user executables [EPREFIX/bin]
  --sbindir=DIR           system admin executables [EPREFIX/sbin]
  --libexecdir=DIR        program executables [EPREFIX/libexec]
  --sysconfdir=DIR        read-only single-machine data [PREFIX/etc]
  --sharedstatedir=DIR    modifiable architecture-independent data [PREFIX/com]
  --localstatedir=DIR     modifiable single-machine data [PREFIX/var]
  --libdir=DIR            object code libraries [EPREFIX/lib]
  --includedir=DIR        C header files [PREFIX/include]
  --oldincludedir=DIR     C header files for non-gcc [/usr/include]
  --datarootdir=DIR       read-only arch.-independent data root [PREFIX/share]
  --datadir=DIR           read-only architecture-independent data [DATAROOTDIR]
  --infodir=DIR           info documentation [DATAROOTDIR/info]
```

```
  --localedir=DIR         locale-dependent data [DATAROOTDIR/locale]
  --mandir=DIR            man documentation [DATAROOTDIR/man]
  --docdir=DIR            documentation root [DATAROOTDIR/doc/otf2]
  --htmldir=DIR           html documentation [DOCDIR]
  --dvidir=DIR            dvi documentation [DOCDIR]
  --pdfdir=DIR            pdf documentation [DOCDIR]
  --psdir=DIR             ps documentation [DOCDIR]

Program names:
  --program-prefix=PREFIX            prepend PREFIX to installed program names
  --program-suffix=SUFFIX            append SUFFIX to installed program names
  --program-transform-name=PROGRAM   run sed PROGRAM on installed program names

System types:
  --build=BUILD     configure for building on BUILD [guessed]
  --host=HOST       cross-compile to build programs to run on HOST [BUILD]

Optional Features:
  --disable-option-checking  ignore unrecognized --enable/--with options
  --disable-FEATURE       do not include FEATURE (same as --enable-FEATURE=no)
  --enable-FEATURE[=ARG]  include FEATURE [ARG=yes]
  --enable-silent-rules            less verbose build output (undo: 'make V=1')
  --disable-silent-rules           verbose build output (undo: 'make V=0')
  --disable-dependency-tracking  speeds up one-time build
  --enable-dependency-tracking   do not reject slow dependency extractors
  --enable-platform-mic   Force build for Intel MIC platform [no]
  --enable-debug          activate internal debug output [no]
  --enable-backend-test-runs
                          Run tests at make check [no]. If disabled, tests are
                          still build at make check. Additionally, scripts
                          (scorep_*tests.sh) containing the tests are
                          generated in <builddir>/build-backend.
  --enable-shared[=PKGS]  build shared libraries [default=no]
  --enable-static[=PKGS]  build static libraries [default=yes]
  --enable-fast-install[=PKGS]
                          optimize for fast installation [default=yes]
  --disable-libtool-lock  avoid locking (might break parallel builds)

Optional Packages:
  --with-PACKAGE[=ARG]    use PACKAGE [ARG=yes]
  --without-PACKAGE       do not use PACKAGE (same as --with-PACKAGE=no)
  --with-sionlib[=<sionlib-bindir>]
                          Use an already installed sionlib. Provide path to
                          sionconfig. Auto-detected if already in $PATH.
  --with-pic              try to use only PIC/non-PIC objects [default=use
                          both]
  --with-gnu-ld           assume the C compiler uses GNU ld [default=no]
  --with-sysroot=DIR Search for dependent libraries within DIR
                      (or the compiler's sysroot if not specified).

Some influential environment variables:
  CC_FOR_BUILD
              C compiler command for the frontend build
  CXX_FOR_BUILD
              C++ compiler command for the frontend build
  F77_FOR_BUILD
              Fortran 77 compiler command for the frontend build
  FC_FOR_BUILD
              Fortran compiler command for the frontend build
  CPPFLAGS_FOR_BUILD
              (Objective) C/C++ preprocessor flags for the frontend build,
              e.g. -I<include dir> if you have headers in a nonstandard
              directory <include dir>
  CFLAGS_FOR_BUILD
              C compiler flags for the frontend build
  CXXFLAGS_FOR_BUILD
              C++ compiler flags for the frontend build
  FFLAGS_FOR_BUILD
              Fortran 77 compiler flags for the frontend build
  FCFLAGS_FOR_BUILD
              Fortran compiler flags for the frontend build
  LDFLAGS_FOR_BUILD
              linker flags for the frontend build, e.g. -L<lib dir> if you
```

```
                    have libraries in a nonstandard directory <lib dir>
  LIBS_FOR_BUILD
                    libraries to pass to the linker for the frontend build, e.g.
                    -l<library>
  CC          C compiler command
  CFLAGS      C compiler flags
  LDFLAGS     linker flags, e.g. -L<lib dir> if you have libraries in a
                    nonstandard directory <lib dir>
  LIBS        libraries to pass to the linker, e.g. -l<library>
  CPPFLAGS    (Objective) C/C++ preprocessor flags, e.g. -I<include dir> if
                    you have headers in a nonstandard directory <include dir>
  CXX         C++ compiler command
  CXXFLAGS    C++ compiler flags
  CPP         C preprocessor
  CXXCPP      C++ preprocessor
  PYTHON      The python interpreter to use. Not a build requirement, but
                    needed when developing. Python 2.5 or above, but no python 3.
                    Use PYTHON=: to disable python support.
```

Use these variables to override the choices made by 'configure' or to help
it to find libraries and programs with nonstandard names/locations.

Please report bugs to <support@score-p.org>.

Platform-specific instructions
****

Intel MIC

   Building OTF2 for the Intel MIC platform requires some extra care, and in
some cases two installations into the same location. Therefore, we strongly
recommend to strictly follow the procedure as described below.

  1. Ensure that Intel compilers are installed and available in $PATH, and
     that the Intel Manycore Platform Software Stack (MPSS) is installed.

  2. Configure OTF2 to use the MIC platform:

        ./configure --enable-platform-mic [other options, e.g., '--prefix']

  3. Build and install:

        make; make install

   On non-cross compiling systems (e.g., typical Linux clusters), that's it.
On cross-compiling systems (e.g., Cray XC30 with Xeon Phi daughter board), a
second installation of OTF2 *on top* of the just installed one is required to
provide a single installation serving login nodes, compute nodes, and MIC:

  4. Remove MIC program binaries, object files, and configure-generated files
     from the source code directory:

        make distclean

  5. Reconfigure for login/compute nodes using *identical directory options*
     (e.g., '--prefix' or '--bindir') as in step 2:

        ./configure [other options as used in step 2]

     This will automatically detect the already existing native MIC build and
     enable the required support in the login node tools.

  6. Build and install:

        make; make install

   Note that this approach also works with VPATH builds (even with two
separate build directories) as long as the same options defining directory
locations are passed in steps 2 and 5.

Installation Instructions

```
**************************
```

Basic Installation
==================

   Briefly, the shell commands './configure; make; make install' should
configure, build, and install this package. The following
more-detailed instructions are generic; see the 'README' file for
instructions specific to this package. Some packages provide this
'INSTALL' file but do not implement all of the features documented
below. The lack of an optional feature in a given package is not
necessarily a bug. More recommendations for GNU packages can be found
in *note Makefile Conventions: (standards)Makefile Conventions.

   The 'configure' shell script attempts to guess correct values for
various system-dependent variables used during compilation. It uses
those values to create a 'Makefile' in each directory of the package.
It may also create one or more '.h' files containing system-dependent
definitions. Finally, it creates a shell script 'config.status' that
you can run in the future to recreate the current configuration, and a
file 'config.log' containing compiler output (useful mainly for
debugging 'configure').

   It can also use an optional file (typically called 'config.cache'
and enabled with '--cache-file=config.cache' or simply '-C') that saves
the results of its tests to speed up reconfiguring. Caching is
disabled by default to prevent problems with accidental use of stale
cache files.

   If you need to do unusual things to compile the package, please try
to figure out how 'configure' could check whether to do them, and mail
diffs or instructions to the address given in the 'README' so they can
be considered for the next release. If you are using the cache, and at
some point 'config.cache' contains results you don't want to keep, you
may remove or edit it.

   The file 'configure.ac' (or 'configure.in') is used to create
'configure' by a program called 'autoconf'. You need 'configure.ac' if
you want to change it or regenerate 'configure' using a newer version
of 'autoconf'.

   The simplest way to compile this package is:

  1. 'cd' to the directory containing the package's source code and type
     './configure' to configure the package for your system.

     Running 'configure' might take a while. While running, it prints
     some messages telling which features it is checking for.

  2. Type 'make' to compile the package.

  3. Optionally, type 'make check' to run any self-tests that come with
     the package, generally using the just-built uninstalled binaries.

  4. Type 'make install' to install the programs and any data files and
     documentation. When installing into a prefix owned by root, it is
     recommended that the package be configured and built as a regular
     user, and only the 'make install' phase executed with root
     privileges.

  5. Optionally, type 'make installcheck' to repeat any self-tests, but
     this time using the binaries in their final installed location.
     This target does not install anything. Running this target as a
     regular user, particularly if the prior 'make install' required
     root privileges, verifies that the installation completed

correctly.

6. You can remove the program binaries and object files from the
   source code directory by typing 'make clean'. To also remove the
   files that 'configure' created (so you can compile the package for
   a different kind of computer), type 'make distclean'. There is
   also a 'make maintainer-clean' target, but that is intended mainly
   for the package's developers. If you use it, you may have to get
   all sorts of other programs in order to regenerate files that came
   with the distribution.

7. Often, you can also type 'make uninstall' to remove the installed
   files again. In practice, not all packages have tested that
   uninstallation works correctly, even though it is required by the
   GNU Coding Standards.

8. Some packages, particularly those that use Automake, provide 'make
   distcheck', which can by used by developers to test that all other
   targets like 'make install' and 'make uninstall' work correctly.
   This target is generally not run by end users.

Compilers and Options
=====================

   Some systems require unusual options for compilation or linking that
the 'configure' script does not know about. Run './configure --help'
for details on some of the pertinent environment variables.

   You can give 'configure' initial values for configuration parameters
by setting variables in the command line or in the environment. Here
is an example:

    ./configure CC=c99 CFLAGS=-g LIBS=-lposix

   *Note Defining Variables::, for more details.

Compiling For Multiple Architectures
====================================

   You can compile the package for more than one kind of computer at the
same time, by placing the object files for each architecture in their
own directory. To do this, you can use GNU 'make'. 'cd' to the
directory where you want the object files and executables to go and run
the 'configure' script. 'configure' automatically checks for the
source code in the directory that 'configure' is in and in '..'. This
is known as a "VPATH" build.

   With a non-GNU 'make', it is safer to compile the package for one
architecture at a time in the source code directory. After you have
installed the package for one architecture, use 'make distclean' before
reconfiguring for another architecture.

   On MacOS X 10.5 and later systems, you can create libraries and
executables that work on multiple system types--known as "fat" or
"universal" binaries--by specifying multiple '-arch' options to the
compiler but only a single '-arch' option to the preprocessor. Like
this:

    ./configure CC="gcc -arch i386 -arch x86_64 -arch ppc -arch ppc64" \
                CXX="g++ -arch i386 -arch x86_64 -arch ppc -arch ppc64" \
                CPP="gcc -E" CXXCPP="g++ -E"

   This is not guaranteed to produce working output in all cases, you
may have to build one architecture at a time and combine the results
using the 'lipo' tool if you have problems.

Installation Names
==================

   By default, 'make install' installs the package's commands under
'/usr/local/bin', include files under '/usr/local/include', etc. You
can specify an installation prefix other than '/usr/local' by giving
'configure' the option '--prefix=PREFIX', where PREFIX must be an

```
absolute file name.
```

   You can specify separate installation prefixes for
architecture-specific files and architecture-independent files. If you
pass the option '--exec-prefix=PREFIX' to 'configure', the package uses
PREFIX as the prefix for installing programs and libraries.
Documentation and other data files still use the regular prefix.

   In addition, if you use an unusual directory layout you can give
options like '--bindir=DIR' to specify different values for particular
kinds of files. Run 'configure --help' for a list of the directories
you can set and what kinds of files go in them. In general, the
default for these options is expressed in terms of '${prefix}', so that
specifying just '--prefix' will affect all of the other directory
specifications that were not explicitly provided.

   The most portable way to affect installation locations is to pass the
correct locations to 'configure'; however, many packages provide one or
both of the following shortcuts of passing variable assignments to the
'make install' command line to change installation locations without
having to reconfigure or recompile.

   The first method involves providing an override variable for each
affected directory. For example, 'make install
prefix=/alternate/directory' will choose an alternate location for all
directory configuration variables that were expressed in terms of
'${prefix}'. Any directories that were specified during 'configure',
but not in terms of '${prefix}', must each be overridden at install
time for the entire installation to be relocated. The approach of
makefile variable overrides for each directory variable is required by
the GNU Coding Standards, and ideally causes no recompilation.
However, some platforms have known limitations with the semantics of
shared libraries that end up requiring recompilation when using this
method, particularly noticeable in packages that use GNU Libtool.

   The second method involves providing the 'DESTDIR' variable. For
example, 'make install DESTDIR=/alternate/directory' will prepend
'/alternate/directory' before all installation names. The approach of
'DESTDIR' overrides is not required by the GNU Coding Standards, and
does not work on platforms that have drive letters. On the other hand,
it does better at avoiding recompilation issues, and works well even
when some directory options were not specified in terms of '${prefix}'
at 'configure' time.

```
Optional Features
=================
```

   If the package supports it, you can cause programs to be installed
with an extra prefix or suffix on their names by giving 'configure' the
option '--program-prefix=PREFIX' or '--program-suffix=SUFFIX'.

   Some packages pay attention to '--enable-FEATURE' options to
'configure', where FEATURE indicates an optional part of the package.
They may also pay attention to '--with-PACKAGE' options, where PACKAGE
is something like 'gnu-as' or 'x' (for the X Window System). The
'README' should mention any '--enable-' and '--with-' options that the
package recognizes.

   For packages that use the X Window System, 'configure' can usually
find the X include and library files automatically, but if it doesn't,
you can use the 'configure' options '--x-includes=DIR' and
'--x-libraries=DIR' to specify their locations.

   Some packages offer the ability to configure how verbose the
execution of 'make' will be. For these packages, running './configure
--enable-silent-rules' sets the default to minimal output, which can be
overridden with 'make V=1'; while running './configure
--disable-silent-rules' sets the default to verbose, which can be
overridden with 'make V=0'.

```
Particular systems
==================
```

On HP-UX, the default C compiler is not ANSI C compatible. If GNU
CC is not installed, it is recommended to use the following options in
order to use an ANSI C compiler:

     ./configure CC="cc -Ae -D_XOPEN_SOURCE=500"

and if that doesn't work, install pre-built binaries of GCC for HP-UX.

   On OSF/1 a.k.a. Tru64, some versions of the default C compiler cannot
parse its '<wchar.h>' header file. The option '-nodtk' can be used as
a workaround. If GNU CC is not installed, it is therefore recommended
to try

     ./configure CC="cc"

and if that doesn't work, try

     ./configure CC="cc -nodtk"

   On Solaris, don't put '/usr/ucb' early in your 'PATH'. This
directory contains several dysfunctional programs; working variants of
these programs are available in '/usr/bin'. So, if you need '/usr/ucb'
in your 'PATH', put it _after_ '/usr/bin'.

   On Haiku, software installed for all users goes in '/boot/common',
not '/usr/local'. It is recommended to use the following options:

     ./configure --prefix=/boot/common

Specifying the System Type
==========================

   There may be some features 'configure' cannot figure out
automatically, but needs to determine by the type of machine the package
will run on. Usually, assuming the package is built to be run on the
same architectures, 'configure' can figure that out, but if it prints
a message saying it cannot guess the machine type, give it the
'--build=TYPE' option. TYPE can either be a short name for the system
type, such as 'sun4', or a canonical name which has the form:

     CPU-COMPANY-SYSTEM

where SYSTEM can have one of these forms:

     OS
     KERNEL-OS

   See the file 'config.sub' for the possible values of each field. If
'config.sub' isn't included in this package, then this package doesn't
need to know the machine type.

   If you are _building_ compiler tools for cross-compiling, you should
use the option '--target=TYPE' to select the type of system they will
produce code for.

   If you want to _use_ a cross compiler, that generates code for a
platform different from the build platform, you should specify the
"host" platform (i.e., that on which the generated programs will
eventually be run) with '--host=TYPE'.

Sharing Defaults
================

   If you want to set default values for 'configure' scripts to share,
you can create a site shell script called 'config.site' that gives
default values for variables like 'CC', 'cache_file', and 'prefix'.
'configure' looks for 'PREFIX/share/config.site' if it exists, then
'PREFIX/etc/config.site' if it exists. Or, you can set the
'CONFIG_SITE' environment variable to the location of the site script.
A warning: not all 'configure' scripts look for a site script.

Defining Variables
==================

Variables not defined in a site shell script can be set in the
environment passed to 'configure'. However, some packages may run
configure again during the build, and the customized values of these
variables may be lost. In order to avoid this problem, you should set
them in the 'configure' command line, using 'VAR=value'. For example:

    ./configure CC=/usr/local2/bin/gcc

causes the specified 'gcc' to be used as the C compiler (unless it is
overridden in the site shell script).

Unfortunately, this technique does not work for 'CONFIG_SHELL' due to
an Autoconf bug. Until the bug is fixed you can use this workaround:

    CONFIG_SHELL=/bin/bash /bin/bash ./configure CONFIG_SHELL=/bin/bash

'configure' Invocation
======================

    'configure' recognizes the following options to control how it
operates.

'--help'
'-h'
    Print a summary of all of the options to 'configure', and exit.

'--help=short'
'--help=recursive'
    Print a summary of the options unique to this package's
    'configure', and exit. The 'short' variant lists options used
    only in the top level, while the 'recursive' variant lists options
    also present in any nested packages.

'--version'
'-V'
    Print the version of Autoconf used to generate the 'configure'
    script, and exit.

'--cache-file=FILE'
    Enable the cache: use and save the results of the tests in FILE,
    traditionally 'config.cache'. FILE defaults to '/dev/null' to
    disable caching.

'--config-cache'
'-C'
    Alias for '--cache-file=config.cache'.

'--quiet'
'--silent'
'-q'
    Do not print messages saying which checks are being made. To
    suppress all normal output, redirect it to '/dev/null' (any error
    messages will still be shown).

'--srcdir=DIR'
    Look for the package's source code in directory DIR. Usually
    'configure' can determine that directory automatically.

'--prefix=DIR'
    Use DIR as the installation prefix. *note Installation Names::
    for more details, including other options available for fine-tuning
    the installation locations.

'--no-create'
'-n'
    Run the configure checks, but stop before creating any output
    files.

'configure' also accepts some other, not widely useful, options. Run
'configure --help' for more details.

Appendix B

Deprecated List

Module records_definition

In version 2.0

Module records_event

In version 1.2

In version 1.2

In version 1.2

In version 1.2

In version 1.2

In version 1.2

In version 1.2

Appendix C

Module Documentation

C.1 OTF2 records

Modules

- List of all definition records
- List of all event records
- List of all marker records
- List of all snapshot records

C.1.1 Detailed Description

C.2 List of all definition records

C.3 ClockProperties

Defines the timer resolution and time range of this trace. There will be no event with a timestamp less than `globalOffset`, and no event with timestamp greater than (`globalOffset` + `traceLength`).

This definition is only valid as a global definition.

Attributes

uint64_t	timerResolution	Ticks per seconds.
uint64_t	globalOffset	A timestamp smaller than all event timestamps.
uint64_t	traceLength	A timespan which includes the timespan between the smallest and greatest timestamp of all event timestamps.

See also

> OTF2_GlobalDefWriter_WriteClockProperties()
> OTF2_GlobalDefReaderCallbacks_SetClockPropertiesCallback()

Since

> Version 1.0

C.4   Paradigm

Attests that the following parallel paradigm was available at the time when the trace was recorded, and vice versa. Note that this does not attest that the paradigm was used. For convenience, this also includes a proper name for the paradigm and a classification. This definition is only allowed to appear at most once in the definitions per *Paradigm*.

This definition is only valid as a global definition.

Attributes

OTF2_↩ Paradigm	paradigm	The paradigm to attest.
OTF2_↩ StringRef	name	The name of the paradigm. References a *String* definition.
OTF2_↩ Paradigm↩ Class	paradigmClass	The class of this paradigm.

See also

> OTF2_GlobalDefWriter_WriteParadigm()
> OTF2_GlobalDefReaderCallbacks_SetParadigmCallback()

Since

> Version 1.5

C.5   ParadigmProperty

Extensible annotation for the *Paradigm* definition.

The tuple (*paradigm*, *property*) must be unique.

This definition is only valid as a global definition.

Attributes

OTF2_↩ Paradigm	paradigm	The paradigm to annotate.
OTF2_↩ Paradigm↩ Property	property	The property.
OTF2_↩ Type	type	The type of this property. Must match with the defined type of the *property*.
OTF2_↩ Attribute↩ Value	value	The value of this property.

See also

> OTF2_GlobalDefWriter_WriteParadigmProperty()
> OTF2_GlobalDefReaderCallbacks_SetParadigmPropertyCallback()

Since

> Version 1.5

C.6 MappingTable

Mapping tables are needed for situations where an ID is not globally known at measurement time. They are applied automatically at reading.

This definition is only valid as a local definition.

Attributes

OTF2_↩ Mapping↩ Type	mappingType	Says to what type of ID the mapping table has to be applied.
const OT↩ F2_IdMap∗	idMap	Mapping table.

See also

> OTF2_DefWriter_WriteMappingTable()
> OTF2_DefReaderCallbacks_SetMappingTableCallback()

Since

> Version 1.0

C.7 ClockOffset

Clock offsets are used for clock corrections.

This definition is only valid as a local definition.

Attributes

OTF2_↩ Time↩ Stamp	time	Time when this offset was determined.
int64_t	offset	The offset to the global clock which was determined at `time`.
double	standard↩ Deviation	A possible standard deviation, which can be used as a metric for the quality of the offset.

See also

> OTF2_DefWriter_WriteClockOffset()
> OTF2_DefReaderCallbacks_SetClockOffsetCallback()

Since

> Version 1.0

C.8 *OTF2_StringRef* String

The string definition.

Attributes

const char∗	string	The string, null terminated.

See also

> OTF2_GlobalDefWriter_WriteString()
> OTF2_GlobalDefReaderCallbacks_SetStringCallback()
> OTF2_DefWriter_WriteString()
> OTF2_DefReaderCallbacks_SetStringCallback()

Since

> Version 1.0

C.9 *OTF2_AttributeRef* Attribute

The attribute definition.

Attributes

OTF2_↩ StringRef	name	Name of the attribute. References a *String* definition.
OTF2_↩ StringRef	description	Description of the attribute. References a *String* definition. Since version 1.4.
OTF2_↩ Type	type	Type of the attribute value.

See also

> OTF2_GlobalDefWriter_WriteAttribute()
> OTF2_GlobalDefReaderCallbacks_SetAttributeCallback()
> OTF2_DefWriter_WriteAttribute()
> OTF2_DefReaderCallbacks_SetAttributeCallback()

Since

> Version 1.0

C.10 *OTF2_SystemTreeNodeRef* SystemTreeNode

The system tree node definition.

Attributes

OTF2_↩ StringRef	name	Free form instance name of this node. References a *String* definition.
OTF2_↩ StringRef	className	Free form class name of this node References a *String* definition.

OTF2_↩ System↩ Tree↩ NodeRef		parent	Parent id of this node. May be *OTF2_UNDEFINED_SYSTEM_TREE_NODE* to indicate that there is no parent. References a *SystemTreeNode* definition.

Supplements

> *SystemTreeNodeProperty*
> *SystemTreeNodeDomain*

See also

> OTF2_GlobalDefWriter_WriteSystemTreeNode()
> OTF2_GlobalDefReaderCallbacks_SetSystemTreeNodeCallback()
> OTF2_DefWriter_WriteSystemTreeNode()
> OTF2_DefReaderCallbacks_SetSystemTreeNodeCallback()

Since

> Version 1.0

C.11   *OTF2_LocationGroupRef* LocationGroup

The location group definition.

Attributes

OTF2_↩ StringRef		name	Name of the group. References a *String* definition.
OTF2_↩ Location↩ GroupType	locationGroup↩ Type		Type of this group.
OTF2_↩ System↩ Tree↩ NodeRef	systemTree↩ Parent		Parent of this location group in the system tree. References a *SystemTree↩ Node* definition.

Supplements

> *LocationGroupProperty*

See also

> OTF2_GlobalDefWriter_WriteLocationGroup()
> OTF2_GlobalDefReaderCallbacks_SetLocationGroupCallback()
> OTF2_DefWriter_WriteLocationGroup()
> OTF2_DefReaderCallbacks_SetLocationGroupCallback()

Since

> Version 1.0

C.12   *OTF2_LocationRef* Location

The location definition.

Attributes

OTF2_↩ StringRef	name	Name of the location References a *String* definition.
OTF2_↩ Location↩ Type	locationType	Location type.
uint64_t	numberOfEvents	Number of events this location has recorded.
OTF2_↩ Location↩ GroupRef	locationGroup	Location group which includes this location. References a *LocationGroup* definition.

Supplements

> *LocationProperty*

See also

> OTF2_GlobalDefWriter_WriteLocation()
> OTF2_GlobalDefReaderCallbacks_SetLocationCallback()
> OTF2_DefWriter_WriteLocation()
> OTF2_DefReaderCallbacks_SetLocationCallback()

Since

> Version 1.0

C.13 *OTF2_RegionRef* Region

The region definition.

Attributes

OTF2_↩ StringRef	name	Name of the region (demangled name if available). References a *String* definition.
OTF2_↩ StringRef	canonicalName	Alternative name of the region (e.g. mangled name). References a *String* definition. Since version 1.1.
OTF2_↩ StringRef	description	A more detailed description of this region. References a *String* definition.
OTF2_↩ Region↩ Role	regionRole	Region role. Since version 1.1.
OTF2_↩ Paradigm	paradigm	Paradigm. Since version 1.1.
OTF2_↩ Region↩ Flag	regionFlags	Region flags. Since version 1.1.
OTF2_↩ StringRef	sourceFile	The source file where this region was declared. References a *String* definition.
uint32_t	beginLine↩ Number	Starting line number of this region in the source file.

uint32_t	endLineNumber	Ending line number of this region in the source file.

See also

    OTF2_GlobalDefWriter_WriteRegion()
    OTF2_GlobalDefReaderCallbacks_SetRegionCallback()
    OTF2_DefWriter_WriteRegion()
    OTF2_DefReaderCallbacks_SetRegionCallback()

Since

    Version 1.0

C.14 *OTF2_CallsiteRef* Callsite

The callsite definition.

Attributes

OTF2_↩ StringRef	sourceFile	The source file where this call was made. References a *String* definition.
uint32_t	lineNumber	Line number in the source file where this call was made.
OTF2_↩ RegionRef	enteredRegion	The region which was called. References a *Region* definition.
OTF2_↩ RegionRef	leftRegion	The region which made the call. References a *Region* definition.

See also

    OTF2_GlobalDefWriter_WriteCallsite()
    OTF2_GlobalDefReaderCallbacks_SetCallsiteCallback()
    OTF2_DefWriter_WriteCallsite()
    OTF2_DefReaderCallbacks_SetCallsiteCallback()

Since

    Version 1.0

Deprecated In version 2.0

C.15 *OTF2_CallpathRef* Callpath

The callpath definition.

Attributes

OTF2_↩ Callpath↩ Ref	parent	The parent of this callpath. References a *Callpath* definition.

OTF2_↵	region	The region of this callpath. References a *Region* definition.
RegionRef		

See also

OTF2_GlobalDefWriter_WriteCallpath()
OTF2_GlobalDefReaderCallbacks_SetCallpathCallback()
OTF2_DefWriter_WriteCallpath()
OTF2_DefReaderCallbacks_SetCallpathCallback()

Since

Version 1.0

C.16 *OTF2_GroupRef* Group

The group definition.

Attributes

OTF2_↵	name	Name of this group References a *String* definition.
StringRef		
OTF2_↵	groupType	The type of this group. Since version 1.2.
GroupType		
OTF2_↵	paradigm	The paradigm of this communication group. Since version 1.2.
Paradigm		
OTF2_↵	groupFlags	Flags for this group. Since version 1.2.
GroupFlag		
uint32_t	numberOf↵ Members	The number of members in this group.
uint64_t	members [numberOf↵ Members]	The identifiers of the group members.

See also

OTF2_GlobalDefWriter_WriteGroup()
OTF2_GlobalDefReaderCallbacks_SetGroupCallback()
OTF2_DefWriter_WriteGroup()
OTF2_DefReaderCallbacks_SetGroupCallback()

Since

Version 1.0

C.17 *OTF2_MetricMemberRef* MetricMember

A metric is defined by a metric member definition. A metric member is always a member of a metric class. Therefore, a single metric is a special case of a metric class with only one member. It is not allowed to reference a metric member id in a metric event, but only metric class IDs.

Attributes

OTF2_↩ StringRef	name	Name of the metric. References a *String* definition.
OTF2_↩ StringRef	description	Description of the metric. References a *String* definition.
OTF2_↩ MetricType	metricType	Metric type: PAPI, etc.
OTF2_↩ Metric↩ Mode	metricMode	Metric mode: accumulative, fix, relative, etc.
OTF2_↩ Type	valueType	Type of the value. Only *OTF2_TYPE_INT64*, *OTF2_TYPE_UINT64*, and *O↩ TF2_TYPE_DOUBLE* are valid types. If this metric member is recorded in a *Metric* event, than this type and the type in the event must match.
OTF2_↩ Base	base	The recorded values should be handled in this given base, either binary or decimal. This information can be used if the value needs to be scaled.
int64_t	exponent	The values inside the Metric events should be scaled by the factor $\text{base}^{\text{exponent}}$, to get the value in its base unit. For example, if the metric values come in as KiBi, than the base should be *OTF2_BASE_BINARY* and the exponent 10. Than the writer does not need to scale the values up to bytes, but can directly write the KiBi values into the Metric event. At reading time, the reader can apply the scaling factor to get the value in its base unit, ie. in bytes.
OTF2_↩ StringRef	unit	Unit of the metric. This needs to be the scale free base unit, ie. "bytes", "operations", or "seconds". In particular this unit should not have any scale prefix. References a *String* definition.

See also

OTF2_GlobalDefWriter_WriteMetricMember()
OTF2_GlobalDefReaderCallbacks_SetMetricMemberCallback()
OTF2_DefWriter_WriteMetricMember()
OTF2_DefReaderCallbacks_SetMetricMemberCallback()

Since

Version 1.0

C.18 *OTF2_MetricRef* MetricClass

For a metric class it is implicitly given that the event stream that records the metric is also the scope. A metric class can contain multiple different metrics.

Attributes

uint8_t	numberOf↩ Metrics	Number of metrics within the set.
OTF2_↩ Metric↩ Member↩ Ref	metricMembers [numberOf↩ Metrics]	List of metric members. References a *MetricMember* definition.

OTF2_↩ Metric↩ Occurrence	metric↩ Occurrence	Defines occurrence of a metric set.
OTF2_↩ Recorder↩ Kind	recorderKind	What kind of locations will record this metric class, or will this metric class only be recorded by metric instances. Since version 1.2.

Supplements

    MetricClassRecorder

See also

    OTF2_GlobalDefWriter_WriteMetricClass()
    OTF2_GlobalDefReaderCallbacks_SetMetricClassCallback()
    OTF2_DefWriter_WriteMetricClass()
    OTF2_DefReaderCallbacks_SetMetricClassCallback()

Since

    Version 1.0

C.19 *OTF2_MetricRef* MetricInstance

A metric instance is used to define metrics that are recorded at one location for multiple locations or for another location. The occurrence of a metric instance is implicitly of type *OTF2_METRIC_ASYNCHRONOUS*.

Attributes

OTF2_↩ MetricRef	metricClass	The instanced *MetricClass*. This metric class must be of kind *OTF2_RECO↩RDER_KIND_ABSTRACT*. References a *MetricClass* definition.
OTF2_↩ Location↩ Ref	recorder	Recorder of the metric: location ID. References a *Location* definition.
OTF2_↩ Metric↩ Scope	metricScope	Defines type of scope: location, location group, system tree node, or a generic group of locations.
uint64_t	scope	Scope of metric: ID of a location, location group, system tree node, or a generic group of locations.

See also

    OTF2_GlobalDefWriter_WriteMetricInstance()
    OTF2_GlobalDefReaderCallbacks_SetMetricInstanceCallback()
    OTF2_DefWriter_WriteMetricInstance()
    OTF2_DefReaderCallbacks_SetMetricInstanceCallback()

Since

    Version 1.0

C.20 *OTF2_CommRef* Comm

The communicator definition.

Attributes

OTF2_↩ StringRef	name	The name given by calling MPI_Comm_set_name on this communicator. Or the empty name to indicate that no name was given. References a *String* definition.
OTF2_↩ GroupRef	group	The describing MPI group of this MPI communicator The group needs to be of type *OTF2_GROUP_TYPE_COMM_GROUP* or *O↩ TF2_GROUP_TYPE_COMM_SELF*. References a *Group* definition.
OTF2_↩ CommRef	parent	The parent MPI communicator from which this communicator was created, if any. Use *OTF2_UNDEFINED_COMM* to indicate no parent. References a *Comm* definition.

See also

> OTF2_GlobalDefWriter_WriteComm()
> OTF2_GlobalDefReaderCallbacks_SetCommCallback()
> OTF2_DefWriter_WriteComm()
> OTF2_DefReaderCallbacks_SetCommCallback()

Since

> Version 1.0

C.21 *OTF2_ParameterRef* Parameter

The parameter definition.

Attributes

OTF2_↩ StringRef	name	Name of the parameter (variable name etc.) References a *String* definition.
OTF2_↩ Parameter↩ Type	parameterType	Type of the parameter, *OTF2_ParameterType* for possible types.

See also

> OTF2_GlobalDefWriter_WriteParameter()
> OTF2_GlobalDefReaderCallbacks_SetParameterCallback()
> OTF2_DefWriter_WriteParameter()
> OTF2_DefReaderCallbacks_SetParameterCallback()

Since

> Version 1.0

C.22 *OTF2_RmaWinRef* RmaWin

A window defines the communication context for any remote-memory access operation.

Attributes

OTF2_↩ StringRef	name	Name, e.g. 'GASPI Queue 1', 'NVidia Card 2', etc.. References a *String* definition.
OTF2_↩ CommRef	comm	Communicator object used to create the window. References a *Comm* definition.

See also

> OTF2_GlobalDefWriter_WriteRmaWin()
> OTF2_GlobalDefReaderCallbacks_SetRmaWinCallback()
> OTF2_DefWriter_WriteRmaWin()
> OTF2_DefReaderCallbacks_SetRmaWinCallback()

Since

> Version 1.2

C.23 MetricClassRecorder

The metric class recorder definition.

Attributes

OTF2_↩ MetricRef	metricClass	Parent *MetricClass* definition to which this one is a supplementary definition. References a *MetricClass* definition.
OTF2_↩ Location↩ Ref	recorder	The location which recorded the referenced metric class. References a *Location* definition.

See also

> OTF2_GlobalDefWriter_WriteMetricClassRecorder()
> OTF2_GlobalDefReaderCallbacks_SetMetricClassRecorderCallback()
> OTF2_DefWriter_WriteMetricClassRecorder()
> OTF2_DefReaderCallbacks_SetMetricClassRecorderCallback()

Since

> Version 1.2

C.24 SystemTreeNodeProperty

An arbitrary key/value property for a *SystemTreeNode* definition.

Attributes

OTF2_↩ System↩ Tree↩ NodeRef	systemTreeNode	Parent *SystemTreeNode* definition to which this one is a supplementary definition. References a *SystemTreeNode* definition.

OTF2_↩ StringRef	name	Name of the property. References a *String* definition.
OTF2_↩ Type	type	The type of this property. Since version 2.0.
OTF2_↩ Attribute↩ Value	value	The value of this property. Since version 2.0.

See also

> OTF2_GlobalDefWriter_WriteSystemTreeNodeProperty()
> OTF2_GlobalDefReaderCallbacks_SetSystemTreeNodePropertyCallback()
> OTF2_DefWriter_WriteSystemTreeNodeProperty()
> OTF2_DefReaderCallbacks_SetSystemTreeNodePropertyCallback()

Since

> Version 1.2

C.25 SystemTreeNodeDomain

The system tree node domain definition.

Attributes

OTF2_↩ System↩ Tree↩ NodeRef	systemTreeNode	Parent *SystemTreeNode* definition to which this one is a supplementary definition. References a *SystemTreeNode* definition.
OTF2_↩ System↩ Tree↩ Domain	systemTree↩ Domain	The domain in which the referenced *SystemTreeNode* operates in.

See also

> OTF2_GlobalDefWriter_WriteSystemTreeNodeDomain()
> OTF2_GlobalDefReaderCallbacks_SetSystemTreeNodeDomainCallback()
> OTF2_DefWriter_WriteSystemTreeNodeDomain()
> OTF2_DefReaderCallbacks_SetSystemTreeNodeDomainCallback()

Since

> Version 1.2

C.26 LocationGroupProperty

An arbitrary key/value property for a *LocationGroup* definition.

Attributes

OTF2_↩ Location↩ GroupRef	locationGroup		Parent *LocationGroup* definition to which this one is a supplementary definition. References a *LocationGroup* definition.
OTF2_↩ StringRef	name		Name of the property. References a *String* definition.
OTF2_↩ Type	type		The type of this property. Since version 2.0.
OTF2_↩ Attribute↩ Value	value		The value of this property. Since version 2.0.

See also

> OTF2_GlobalDefWriter_WriteLocationGroupProperty()
> OTF2_GlobalDefReaderCallbacks_SetLocationGroupPropertyCallback()
> OTF2_DefWriter_WriteLocationGroupProperty()
> OTF2_DefReaderCallbacks_SetLocationGroupPropertyCallback()

Since

> Version 1.3

C.27 LocationProperty

An arbitrary key/value property for a *Location* definition.

Attributes

OTF2_↩ Location↩ Ref	location		Parent *Location* definition to which this one is a supplementary definition. References a *Location* definition.
OTF2_↩ StringRef	name		Name of the property. References a *String* definition.
OTF2_↩ Type	type		The type of this property. Since version 2.0.
OTF2_↩ Attribute↩ Value	value		The value of this property. Since version 2.0.

See also

> OTF2_GlobalDefWriter_WriteLocationProperty()
> OTF2_GlobalDefReaderCallbacks_SetLocationPropertyCallback()
> OTF2_DefWriter_WriteLocationProperty()
> OTF2_DefReaderCallbacks_SetLocationPropertyCallback()

Since

> Version 1.3

C.28 *OTF2_CartDimensionRef* CartDimension

Each dimension in a Cartesian topology is composed of a global id, a name, its size, and whether it is periodic or not.

Attributes

OTF2_↩ StringRef	name	The name of the cartesian topology dimension. References a *String* definition.
uint32_t	size	The size of the cartesian topology dimension.
OTF2_↩ Cart↩ Periodicity	cartPeriodicity	Periodicity of the cartesian topology dimension.

See also

OTF2_GlobalDefWriter_WriteCartDimension()
OTF2_GlobalDefReaderCallbacks_SetCartDimensionCallback()
OTF2_DefWriter_WriteCartDimension()
OTF2_DefReaderCallbacks_SetCartDimensionCallback()

Since

Version 1.3

C.29 *OTF2_CartTopologyRef* CartTopology

Each topology is described by a global id, a reference to its name, a reference to a communicator, the number of dimensions, and references to those dimensions. The topology type is defined by the paradigm of the group referenced by the associated communicator.

Attributes

OTF2_↩ StringRef	name	The name of the topology. References a *String* definition.
OTF2_↩ CommRef	communicator	Communicator object used to create the topology. References a *Comm* definition.
uint8_t	numberOf↩ Dimensions	Number of dimensions.
OTF2_↩ Cart↩ Dimension↩ Ref	cartDimensions [numberOf↩ Dimensions]	The dimensions of this topology. References a *CartDimension* definition.

Supplements

CartCoordinate

See also

OTF2_GlobalDefWriter_WriteCartTopology()
OTF2_GlobalDefReaderCallbacks_SetCartTopologyCallback()
OTF2_DefWriter_WriteCartTopology()
OTF2_DefReaderCallbacks_SetCartTopologyCallback()

Since

Version 1.3

C.30   CartCoordinate

Defines the coordinate of the location referenced by the given rank (w.r.t. the communicator associated to the topology) in the referenced topology.

Attributes

OTF2_↩ Cart↩ Topology↩ Ref	cartTopology	Parent *CartTopology* definition to which this one is a supplementary definition. References a *CartTopology* definition.
uint32_t	rank	The rank w.r.t. the communicator associated to the topology referencing this coordinate.
uint8_t	numberOf↩ Dimensions	Number of dimensions.
uint32_t	coordinates [numberOf↩ Dimensions]	Coordinates, indexed by dimension.

See also

> OTF2_GlobalDefWriter_WriteCartCoordinate()
> OTF2_GlobalDefReaderCallbacks_SetCartCoordinateCallback()
> OTF2_DefWriter_WriteCartCoordinate()
> OTF2_DefReaderCallbacks_SetCartCoordinateCallback()

Since

> Version 1.3

C.31 *OTF2_SourceCodeLocationRef* SourceCodeLocation

The definition of a source code location as tuple of the corresponding file name and line number.

When used to attach source code annotations to events, use the *OTF2_AttributeList* with a *Attribute* definition named `"SOURCE_CODE_LOCATION"` and typed *OTF2_TYPE_SOURCE_CODE_LOCATION*.

Attributes

OTF2_↩ StringRef	file	The name of the file for the source code location. References a *String* definition.
uint32_t	lineNumber	The line number for the source code location.

See also

> OTF2_GlobalDefWriter_WriteSourceCodeLocation()
> OTF2_GlobalDefReaderCallbacks_SetSourceCodeLocationCallback()
> OTF2_DefWriter_WriteSourceCodeLocation()
> OTF2_DefReaderCallbacks_SetSourceCodeLocationCallback()

Since

> Version 1.5

C.32 *OTF2_CallingContextRef* CallingContext

Defines a node in the calling context tree. These nodes are referenced in the *CallingContextSample*, *Calling↩ ContextEnter*, and *CallingContextLeave* events.

The referenced *CallingContext* node in these events form a path which represents the calling context at this time. This path will be partitioned into at most three sub-paths by the *unwindDistance* attribute. For the *CallingContext↩ Leave* event, the *unwindDistance* is defined to be 1.

Starting from the referenced *CallingContext* node, the first $N \geq 0$ nodes were newly entered regions since the previous calling context event. The next node is a region which was not left but made progress since the previous calling context event. All other nodes did not make progress at all, and thus the regions were neither left nor entered again. The *unwindDistance* is then $N + 1$. In case the `unwindDistance` is 0, there are neither newly entered regions nor regions which made progress.

It is guaranteed, that the node referenced by the *unwindDistance* exists in the previous and current calling context. All descendants of this node's child in the previous calling context were left since the previous calling context event.

It is valid that this node is the *OTF2_UNDEFINED_CALLING_CONTEXT* node and that this node is already reached after *unwindDistance* -1 steps. In the latter case, there exists no region which made progress, all regions in the previous calling context were left and all regions in the current calling context were newly entered.

Note that for *CallingContextLeave* events, the parent of the referenced *CallingContext* must be used as the previous calling context for the next event.

Regions which were entered with a *CallingContextEnter* event form an upper bound for the unwind distance, i.e., the *unwindDistance* points either to the parent of the last such entered region, or a node which is a descendant to this parent.

To summarize, an *unwindDistance* of 0 means that no regions were left, newly entered, or made any progress. An *unwindDistance* of 1 means that some regions were left regarding the previous calling context, no regions were newly entered, and there was progress in the region of the first node. An *unwindDistance* greater than 1 means that some regions were left regarding the previous calling context, there was progress in one region, and the first *unwindDistance* -1 regions were newly entered.

Attributes

OTF2_↩ RegionRef	region	The region. References a *Region* definition.
OTF2_↩ Source↩ Code↩ Location↩ Ref	sourceCode↩ Location	The absolute source code location of this calling context. References a *SourceCodeLocation* definition.
OTF2_↩ Calling↩ ContextRef	parent	Parent id of this context. References a *CallingContext* definition.

Supplements

>   *CallingContextProperty*

See also

>   OTF2_GlobalDefWriter_WriteCallingContext()
>   OTF2_GlobalDefReaderCallbacks_SetCallingContextCallback()
>   OTF2_DefWriter_WriteCallingContext()
>   OTF2_DefReaderCallbacks_SetCallingContextCallback()

Since

>   Version 1.5

C.33   CallingContextProperty

An arbitrary key/value property for a *CallingContext* definition.

Attributes

OTF2_↩ Calling↩ ContextRef	callingContext	Parent *CallingContext* definition to which this one is a supplementary definition. References a *CallingContext* definition.
OTF2_↩ StringRef	name	Property name. References a *String* definition.
OTF2_↩ Type	type	The type of this property. Must match with the defined type of the *property*.
OTF2_↩ Attribute↩ Value	value	The value of this property.

See also

> OTF2_GlobalDefWriter_WriteCallingContextProperty()
> OTF2_GlobalDefReaderCallbacks_SetCallingContextPropertyCallback()
> OTF2_DefWriter_WriteCallingContextProperty()
> OTF2_DefReaderCallbacks_SetCallingContextPropertyCallback()

Since

> Version 2.0

C.34 *OTF2_InterruptGeneratorRef* InterruptGenerator

Defines an interrupt generator which periodically triggers *CallingContextSample* events. If the mode of the interrupt generator is set to *OTF2_INTERRUPT_GENERATOR_MODE_TIME*, the generator produces interrupts which are uniformly distributed over time, and the unit of the period is implicitly in seconds. If the mode is *OTF2_INTERRUP↩ T_GENERATOR_MODE_COUNT*, the interrupt is triggered if a specific counter threshold is reached in the system. Therefore these samples are unlikely to be uniformly distributed over time. The unit of the period is then implicitly a number (threshold value).

The interrupts period in base unit (which is implicitly seconds or number, based on the `mode`) is derived out of the `base`, the `exponent`, and the `period` attributes by this formula:

base-period = period x base$^\wedge$exponent

Attributes

OTF2_↩ StringRef	name	The name of this interrupt generator. References a *String* definition.
OTF2_↩ Interrupt↩ Generator↩ Mode	interrupt↩ GeneratorMode	Mode of the interrupt generator.
OTF2_↩ Base	base	The base for the period calculation.
int64_t	exponent	The exponent for the period calculation.
uint64_t	period	The period this interrupt generator generates interrupts.

See also

> OTF2_GlobalDefWriter_WriteInterruptGenerator()
> OTF2_GlobalDefReaderCallbacks_SetInterruptGeneratorCallback()
> OTF2_DefWriter_WriteInterruptGenerator()
> OTF2_DefReaderCallbacks_SetInterruptGeneratorCallback()

Since

Version 1.5

C.35   List of all event records

C.36   BufferFlush

This event signals that the internal buffer was flushed at the given time.

Attributes

OTF2_↩ Location↩ Ref	location	The location where this event happened.
OTF2_↩ Time↩ Stamp	timestamp	The time when this event happened.
OTF2_↩ Time↩ Stamp	stopTime	The time the buffer flush finished.

See also

>
    OTF2_EvtWriter_BufferFlush()
    OTF2_GlobalEvtReaderCallbacks_SetBufferFlushCallback()
    OTF2_EvtReaderCallbacks_SetBufferFlushCallback()

Since

>
    Version 1.0

C.37   MeasurementOnOff

This event signals where the measurement system turned measurement on or off.

Attributes

OTF2_↩ Location↩ Ref	location	The location where this event happened.
OTF2_↩ Time↩ Stamp	timestamp	The time when this event happened.
OTF2_↩ Measurement↩ Mode	measurement↩ Mode	Is the measurement turned on (*OTF2_MEASUREMENT_ON*) or off (*OTF2↩ _MEASUREMENT_OFF*)?

See also

>
    OTF2_EvtWriter_MeasurementOnOff()
    OTF2_GlobalEvtReaderCallbacks_SetMeasurementOnOffCallback()
    OTF2_EvtReaderCallbacks_SetMeasurementOnOffCallback()

Since

>
    Version 1.0

C.38   Enter

An enter record indicates that the program enters a code region.

Attributes

*OTF2_* ↩ *Location* ↩ *Ref*	location	The location where this event happened.
*OTF2_* ↩ *Time* ↩ *Stamp*	timestamp	The time when this event happened.
*OTF2_* ↩ *RegionRef*	region	Needs to be defined in a definition record References a *Region* definition and will be mapped to the global definition if a mapping table of type *OTF2_MA* ↩ *PPING_REGION* is available.

See also

> OTF2_EvtWriter_Enter()
> OTF2_GlobalEvtReaderCallbacks_SetEnterCallback()
> OTF2_EvtReaderCallbacks_SetEnterCallback()

Since

> Version 1.0

C.39 Leave

A leave record indicates that the program leaves a code region.

Attributes

*OTF2_* ↩ *Location* ↩ *Ref*	location	The location where this event happened.
*OTF2_* ↩ *Time* ↩ *Stamp*	timestamp	The time when this event happened.
*OTF2_* ↩ *RegionRef*	region	Needs to be defined in a definition record References a *Region* definition and will be mapped to the global definition if a mapping table of type *OTF2_MA* ↩ *PPING_REGION* is available.

See also

> OTF2_EvtWriter_Leave()
> OTF2_GlobalEvtReaderCallbacks_SetLeaveCallback()
> OTF2_EvtReaderCallbacks_SetLeaveCallback()

Since

> Version 1.0

C.40 MpiSend

A MpiSend record indicates that a MPI message send process was initiated (MPI_SEND). It keeps the necessary information for this event: receiver of the message, communicator, and the message tag. You can optionally add further information like the message length (size of the send buffer).

Attributes

OTF2_↩ Location↩ Ref	location	The location where this event happened.
OTF2_↩ Time↩ Stamp	timestamp	The time when this event happened.
uint32_t	receiver	MPI rank of receiver in `communicator`.
OTF2_↩ CommRef	communicator	Communicator ID. References a *Comm* definition and will be mapped to the global definition if a mapping table of type *OTF2_MAPPING_COMM* is available.
uint32_t	msgTag	Message tag
uint64_t	msgLength	Message length

See also

> OTF2_EvtWriter_MpiSend()
> OTF2_GlobalEvtReaderCallbacks_SetMpiSendCallback()
> OTF2_EvtReaderCallbacks_SetMpiSendCallback()

Since

> Version 1.0

C.41   MpiIsend

A MpiIsend record indicates that a MPI message send process was initiated (MPI_ISEND). It keeps the necessary information for this event: receiver of the message, communicator, and the message tag. You can optionally add further information like the message length (size of the send buffer).

Attributes

OTF2_↩ Location↩ Ref	location	The location where this event happened.
OTF2_↩ Time↩ Stamp	timestamp	The time when this event happened.
uint32_t	receiver	MPI rank of receiver in `communicator`.
OTF2_↩ CommRef	communicator	Communicator ID. References a *Comm* definition and will be mapped to the global definition if a mapping table of type *OTF2_MAPPING_COMM* is available.
uint32_t	msgTag	Message tag
uint64_t	msgLength	Message length
uint64_t	requestID	ID of the related request

See also

> OTF2_EvtWriter_MpiIsend()
> OTF2_GlobalEvtReaderCallbacks_SetMpiIsendCallback()
> OTF2_EvtReaderCallbacks_SetMpiIsendCallback()

Since

> Version 1.0

C.42   MpiIsendComplete

Signals the completion of non-blocking send request.

Attributes

OTF2_↩ Location↩ Ref	location	The location where this event happened.
OTF2_↩ Time↩ Stamp	timestamp	The time when this event happened.
uint64_t	requestID	ID of the related request

See also

> OTF2_EvtWriter_MpiIsendComplete()
> OTF2_GlobalEvtReaderCallbacks_SetMpiIsendCompleteCallback()
> OTF2_EvtReaderCallbacks_SetMpiIsendCompleteCallback()

Since

> Version 1.0

C.43   MpiIrecvRequest

Signals the request of a receive, which can be completed later.

Attributes

OTF2_↩ Location↩ Ref	location	The location where this event happened.
OTF2_↩ Time↩ Stamp	timestamp	The time when this event happened.
uint64_t	requestID	ID of the requested receive

See also

> OTF2_EvtWriter_MpiIrecvRequest()
> OTF2_GlobalEvtReaderCallbacks_SetMpiIrecvRequestCallback()
> OTF2_EvtReaderCallbacks_SetMpiIrecvRequestCallback()

Since

> Version 1.0

C.44   MpiRecv

A MpiRecv record indicates that a MPI message was received (MPI_RECV). It keeps the necessary information for this event: sender of the message, communicator, and the message tag. You can optionally add further information like the message length (size of the receive buffer).

Attributes

OTF2_↩ Location↩ Ref	location	The location where this event happened.
OTF2_↩ Time↩ Stamp	timestamp	The time when this event happened.
uint32_t	sender	MPI rank of sender in `communicator`.
OTF2_↩ CommRef	communicator	Communicator ID. References a *Comm* definition and will be mapped to the global definition if a mapping table of type *OTF2_MAPPING_COMM* is available.
uint32_t	msgTag	Message tag
uint64_t	msgLength	Message length

See also

> OTF2_EvtWriter_MpiRecv()
> OTF2_GlobalEvtReaderCallbacks_SetMpiRecvCallback()
> OTF2_EvtReaderCallbacks_SetMpiRecvCallback()

Since

> Version 1.0

C.45 MpiIrecv

A MpiIrecv record indicates that a MPI message was received (MPI_IRECV). It keeps the necessary information for this event: sender of the message, communicator, and the message tag. You can optionally add further information like the message length (size of the receive buffer).

Attributes

OTF2_↩ Location↩ Ref	location	The location where this event happened.
OTF2_↩ Time↩ Stamp	timestamp	The time when this event happened.
uint32_t	sender	MPI rank of sender in `communicator`.
OTF2_↩ CommRef	communicator	Communicator ID. References a *Comm* definition and will be mapped to the global definition if a mapping table of type *OTF2_MAPPING_COMM* is available.
uint32_t	msgTag	Message tag
uint64_t	msgLength	Message length
uint64_t	requestID	ID of the related request

See also

> OTF2_EvtWriter_MpiIrecv()
> OTF2_GlobalEvtReaderCallbacks_SetMpiIrecvCallback()
> OTF2_EvtReaderCallbacks_SetMpiIrecvCallback()

Since

> Version 1.0

C.46 MpiRequestTest

This events appears if the program tests if a request has already completed but the test failed.

Attributes

OTF2_↩ Location↩ Ref	location	The location where this event happened.
OTF2_↩ Time↩ Stamp	timestamp	The time when this event happened.
uint64_t	requestID	ID of the related request

See also

    OTF2_EvtWriter_MpiRequestTest()
    OTF2_GlobalEvtReaderCallbacks_SetMpiRequestTestCallback()
    OTF2_EvtReaderCallbacks_SetMpiRequestTestCallback()

Since

    Version 1.0

C.47 MpiRequestCancelled

This events appears if the program canceled a request.

Attributes

OTF2_↩ Location↩ Ref	location	The location where this event happened.
OTF2_↩ Time↩ Stamp	timestamp	The time when this event happened.
uint64_t	requestID	ID of the related request

See also

    OTF2_EvtWriter_MpiRequestCancelled()
    OTF2_GlobalEvtReaderCallbacks_SetMpiRequestCancelledCallback()
    OTF2_EvtReaderCallbacks_SetMpiRequestCancelledCallback()

Since

    Version 1.0

C.48 MpiCollectiveBegin

A MpiCollectiveBegin record marks the begin of a MPI collective operation (MPI_GATHER, MPI_SCATTER etc.).

Attributes

OTF2_↩ Location↩ Ref	location	The location where this event happened.
OTF2_↩ Time↩ Stamp	timestamp	The time when this event happened.

See also

> OTF2_EvtWriter_MpiCollectiveBegin()
> OTF2_GlobalEvtReaderCallbacks_SetMpiCollectiveBeginCallback()
> OTF2_EvtReaderCallbacks_SetMpiCollectiveBeginCallback()

Since

> Version 1.0

C.49   MpiCollectiveEnd

A MpiCollectiveEnd record marks the end of a MPI collective operation (MPI_GATHER, MPI_SCATTER etc.). It keeps the necessary information for this event: type of collective operation, communicator, the root of this collective operation. You can optionally add further information like sent and received bytes.

Attributes

OTF2_↩ Location↩ Ref	location	The location where this event happened.
OTF2_↩ Time↩ Stamp	timestamp	The time when this event happened.
OTF2_↩ Collective↩ Op	collectiveOp	Determines which collective operation it is.
OTF2_↩ CommRef	communicator	Communicator References a *Comm* definition and will be mapped to the global definition if a mapping table of type *OTF2_MAPPING_COMM* is available.
uint32_t	root	MPI rank of root in `communicator`.
uint64_t	sizeSent	Size of the sent message.
uint64_t	sizeReceived	Size of the received message.

See also

> OTF2_EvtWriter_MpiCollectiveEnd()
> OTF2_GlobalEvtReaderCallbacks_SetMpiCollectiveEndCallback()
> OTF2_EvtReaderCallbacks_SetMpiCollectiveEndCallback()

Since

> Version 1.0

C.50   OmpFork

An OmpFork record marks that an OpenMP Thread forks a thread team.

This event record is superseded by the *ThreadFork* event record and should not be used when the *ThreadFork* event record is in use.

Attributes

OTF2_↩ Location↩ Ref	location	The location where this event happened.
OTF2_↩ Time↩ Stamp	timestamp	The time when this event happened.
uint32_t	numberOf↩ Requested↩ Threads	Requested size of the team.

See also

    OTF2_EvtWriter_OmpFork()
    OTF2_GlobalEvtReaderCallbacks_SetOmpForkCallback()
    OTF2_EvtReaderCallbacks_SetOmpForkCallback()

Since

    Version 1.0

Deprecated In version 1.2

C.51 OmpJoin

An OmpJoin record marks that a team of threads is joint and only the master thread continues execution.

This event record is superseded by the *ThreadJoin* event record and should not be used when the *ThreadJoin* event record is in use.

Attributes

OTF2_↩ Location↩ Ref	location	The location where this event happened.
OTF2_↩ Time↩ Stamp	timestamp	The time when this event happened.

See also

    OTF2_EvtWriter_OmpJoin()
    OTF2_GlobalEvtReaderCallbacks_SetOmpJoinCallback()
    OTF2_EvtReaderCallbacks_SetOmpJoinCallback()

Since

    Version 1.0

Deprecated In version 1.2

C.52 OmpAcquireLock

An OmpAcquireLock record marks that a thread acquires an OpenMP lock.

This event record is superseded by the *ThreadAcquireLock* event record and should not be used when the *Thread↩ AcquireLock* event record is in use.

Attributes

OTF2_↩ Location↩ Ref	location	The location where this event happened.
OTF2_↩ Time↩ Stamp	timestamp	The time when this event happened.
uint32_t	lockID	ID of the lock.
uint32_t	acquisitionOrder	A monotonically increasing number to determine the order of lock acquisitions (with unsynchronized clocks this is otherwise not possible). Corresponding acquire-release events have same number.

See also

> OTF2_EvtWriter_OmpAcquireLock()
> OTF2_GlobalEvtReaderCallbacks_SetOmpAcquireLockCallback()
> OTF2_EvtReaderCallbacks_SetOmpAcquireLockCallback()

Since

> Version 1.0

Deprecated In version 1.2

C.53   OmpReleaseLock

An OmpReleaseLock record marks that a thread releases an OpenMP lock.

This event record is superseded by the *ThreadReleaseLock* event record and should not be used when the *Thread↩ ReleaseLock* event record is in use.

Attributes

OTF2_↩ Location↩ Ref	location	The location where this event happened.
OTF2_↩ Time↩ Stamp	timestamp	The time when this event happened.
uint32_t	lockID	ID of the lock.
uint32_t	acquisitionOrder	A monotonically increasing number to determine the order of lock acquisitions (with unsynchronized clocks this is otherwise not possible). Corresponding acquire-release events have same number.

See also

> OTF2_EvtWriter_OmpReleaseLock()
> OTF2_GlobalEvtReaderCallbacks_SetOmpReleaseLockCallback()
> OTF2_EvtReaderCallbacks_SetOmpReleaseLockCallback()

Since

> Version 1.0

Deprecated In version 1.2

C.54 OmpTaskCreate

An OmpTaskCreate record marks that an OpenMP Task was/will be created in the current region.

This event record is superseded by the *ThreadTaskCreate* event record and should not be used when the *Thread↩ TaskCreate* event record is in use.

Attributes

OTF2_↩ Location↩ Ref	location	The location where this event happened.
OTF2_↩ Time↩ Stamp	timestamp	The time when this event happened.
uint64_t	taskID	Identifier of the newly created task instance.

See also

    OTF2_EvtWriter_OmpTaskCreate()
    OTF2_GlobalEvtReaderCallbacks_SetOmpTaskCreateCallback()
    OTF2_EvtReaderCallbacks_SetOmpTaskCreateCallback()

Since

    Version 1.0

Deprecated In version 1.2

C.55 OmpTaskSwitch

An OmpTaskSwitch record indicates that the execution of the current task will be suspended and another task starts/restarts its execution. Please note that this may change the current call stack of the executing location.

This event record is superseded by the *ThreadTaskSwitch* event record and should not be used when the *Thread↩ TaskSwitch* event record is in use.

Attributes

OTF2_↩ Location↩ Ref	location	The location where this event happened.
OTF2_↩ Time↩ Stamp	timestamp	The time when this event happened.
uint64_t	taskID	Identifier of the now active task instance.

See also

    OTF2_EvtWriter_OmpTaskSwitch()
    OTF2_GlobalEvtReaderCallbacks_SetOmpTaskSwitchCallback()
    OTF2_EvtReaderCallbacks_SetOmpTaskSwitchCallback()

Since

    Version 1.0

Deprecated In version 1.2

C.56   OmpTaskComplete

An OmpTaskComplete record indicates that the execution of an OpenMP task has finished.

This event record is superseded by the *ThreadTaskComplete* event record and should not be used when the *ThreadTaskComplete* event record is in use.

Attributes

OTF2_↩ Location↩ Ref	location	The location where this event happened.
OTF2_↩ Time↩ Stamp	timestamp	The time when this event happened.
uint64_t	taskID	Identifier of the completed task instance.

See also

> OTF2_EvtWriter_OmpTaskComplete()
> OTF2_GlobalEvtReaderCallbacks_SetOmpTaskCompleteCallback()
> OTF2_EvtReaderCallbacks_SetOmpTaskCompleteCallback()

Since

> Version 1.0

Deprecated In version 1.2

C.57   Metric

A metric event is always stored at the location that recorded the metric. A metric event can reference a metric class or metric instance. Therefore, metric classes and instances share same ID space. Synchronous metrics are always located right before the according enter and leave event.

Attributes

OTF2_↩ Location↩ Ref	location	The location where this event happened.
OTF2_↩ Time↩ Stamp	timestamp	The time when this event happened.
OTF2_↩ MetricRef	metric	Could be a metric class or a metric instance. References a *MetricClass*, or a *MetricInstance* definition and will be mapped to the global definition if a mapping table of type *OTF2_MAPPING_METRIC* is available.
uint8_t	numberOf↩ Metrics	Number of metrics with in the set.
OTF2_↩ Type	typeIDs [numberOf↩ Metrics]	List of metric types. These types must match that of the corresponding *MetricMember* definitions.

OTF2_↩ Metric↩ Value	metricValues [numberOf↩ Metrics]	List of metric values.

See also

> OTF2_EvtWriter_Metric()
> OTF2_GlobalEvtReaderCallbacks_SetMetricCallback()
> OTF2_EvtReaderCallbacks_SetMetricCallback()

Since

> Version 1.0

C.58 ParameterString

A ParameterString record marks that in the current region, the specified string parameter has the specified value.

Attributes

OTF2_↩ Location↩ Ref	location	The location where this event happened.
OTF2_↩ Time↩ Stamp	timestamp	The time when this event happened.
OTF2_↩ Parameter↩ Ref	parameter	Parameter ID. References a *Parameter* definition and will be mapped to the global definition if a mapping table of type *OTF2_MAPPING_PARAMETER* is available.
OTF2_↩ StringRef	string	Value: Handle of a string definition References a *String* definition and will be mapped to the global definition if a mapping table of type *OTF2_MAPPING↩ _STRING* is available.

See also

> OTF2_EvtWriter_ParameterString()
> OTF2_GlobalEvtReaderCallbacks_SetParameterStringCallback()
> OTF2_EvtReaderCallbacks_SetParameterStringCallback()

Since

> Version 1.0

C.59 ParameterInt

A ParameterInt record marks that in the current region, the specified integer parameter has the specified value.

Attributes

OTF2_↩ Location↩ Ref	location	The location where this event happened.
OTF2_↩ Time↩ Stamp	timestamp	The time when this event happened.
OTF2_↩ Parameter↩ Ref	parameter	Parameter ID. References a *Parameter* definition and will be mapped to the global definition if a mapping table of type *OTF2_MAPPING_PARAMETER* is available.
int64_t	value	Value of the recorded parameter.

See also

> OTF2_EvtWriter_ParameterInt()
> OTF2_GlobalEvtReaderCallbacks_SetParameterIntCallback()
> OTF2_EvtReaderCallbacks_SetParameterIntCallback()

Since

> Version 1.0

C.60 ParameterUnsignedInt

A ParameterUnsignedInt record marks that in the current region, the specified unsigned integer parameter has the specified value.

Attributes

OTF2_↩ Location↩ Ref	location	The location where this event happened.
OTF2_↩ Time↩ Stamp	timestamp	The time when this event happened.
OTF2_↩ Parameter↩ Ref	parameter	Parameter ID. References a *Parameter* definition and will be mapped to the global definition if a mapping table of type *OTF2_MAPPING_PARAMETER* is available.
uint64_t	value	Value of the recorded parameter.

See also

> OTF2_EvtWriter_ParameterUnsignedInt()
> OTF2_GlobalEvtReaderCallbacks_SetParameterUnsignedIntCallback()
> OTF2_EvtReaderCallbacks_SetParameterUnsignedIntCallback()

Since

> Version 1.0

C.61 RmaWinCreate

A RmaWinCreate record denotes the creation of a RMA window.

Attributes

OTF2_↩ *Location↩* *Ref*	location	The location where this event happened.
OTF2_↩ *Time↩* *Stamp*	timestamp	The time when this event happened.
OTF2_↩ *RmaWin↩* *Ref*	win	ID of the window created. References a *RmaWin* definition and will be mapped to the global definition if a mapping table of type *OTF2_MAPPING_RMA_WIN* is available.

See also

> OTF2_EvtWriter_RmaWinCreate()
> OTF2_GlobalEvtReaderCallbacks_SetRmaWinCreateCallback()
> OTF2_EvtReaderCallbacks_SetRmaWinCreateCallback()

Since

> Version 1.2

C.62 RmaWinDestroy

A RmaWinDestroy record denotes the destruction of a RMA window.

Attributes

OTF2_↩ *Location↩* *Ref*	location	The location where this event happened.
OTF2_↩ *Time↩* *Stamp*	timestamp	The time when this event happened.
OTF2_↩ *RmaWin↩* *Ref*	win	ID of the window destructed. References a *RmaWin* definition and will be mapped to the global definition if a mapping table of type *OTF2_MAPPING↩* *_RMA_WIN* is available.

See also

> OTF2_EvtWriter_RmaWinDestroy()
> OTF2_GlobalEvtReaderCallbacks_SetRmaWinDestroyCallback()
> OTF2_EvtReaderCallbacks_SetRmaWinDestroyCallback()

Since

> Version 1.2

C.63 RmaCollectiveBegin

A RmaCollectiveBegin record denotes the beginning of a collective RMA operation.

Attributes

OTF2_↩ Location↩ Ref	location	The location where this event happened.
OTF2_↩ Time↩ Stamp	timestamp	The time when this event happened.

See also

> OTF2_EvtWriter_RmaCollectiveBegin()
> OTF2_GlobalEvtReaderCallbacks_SetRmaCollectiveBeginCallback()
> OTF2_EvtReaderCallbacks_SetRmaCollectiveBeginCallback()

Since

> Version 1.2

C.64   RmaCollectiveEnd

A RmaCollectiveEnd record denotes the end of a collective RMA operation.

Attributes

OTF2_↩ Location↩ Ref	location	The location where this event happened.
OTF2_↩ Time↩ Stamp	timestamp	The time when this event happened.
OTF2_↩ Collective↩ Op	collectiveOp	Determines which collective operation it is.
OTF2_↩ Rma↩ SyncLevel	syncLevel	Synchronization level of this collective operation.
OTF2_↩ RmaWin↩ Ref	win	ID of the window used for this operation. References a *RmaWin* definition and will be mapped to the global definition if a mapping table of type *OTF2_MA↩ PPING_RMA_WIN* is available.
uint32_t	root	Root process for this operation.
uint64_t	bytesSent	Bytes sent in operation.
uint64_t	bytesReceived	Bytes receives in operation.

See also

> OTF2_EvtWriter_RmaCollectiveEnd()
> OTF2_GlobalEvtReaderCallbacks_SetRmaCollectiveEndCallback()
> OTF2_EvtReaderCallbacks_SetRmaCollectiveEndCallback()

Since

> Version 1.2

C.65   RmaGroupSync

A RmaGroupSync record denotes the synchronization with a subgroup of processes on a window.

Attributes

OTF2_↩ Location↩ Ref	location	The location where this event happened.	
OTF2_↩ Time↩ Stamp	timestamp	The time when this event happened.	
OTF2_↩ Rma↩ SyncLevel	syncLevel	Synchronization level of this collective operation.	
OTF2_↩ RmaWin↩ Ref	win	ID of the window used for this operation. References a *RmaWin* definition and will be mapped to the global definition if a mapping table of type *OTF2_MA↩ PPING_RMA_WIN* is available.	
OTF2_↩ GroupRef	group	Group of remote processes involved in synchronization. References a *Group* definition and will be mapped to the global definition if a mapping table of type *OTF2_MAPPING_GROUP* is available.	

See also

> OTF2_EvtWriter_RmaGroupSync()
> OTF2_GlobalEvtReaderCallbacks_SetRmaGroupSyncCallback()
> OTF2_EvtReaderCallbacks_SetRmaGroupSyncCallback()

Since

> Version 1.2

C.66   RmaRequestLock

A RmaRequestLock record denotes the time a lock was requested and with it the earliest time it could have been granted. It is used to mark (possibly) non-blocking lock request, as defined by the MPI standard.

Attributes

OTF2_↩ Location↩ Ref	location	The location where this event happened.
OTF2_↩ Time↩ Stamp	timestamp	The time when this event happened.
OTF2_↩ RmaWin↩ Ref	win	ID of the window used for this operation. References a *RmaWin* definition and will be mapped to the global definition if a mapping table of type *OTF2_MA↩ PPING_RMA_WIN* is available.
uint32_t	remote	Rank of the locked remote process.
uint64_t	lockId	ID of the lock acquired, if multiple locks are defined on a window.
OTF2_↩ LockType	lockType	Type of lock acquired.

See also

> OTF2_EvtWriter_RmaRequestLock()
> OTF2_GlobalEvtReaderCallbacks_SetRmaRequestLockCallback()
> OTF2_EvtReaderCallbacks_SetRmaRequestLockCallback()

Since

> Version 1.2

C.67 RmaAcquireLock

A RmaAcquireLock record denotes the time a lock was acquired by the process.

Attributes

OTF2_↩ Location↩ Ref	location	The location where this event happened.
OTF2_↩ Time↩ Stamp	timestamp	The time when this event happened.
OTF2_↩ RmaWin↩ Ref	win	ID of the window used for this operation. References a *RmaWin* definition and will be mapped to the global definition if a mapping table of type *OTF2_MA↩ PPING_RMA_WIN* is available.
uint32_t	remote	Rank of the locked remote process.
uint64_t	lockId	ID of the lock acquired, if multiple locks are defined on a window.
OTF2_↩ LockType	lockType	Type of lock acquired.

See also

> OTF2_EvtWriter_RmaAcquireLock()
> OTF2_GlobalEvtReaderCallbacks_SetRmaAcquireLockCallback()
> OTF2_EvtReaderCallbacks_SetRmaAcquireLockCallback()

Since

> Version 1.2

C.68 RmaTryLock

A RmaTryLock record denotes the time of an unsuccessful attempt to acquire the lock.

Attributes

OTF2_↩ Location↩ Ref	location	The location where this event happened.
OTF2_↩ Time↩ Stamp	timestamp	The time when this event happened.
OTF2_↩ RmaWin↩ Ref	win	ID of the window used for this operation. References a *RmaWin* definition and will be mapped to the global definition if a mapping table of type *OTF2_MA↩ PPING_RMA_WIN* is available.
uint32_t	remote	Rank of the locked remote process.
uint64_t	lockId	ID of the lock acquired, if multiple locks are defined on a window.
OTF2_↩ LockType	lockType	Type of lock acquired.

See also

> OTF2_EvtWriter_RmaTryLock()
> OTF2_GlobalEvtReaderCallbacks_SetRmaTryLockCallback()
> OTF2_EvtReaderCallbacks_SetRmaTryLockCallback()

Since

> Version 1.2

C.69   RmaReleaseLock

A RmaReleaseLock record denotes the time the lock was released.

Attributes

OTF2_↩ Location↩ Ref	location	The location where this event happened.
OTF2_↩ Time↩ Stamp	timestamp	The time when this event happened.
OTF2_↩ RmaWin↩ Ref	win	ID of the window used for this operation. References a *RmaWin* definition and will be mapped to the global definition if a mapping table of type *OTF2_MA↩ PPING_RMA_WIN* is available.
uint32_t	remote	Rank of the locked remote process.
uint64_t	lockId	ID of the lock released, if multiple locks are defined on a window.

See also

> OTF2_EvtWriter_RmaReleaseLock()
> OTF2_GlobalEvtReaderCallbacks_SetRmaReleaseLockCallback()
> OTF2_EvtReaderCallbacks_SetRmaReleaseLockCallback()

Since

> Version 1.2

C.70   RmaSync

A RmaSync record denotes the direct synchronization with a possibly remote process.

Attributes

OTF2_↩ Location↩ Ref	location	The location where this event happened.
OTF2_↩ Time↩ Stamp	timestamp	The time when this event happened.
OTF2_↩ RmaWin↩ Ref	win	ID of the window used for this operation. References a *RmaWin* definition and will be mapped to the global definition if a mapping table of type *OTF2_MA↩ PPING_RMA_WIN* is available.
uint32_t	remote	Rank of the locked remote process.
OTF2_↩ Rma↩ SyncType	syncType	Type of synchronization.

OTF2_EvtWriter_RmaSync()
OTF2_GlobalEvtReaderCallbacks_SetRmaSyncCallback()
OTF2_EvtReaderCallbacks_SetRmaSyncCallback()

Since

Version 1.2

C.71   RmaWaitChange

A RmaWaitChange record denotes the change of a window that was waited for.

Attributes

OTF2_↩ Location↩ Ref	location	The location where this event happened.
OTF2_↩ Time↩ Stamp	timestamp	The time when this event happened.
OTF2_↩ RmaWin↩ Ref	win	ID of the window used for this operation. References a *RmaWin* definition and will be mapped to the global definition if a mapping table of type *OTF2_MA↩ PPING_RMA_WIN* is available.

See also

OTF2_EvtWriter_RmaWaitChange()
OTF2_GlobalEvtReaderCallbacks_SetRmaWaitChangeCallback()
OTF2_EvtReaderCallbacks_SetRmaWaitChangeCallback()

Since

Version 1.2

C.72   RmaPut

A RmaPut record denotes the time a put operation was issued.

Attributes

OTF2_↩ Location↩ Ref	location	The location where this event happened.
OTF2_↩ Time↩ Stamp	timestamp	The time when this event happened.

OTF2_↩ *RmaWin↩* *Ref*	win	ID of the window used for this operation. References a *RmaWin* definition and will be mapped to the global definition if a mapping table of type *OTF2_MA↩ PPING_RMA_WIN* is available.
uint32_t	remote	Rank of the target process.
uint64_t	bytes	Bytes sent to target.
uint64_t	matchingId	ID used for matching the corresponding completion record.

See also

> OTF2_EvtWriter_RmaPut()
> OTF2_GlobalEvtReaderCallbacks_SetRmaPutCallback()
> OTF2_EvtReaderCallbacks_SetRmaPutCallback()

Since

> Version 1.2

C.73 RmaGet

A RmaGet record denotes the time a get operation was issued.

Attributes

OTF2_↩ *Location↩* *Ref*	location	The location where this event happened.
OTF2_↩ *Time↩* *Stamp*	timestamp	The time when this event happened.
OTF2_↩ *RmaWin↩* *Ref*	win	ID of the window used for this operation. References a *RmaWin* definition and will be mapped to the global definition if a mapping table of type *OTF2_MA↩ PPING_RMA_WIN* is available.
uint32_t	remote	Rank of the target process.
uint64_t	bytes	Bytes received from target.
uint64_t	matchingId	ID used for matching the corresponding completion record.

See also

> OTF2_EvtWriter_RmaGet()
> OTF2_GlobalEvtReaderCallbacks_SetRmaGetCallback()
> OTF2_EvtReaderCallbacks_SetRmaGetCallback()

Since

> Version 1.2

C.74 RmaAtomic

A RmaAtomic record denotes the time a atomic operation was issued.

Attributes

OTF2_↩ Location↩ Ref	location	The location where this event happened.	
OTF2_↩ Time↩ Stamp	timestamp	The time when this event happened.	
OTF2_↩ RmaWin↩ Ref	win	ID of the window used for this operation. References a [*RmaWin*](#) definition and will be mapped to the global definition if a mapping table of type *OTF2_MA↩ PPING_RMA_WIN* is available.	
uint32_t	remote	Rank of the target process.	
OTF2_↩ Rma↩ Atomic↩ Type	type	Type of atomic operation.	
uint64_t	bytesSent	Bytes sent to target.	
uint64_t	bytesReceived	Bytes received from target.	
uint64_t	matchingId	ID used for matching the corresponding completion record.	

See also

> OTF2_EvtWriter_RmaAtomic()
> OTF2_GlobalEvtReaderCallbacks_SetRmaAtomicCallback()
> OTF2_EvtReaderCallbacks_SetRmaAtomicCallback()

Since

> Version 1.2

C.75   RmaOpCompleteBlocking

A RmaOpCompleteBlocking record denotes the local completion of a blocking RMA operation.

Attributes

OTF2_↩ Location↩ Ref	location	The location where this event happened.	
OTF2_↩ Time↩ Stamp	timestamp	The time when this event happened.	
OTF2_↩ RmaWin↩ Ref	win	ID of the window used for this operation. References a [*RmaWin*](#) definition and will be mapped to the global definition if a mapping table of type *OTF2_MA↩ PPING_RMA_WIN* is available.	
uint64_t	matchingId	ID used for matching the corresponding RMA operation record.	

See also

> OTF2_EvtWriter_RmaOpCompleteBlocking()
> OTF2_GlobalEvtReaderCallbacks_SetRmaOpCompleteBlockingCallback()
> OTF2_EvtReaderCallbacks_SetRmaOpCompleteBlockingCallback()

Since

> Version 1.2

C.76   RmaOpCompleteNonBlocking

A RmaOpCompleteNonBlocking record denotes the local completion of a non-blocking RMA operation.

Attributes

OTF2_↵ Location↵ Ref	location	The location where this event happened.
OTF2_↵ Time↵ Stamp	timestamp	The time when this event happened.
OTF2_↵ RmaWin↵ Ref	win	ID of the window used for this operation. References a *RmaWin* definition and will be mapped to the global definition if a mapping table of type *OTF2_MA↵ PPING_RMA_WIN* is available.
uint64_t	matchingId	ID used for matching the corresponding RMA operation record.

See also

> OTF2_EvtWriter_RmaOpCompleteNonBlocking()
> OTF2_GlobalEvtReaderCallbacks_SetRmaOpCompleteNonBlockingCallback()
> OTF2_EvtReaderCallbacks_SetRmaOpCompleteNonBlockingCallback()

Since

> Version 1.2

C.77 RmaOpTest

A RmaOpTest record denotes that a non-blocking RMA operation has been tested for completion unsuccessfully.

Attributes

OTF2_↵ Location↵ Ref	location	The location where this event happened.
OTF2_↵ Time↵ Stamp	timestamp	The time when this event happened.
OTF2_↵ RmaWin↵ Ref	win	ID of the window used for this operation. References a *RmaWin* definition and will be mapped to the global definition if a mapping table of type *OTF2_MA↵ PPING_RMA_WIN* is available.
uint64_t	matchingId	ID used for matching the corresponding RMA operation record.

See also

> OTF2_EvtWriter_RmaOpTest()
> OTF2_GlobalEvtReaderCallbacks_SetRmaOpTestCallback()
> OTF2_EvtReaderCallbacks_SetRmaOpTestCallback()

Since

> Version 1.2

C.78 RmaOpCompleteRemote

A RmaOpCompleteRemote record denotes the remote completion of a RMA operation.

Attributes

OTF2_↩ Location↩ Ref	location	The location where this event happened.
OTF2_↩ Time↩ Stamp	timestamp	The time when this event happened.
OTF2_↩ RmaWin↩ Ref	win	ID of the window used for this operation. References a *RmaWin* definition and will be mapped to the global definition if a mapping table of type *OTF2_MA↩ PPING_RMA_WIN* is available.
uint64_t	matchingId	ID used for matching the corresponding RMA operation record.

See also

OTF2_EvtWriter_RmaOpCompleteRemote()
OTF2_GlobalEvtReaderCallbacks_SetRmaOpCompleteRemoteCallback()
OTF2_EvtReaderCallbacks_SetRmaOpCompleteRemoteCallback()

Since

Version 1.2

C.79 ThreadFork

A ThreadFork record marks that a thread forks a thread team.

Attributes

OTF2_↩ Location↩ Ref	location	The location where this event happened.
OTF2_↩ Time↩ Stamp	timestamp	The time when this event happened.
OTF2_↩ Paradigm	model	The threading paradigm this event took place.
uint32_t	numberOf↩ Requested↩ Threads	Requested size of the team.

See also

OTF2_EvtWriter_ThreadFork()
OTF2_GlobalEvtReaderCallbacks_SetThreadForkCallback()
OTF2_EvtReaderCallbacks_SetThreadForkCallback()

Since

Version 1.2

C.80 ThreadJoin

A ThreadJoin record marks that a team of threads is joint and only the master thread continues execution.

Attributes

OTF2_↩ Location↩ Ref	location	The location where this event happened.
OTF2_↩ Time↩ Stamp	timestamp	The time when this event happened.
OTF2_↩ Paradigm	model	The threading paradigm this event took place.

See also

> OTF2_EvtWriter_ThreadJoin()
> OTF2_GlobalEvtReaderCallbacks_SetThreadJoinCallback()
> OTF2_EvtReaderCallbacks_SetThreadJoinCallback()

Since

> Version 1.2

C.81   ThreadTeamBegin

The current location enters the specified thread team.

Attributes

OTF2_↩ Location↩ Ref	location	The location where this event happened.
OTF2_↩ Time↩ Stamp	timestamp	The time when this event happened.
OTF2_↩ CommRef	threadTeam	Thread team References a *Comm* definition and will be mapped to the global definition if a mapping table of type *OTF2_MAPPING_COMM* is available.

See also

> OTF2_EvtWriter_ThreadTeamBegin()
> OTF2_GlobalEvtReaderCallbacks_SetThreadTeamBeginCallback()
> OTF2_EvtReaderCallbacks_SetThreadTeamBeginCallback()

Since

> Version 1.2

C.82   ThreadTeamEnd

The current location leaves the specified thread team.

Attributes

OTF2_↩ Location↩ Ref	location	The location where this event happened.
OTF2_↩ Time↩ Stamp	timestamp	The time when this event happened.
OTF2_↩ CommRef	threadTeam	Thread team References a *Comm* definition and will be mapped to the global definition if a mapping table of type *OTF2_MAPPING_COMM* is available.

See also

> OTF2_EvtWriter_ThreadTeamEnd()
> OTF2_GlobalEvtReaderCallbacks_SetThreadTeamEndCallback()
> OTF2_EvtReaderCallbacks_SetThreadTeamEndCallback()

Since

> Version 1.2

C.83 ThreadAcquireLock

A ThreadAcquireLock record marks that a thread acquires a lock.

Attributes

OTF2_↩ Location↩ Ref	location	The location where this event happened.
OTF2_↩ Time↩ Stamp	timestamp	The time when this event happened.
OTF2_↩ Paradigm	model	The threading paradigm this event took place.
uint32_t	lockID	ID of the lock.
uint32_t	acquisitionOrder	A monotonically increasing number to determine the order of lock acquisitions (with unsynchronized clocks this is otherwise not possible). Corresponding acquire-release events have same number.

See also

> OTF2_EvtWriter_ThreadAcquireLock()
> OTF2_GlobalEvtReaderCallbacks_SetThreadAcquireLockCallback()
> OTF2_EvtReaderCallbacks_SetThreadAcquireLockCallback()

Since

> Version 1.2

C.84 ThreadReleaseLock

A ThreadReleaseLock record marks that a thread releases a lock.

Attributes

OTF2_↩ Location↩ Ref	location		The location where this event happened.
OTF2_↩ Time↩ Stamp	timestamp		The time when this event happened.
OTF2_↩ Paradigm	model		The threading paradigm this event took place.
uint32_t	lockID		ID of the lock.
uint32_t	acquisitionOrder		A monotonically increasing number to determine the order of lock acquisitions (with unsynchronized clocks this is otherwise not possible). Corresponding acquire-release events have same number.

See also

> OTF2_EvtWriter_ThreadReleaseLock()
> OTF2_GlobalEvtReaderCallbacks_SetThreadReleaseLockCallback()
> OTF2_EvtReaderCallbacks_SetThreadReleaseLockCallback()

Since

> Version 1.2

C.85 ThreadTaskCreate

A ThreadTaskCreate record marks that a task in was/will be created and will be processed by the specified thread team.

Attributes

OTF2_↩ Location↩ Ref	location		The location where this event happened.
OTF2_↩ Time↩ Stamp	timestamp		The time when this event happened.
OTF2_↩ CommRef	threadTeam		Thread team References a *Comm* definition and will be mapped to the global definition if a mapping table of type *OTF2_MAPPING_COMM* is available.
uint32_t	creatingThread		Creating thread of this task.
uint32_t	generation↩ Number		Thread-private generation number of task's creating thread.

See also

> OTF2_EvtWriter_ThreadTaskCreate()
> OTF2_GlobalEvtReaderCallbacks_SetThreadTaskCreateCallback()
> OTF2_EvtReaderCallbacks_SetThreadTaskCreateCallback()

Since

> Version 1.2

C.86 ThreadTaskSwitch

A ThreadTaskSwitch record indicates that the execution of the current task will be suspended and another task starts/restarts its execution. Please note that this may change the current call stack of the executing location.

Attributes

OTF2_↩ Location↩ Ref	location	The location where this event happened.
OTF2_↩ Time↩ Stamp	timestamp	The time when this event happened.
OTF2_↩ CommRef	threadTeam	Thread team References a *Comm* definition and will be mapped to the global definition if a mapping table of type *OTF2_MAPPING_COMM* is available.
uint32_t	creatingThread	Creating thread of this task.
uint32_t	generation↩ Number	Thread-private generation number of task's creating thread.

See also

> OTF2_EvtWriter_ThreadTaskSwitch()
> OTF2_GlobalEvtReaderCallbacks_SetThreadTaskSwitchCallback()
> OTF2_EvtReaderCallbacks_SetThreadTaskSwitchCallback()

Since

> Version 1.2

C.87 ThreadTaskComplete

A ThreadTaskComplete record indicates that the execution of an OpenMP task has finished.

Attributes

OTF2_↩ Location↩ Ref	location	The location where this event happened.
OTF2_↩ Time↩ Stamp	timestamp	The time when this event happened.
OTF2_↩ CommRef	threadTeam	Thread team References a *Comm* definition and will be mapped to the global definition if a mapping table of type *OTF2_MAPPING_COMM* is available.
uint32_t	creatingThread	Creating thread of this task.
uint32_t	generation↩ Number	Thread-private generation number of task's creating thread.

See also

> OTF2_EvtWriter_ThreadTaskComplete()
> OTF2_GlobalEvtReaderCallbacks_SetThreadTaskCompleteCallback()
> OTF2_EvtReaderCallbacks_SetThreadTaskCompleteCallback()

Since

> Version 1.2

C.88 ThreadCreate

The location created successfully a new thread.

Attributes

OTF2_↩Location↩Ref	location	The location where this event happened.
OTF2_↩Time↩Stamp	timestamp	The time when this event happened.
OTF2_↩CommRef	thread↩Contingent	The thread contingent. References a *Comm* definition and will be mapped to the global definition if a mapping table of type *OTF2_MAPPING_COMM* is available.
uint64_t	sequenceCount	A `threadContingent` unique number. The corresponding *ThreadBegin* event does have the same number.

See also

> OTF2_EvtWriter_ThreadCreate()
> OTF2_GlobalEvtReaderCallbacks_SetThreadCreateCallback()
> OTF2_EvtReaderCallbacks_SetThreadCreateCallback()

Since

> Version 1.3

C.89 ThreadBegin

Marks the begin of a thread created by another thread.

Attributes

OTF2_↩Location↩Ref	location	The location where this event happened.
OTF2_↩Time↩Stamp	timestamp	The time when this event happened.
OTF2_↩CommRef	thread↩Contingent	The thread contingent. References a *Comm* definition and will be mapped to the global definition if a mapping table of type *OTF2_MAPPING_COMM* is available.
uint64_t	sequenceCount	A `threadContingent` unique number. The corresponding *ThreadCreate* event does have the same number.

See also

> OTF2_EvtWriter_ThreadBegin()
> OTF2_GlobalEvtReaderCallbacks_SetThreadBeginCallback()
> OTF2_EvtReaderCallbacks_SetThreadBeginCallback()

Since

> Version 1.3

C.90 ThreadWait

The location waits for the completion of another thread.

Attributes

OTF2_↩ Location↩ Ref	location	The location where this event happened.
OTF2_↩ Time↩ Stamp	timestamp	The time when this event happened.
OTF2_↩ CommRef	thread↩ Contingent	The thread contingent. References a *Comm* definition and will be mapped to the global definition if a mapping table of type *OTF2_MAPPING_COMM* is available.
uint64_t	sequenceCount	A `threadContingent` unique number. The corresponding *ThreadEnd* event does have the same number.

See also

> OTF2_EvtWriter_ThreadWait()
> OTF2_GlobalEvtReaderCallbacks_SetThreadWaitCallback()
> OTF2_EvtReaderCallbacks_SetThreadWaitCallback()

Since

> Version 1.3

C.91 ThreadEnd

Marks the end of a thread.

Attributes

OTF2_↩ Location↩ Ref	location	The location where this event happened.
OTF2_↩ Time↩ Stamp	timestamp	The time when this event happened.
OTF2_↩ CommRef	thread↩ Contingent	The thread contingent. References a *Comm* definition and will be mapped to the global definition if a mapping table of type *OTF2_MAPPING_COMM* is available.
uint64_t	sequenceCount	A `threadContingent` unique number. The corresponding *ThreadWait* event does have the same number. *OTF2_UNDEFINED_UINT64* in case no corresponding *ThreadWait* event exists.

See also

> OTF2_EvtWriter_ThreadEnd()
> OTF2_GlobalEvtReaderCallbacks_SetThreadEndCallback()
> OTF2_EvtReaderCallbacks_SetThreadEndCallback()

Since

> Version 1.3

C.92 CallingContextEnter

The thread entered an instrumented region, represented by the referenced *CallingContext*. In contrast to the *Enter* event, it gives the full calling context through the *CallingContext* tree.

Events based on the *CallingContext* definition are mutually exclusive with the *Enter*/*Leave* events in a trace.

If no callback for this event is set but a callback for *Enter* events is defined, the reader will automatically generate an *Enter* callback call for the *Region* referenced by the *CallingContext* attribute of this event. Note that this emulation does **not** re-create the full calling context! It only re-creates the event order for instrumented regions.

Attributes

OTF2_↩ Location↩ Ref	location	The location where this event happened.
OTF2_↩ Time↩ Stamp	timestamp	The time when this event happened.
OTF2_↩ Calling↩ ContextRef	callingContext	The entered region as referenced by the *CallingContext* definition. References a *CallingContext* definition and will be mapped to the global definition if a mapping table of type *OTF2_MAPPING_CALLING_CONTEXT* is available.
uint32_t	unwindDistance	The unwindDistance for this `callingContext`. See the description in *CallingContext*.

See also

> OTF2_EvtWriter_CallingContextEnter()
> OTF2_GlobalEvtReaderCallbacks_SetCallingContextEnterCallback()
> OTF2_EvtReaderCallbacks_SetCallingContextEnterCallback()

Since

> Version 2.0

C.93 CallingContextLeave

The thread left an instrumented region, represented by the referenced *CallingContext*. In contrast to the *Leave* event, it gives the full calling context through the *CallingContext* tree.

The unwind distance for this *CallingContext* is defined to be 1. Because it must be assumed that the instrumented region made progress since the previous *CallingContext* event.

Events based on the *CallingContext* definition are mutually exclusive with the *Enter*/*Leave* events in a trace.

The parent of the *CallingContext* must be used as the previous calling context for the next event.

If no callback for this event is set but a callback for *Leave* events is defined, the reader will automatically generate an *Leave* callback call for the *Region* referenced by the *CallingContext* attribute of this event. Note that this emulation does **not** re-create the full calling context! It only re-creates the event order for instrumented regions.

Attributes

OTF2_↩ Location↩ Ref	location	The location where this event happened.

OTF2_↩ Time↩ Stamp	timestamp	The time when this event happened.
OTF2_↩ Calling↩ ContextRef	callingContext	The left region as referenced by the *CallingContext* definition. References a *CallingContext* definition and will be mapped to the global definition if a mapping table of type *OTF2_MAPPING_CALLING_CONTEXT* is available.

See also

> OTF2_EvtWriter_CallingContextLeave()
> OTF2_GlobalEvtReaderCallbacks_SetCallingContextLeaveCallback()
> OTF2_EvtReaderCallbacks_SetCallingContextLeaveCallback()

Since

> Version 2.0

C.94 CallingContextSample

The thread was interrupted to take a sample of its current state (region and source code location).

Events based on the *CallingContext* definition are mutually exclusive with the *Enter*/*Leave* events in a trace.

Attributes

OTF2_↩ Location↩ Ref	location	The location where this event happened.
OTF2_↩ Time↩ Stamp	timestamp	The time when this event happened.
OTF2_↩ Calling↩ ContextRef	callingContext	Describes the calling context of the thread when it was interrupted. References a *CallingContext* definition and will be mapped to the global definition if a mapping table of type *OTF2_MAPPING_CALLING_CONTEXT* is available.
uint32_t	unwindDistance	The unwindDistance for this `callingContext`. See the description in *CallingContext*.
OTF2_↩ Interrupt↩ Generator↩ Ref	interrupt↩ Generator	References a *InterruptGenerator* definition and will be mapped to the global definition if a mapping table of type *OTF2_MAPPING_INTERRUPT_GENE↩ RATOR* is available.

See also

> OTF2_EvtWriter_CallingContextSample()
> OTF2_GlobalEvtReaderCallbacks_SetCallingContextSampleCallback()
> OTF2_EvtReaderCallbacks_SetCallingContextSampleCallback()

Since

> Version 1.5

C.95 Usage of OTF2 tools

Modules

- OTF2 config tool
- OTF2 print tool
- OTF2 snapshots tool
- OTF2 marker tool
- OTF2 estimator tool

C.95.1 Detailed Description

C.96   OTF2 config tool

A call to otf2-config has the following syntax:

```
Usage: otf2-config [OPTION]... COMMAND

Commands:
  --cflags     prints additional compiler flags. They already contain
               the include flags
  --cppflags   prints the include flags for the OTF2 headers
  --libs       prints the required libraries for linking
  --ldflags    prints the required linker flags
  --cc         prints the C compiler name
  --features <FEATURE-CATEGORY>
               prints available features selected by <FEATURE-CATEGORY>.
               Available feature categories:
                * substrates
                * compressions
                * targets
  --help       prints this usage information

  --version    prints the version number of the OTF2 package and
  --otf2-revision
               prints the revision number of the OTF2 package
  --common-revision
               prints the revision number of the common package
  --interface-version
               prints the interface version number

Options:
  --target <TARGET>
               displays the requested information for the given <TARGET>.
               On non-cross compiling systems, the 'backend' target is ignored.
  --backend    equivalent to '--target backend' (deprecated)
  --cuda       specifies that the required flags are for the CUDA compiler
               nvcc (deprecated)
```

C.97   OTF2 print tool

A call to oft2-print has the following syntax:

```
Usage: otf2-print [OPTION]... [--] ANCHORFILE
Print selected content of the OTF2 archive specified by ANCHORFILE.

Options:
  -A, --show-all          print all output including definitions and anchor
                          file
  -G, --show-global-defs  print all global definitions
  -I, --show-info         print information from the anchor file
  -T, --show-thumbnails   print the headers from all thumbnails
  -M, --show-mappings     print mappings to global definitions
  -C, --show-clock-offsets
                          print clock offsets to global timer
      --timestamps=<FORMAT>
                          format of the timestamps. <FORMAT> is one of:
                           plain -  no formatting is done (default)
                           offset - timestamps are relative to the global offset
                                    (taken form the ClockProperties definition)
  -L, --location <LID>    limit output to location <LID>
  -s, --step <N>          step through output by steps of <N> events
      --time <MIN> <MAX>  limit output to events within time interval
      --system-tree       output system tree to dot-file
      --silent            only validate trace and do not print any events
      --unwind-calling-context
                          unwind the calling context for each calling context
                          event. Each calling context node is prefixed depending
                          on the unwind distance of the current event:
                           '?' - unwind distance is undefined
                           '+' - region was newly entered
                           '*' - region was not left
                           ' ' - region did not made any progress
  -d, --debug             turn on debug mode
  -V, --version           print version information
  -h, --help              print this help information
```

C.98   OTF2 snapshots tool

A call to oft2-snapshots has the following syntax:

```
Usage: otf2-snapshots [OPTION]... ANCHORFILE
Append snapshots to existing otf2 traces at given 'break' timestamps.

Options:
  -n, --number <BREAKS> Number of breaks (distributed regularly)
                        if -p and -t are not set, the default for -n is 10
                        breaks.
  -p <TICK_RATE>        Create break every <TICK_RATE> ticks
                        if both, -n and -p are specified the one producing
                        more breaks wins.
      --progress        Brief mode, print progress information.
      --verbose         Verbose mode, print break timestamps, i.e. snapshot
                        informations to stdout.
  -V, --version         Print version information.
  -h, --help            Print this help information.
```

C.99 OTF2 marker tool

A call to oft2-marker has the following syntax:

```
Usage: otf2-marker [OPTION] [ARGUMENTS]... ANCHORFILE
Read or edit a marker file.

Options:
                      Print all markers sorted by group.
      --def <GROUP> [<CATEGORY>]
                      Print all marker definitions of group <GROUP> or of
                      category <CATEGORY> from group <GROUP>.
      --defs-only     Print only marker definitions.
      --add-def <GROUP> <CATEGORY> <SEVERITY>
                      Add a new marker definition.
      --add <GROUP> <CATEGORY> <TIME> <SCOPE> <TEXT>
                      Add a marker to an existing definition.
      --remove-def <GROUP> [<CATEGORY>]
                      Remove all marker classes of group <GROUP> or only the
                      category <CATEGORY> of group <GROUP>; and all according
                      markers.
      --clear-def <GROUP> [<CATEGORY>]
                      Remove all markers of group <GROUP> or only of category
                      <CATEGORY> of group <GROUP>.
      --reset         Reset all marker.
  -V, --version       Print version information.
  -h, --help          Print this help information.

Argument descriptions:
  <GROUP>, <CATEGORY>, <TEXT>
                      Arbitrary strings.
  <SEVERITY>          One of:
                       * NONE
                       * LOW
                       * MEDIUM
                       * HIGH
  <TIME>              One of the following formats:
                       * <TIMESTAMP>
                         A valid timestamp inside the trace range
                         'global offset' and 'global offset' + 'trace
                         length'.
                       * <TIMESTAMP>+<DURATION>
                         <TIMESTAMP> and <TIMESTAMP> + <DURATION> must be valid
                         timestamps inside the trace range 'global
                         offset' and 'global offset' + 'trace length'.
                       * <TIMESTAMP-START>-<TIMESTAMP-END>
                         Two valid timestamps inside the trace range 'global
                         offset' and 'global offset' + 'trace length', with
                         <TIMESTAMP-START> <= <TIMESTAMP-END>.
                      See the CLOCK_PROPERTIES definition with the help
                      of the 'otf2-print -G' tool.
  <SCOPE>[:<SCOPE-REF>]
                       The <SCOPE> must be one of:
                       * GLOBAL
                       * LOCATION:<LOCATION-REF>
                       * LOCATION_GROUP:<LOCATION-GROUP-REF>
                       * SYSTEM_TREE_NODE:<SYSTEM-TREE-NODE-REF>
                       * GROUP:<GROUP-REF>
                       * COMM:<COMMUNICATOR-REF>
                      <SCOPE-REF> must be a valid definition reference of
                      the specified scope. Use 'otf2-print -G' for a list of
                      defined references.
                      There is no <SCOPE-REF> for <SCOPE> 'GLOBAL'.
                      For a scope 'GROUP' the type of the referenced
                      group must be 'OTF2_GROUP_TYPE_LOCATIONS' or
                      'OTF2_GROUP_TYPE_COMM_LOCATIONS'.
```

C.100   OTF2 estimator tool

A call to oft2-estimator has the following syntax:

```
Usage: otf2-estimator [OPTION]...
This tool estimates the size of OTF2 events.
It will open a prompt to type in commands.

Options:
  -V, --version       Print version information.
  -h, --help          Print this help information.

Commands:
    list definitions          Lists all known definition names.
    list events               Lists all known event names.
    list types                Lists all known type names.
    set <DEFINITION> <NUMBER>  Specifies the number of definitions of a
                              type of defintions.
    get DefChunkSize          Prints the estimated definition chunk size.
    get Timestamp             Prints the size of a timestamp.
    get AttributeList [TYPES...] Prints the estimated size for an attribute
                              list with the given number of entries and
                              types.
    get <EVENT> [ARGS...]     Prints the estimated size of records for
                              <EVENT>.
    exit                      Exits the tool.
```

This tool provides a command line interface to the estimator API of the OTF2
library. It is based on a stream based protocol. Commands are send to the
standard input stream of the program and the result is written to the standard
output stream of the program. All definition and event names are in there
canonical CamelCase form. Numbers are printed in decimal. The TYPES are in
ALL_CAPS. See the output of the appropriate 'list' commands. Arguments are
separated with an arbitrary number of white space. The 'get' commands are using
everything after the first white space separator verbatim as a key, which is
then printed in the output line and appended with the estimated size.

Here is a simple example. We have at most 4 region definitions and one metric
definition. We want to know the size of a timestamp, enter, and leave event,
and a metric event with 4 values.

```
cat <<EOC | otf2-estimator
set Region 4
set Metric 1
get Timestamp
get Enter
get Leave
get Metric  4
exit
EOC
Timestamp 9
Enter 3
Leave 3
Metric  4 44
```

C.101 List of all marker records

C.102 *OTF2_MarkerRef* DefMarker

Group markers by name and severity.

Attributes

const char∗	markerGroup	Group name, e.g., "MUST", ...
const char∗	markerCategory	Marker category, e.g., "Argument type error", ...
OTF2_↩ Marker↩ Severity	severity	The severity for these markers.

See also

> OTF2_MarkerWriter_WriteDefMarker()
> OTF2_MarkerReaderCallbacks_SetDefMarkerCallback()

Since

> Version 1.2

C.103 Marker

A user marker instance, with implied time stamp.

Attributes

OTF2_↩ Time↩ Stamp	timestamp	The time when this marker happened.
OTF2_↩ Time↩ Stamp	duration	A possible duration of this marker. May be 0.
OTF2_↩ MarkerRef	marker	Groups this marker by name and severity. References a *DefMarker* definition.
OTF2_↩ Marker↩ Scope	scope	The type of scope of this marker instance.
uint64_t	scopeRef	The scope instance of this marker. Depends on `scope`.
const char∗	text	A textual description for this marker.

See also

> OTF2_MarkerWriter_WriteMarker()
> OTF2_MarkerReaderCallbacks_SetMarkerCallback()

Since

> Version 1.2

C.104   List of all snapshot records

C.105   SnapshotStart

This record marks the start of a snapshot.

A snapshot consists of a timestamp and a set of snapshot records. All these snapshot records have the same snapshot time. A snapshot starts with one *SnapshotStart* record and closes with one *SnapshotEnd* record. All snapshot records inbetween are ordered by the `origEventTime`, which are also less than the snapshot timestamp. Ie. The timestamp of the next event read from the event stream is greater or equal to the snapshot time.

Attributes

OTF2_↩ Location↩ Ref	location	The location of the snapshot.
OTF2_↩ Time↩ Stamp	timestamp	The snapshot time of this record.
uint64_t	numberOf↩ Records	Number of snapshot event records in this snapshot. Excluding the *Snapshot↩ End* record.

See also

> OTF2_SnapWriter_SnapshotStart()
> OTF2_GlobalSnapReaderCallbacks_SetSnapshotStartCallback()
> OTF2_SnapReaderCallbacks_SetSnapshotStartCallback()

Since

> Version 1.2

C.106   SnapshotEnd

This record marks the end of a snapshot. It contains the position to continue reading in the event trace for this location. Use *OTF2_EvtReader_Seek* with `contReadPos` as the position.

Attributes

OTF2_↩ Location↩ Ref	location	The location of the snapshot.
OTF2_↩ Time↩ Stamp	timestamp	The snapshot time of this record.
uint64_t	contReadPos	Position to continue reading in the event trace.

See also

> OTF2_SnapWriter_SnapshotEnd()
> OTF2_GlobalSnapReaderCallbacks_SetSnapshotEndCallback()
> OTF2_SnapReaderCallbacks_SetSnapshotEndCallback()

Since

> Version 1.2

C.107   MeasurementOnOffSnap

The last occurrence of a *MeasurementOnOff* event of this location, if any.

Attributes

OTF2_↩ Location↩ Ref	location	The location of the snapshot.
OTF2_↩ Time↩ Stamp	timestamp	The snapshot time of this record.
OTF2_↩ Time↩ Stamp	origEventTime	The original time this event happened.
OTF2_↩ Measurement↩ Mode	measurement↩ Mode	Is the measurement turned on (*OTF2_MEASUREMENT_ON*) or off (*OTF2↩ _MEASUREMENT_OFF*)?

See also

[*MeasurementOnOff*](#) event
OTF2_SnapWriter_MeasurementOnOff()
OTF2_GlobalSnapReaderCallbacks_SetMeasurementOnOffCallback()
OTF2_SnapReaderCallbacks_SetMeasurementOnOffCallback()

Since

Version 1.2

C.108   EnterSnap

This record exists for each *Enter* event where the corresponding *Leave* event did not occur before the snapshot.

Attributes

OTF2_↩ Location↩ Ref	location	The location of the snapshot.
OTF2_↩ Time↩ Stamp	timestamp	The snapshot time of this record.
OTF2_↩ Time↩ Stamp	origEventTime	The original time this event happened.
OTF2_↩ RegionRef	region	Needs to be defined in a definition record References a *Region* definition and will be mapped to the global definition if a mapping table of type *OTF2_MA↩ PPING_REGION* is available.

See also

[*Enter*](#) event
OTF2_SnapWriter_Enter()
OTF2_GlobalSnapReaderCallbacks_SetEnterCallback()
OTF2_SnapReaderCallbacks_SetEnterCallback()

Since

Version 1.2

C.109 MpiSendSnap

This record exists for each *MpiSend* event where the matching receive message event did not occur on the remote location before the snapshot. This could either be a *MpiRecv* or a *MpiIrecv* event. Note that it may so, that a previous *MpiIsend* with the same envelope than this one is neither completed not canceled yet, thus the matching receive may already occurred, but the matching couldn't be done yet.

Attributes

OTF2_↩ Location↩ Ref	location	The location of the snapshot.
OTF2_↩ Time↩ Stamp	timestamp	The snapshot time of this record.
OTF2_↩ Time↩ Stamp	origEventTime	The original time this event happened.
uint32_t	receiver	MPI rank of receiver in `communicator`.
OTF2_↩ CommRef	communicator	Communicator ID. References a *Comm* definition and will be mapped to the global definition if a mapping table of type *OTF2_MAPPING_COMM* is available.
uint32_t	msgTag	Message tag
uint64_t	msgLength	Message length

See also

> *MpiSend* event
> OTF2_SnapWriter_MpiSend()
> OTF2_GlobalSnapReaderCallbacks_SetMpiSendCallback()
> OTF2_SnapReaderCallbacks_SetMpiSendCallback()

Since

> Version 1.2

C.110 MpiIsendSnap

This record exists for each *MpiIsend* event where a corresponding *MpiIsendComplete* or *MpiRequestCancelled* event did not occur on this location before the snapshot. Or the corresponding *MpiIsendComplete* did occurred (the *MpiIsendCompleteSnap* record exists in the snapshot) but the matching receive message event did not occur on the remote location before the snapshot. (This could either be an *MpiRecv* or a *MpiIrecv* event.)

Attributes

OTF2_↩ Location↩ Ref	location	The location of the snapshot.
OTF2_↩ Time↩ Stamp	timestamp	The snapshot time of this record.

OTF2_↩ Time↩ Stamp	origEventTime	The original time this event happened.
uint32_t	receiver	MPI rank of receiver in `communicator`.
OTF2_↩ CommRef	communicator	Communicator ID. References a *Comm* definition and will be mapped to the global definition if a mapping table of type *OTF2_MAPPING_COMM* is available.
uint32_t	msgTag	Message tag
uint64_t	msgLength	Message length
uint64_t	requestID	ID of the related request

See also

> *MpiIsend* event
> OTF2_SnapWriter_MpiIsend()
> OTF2_GlobalSnapReaderCallbacks_SetMpiIsendCallback()
> OTF2_SnapReaderCallbacks_SetMpiIsendCallback()

Since

> Version 1.2

C.111   MpiIsendCompleteSnap

This record exists for each *MpiIsend* event where the corresponding *MpiIsendComplete* event occurred, but where the matching receive message event did not occur on the remote location before the snapshot. (This could either be a *MpiRecv* or a *MpiIrecv* event.) .

Attributes

OTF2_↩ Location↩ Ref	location	The location of the snapshot.
OTF2_↩ Time↩ Stamp	timestamp	The snapshot time of this record.
OTF2_↩ Time↩ Stamp	origEventTime	The original time this event happened.
uint64_t	requestID	ID of the related request

See also

> *MpiIsendComplete* event
> OTF2_SnapWriter_MpiIsendComplete()
> OTF2_GlobalSnapReaderCallbacks_SetMpiIsendCompleteCallback()
> OTF2_SnapReaderCallbacks_SetMpiIsendCompleteCallback()

Since

> Version 1.2

C.112   MpiRecvSnap

This record exists for each *MpiRecv* event where the matching send message event did not occur on the remote location before the snapshot. This could either be a *MpiSend* or a *MpiIsendComplete* event. Or a *MpiIrecvRequest*

occurred before this event but the corresponding *MpiIrecv* event did not occurred before this snapshot. In this case the message matching couldn't performed yet, because the envelope of the ongoing *MpiIrecvRequest* is not yet known.

Attributes

OTF2_↩ *Location↩* *Ref*	location	The location of the snapshot.
OTF2_↩ *Time↩* *Stamp*	timestamp	The snapshot time of this record.
OTF2_↩ *Time↩* *Stamp*	origEventTime	The original time this event happened.
uint32_t	sender	MPI rank of sender in `communicator`.
OTF2_↩ *CommRef*	communicator	Communicator ID. References a *Comm* definition and will be mapped to the global definition if a mapping table of type *OTF2_MAPPING_COMM* is available.
uint32_t	msgTag	Message tag
uint64_t	msgLength	Message length

See also

> *MpiRecv* event
> OTF2_SnapWriter_MpiRecv()
> OTF2_GlobalSnapReaderCallbacks_SetMpiRecvCallback()
> OTF2_SnapReaderCallbacks_SetMpiRecvCallback()

Since

> Version 1.2

C.113 MpiIrecvRequestSnap

This record exists for each *MpiIrecvRequest* event where an corresponding *MpiIrecv* or *MpiRequestCancelled* event did not occur on this location before the snapshot. Or the corresponding *MpiIrecv* did occurred (the *MpiIrecvSnap* record exists in the snapshot) but the matching receive message event did not occur on the remote location before the snapshot. This could either be an *MpiRecv* or a *MpiIrecv* event.

Attributes

OTF2_↩ *Location↩* *Ref*	location	The location of the snapshot.
OTF2_↩ *Time↩* *Stamp*	timestamp	The snapshot time of this record.
OTF2_↩ *Time↩* *Stamp*	origEventTime	The original time this event happened.

uint64_t	requestID	ID of the requested receive

See also

> [*MpiIrecvRequest*](#) event
> OTF2_SnapWriter_MpiIrecvRequest()
> OTF2_GlobalSnapReaderCallbacks_SetMpiIrecvRequestCallback()
> OTF2_SnapReaderCallbacks_SetMpiIrecvRequestCallback()

Since

> Version 1.2

C.114 MpiIrecvSnap

This record exists for each [*MpiIrecv*](#) event where the matching send message event did not occur on the remote location before the snapshot. This could either be a [*MpiSend*](#) or a [*MpiIsendComplete*](#) event. Or a [*MpiIrecvRequest*](#) occurred before this event but the corresponding [*MpiIrecv*](#) event did not occurred before this snapshot. In this case the message matching couldn't performed yet, because the envelope of the ongoing [*MpiIrecvRequest*](#) is not yet known.

Attributes

OTF2_↩ Location↩ Ref	location	The location of the snapshot.
OTF2_↩ Time↩ Stamp	timestamp	The snapshot time of this record.
OTF2_↩ Time↩ Stamp	origEventTime	The original time this event happened.
uint32_t	sender	MPI rank of sender in `communicator`.
OTF2_↩ CommRef	communicator	Communicator ID. References a [*Comm*](#) definition and will be mapped to the global definition if a mapping table of type *OTF2_MAPPING_COMM* is available.
uint32_t	msgTag	Message tag
uint64_t	msgLength	Message length
uint64_t	requestID	ID of the related request

See also

> [*MpiIrecv*](#) event
> OTF2_SnapWriter_MpiIrecv()
> OTF2_GlobalSnapReaderCallbacks_SetMpiIrecvCallback()
> OTF2_SnapReaderCallbacks_SetMpiIrecvCallback()

Since

> Version 1.2

C.115 MpiCollectiveBeginSnap

Indicates that this location started a collective operation but not all of the participating locations completed the operation yet, including this location.

Attributes

OTF2_↩ Location↩ Ref	location	The location of the snapshot.
OTF2_↩ Time↩ Stamp	timestamp	The snapshot time of this record.
OTF2_↩ Time↩ Stamp	origEventTime	The original time this event happened.

See also

> *MpiCollectiveBegin* event
> OTF2_SnapWriter_MpiCollectiveBegin()
> OTF2_GlobalSnapReaderCallbacks_SetMpiCollectiveBeginCallback()
> OTF2_SnapReaderCallbacks_SetMpiCollectiveBeginCallback()

Since

> Version 1.2

C.116 MpiCollectiveEndSnap

Indicates that this location completed a collective operation locally but not all of the participating locations completed the operation yet. The corresponding *MpiCollectiveBeginSnap* record is still in the snapshot though.

Attributes

OTF2_↩ Location↩ Ref	location	The location of the snapshot.
OTF2_↩ Time↩ Stamp	timestamp	The snapshot time of this record.
OTF2_↩ Time↩ Stamp	origEventTime	The original time this event happened.
OTF2_↩ Collective↩ Op	collectiveOp	Determines which collective operation it is.
OTF2_↩ CommRef	communicator	Communicator References a *Comm* definition and will be mapped to the global definition if a mapping table of type *OTF2_MAPPING_COMM* is available.
uint32_t	root	MPI rank of root in `communicator`.
uint64_t	sizeSent	Size of the sent message.
uint64_t	sizeReceived	Size of the received message.

See also

> *MpiCollectiveEnd* event
> OTF2_SnapWriter_MpiCollectiveEnd()
> OTF2_GlobalSnapReaderCallbacks_SetMpiCollectiveEndCallback()
> OTF2_SnapReaderCallbacks_SetMpiCollectiveEndCallback()

Since

> Version 1.2

C.117   OmpForkSnap

This record exists for each *OmpFork* event where the corresponding *OmpJoin* did not occurred before this snapshot.

Attributes

OTF2_↩ Location↩ Ref	location	The location of the snapshot.
OTF2_↩ Time↩ Stamp	timestamp	The snapshot time of this record.
OTF2_↩ Time↩ Stamp	origEventTime	The original time this event happened.
uint32_t	numberOf↩ Requested↩ Threads	Requested size of the team.

See also

> *OmpFork* event
> OTF2_SnapWriter_OmpFork()
> OTF2_GlobalSnapReaderCallbacks_SetOmpForkCallback()
> OTF2_SnapReaderCallbacks_SetOmpForkCallback()

Since

> Version 1.2

C.118   OmpAcquireLockSnap

This record exists for each *OmpAcquireLock* event where the corresponding *OmpReleaseLock* did not occurred before this snapshot yet.

Attributes

OTF2_↩ Location↩ Ref	location	The location of the snapshot.
OTF2_↩ Time↩ Stamp	timestamp	The snapshot time of this record.
OTF2_↩ Time↩ Stamp	origEventTime	The original time this event happened.
uint32_t	lockID	ID of the lock.
uint32_t	acquisitionOrder	A monotonically increasing number to determine the order of lock acquisitions (with unsynchronized clocks this is otherwise not possible). Corresponding acquire-release events have same number.

See also

> *OmpAcquireLock* event
> OTF2_SnapWriter_OmpAcquireLock()
> OTF2_GlobalSnapReaderCallbacks_SetOmpAcquireLockCallback()
> OTF2_SnapReaderCallbacks_SetOmpAcquireLockCallback()

Since

Version 1.2

C.119 OmpTaskCreateSnap

This record exists for each *OmpTaskCreate* event where the corresponding *OmpTaskComplete* event did not occurred before this snapshot. Neither on this location nor on any other location in the current thread team.

Attributes

OTF2_↩ Location↩ Ref	location	The location of the snapshot.
OTF2_ ↩ Time↩ Stamp	timestamp	The snapshot time of this record.
OTF2_ ↩ Time↩ Stamp	origEventTime	The original time this event happened.
uint64_t	taskID	Identifier of the newly created task instance.

See also

OmpTaskCreate event
OTF2_SnapWriter_OmpTaskCreate()
OTF2_GlobalSnapReaderCallbacks_SetOmpTaskCreateCallback()
OTF2_SnapReaderCallbacks_SetOmpTaskCreateCallback()

Since

Version 1.2

C.120 OmpTaskSwitchSnap

This record exists for each *OmpTaskSwitch* event where the corresponding *OmpTaskComplete* event did not occurred before this snapshot. Neither on this location nor on any other location in the current thread team.

Attributes

OTF2_ ↩ Location↩ Ref	location	The location of the snapshot.
OTF2_ ↩ Time↩ Stamp	timestamp	The snapshot time of this record.
OTF2_ ↩ Time↩ Stamp	origEventTime	The original time this event happened.

uint64_t	taskID	Identifier of the now active task instance.

See also

> [OmpTaskSwitch](#) event
> OTF2_SnapWriter_OmpTaskSwitch()
> OTF2_GlobalSnapReaderCallbacks_SetOmpTaskSwitchCallback()
> OTF2_SnapReaderCallbacks_SetOmpTaskSwitchCallback()

Since

> Version 1.2

C.121   MetricSnap

This record exists for each referenced metric class or metric instance event this location recorded metrics before and provides the last known recorded metric values.

As an exception for metric classes where the metric mode denotes an *OTF2_METRIC_VALUE_RELATIVE* mode the value indicates the accumulation of all previous metric values recorded.

Attributes

OTF2_↩ Location↩ Ref	location	The location of the snapshot.
OTF2_↩ Time↩ Stamp	timestamp	The snapshot time of this record.
OTF2_↩ Time↩ Stamp	origEventTime	The original time this event happened.
OTF2_↩ MetricRef	metric	Could be a metric class or a metric instance. References a [MetricClass](#), or a [MetricInstance](#) definition and will be mapped to the global definition if a mapping table of type *OTF2_MAPPING_METRIC* is available.
uint8_t	numberOf↩ Metrics	Number of metrics with in the set.
OTF2_↩ Type	typeIDs [numberOf↩ Metrics]	List of metric types. These types must match that of the corresponding [MetricMember](#) definitions.
OTF2_↩ Metric↩ Value	metricValues [numberOf↩ Metrics]	List of metric values.

See also

> [Metric](#) event
> OTF2_SnapWriter_Metric()
> OTF2_GlobalSnapReaderCallbacks_SetMetricCallback()
> OTF2_SnapReaderCallbacks_SetMetricCallback()

Since

> Version 1.2

C.122 ParameterStringSnap

This record must be included in the snapshot until the leave event for the enter event occurs which has the greatest timestamp less or equal the timestamp of this record.

Attributes

OTF2_↩ Location↩ Ref	location	The location of the snapshot.
OTF2_↩ Time↩ Stamp	timestamp	The snapshot time of this record.
OTF2_↩ Time↩ Stamp	origEventTime	The original time this event happened.
OTF2_↩ Parameter↩ Ref	parameter	Parameter ID. References a *Parameter* definition and will be mapped to the global definition if a mapping table of type *OTF2_MAPPING_PARAMETER* is available.
OTF2_↩ StringRef	string	Value: Handle of a string definition References a *String* definition and will be mapped to the global definition if a mapping table of type *OTF2_MAPPING↩ _STRING* is available.

See also

> *ParameterString* event
> OTF2_SnapWriter_ParameterString()
> OTF2_GlobalSnapReaderCallbacks_SetParameterStringCallback()
> OTF2_SnapReaderCallbacks_SetParameterStringCallback()

Since

> Version 1.2

C.123   ParameterIntSnap

This record must be included in the snapshot until the leave event for the enter event occurs which has the greatest timestamp less or equal the timestamp of this record.

Attributes

OTF2_↩ Location↩ Ref	location	The location of the snapshot.
OTF2_↩ Time↩ Stamp	timestamp	The snapshot time of this record.
OTF2_↩ Time↩ Stamp	origEventTime	The original time this event happened.
OTF2_↩ Parameter↩ Ref	parameter	Parameter ID. References a *Parameter* definition and will be mapped to the global definition if a mapping table of type *OTF2_MAPPING_PARAMETER* is available.
int64_t	value	Value of the recorded parameter.

See also

> *ParameterInt* event
> OTF2_SnapWriter_ParameterInt()
> OTF2_GlobalSnapReaderCallbacks_SetParameterIntCallback()
> OTF2_SnapReaderCallbacks_SetParameterIntCallback()

Since

> Version 1.2

C.124 ParameterUnsignedIntSnap

This record must be included in the snapshot until the leave event for the enter event occurs which has the greatest timestamp less or equal the timestamp of this record.

Attributes

OTF2_↩ Location↩ Ref	location	The location of the snapshot.
OTF2_↩ Time↩ Stamp	timestamp	The snapshot time of this record.
OTF2_↩ Time↩ Stamp	origEventTime	The original time this event happened.
OTF2_↩ Parameter↩ Ref	parameter	Parameter ID. References a *Parameter* definition and will be mapped to the global definition if a mapping table of type *OTF2_MAPPING_PARAMETER* is available.
uint64_t	value	Value of the recorded parameter.

See also

> *ParameterUnsignedInt* event
> OTF2_SnapWriter_ParameterUnsignedInt()
> OTF2_GlobalSnapReaderCallbacks_SetParameterUnsignedIntCallback()
> OTF2_SnapReaderCallbacks_SetParameterUnsignedIntCallback()

Since

> Version 1.2

Index