

Fast and Practical Single-Exponential Algorithms for Branchwidth

Taiki Kaneda ✉

Hokkaido University, Sapporo, Japan

Yasuaki Kobayashi ✉ 

Hokkaido University, Sapporo, Japan

Hisao Tamaki ✉ 

Meiji University, Kawasaki, Japan

Abstract

In this paper, we present exact exponential algorithms for computing branchwidth that are fast both in theory and in practice. The running times of these algorithms are single-exponential in the number of vertices. Our basic algorithm is based on a conceptually simple recurrence on vertex sets and computes the branchwidth of an n -vertex hypergraph in time $\mathcal{O}^*(4^n)$. This is the first single-exponential time algorithm for hypergraphs.

We have two algorithms tailored specifically for graphs. The first algorithm runs in time $\mathcal{O}(3.293^n)$, improving upon the previously best-known running time of $\mathcal{O}(3.4652^n)$ [Fomin-Mazoit-Todinca, DAM 2009]. Moreover, our computational experiment shows that it overwhelmingly outperforms state-of-the-art practical algorithms for computing branchwidth. The second algorithm is a candidate for a theoretical improvement: we conjecture that it runs in time $\mathcal{O}(c^n)$ for some constant c that is smaller than 3.293. In practice, it performs significantly better on some instances that are hard for the first algorithm.

2012 ACM Subject Classification Theory of computation → Design and analysis of algorithms → Parameterized complexity and exact algorithms

Keywords and phrases Branchwidth, Exact exponential algorithms, Hypergraphs

Digital Object Identifier 10.4230/LIPIcs.CVIT.2016.23

Funding *Yasuaki Kobayashi*: JSPS KAKENHI Grant numbers JP23K28034, JP24H00686, JP24H00697. *Hisao Tamaki*: JSPS KAKENHI Grant number JP24H00697.

1 Introduction

The *branchwidth* of a graph is a well-studied concept introduced in the seminal Graph Minors project by Robertson and Seymour [25] and plays an important role in the proof of the graph minor theorem. This graph parameter measures how close a graph is to a tree, and is known to be linearly related to *treewidth* [25], which serves a similar purpose in solving problems on graphs. Since the branchwidth of a graph can be easily generalized to hypergraphs, matroids, and symmetric submodular functions, due to this versatility, its mathematical properties and algorithmic aspects have been extensively studied in the literature [11, 14, 18, 21, 25].

Algorithms for computing the treewidth and branchwidth of a graph have been well studied in the context of exact algorithms. The main reason for this is that, given a decomposition of small width for a given graph, numerous optimization problems on graphs can be solved efficiently [1, 3, 7], with running time typically linear in the size of an input graph and exponential in these width parameters. This implies that it is crucial to exactly compute the treewidth or branchwidth of a graph. Given a graph G and an integer k , the problems of deciding whether the treewidth or branchwidth of G is at most k are known to be fixed-parameter tractable (FPT) parameterized by k , with the running time dependencies



© Taiki Kaneda, Yasuaki Kobayashi, and Hisao Tamaki;
licensed under Creative Commons License CC-BY 4.0

42nd Conference on Very Important Topics (CVIT 2016).

Editors: John Q. Open and Joan R. Access; Article No. 23; pp. 23:1–23:29

Leibniz International Proceedings in Informatics



LIPICs Schloss Dagstuhl – Leibniz-Zentrum für Informatik, Dagstuhl Publishing, Germany

linear in the number of vertices [4, 5]. However, since the dependence on k in these running times is non-negligibly large, exact exponential-time algorithms are often preferred in practice.

For computing treewidth, Bouchitté and Todinca [6] proposed a dynamic programming algorithm for computing treewidth based on potential maximal cliques, which leads to a running time bound essentially depending on the number of potential maximal cliques in an input graph. The current best running time bound is due to Fomin, Todinca, and Villanger [12] and is in $\mathcal{O}(1.7347^n)$, where n is the number of vertices in the input graph. Interestingly, the essential idea behind this algorithm can be leveraged to develop highly practical algorithms; specifically, a framework called positive-instance driven dynamic programming [27], introduced by one of the current authors, successfully computes the treewidth of moderate-sized graphs. Exact exponential-time algorithms are also known for branchwidth, including an $\mathcal{O}^*(2^m)$ -time algorithm¹ by Oum [24] and an $\mathcal{O}^*((2\sqrt{3})^n) \subset \mathcal{O}(3.4652^n)$ -time algorithm by Fomin, Mazoit, and Todinca [10], where m is the number of edges in the input graph. However, these algorithms either compute branchwidth values across all edge subsets or involve highly complex procedures; consequently, a straightforward implementation of these methods does not appear to be practical. In fact, the current state-of-the-art practical algorithms for branchwidth are Hicks' algorithm [16], which utilizes the notion of tangles, as well as the SAT-encoding approach proposed by Lodha, Ordyniak, and Szeider [23]. Nevertheless, as reported in [23], these existing approaches still cannot successfully compute the branchwidth of moderate-sized graphs on which Tamaki's algorithm can compute the treewidth exactly within a practical time limit.

In this paper, we aim to take a step forward in the practical aspects of branchwidth computation. We present practical algorithms for computing the branchwidth of a (hyper)graph. Our first algorithm is based on a relatively simple recurrence for computing branchwidth and runs in $\mathcal{O}^*(4^n)$ time. The basic idea of this algorithm is to evaluate a recurrence based on the (rooted) tree structure of an optimal branch-decomposition using dynamic programming, similar to the approach taken by Oum [24]. However, a major improvement is that our running time is single-exponential with respect to n , the number of vertices in the input graph. The technical key ingredient to achieving this improvement lies in showing a recurrence over vertex subsets rather than edge subsets. While this approach shares an underlying concept with the algorithm for computing linearwidth given by Kobayashi and Nakahata [20], proving its correctness for branch-decompositions requires non-trivial extensions. It is worth noting that this is the first algorithm for computing the branchwidth of hypergraphs that runs in time single-exponential in n ; the algorithm given by Fomin, Mazoit, and Todinca [10] seems to work only on graphs.

► **Theorem 1.** *The branchwidth of an n -vertex hypergraph can be computed in time $\mathcal{O}^*(4^n)$.*

Our second algorithm builds upon the recurrence of the first one to provide a faster algorithm specialized for graphs. This improves upon one of the best known theoretical running time bounds due to [10], proving the following theorem.

► **Theorem 2.** *The branchwidth of an n -vertex graph can be computed in time $\mathcal{O}(3.293^n)$.*

This improvement is achieved by building our recurrence on vertex subsets satisfying a certain connectivity condition, which we call *blocks*. While this block-based algorithm improves the running time as stated in the theorem, the recurrence itself becomes more involved, and its evaluation becomes non-trivial.

¹ The notation $\mathcal{O}^*$ hides a polynomial factor in the input size.

We also give an alternative to the algorithm stated in Theorem 2. Based on some partial analysis, we conjecture that it runs in time $\mathcal{O}(c^n)$ where c is a constant smaller than the one in Theorem 2. In practice, it performs significantly better on instances that are hard for the algorithm in Theorem 2.

Related work.

Although computing the branchwidth of a graph is known to be NP-hard [26] even when restricted to several specific graph classes [19], a highly notable result is that it can be computed in polynomial time for planar graphs [26]. This is in contrast to computing treewidth for planar graphs, whose computational complexity has been a long-standing open problem. Seymour and Thomas [26] showed that the branchwidth of a planar graph can be computed in time $\mathcal{O}(n^2)$. Their algorithm takes time $\mathcal{O}(n^4)$ to construct the corresponding branch-decomposition, which was later improved to $\mathcal{O}(n^3)$ by Gu and Tamaki [15]. The computation of branchwidth for planar graphs has also been extensively investigated from a practical perspective, enabling the exact computation of optimal branch-decompositions within a practical running time, even for large planar graphs [2, 16, 17].

2 Preliminaries

Let G be a hypergraph. The vertex set and edge set of G are denoted by $V(G)$ and $E(G)$, respectively. For $F \subseteq E(G)$, we define the set of vertices contained in some (hyper)edge of F as $V(F) = \bigcup_{e \in F} e$. For $X \subseteq V(G)$, the *boundary* of X , denoted by $\partial_G(X)$, is the set of vertices in X that have an incident hyperedge e with $e \cap (V(G) \setminus X) \neq \emptyset$. We can extend this definition for edge sets: For $F \subseteq E(G)$, the boundary of F , denoted by $\partial_G(F)$ is defined to be $V(F) \cap V(E(G) \setminus F)$. For $X \subseteq V(G)$, we define $E_G(X) = \{e \in E(G) : e \subseteq X\}$, and the subgraph of G induced by X is denoted by $G[X]$, i.e., $V(G[X]) = X$ and $E(G[X]) = E_G(X)$. We write $\text{clos}(F)$ to denote the set of edges in the subgraph induced by $V(F)$, that is, $\text{clos}(F) = E(V(F))$ for $F \subseteq E(G)$. An edge set $F \subseteq E(G)$ is *closed* if it satisfies $\text{clos}(F) = F$. In other words, F is closed if and only if there is a vertex set X such that $E(X) = F$. If G is a graph, the sets of open and closed neighbors of $X \subseteq V(G)$ are denoted by $N_G(X)$ and $N_G[X]$, respectively. When the hypergraph G is clear from the context, we may omit it from these notations.

Let T be a rooted binary tree. The set of leaves in T is denoted by $L(T)$. We particularly refer to the vertices of T as nodes to distinguish them from the vertices of G . For a node $p \in V(T)$, the subtree of T rooted at p is denoted by T_p . We denote by $T - T_p$ the rooted tree obtained from T by deleting all nodes in T_p . We say that T is *full* if all internal nodes have exactly two children.

A *branch-decomposition* of a hypergraph G is a pair consisting of a rooted full binary tree T and a bijection from the leaves of T to $E(G)$. Let $\mathcal{T} = (T, \varphi)$ be a branch-decomposition of G . We may refer to the nodes and edges of T as the nodes and edges of $\mathcal{T}$ as well. For a subtree T' of T , we write $\varphi(T')$ to denote the set of edges to which φ maps the leaves of T belonging to T' . For a node $p \in V(T)$, the *middle set* of p is defined as $\text{mid}_{\mathcal{T}}(p) = V(\varphi(T_p)) \cap V(\varphi(T - T_p))$, that is, the set of vertices in G , each of which has at least one incident edge in both $\varphi(T_p)$ and $\varphi(T - T_p)$. The *order* of a node p in $\mathcal{T}$ is defined as $|\text{mid}_{\mathcal{T}}(p)|$. The *width* of $\mathcal{T}$ is defined as the maximum order of a node in $\mathcal{T}$, and the *branchwidth* of G , denoted by $\text{bw}(G)$, is the minimum integer k such that G has a branch-decomposition of width at most k . A branch-decomposition can be defined for edge subsets: A *branch-decomposition* of $F \subseteq E(G)$ is a pair $\mathcal{T} = (T, \varphi)$, where T is a rooted full binary tree and φ is a bijection from the

leaves of T to F . For each node p of $\mathcal{T}$, the *lower edge set* of p in $\mathcal{T}$, denoted by $\mathcal{L}_{\mathcal{T}}(p)$, is defined as $\mathcal{L}_{\mathcal{T}}(p) = \varphi(T_p)$; the *upper edge set* of p in $\mathcal{T}$, denoted by $\mathcal{U}_{\mathcal{T}}(p)$, is defined as $\mathcal{U}_{\mathcal{T}}(p) = \varphi(T - T_p) \cup (E(G) \setminus F)$. Note that these definitions are asymmetric in the sense that the upper edge set contains all the edges outside F . The *middle set* of p in $\mathcal{T}$, denoted by $\text{mid}_{\mathcal{T}}(p)$, is defined as $\text{mid}_{\mathcal{T}}(p) = V(\mathcal{L}_{\mathcal{T}}(p)) \cap V(\mathcal{U}_{\mathcal{T}}(p))$. The order of a node, the width of $\mathcal{T}$, and the branchwidth of F of G are defined analogously. We denote the branchwidth of F of G by $\text{bw}_G(F)$. The notions of the upper set, the middle set, and the order of a node of a branch-decomposition depend on the hypergraph G under consideration. We, however, do not make an explicit reference to G when using those notions and related notation unless there is a fear of confusion. It is easy to see that $\text{bw}(G) = \text{bw}(E(G))$.

We use a relaxed version of branch-decompositions [25]. A pair $\mathcal{T} = (T, \varphi)$ is called a *relaxed branch-decomposition* of G if T is a rooted (not necessarily full) binary tree and φ is a *surjection* from $L(T)$ to $E(G)$, that is, there can be two distinct leaves ℓ and ℓ' with $\varphi(\ell) = \varphi(\ell')$. The order of a node (and hence the width of $\mathcal{T}$) is defined in an analogous way. For every graph G , the minimum width of a relaxed branch-decomposition of G is equal to $\text{bw}(G)$ [25]. In this paper, we simply refer to a relaxed branch-decomposition $\mathcal{T} = (T, \varphi)$ as a branch decomposition; $\mathcal{T}$ is *full* if T is a full binary tree and is *injective* if φ is an injection. The following is a straightforward generalization of standard observations on relaxed branch-decompositions.

► **Proposition 3.** *Let F be an edge set of a hypergraph G of branchwidth k . Then, there is an injective branch-decomposition of F of width k , there is a full branch-decomposition of F of width k , and there is a full and injective branch-decomposition of F of width k .*

In the subsequent sections, we will assume that the input hypergraph is connected, has no vertex belonging to at most one hyperedge, and has no two hyperedges such that one contains the other. It is easy to verify that the branchwidth of a hypergraph is equal to the maximum branchwidth of its connected components. The other two assumptions are justified by the following two easy propositions.

► **Proposition 4.** *Let G be a hypergraph and let v be a vertex that belongs to at most one hyperedge in G . Let G' be the hypergraph with $V(G') = V(G) \setminus \{v\}$ and $E(G') = \{e \setminus \{v\} : e \in E(G)\}$. Then, $\text{bw}(G) = \text{bw}(G')$.*

Proof. Let $\mathcal{T} = (T, \varphi)$ be an injective branch-decomposition of G and let $\mathcal{T}' = (T, \varphi')$ be a branch-decomposition of G' , where φ' maps each leaf ℓ of T to the edge $\varphi(\ell) \setminus \{v\}$. Clearly, the width of $\mathcal{T}'$ is at most the width of $\mathcal{T}$. From an injective branch-decomposition $\mathcal{T}'$ of G' , we can define a branch-decomposition $\mathcal{T}$ of G in the opposite way. As v does not appear in any middle set of a node in $\mathcal{T}$, the width of $\mathcal{T}$ is at most the width of $\mathcal{T}'$. ◀

► **Proposition 5.** *Let G be a hypergraph. Suppose that G has a hyperedge e and a distinct hyperedge e' with $e \subseteq e'$. Let G' be the graph obtained from G by deleting e . Then, $\text{bw}(G) = \max\{\text{bw}(G'), |e|\}$.*

Proof. Since G' is a sub-hypergraph of G , we have $\text{bw}(G') \leq \text{bw}(G)$. Moreover, for every branch-decomposition $\mathcal{T} = (T, \varphi)$, the middle set of a leaf node ℓ with $\varphi(\ell) = e$ contains all vertices in e . Thus, we have $|e| \leq \text{bw}(G)$.

Conversely, let $\mathcal{T}' = (T', \varphi')$ be an injective branch-decomposition of G' . Let ℓ' be a leaf of T' such that $\varphi'(\ell') = e'$ and let p be the parent of ℓ' . Then, we subdivide the edge between p and ℓ' with a new node q and add a new leaf ℓ as a child of q . We denote by T the tree obtained as above. We also extend the mapping φ' by mapping ℓ to e and denote the

extended mapping by φ . Then, $\mathcal{T} = (T, \varphi)$ is an injective branch-decomposition of G . As $e \subseteq e'$, the order of ℓ equals $|e|$, the order of q equals the order of p , and the order of every other node in $\mathcal{T}$ equals its order in $\mathcal{T}'$. Hence, $\text{bw}(G) \leq \max\{\text{bw}(G'), |e|\}$. $\blacktriangleleft$

3 An $\mathcal{O}^*(4^n)$ -time algorithm for hypergraphs

In this section, we develop a branchwidth algorithm for hypergraphs that runs in time $\mathcal{O}^*(4^n)$.

We assume the hypergraph G for which we compute the branchwidth is connected, every vertex of G belongs to at least two edges of G , and no edge of G is strictly contained in another edge of G . By Propositions 4 and 5, we can reduce the branchwidth computation of general hypergraphs to the branchwidth computation of hypergraphs that satisfy these conditions.

The following observations are crucial in reasoning about the branchwidth of edge sets.

► **Lemma 6.** *Let $\mathcal{T}$ be an injective branch-decomposition of an edge set of G and let p_1 and p_2 be two nodes of $\mathcal{T}$ that share a common parent. Let $L_i = \mathcal{L}_{\mathcal{T}}(p_i)$ for $i = 1, 2$. Then, $V(L_1) \cap V(L_2) = \partial(L_1) \cap \partial(L_2)$.*

Proof. Since $\mathcal{T}$ is injective, L_1 and L_2 are disjoint from each other. Let v be a vertex in $V(L_1) \cap V(L_2)$. Since v is incident to an edge in L_1 as well as to an edge in L_2 , it belongs to $\partial(L_1)$ and to $\partial(L_2)$. Therefore, $V(L_1) \cap V(L_2)$ is contained in $\partial(L_1) \cap \partial(L_2)$. The inclusion in the other direction is trivial as $\partial(L_i) \subseteq V(L_i)$ for $i = 1, 2$. $\blacktriangleleft$

Let $\mathcal{T} = (T, \varphi)$ be a branch-decomposition of an edge set of a hypergraph G and p a node of T . The *sub-branch-decomposition* of $\mathcal{T}$ at p is the branch-decomposition (T_p, φ_p) where T_p is the subtree of T rooted at p and φ_p is the restriction of φ to the leaves that belong to T_p .

► **Lemma 7.** *Let $\mathcal{T}$ be an injective branch-decomposition of an edge set of G and p a node of $\mathcal{T}$. Then, the width of the sub-branch-decomposition $\mathcal{T}_p$ of $\mathcal{T}$ at p is at most the width of $\mathcal{T}$.*

Proof. Let q be a node of $\mathcal{T}_p$. The lower sets of q in $\mathcal{T}_p$ and in $\mathcal{T}$ are identical. Since $\mathcal{T}$ is injective, the upper sets of q in $\mathcal{T}_p$ and in $\mathcal{T}$ are also identical. Therefore, the order of q in $\mathcal{T}_p$ is equal to its order in $\mathcal{T}$. $\blacktriangleleft$

► **Lemma 8.** *Let F_1 and F_2 be edge sets of G such that $F_1 \subseteq F_2$ and each edge $e \in F_2 \setminus F_1$ intersects $V(F_1)$ only in $\partial(F_2)$, that is, $e \cap V(F_1) \subseteq \partial(F_2)$. Then, we have $\text{bw}(F_1) \leq \text{bw}(F_2)$.*

Proof. Let $\mathcal{T}$ be a branch-decomposition of F_2 of width $\text{bw}(F_2)$. For each $e \in F_2 \setminus F_1$, we remove the leaves that are mapped to e , and then repeatedly remove the new leaves that are internal nodes in $\mathcal{T}$. Then, let $\mathcal{T}'$ be the branch-decomposition of F_1 obtained in this way. For each node p of $\mathcal{T}'$, it holds that $\mathcal{L}_{\mathcal{T}'}(p) = \mathcal{L}_{\mathcal{T}}(p) \cap F_1$ and $\mathcal{U}_{\mathcal{T}'}(p) = \mathcal{U}_{\mathcal{T}}(p) \cup (F_2 \setminus F_1)$. Moreover, we have $V(\mathcal{U}_{\mathcal{T}'}(p)) \subseteq V(\mathcal{U}_{\mathcal{T}}(p))$ as every edge $e \in F_2 \setminus F_1$ intersects $V(F_1)$ only in $\partial(F_2)$ by assumption, and $\partial(F_2) \subseteq V(\mathcal{U}_{\mathcal{T}}(p))$ as $\mathcal{U}_{\mathcal{T}}(p)$ contains $E(G) \setminus F_2$. Hence, $\text{mid}_{\mathcal{T}'}(p) \subseteq \text{mid}_{\mathcal{T}}(p)$, implying that the order of p in $\mathcal{T}'$ is at most that in $\mathcal{T}$. $\blacktriangleleft$

Let $\mathcal{T}_1 = (T_1, \varphi_1)$ and $\mathcal{T}_2 = (T_2, \varphi_2)$ be branch-decompositions of edge sets of a hypergraph G . The *composition* of $\mathcal{T}_1$ and $\mathcal{T}_2$ is the branch-decomposition $\mathcal{T} = (T, \varphi)$ defined as follows. The tree T has a root r with two child nodes identified with the roots of T_1 and T_2 . The mapping φ maps a leaf ℓ to $\varphi_i(\ell)$, where i is such that ℓ belongs to T_i .

► **Lemma 9.** *Let F_1 and F_2 be edge sets of G such that $V(F_1) \cap V(F_2) = \partial(F_1) \cap \partial(F_2)$. Let $\mathcal{T}_i$ be a branch-decomposition of F_i , for $i = 1, 2$ and let $\mathcal{T}$ be the composition of $\mathcal{T}_1$ and $\mathcal{T}_2$. Then the width of $\mathcal{T}$ is at most the largest of the width of $\mathcal{T}_1$, the width of $\mathcal{T}_2$, and $|\partial(F)|$, where $F = F_1 \cup F_2$.*

Proof. Let p be a node of $\mathcal{T}$ that belongs to $\mathcal{T}_1$. Then, we have $\mathcal{L}_{\mathcal{T}}(p) = \mathcal{L}_{\mathcal{T}_1}(p)$ and $\mathcal{U}_{\mathcal{T}}(p) = \mathcal{U}_{\mathcal{T}_1}(p) \cup F_2$. Since each edge $e \in F_2$ intersects $V(F_1)$ only in $\partial(F_1)$ and $\partial(F_1) \subseteq V(\mathcal{U}_{\mathcal{T}_1}(p))$, we have $\text{mid}_{\mathcal{T}}(p) \subseteq \text{mid}_{\mathcal{T}_1}(p)$. Thus, the order of each node p of $\mathcal{T}$ that belongs to $\mathcal{T}_1$ is at most the width of $\mathcal{T}_1$. Similarly, the order of each node p of $\mathcal{T}$ that belongs to $\mathcal{T}_2$ is at most the width of $\mathcal{T}_2$. The middle set of the root r of $\mathcal{T}$ is $V(F) \cap V(E(G) \setminus F) = \partial(F)$ and hence its order is equal to $|\partial(F)|$. ◀

► **Lemma 10.** *For $F \subseteq E(G)$, we have $\text{bw}(\text{clos}(F)) \leq \text{bw}(F)$.*

Proof. Suppose that $\text{bw}(F) = k$ and let $\mathcal{T} = (T, \varphi)$ be a branch-decomposition of F of width k . Let $F^+ = \text{clos}(F) \setminus F$. Observe that each edge $e \in F^+$ is contained in $\partial(F) = V(F) \cap V(E(G) \setminus F)$. This follows since $V(F) = V(\text{clos}(F))$ and $e \in E(G) \setminus F$. Thus, we have $V(F^+) \subseteq \partial(F)$. Let $\mathcal{T}^+$ be an arbitrary branch-decomposition of F^+ . Since $|V(F)| \leq |\partial(F)| \leq \text{bw}(F) \leq k$, the width of $\mathcal{T}^+$ is at most k . Let $\mathcal{T}'$ be the composition of $\mathcal{T}$ and $\mathcal{T}^+$. Then, by Lemma 9, the width of $\mathcal{T}'$ is the largest of the width of $\mathcal{T}$, the width of $\mathcal{T}^+$, and $|\partial(\text{clos}(F))|$. Since $V(F) = V(\text{clos}(F))$ and $E(G) \setminus \text{clos}(F) \subseteq E(G) \setminus F$, $\partial(\text{clos}(F)) \subseteq \partial(F)$. Hence, the width of $\mathcal{T}'$ is at most k . ◀

For vertex sets X_1 and X_2 of G , we define $F^+(X_1, X_2) = E(X_1 \cup X_2) \setminus (E(X_1) \cup E(X_2))$.

► **Lemma 11.** *Let X_1 and X_2 be vertex sets of a hypergraph G . Then, $\partial(E(X_1) \cup E(X_2))$ is contained in $\partial(X_1 \cup X_2) \cup V(F^+(X_1, X_2))$.*

Proof. Let $X = X_1 \cup X_2$. Let e be an arbitrary edge in $E(G) \setminus (E(X_1) \cup E(X_2))$. Suppose that $e \cap (V(G) \setminus X) \neq \emptyset$. Then, e intersects $V(E(X_1) \cup E(X_2)) = X$ only in $\partial(X)$. Suppose otherwise. Then, e belongs to $F^+(X_1, X_2)$ and hence is contained in $V(F^+(X_1, X_2))$. Therefore, $\partial(E(X_1) \cup E(X_2))$ is contained in $\partial(X) \cup V(F^+(X_1, X_2))$. ◀

We are now ready to prove the recurrence of our algorithm.

► **Lemma 12.** *Let X be a vertex set of G with $|E(X)| \geq 2$. Then, $\text{bw}(E(X)) \leq k$ if and only if there are proper subsets X_1 and X_2 of X such that*

1. $X_1 \cup X_2 = X$,
2. $\text{bw}(E(X_i)) \leq k$ for $i = 1, 2$,
3. $X_1 \cap X_2 = \partial(X_1) \cap \partial(X_2)$, and
4. $|\partial(X) \cup V(F^+(X_1, X_2))| \leq k$.

Proof. Suppose first that there are proper subsets X_1 and X_2 of X such that the four conditions in the lemma are satisfied. Let $\mathcal{T}_i = (T_i, \varphi_i)$ be a full and injective branch-decomposition of $E(X_i)$ for $i = 1, 2$. Let $\mathcal{T} = (T, \varphi)$ be the composition of $\mathcal{T}_1$ and $\mathcal{T}_2$. Then, $\mathcal{T}$ is a branch-decomposition of $E(X_1) \cup E(X_2)$ and, by Lemma 9, its width is the largest of the width of $\mathcal{T}_1$, the width of $\mathcal{T}_2$, and $|\partial(E(X_1) \cup E(X_2))|$. The first two are at most k by the second condition in the assumption. Since $\partial(E(X_1) \cup E(X_2))$ is a subset of $\partial(X) \cup V(F^+(X_1, X_2))$ due to Lemma 11, the last is also at most k by the fourth condition in the assumption. We conclude that the width of $\mathcal{T}$ is at most k and hence $\text{bw}(E(X_1) \cup E(X_2)) \leq k$. Since $\text{clos}(E(X_1) \cup E(X_2)) = E(X)$, we may apply Lemma 10 and conclude that $\text{bw}(E(X))$ is at most k as well.

For the converse, suppose that X is a vertex set of G with $|E(X)| \geq 2$ and $\text{bw}(E(X)) = k$. We prove that there are proper subsets X_1 and X_2 of X that satisfy the four conditions in the lemma. Let $\mathcal{T} = (T, X)$ be a branch-decomposition of $E(X)$ of width k . We can assume that $\mathcal{T}$ is full and injective due to Proposition 3. Let p be the furthest node of T from the root such that $\mathcal{L}_{\mathcal{T}}(p) = X$. Since $|E(X)| \geq 2$ and no edge of G strictly contains another edge by our assumption on G , p is not a leaf. Moreover, as p is the furthest node from the root such that $\mathcal{L}_{\mathcal{T}}(p) = X$, p has two child nodes p_1 and p_2 such that $V(\mathcal{L}_{\mathcal{T}}(p_i))$ is a proper subset of X for $i = 1, 2$. We let $X_i = V(\mathcal{L}_{\mathcal{T}}(p_i))$ for $i = 1, 2$. The first condition that $X_1 \cup X_2 = X$ holds since $\mathcal{L}_{\mathcal{T}}(p_1) \cup \mathcal{L}_{\mathcal{T}}(p_2) = \mathcal{L}_{\mathcal{T}}(p)$. Since $\mathcal{T}$ is injective, we have $X_1 \cap X_2 = \partial(X_1) \cap \partial(X_2)$ by Lemma 6: the third condition holds.

It remains to show that the second and last conditions hold. Let $L_i = \mathcal{L}_{\mathcal{T}}(p_i)$ for $i = 1, 2$, and let $\mathcal{T}_i = (T_i, \varphi_i)$ be the sub-branch-decomposition of $\mathcal{T}$ at p_i , which is a branch-decomposition of L_i . Since $\mathcal{T}$ is injective, the width of $\mathcal{T}_i$ is at most k for $i = 1, 2$, by Lemma 7 and hence $\text{bw}(L_i)$ is at most k . Since $E(X_i) = \text{clos}(L_i)$, $\text{bw}(E(X_i))$ is at most k for $i = 1, 2$ by Lemma 10: the second condition in the lemma holds. For the last condition, observe that $V(\mathcal{L}_{\mathcal{T}}(p)) = X_1 \cup X_2 = X$ and $E(G) \setminus (E(X_1) \cup E(X_2)) \subseteq E(G) \setminus \mathcal{L}_{\mathcal{T}}(p)$. Therefore, both $\partial(X)$ and $V(F^+(X_1, X_2))$ are subsets of $\partial(\mathcal{L}_{\mathcal{T}}(p))$. As $\partial(\mathcal{L}_{\mathcal{T}}(p))$ is contained in the middle set of p , its cardinality is at most k . Therefore, we have $|\partial(X) \cup V(F^+(X_1, X_2))| \leq |\partial(\mathcal{L}_{\mathcal{T}}(p))| \leq k$. ◀

Our algorithm simply evaluates the recurrence in Lemma 12 in a dynamic programming manner. Fix an integer $k \geq 0$. We can decide if $\text{bw}(E(X)) \leq k$ for all $X \subseteq V(G)$ in total time $\mathcal{O}^*(4^n)$, where $n = |V(G)|$. Since the branchwidth of G is the smallest integer k such that $\text{bw}(E(G)) \leq k$ holds, this completes the proof of Theorem 1.

4 An $\mathcal{O}(3.293^n)$ -time algorithm for graphs

In this section, we improve the running time of the previous algorithm for *graphs*.

4.1 Blocks and block derivations

The *core* of X , denoted by $\kappa_G(X)$ or simply by $\kappa(X)$, is defined to be $\kappa(X) = X \setminus \partial(X)$, that is, the subset of vertices in X that has no neighbors outside X . The *core* of an edge set F , denoted by $\kappa_G(F)$ or simply $\kappa(F)$, is defined as $\kappa(F) = V(F) \setminus \partial(F)$. Note that $\partial(F) = \partial(V(F))$ if F is closed.

For brevity, we refer to the closed neighborhood of a vertex set W as the *vertex closure* or simply the *closure* of W and use the notation $\hat{W}$ interchangeably with $N[W]$ when G is clear from the context. We denote by $\hat{\kappa}(X)$ the closure of $\kappa(X)$.

We call a vertex set X of a hypergraph G a *block* if $\kappa(X)$ is non-empty and connected and, moreover, $X = \hat{\kappa}(X)$. Under our assumption that G is connected, $V(G)$ is a block with $\hat{\kappa}(V(G)) = V(G)$. It should be noted that while the term “block” is also used in the paper by Fomin, Mazoit, and Todinca [10], our definition, however, differs from theirs.

Let B be a block of a graph G . A *block derivation* of B in G is a pair $D = (B, \mathcal{B})$ where $\mathcal{B}$ is a set of blocks such that $A \subseteq B$ for each $A \in \mathcal{B}$ and $\kappa(A_1) \cap \kappa(A_2) = \emptyset$ for each pair of distinct $A_1, A_2 \in \mathcal{B}$. For a block derivation $D = (B, \mathcal{B})$, we use the following notation: $B(D) := B$, $\mathcal{B}(D) := \mathcal{B}$, $K(D) := \bigcup_{A \in \mathcal{B}} \kappa(A)$, and $S(D) := B \setminus K(D)$.

A triple (M_1, M_2, M_3) of subsets of $S(D)$ is a *mid-triple* of a block derivation D if the following conditions are satisfied:

1. $M_1 \cup M_2 = M_2 \cup M_3 = M_3 \cup M_1 = S(D)$,
2. $\partial(B) \subseteq M_3$, and

3. for each $A \in \mathcal{B}(D)$, $\partial(A)$ is contained in either M_1 or M_2 .

The *order* of a mid-triple (M_1, M_2, M_3) is the largest of $|M_1|$, $|M_2|$, and $|M_3|$. The *order* of a block derivation D is the smallest k such that there is a mid-triple of D of order k . The *width* of a block derivation D is the larger of the order of D and the largest of $\text{bw}(E(A))$ over all $A \in \mathcal{B}(D)$.

► **Lemma 13.** *Let B be a block of a graph G . Suppose that there is a block derivation D of B of width k . Then, $\text{bw}(E(B))$ is at most k .*

Proof. Let (M_1, M_2, M_3) be a mid-triple of D of order at most k . Let $(\mathcal{B}_1, \mathcal{B}_2)$ be a bipartition of $\mathcal{B}(D)$ such that $\partial(A) \subseteq M_i$ for every $A \in \mathcal{B}_i$, for $i = 1, 2$.

We first define several subsets of $E(B)$. For each $A \in \mathcal{B}(D)$, let $F_A = E(A)$. We define F_i as $F_i = \bigcup_{A \in \mathcal{B}_i} F_A$, for $i = 1, 2$. We denote by F_{i+2} the set of edges of G contained in M_i for $i = 1, 2, 3$, that is, $F_{i+2} := E(M_i)$. We claim that $E(B) = F_1 \cup F_2 \cup F_3 \cup F_4 \cup F_5$. For each $1 \leq i \leq 5$, we have $V(F_i) \subseteq B$ and hence $F_i \subseteq E(B)$. Therefore, $F_1 \cup F_2 \cup F_3 \cup F_4 \cup F_5$ is a subset of $E(B)$. For the inclusion in the other direction, let e be an edge in $E(B)$, and we show that e belongs to some F_i . If e is contained in some $A \in \mathcal{B}(D)$, then clearly e belongs to F_1 or F_2 . Suppose otherwise. Since $e \in E(B) \setminus (F_1 \cup F_2)$ intersects $B \setminus V(F_i)$ for each $i = 1, 2$, it has no intersection with $\kappa(A)$ for any $A \in \mathcal{B}(D)$. This implies that $e \subseteq S(D)$. Since every vertex in $S(D)$ belongs to at least two of M_1, M_2 , and M_3 , and moreover G is a graph, there is some $i \in \{1, 2, 3\}$ such that $e \subseteq M_i$ and hence e belongs to F_{i+2} .

We construct a branch-decomposition $\mathcal{T}$ of $E(B)$, which is composed of several sub-branch-decompositions described below. For each $A \in \mathcal{B}(D)$, let $\mathcal{T}_A = (T_A, \varphi_A)$ be a branch-decomposition of F_A of width at most k . We can assume that $\mathcal{T}_A$ is injective due to Proposition 3. For $i = 1, 2$, let $m_i = |\mathcal{B}_i|$ and let $A_1^i, \dots, A_{m_i}^i$ be a listing of the members of $\mathcal{B}_i$ in an arbitrary order. For $i = 1, 2$ and for $1 \leq j \leq m_i$, let $\mathcal{T}_j^i$ be a branch-decomposition of $\bigcup_{1 \leq h \leq j} F_{A_h^i}$ inductively defined as follows: $\mathcal{T}_1^i = \mathcal{T}_{A_1^i}$ and $\mathcal{T}_j^i$ for $2 \leq j \leq m_i$ is the composition of $\mathcal{T}_{j-1}^i$ and $\mathcal{T}_{A_j^i}$. We denote $\mathcal{T}_{m_i}^i$ by $\mathcal{T}_i$, for $i = 1, 2$. For $i = 3, 4, 5$, $\mathcal{T}_i$ is an arbitrary branch-decomposition of F_i . The composition of $\mathcal{T}_1$ and $\mathcal{T}_3$ is denoted by $\mathcal{T}_6$ and the composition of $\mathcal{T}_2$ and $\mathcal{T}_4$ is denoted by $\mathcal{T}_7$. Then, $\mathcal{T}_8$ is the composition of $\mathcal{T}_6$ and $\mathcal{T}_7$. Finally, $\mathcal{T}$ is the composition of $\mathcal{T}_8$ and $\mathcal{T}_5$. To summarize, $\mathcal{T}_i$ is a branch-decomposition of F_i for $1 \leq i \leq 5$, $\mathcal{T}_6$ is a branch-decomposition of $F_1 \cup F_3$, $\mathcal{T}_7$ is a branch-decomposition of $F_2 \cup F_4$, $\mathcal{T}_8$ is a branch-decomposition of $F_1 \cup F_2 \cup F_3 \cup F_4$, and $\mathcal{T}$ is a branch-decomposition of $F_1 \cup F_2 \cup F_3 \cup F_4 \cup F_5 = E(B)$. We now claim that the width of $\mathcal{T}$ is at most k . To see this, let p be a node of $\mathcal{T}$.

Suppose first that p belongs to $\mathcal{T}_A$ for some $A \in \mathcal{B}(D)$. Then the lower edge set of p in $\mathcal{T}$ is identical to that in $\mathcal{T}_A$. Let $e \in \mathcal{U}_{\mathcal{T}}(p) \setminus \mathcal{U}_{\mathcal{T}_A}(p)$. Since $\mathcal{T}_A$ is injective and $e \notin \mathcal{U}_{\mathcal{T}_A}(p)$, it holds that $e \in \mathcal{L}_{\mathcal{T}_A}(p)$, meaning that e belongs to F_A . Moreover, as there is a leaf of $\mathcal{T}$ not in $\mathcal{T}_A$ that is mapped to e , e is not incident to a vertex in $\kappa(A)$. Hence, we have $e \subseteq \partial(A)$, which is a subset of $V(\mathcal{U}_{\mathcal{T}_A}(p))$, and hence the middle set of p in $\mathcal{T}$ is identical to its middle set in $\mathcal{T}_A$. Therefore, the order of p in $\mathcal{T}$ is at most k .

Suppose p is the root of $\mathcal{T}_j^1$ for some $1 \leq j \leq m_1$. Then, $V(\mathcal{L}_{\mathcal{T}}(p))$ is a subset of $\bigcup_{1 \leq h \leq j} A_h^1$. Since no leaf of $\mathcal{T}$ that is not a descendant of p is mapped to an edge that intersects $\bigcup_{1 \leq h \leq j} \kappa(A_h^1)$, the middle set of p is a subset of M_1 and hence its order is at most k . The case where p is the root of $\mathcal{T}_j^2$ for some $1 \leq j \leq m_2$ is similar. We are done with the nodes in $\mathcal{T}_1$ and $\mathcal{T}_2$.

Suppose p is a node in $\mathcal{T}_i$ for some $3 \leq i \leq 5$. Then, the lower edge set of p is a subset of M_{i-2} and hence the order of p is at most k .

Suppose p is the root of $\mathcal{T}_6$, the composition of $\mathcal{T}_1$ and $\mathcal{T}_3$. Its lower edge set is $F_1 \cup F_3$

and its upper edge set is $E(G) \setminus (F_1 \cup F_3)$. Therefore, its middle set is $\partial(F_1 \cup F_3) \subseteq M_1$ and hence its order is at most k . Similarly, the order of the root of $\mathcal{T}_7$ is at most k .

Suppose finally that p is the root of $\mathcal{T}_8$, the composition of $\mathcal{T}_6$ and $\mathcal{T}_7$. Its lower edge set is $F_1 \cup F_2 \cup F_3 \cup F_4$ and its upper edge set is $E(G) \setminus (F_1 \cup F_2 \cup F_3 \cup F_4)$. Therefore, its middle set is $\partial(F_1 \cup F_2 \cup F_3 \cup F_4)$. Let e be an edge in $E(G) \setminus (F_1 \cup F_2 \cup F_3 \cup F_4)$ that intersects $V(F_1 \cup F_2 \cup F_3 \cup F_4) = B$. If e intersects $V(G) \setminus B$ then its intersection with B is contained in $\partial(B) \subseteq M_3$. Otherwise, e intersects both $M_1 \setminus M_2$ and $M_2 \setminus M_1$ and hence contained in M_3 . Therefore, the order of p is at most $|M_3| \leq k$.

Finally, the middle set of the root of $\mathcal{T}$ corresponds to $\partial(B)$ and hence its order is at most k . We conclude that the width of $\mathcal{T}$ is at most k and hence $\text{bw}(E(B))$ is at most k . ◀

► **Theorem 14.** *Let G be a graph and B a block of G . Then, $\text{bw}(E(B)) = k$ if and only if there is a block derivation D of B of width k .*

Proof. By Lemma 13, if there is a block derivation of B of width k then $\text{bw}(E(B)) \leq k$. Therefore, to prove the theorem, it suffices to show that if $\text{bw}(E(B)) = k$ then there is a block derivation of G of width at most k . Suppose that $\text{bw}(E(B)) = k$. Let $\mathcal{T}$ be a full and injective branch-decomposition of $E(B)$ of width k . Since B is a block and each vertex in $\kappa(B)$ is incident to at least two edges, $|E(B)| \geq 2$ and hence $\mathcal{T}$ has at least two leaves. Therefore, similarly to the proof of Lemma 12, there is a node p of $\mathcal{T}$ with child nodes p_1 and p_2 such that $V(\mathcal{L}_{\mathcal{T}}(p)) = B$ but $V(\mathcal{L}_{\mathcal{T}}(p_i))$ is a proper subset of B , for $i = 1, 2$. Let $L_i = \mathcal{L}_{\mathcal{T}}(p_i)$, $X_i = V(L_i)$, and $M_i = \partial(L_i)$ for $i = 1, 2$. Let $\mathcal{C}$ be the set of components of $G[B \setminus (M_1 \cup M_2)]$ and let $\mathcal{B} = \{\hat{C} \mid C \in \mathcal{C}\}$. Note that each $A \in \mathcal{B}$ is contained in either X_1 or X_2 . Then, $D = (B, \mathcal{B})$ is a block derivation of B , since each $A \in \mathcal{B}$ is contained in B and, for each pair of distinct members $A_1, A_2 \in \mathcal{B}$, $\kappa(A_1) \cap \kappa(A_2) = \emptyset$. We claim (M_1, M_2, M_3) , where $M_3 = \partial(B) \cup (M_1 \setminus M_2) \cup (M_2 \setminus M_1)$, is a mid-triple of D . To see this, let A be a member of $\mathcal{B}$. By Lemma 6, it holds that $X_1 \cap X_2 = \partial(X_1) \cap \partial(X_2)$. As A is contained in either X_1 or X_2 , $\partial(A)$ is contained in either M_1 or M_2 . Moreover, the definition of M_3 ensures that $M_1 \cup M_2 = M_2 \cup M_3 = M_1 \cup M_3 = S(D)$ and that $\partial(B) \subseteq M_3$ as required by the definition of mid-triples.

For $i = 1, 2$, since $|M_i| = |\partial(L_i)|$ is at most the order of the node p_i in $\mathcal{T}$, it is at most k . To bound the cardinality of M_3 , we claim that $M_3 \subseteq \partial(L_1 \cup L_2)$. Every vertex in $\partial(B)$ belongs to $\partial(L_1 \cup L_2)$ since it belongs to $V(L_1 \cup L_2) = B$ and is adjacent to some vertex in $V(G) \setminus B$. This implies that $\partial(B) \subseteq \partial(L_1 \cup L_2)$. Let v be a vertex in $(M_1 \setminus M_2) \setminus \partial(B)$. Since v belongs to $M_1 = \partial(L_1)$ but not to $\partial(B)$, there is an edge e of G between v and some vertex u in $X_2 \setminus X_1$. As $v \notin M_2$, u must belong to $\partial(L_2) \setminus X_1 = M_2 \setminus M_1$. Thus, we have $e \in E(G) \setminus (L_1 \cup L_2)$. As $e \subseteq V(L_1 \cup L_2)$, it holds that $v \in \partial(L_1 \cup L_2)$. Hence, $M_1 \setminus M_2$ is a subset of $\partial(L_1 \cup L_2)$. Similarly, $M_2 \setminus M_1$ is a subset of $\partial(L_1 \cup L_2)$. Since $|\partial(L_1 \cup L_2)|$ is at most the order of p in G and hence is at most k , $|M_3|$ is at most k and hence the order of the mid-triple (M_1, M_2, M_3) is at most k . It follows that the order of the block derivation D is at most k .

Finally, let $A \in \mathcal{B}(D)$. We claim that $\text{bw}(E(A)) \leq k$, which implies that the width of D is at most k . Suppose without loss of generality that A is contained in X_1 . We construct a branch-decomposition $\mathcal{T}_A$ of $E(A)$ as follows. Let $\mathcal{T}_1$ denote the sub-branch-decomposition of $\mathcal{T}$ at p_1 . Since $\mathcal{T}$ is injective, the width of $\mathcal{T}_1$ is at most the width of $\mathcal{T}$, by Lemma 7, and hence at most k . We obtain $\mathcal{T}_A$ by removing leaves of $\mathcal{T}$ mapped to edges not in $E(A)$ one by one. Since each edge removed intersects A only in $M_1 = \partial(L_1)$, Lemma 8 applies and the width of $\mathcal{T}_A$ is at most the width of $\mathcal{T}_1$, which is at most k . Therefore, $\text{bw}(E(A)) \leq k$ for every $A \in \mathcal{B}(D)$. ◀

■ **Algorithm 1** Decide if $\text{bw}(G) \leq k$.

Input: A graph G and an integer $k \geq 0$.

- 1 Compute the set $\mathcal{B}_k(G)$ of all blocks B in G such that $|\partial(B)| \leq k$;
- 2 **for** $1 \leq i \leq n$ **do**
- 3 $\mathcal{B}_k(G, i) \leftarrow \{B \in \mathcal{B}_k(G) : |\kappa(B)| = i\}$;
- 4 **for** $B \in \mathcal{B}_k(G)$ **do**
- 5 Compute the set $\mathcal{D}_k(G, B)$ of all block derivations of B of order at most k ;
- 6 **for** $1 \leq i \leq n$ **do**
- 7 $\mathcal{F}_k(G, i) \leftarrow \emptyset$;
- 8 **for** $B \in \mathcal{B}_k(G, i)$ **do**
- 9 **if** there is some $(B, \mathcal{B}) \in \mathcal{D}_k(G, B)$ such that $A \in \bigcup_{j < i} \mathcal{F}_k(G, j)$ for all $A \in \mathcal{B}$
- 10 **then**
- 11 $\mathcal{F}_k(G, i) \leftarrow \mathcal{F}_k(G, i) \cup \{B\}$;
- 12 **Answer YES if** $V(G) \in \mathcal{F}_k(G, n)$; **answer NO otherwise**;

4.2 Algorithm

Algorithm 1 shows our algorithm for deciding whether $\text{bw}(G) \leq k$ for a given graph G and a positive integer k .

► **Lemma 15.** *Algorithm 1 correctly decides if $\text{bw}(G) \leq k$.*

Proof. We prove by induction on i that $\mathcal{F}_k(G, i)$ contains all blocks B of G such that $\text{bw}(E(B)) \leq k$ and $|\kappa(B)| = i$, for $1 \leq i \leq n$. Fix $i \geq 1$ and suppose, for $1 \leq j \leq i - 1$, $\mathcal{F}_k(G, j)$ contains all blocks B in G such that $\text{bw}(E(B)) \leq k$ and $|\kappa(B)| = j$. By Theorem 14, $\text{bw}(E(B)) \leq k$ if and only if there is $(B, \mathcal{B}) \in \mathcal{D}_k(G, B)$ such that $\text{bw}(A) \leq k$ for every $A \in \mathcal{B}$. By the induction hypothesis, $\text{bw}(E(A)) \leq k$ holds if and only if $A \in \bigcup_{j < i} \mathcal{F}_k(G, j)$. This completes the induction proof and $\mathcal{F}_k(G, n)$ is the set of blocks B of G such that $\text{bw}(B) \leq k$. Therefore, the last step of the algorithm correctly decides if $\text{bw}(G) \leq k$. ◀

Our running time analysis of the algorithm mostly consists in bounding the cardinality of $\mathcal{D}_k(G) := \bigcup_{B \in \mathcal{B}_k(G)} \mathcal{D}_k(G, B)$ and the time for generating those block derivations. The following straightforward bound turns out to be useful in the analysis.

► **Lemma 16.** *There are at most 3^n block derivations of G and they can be generated in time $\mathcal{O}^*(3^n)$.*

Proof. For disjoint subsets K and S of $V(G)$, observe that there is at most one block derivation D such that $K(D) = K$ and $S(D) = S$. Indeed, for such a block derivation $D = (B, \mathcal{B})$, it must hold that $B = K \cup S$ and $\mathcal{B} = \{\hat{C} \mid C \in \mathcal{C}\}$, where $\mathcal{C}$ is the set of components of $G[K]$. It can be decided in polynomial time if the pair (K, S) gives rise to such a block derivation, by checking if $N(C) \subseteq S$ for all $C \in \mathcal{C}$. ◀

We need an efficient way to decide if the width of a given block derivation is at most k . In particular, we need to compute a mid-triple (M_1, M_2, M_3) of a block derivation D of order at most k .

► **Observation 17.** *If the order of a block derivation D is k then $|S(D)|$ is at most $3k/2$.*

Proof. Let (M_1, M_2, M_3) be a mid-triple of D of order k . Then, since every vertex in $S(D)$ belongs to at least two of M_1, M_2 , and M_3 , we have $|S| \leq (|M_1| + |M_2| + |M_3|)/2 \leq 3k/2$. ◀

Due to this observation, we can focus on the case where $|S(D)| \leq 3k/2$ in deciding if the width of D is at most k . We use the following tool to reason about mid-triples. Let S be a set. A triple (S_1, S_2, S_3) of subsets of S is a *bicover* of S if each member of S appears in exactly two of S_1, S_2 , and S_3 . For a bicover (S_1, S_2, S_3) of S , it holds that $S_1 \cup S_2 = S_2 \cup S_3 = S_3 \cup S_1 = S$. It is a *subbicover* of S if each member of S appears in at most two of S_1, S_2 , and S_3 . We say that a bicover (S_1, S_2, S_3) *extends* a subbicover (S'_1, S'_2, S'_3) if $S'_i \subseteq S_i$ for $1 \leq i \leq 3$. The *order* of a bicover (S_1, S_2, S_3) is the largest of $|S_1|, |S_2|$, and $|S_3|$. Since $|S_1| + |S_2| + |S_3| = 2|S|$, the order of a bicover of S is at least $2|S|/3$.

▶ **Lemma 18.** *Let S be a set and k a positive integer such that $|S| \leq 3k/2$. Let (S_1, S_2, S_3) be a subbicover of S . Then, there is a bicover of S of order at most k that extends (S_1, S_2, S_3) if and only if the following conditions are satisfied.*

1. $|S_i| \leq k$ for $i = 1, 2, 3$,
2. $|S_i \cap S_j| + |S| \leq 2k$ for $1 \leq i < j \leq 3$;

Proof. Suppose first that there is bicover (R_1, R_2, R_3) of order k that extends (S_1, S_2, S_3) . Then, for $1 \leq i \leq 3$, we have $|S_i| \leq |R_i| \leq k$. Since $|R_1| + |R_2| = |R_1 \cap R_2| + |R_1 \cup R_2| = |R_1 \cap R_2| + |S|$, we have $|S_1 \cap S_2| + |S| \leq |R_1 \cap R_2| + |S| \leq 2k$. Similarly, we have $|S_2 \cap S_3| + |S| \leq 2k$ and $|S_3 \cap S_1| + |S| \leq 2k$.

For the converse, let (S_1, S_2, S_3) be a subbicover of S that satisfies the conditions in the lemma. First suppose that $S_1 \cup S_2 \cup S_3 = S$. The case otherwise will be dealt with later. For $1 \leq i \leq 3$, let U_i be the set of members of S that belongs to S_i but not to S_j for $j \neq i$. We prove that there is bicover of S of order at most k extending (S_1, S_2, S_3) by induction on $|U_1 \cup U_2 \cup U_3|$. The base case where $U_1 \cup U_2 \cup U_3$ is empty is trivial since (S_1, S_2, S_3) is then a bicover and, moreover, of order at most k by Condition 1. Suppose that $U_1 \cup U_2 \cup U_3$ is non-empty. First suppose that Condition 2 is not tight for any pair of distinct $i, j \in \{1, 2, 3\}$: we have $|S_i \cap S_j| + |S| < 2k$ for every such pair. Without loss of generality, suppose U_1 is non-empty and let u be an arbitrary member of U_1 . Then, we have $|S_2| + |S_3| = |S_2 \cup S_3| + |S_2 \cap S_3| = |S \setminus U_1| + |S_2 \cap S_3| \leq |S| + |S_2 \cap S_3| - 1 \leq 2k - 1$ by Condition 2. Note that each member of $S \setminus U_1$ is either not in S_1 or in $S_1 \cap S_i$ for some $i \in \{2, 3\}$, and vice versa, meaning that $S_2 \cup S_3 = S \setminus S_1$ under the assumption that $S_1 \cup S_2 \cup S_3 = S$. Therefore, we have either $|S_2| \leq k - 1$ or $|S_3| \leq k - 1$. We set $S'_2 = S_2 \cup \{u\}$ and $S'_3 = S_3$ in the former case and $S'_2 = S'_2$ and $S'_3 = S_3 \cup \{u\}$ in the latter. Then, Condition 1 with S_i replaced by S'_i for $i \in \{2, 3\}$ is maintained. Moreover, due to the assumption that Condition 2 is not tight for any pair of i and j , Condition 2 with S_i replaced by S'_i for $i \in \{2, 3\}$ is also maintained. Therefore, by the induction hypothesis, there is a bicover of S of order at most k that extends (S_1, S'_2, S'_3) and hence extends (S_1, S_2, S_3) .

Now suppose that $|S_1 \cap S_2| + |S| = 2k$. Then, $|S_1 \cap S_2| \geq k/2$ since $|S| \leq 3k/2$. Let $R_3 = S \setminus (S_1 \cap S_2)$. Note that $S_3 \subseteq R_3$ since (S_1, S_2, S_3) is a subbicover and hence $S_1 \cap S_2 \cap S_3$ is empty. Note also that $|R_3| = |S| - |S_1 \cap S_2| \leq 3k/2 - k/2 \leq k$ since $|S_1 \cap S_2| \geq k/2$ and $|S| \leq 3k/2$. We define R_1 and R_2 so that (R_1, R_2, R_3) is a bicover of S that extends (S_1, S_2, S_3) . To this end, we need to put each member of $U'_3 = R_3 \setminus (S_1 \cup S_2)$ to exactly one of R_1 and R_2 . Regardless of our choices, we have $|R_1| + |R_2| = |R_1 \cup R_2| + |R_1 \cap R_2| = |S| + |S_1 \cap S_2| = 2k$. Since $|S_1| \leq k$ and $|S_2| \leq k$, we can partition U'_3 into $R_1 \setminus S_1$ and $R_2 \setminus S_2$ so that $|R_1| = |R_2| = k$. The triple (R_1, R_2, R_3) thus obtained is a bicover of S of order k that extends (S_1, S_2, S_3) . The cases where $|S| + |S_2 \cap S_3| = 2k$ or $|S| + |S_3 \cap S_1| = 2k$

are similar. This concludes the induction step and the proof of the converse under the assumption that $S_1 \cup S_2 \cup S_3 = S$.

We finally deal with the case where $Q = S \setminus (S_1 \cup S_2 \cup S_3)$ is non-empty. Since (S_1, S_2, S_3) is a subbicover of $S \setminus Q$, we have $|S_1| + |S_2| + |S_3| \leq 2|S \setminus Q|$ and hence $|S_1| + |S_2| + |S_3| + |Q| \leq |S_1| + |S_2| + |S_3| + 2|Q| \leq 2|S| \leq 3k$. Therefore, Q can be partitioned into Q_1, Q_2 , and Q_3 so that $|S_i \cup Q_i| \leq k$ for $i = 1, 2, 3$. Let $S'_i = S_i \cup Q_i$ for $i = 1, 2, 3$. Then, (S'_1, S'_2, S'_3) is a subbicover of S satisfying the condition in the lemma with S_i replaced by S'_i for $1 \leq i \leq 3$. Note here that $S'_1 \cap S'_2 = S_1 \cap S_2$ and so on. Therefore, there is a bicover of S of order at most k that extends (S'_1, S'_2, S'_3) and hence extends (S_1, S_2, S_3) . ◀

Let $D = (B, \mathcal{B})$ be a block derivation and let $(\mathcal{B}_1, \mathcal{B}_2)$ be a bipartition of $\mathcal{B}$. Let $\partial(\mathcal{B}_i)$ denote $\bigcup_{A \in \mathcal{B}_i} \partial(A)$ for $i = 1, 2$. We say that a mid-triple (M_1, M_2, M_3) conforms to the bipartition $(\mathcal{B}_1, \mathcal{B}_2)$ if $\partial(\mathcal{B}_i) \subseteq M_i$ for $i = 1, 2$.

► **Lemma 19.** *Let $D = (B, \mathcal{B})$ be a block derivation of a block B in a graph G and let $(\mathcal{B}_1, \mathcal{B}_2)$ be a bipartition of $\mathcal{B}$. Then, it can be decided in polynomial time if there is a mid-triple of D of order at most k that conforms to $(\mathcal{B}_1, \mathcal{B}_2)$.*

Proof. Let (M_1, M_2, M_3) be a mid-triple of D conforming to $(\mathcal{B}_1, \mathcal{B}_2)$. We have $\partial(\mathcal{B}_i) \subseteq M_i$ for $i = 1, 2$ and, moreover, $\partial(B) \subseteq M_3$ as it is a condition in the definition of a mid-triple of D . Let $\delta_i = \partial(\mathcal{B}_i)$ for $i = 1, 2$ and $\delta_3 = \partial(B)$. Let $I = \delta_1 \cap \delta_2 \cap \delta_3$. We may assume that $M_1 \cap M_2 \cap M_3 = I$, since if some $v \in M_1 \cap M_2 \cap M_3$ does not belong to I , then we may remove v from M_i where i is such that $v \notin \delta_i$, maintaining the property of (M_1, M_2, M_3) being a mid-triple of D . Let $S' = S \setminus I$, $R_i = M_i \setminus I$ for $1 \leq i \leq 3$, and $S_i = \delta_i \setminus I$ for $1 \leq i \leq 3$. Then, (R_1, R_2, R_3) is a bicover of S' that extends the subbicover (S_1, S_2, S_3) of S' . As the order of (R_1, R_2, R_3) is the order of (M_1, M_2, M_3) minus $|I|$, the problem of deciding if D has a mid-triple of order k reduces to deciding if there is a bicover of S' of order at most $k - |I|$ that extends (S_1, S_2, S_3) , which can be immediately answered by checking the conditions in Lemma 18. ◀

By Lemma 19, when $\mathcal{B}(D)$ contains a small number of sets, we can efficiently compute a mid-triple (M_1, M_2, M_3) of D of order at most k by trying all possible bipartitions $(\mathcal{B}_1, \mathcal{B}_2)$ of $\mathcal{B}(D)$ to which (M_1, M_2, M_3) conforms. For the case where $\mathcal{B}(D)$ contains many sets, we have an alternative method of deciding if the width of D is at most k . We call a mid-triple (M_1, M_2, M_3) of a block derivation $D = (B, \mathcal{B})$ *k-full* if $|M_1| = |M_2| = k$.

► **Lemma 20.** *Let $D = (B, \mathcal{B})$ be a block derivation of a block B of order at most k such that $|S(D)| \geq k$. Then, there is a *k-full* mid-triple of D of order k .*

Proof. Let (M_1, M_2, M_3) be a mid-triple of D of order at most k . Initialize M'_i to M_i for $1 \leq i \leq 3$. While $|M'_1| < k$, add a vertex in $M'_2 \setminus M'_1$ to M'_1 . Similarly, while $|M'_2| < k$, add a vertex in $M'_1 \setminus M'_2$ to M'_2 . In this process, (M'_1, M'_2, M'_3) remains a mid-triple of D of order at most k . Since $|S(D)| = |M_1 \cup M_2| \geq k$, the process stops with $|M'_1| = |M'_2| = k$. ◀

► **Lemma 21.** *Let (M_1, M_2, M_3) be a *k-full* mid-triple of a block derivation $D = (B, \mathcal{B})$. Then $|M_1 \cap M_2| = 2k - |S(D)|$.*

Proof. As $S(D) = M_1 \cup M_2$ by the definition of a mid-triple, we have $|S(D)| + |M_1 \cap M_2| = |M_1| + |M_2| = 2k$. ◀

► **Lemma 22.** *Let $D = (B, \mathcal{B})$ be a block derivation in G , I a subset of $S(D)$, and k a positive integer such that $|I| = 2k - |S(D)|$. Then, it can be decided in polynomial time if there is a *k-full* mid-triple (M_1, M_2, M_3) of D of order k such that $M_1 \cap M_2 = I$.*

Proof. Let $A \in \mathcal{B}$. Observe that, in a mid-triple (M_1, M_2, M_3) of D such that $M_1 \cap M_2 = I$, the vertices in $\partial(A) \setminus I$ either altogether belong to M_1 or altogether belong to M_2 . This observation motivates a graph Q on vertex set $S(D) \setminus I$ such that there is an edge between u and v if and only if u and v belong to $\partial(A)$ for some $A \in \mathcal{B}$. Then, each connected component of Q must be contained in exactly one of M_1 or M_2 . Let $\gamma_1, \dots, \gamma_m$ be the list of connected components of Q . Then, our problem of finding a k -full mid-triple (M_1, M_2, M_3) of order k such that $M_1 \cap M_2 = I$ reduces to a subset sum problem that asks for a subset J of $\{1, \dots, m\}$ such that $\sum_{j \in J} |\gamma_j| = k - |I|$. By the classical Bellman's dynamic programming algorithm, this problem can be solved in time $\mathcal{O}(m(k - |I|)) \subseteq \mathcal{O}(n^2)$. Setting up the input for the subset sum problem can be done in polynomial time, and thus the lemma follows. ◀

► **Lemma 23.** *Let $D = (B, \mathcal{B})$ be a block derivation in a graph G with $|S(D)| \geq k$. Then, it can be decided in time $\mathcal{O}^*\left(\min\left\{2^{|B|-|S(D)|}, \binom{|S(D)|}{2k-|S(D)|}\right\}\right)$ whether the order of D is at most k .*

Proof. The first bound of $\mathcal{O}^*(2^{|B|-|S(D)|})$ is achieved by a brute force method that tries all bipartitions $(\mathcal{B}_1, \mathcal{B}_2)$ of $\mathcal{B}$ deciding if there is a mid-triple (M_1, M_2, M_3) of D of order at most k that conforms to this bipartition in polynomial time invoking Lemma 19. For the second bound, by Lemma 20, it suffices to find a k -full mid-triple of D of order at most k . We try all $\binom{|S|}{2k-|S|}$ subsets I of S of cardinality $2k - |S|$ deciding, for each such subset I , if there is a k -full mid-triple (M_1, M_2, M_3) of order k such that $M_1 \cap M_2 = I$ in polynomial time invoking Lemma 22. ◀

We now upper bound the number of blocks and the number of block derivations needed to decide if $\text{bw}(G)$ is at most k . We use the following result due to Fomin and Villanger [13].

► **Lemma 24** (Fomin and Villanger [13]). *Let G a graph and b, c positive integers. Then, the number of connected vertex subsets C of G such that $|C| = c$ and $|N_G(C)| = b$ is at most $n^{\binom{b+c-1}{b}}$ and those subsets can be listed in time $\mathcal{O}^*\left(\binom{b+c-1}{b}\right)$.*

► **Lemma 25.** *Let G be a graph with n vertices and a, b positive integers such that $b \leq a \leq n$. Then, the number of blocks B such that $|B| = a$ and $|\partial(B)| = b$ is at most $\min\left\{n^{\binom{a-1}{b}}, \binom{n}{a}\right\}$. Moreover, those blocks can be listed in time $\mathcal{O}^*\left(\min\left\{\binom{a-1}{b}, \binom{n}{a}\right\}\right)$.*

Proof. Since $\kappa(B)$ is connected and $\partial(B) = N(\kappa(B))$, the number of blocks B such that $|B| = a$ and $|\partial(B)| = b$ is at most $n^{\binom{a-1}{b}}$ by Lemma 24. The latter bound is simply the number of subsets of $V(G)$ of cardinality a . The listing procedure in Lemma 24 together with a brute force procedure for the latter bound achieves the claimed time bound. ◀

Recall that $\mathcal{D}_k(G) = \bigcup_{B \in \mathcal{B}_k(G)} \mathcal{D}_k(G, B)$, where $\mathcal{B}_k$ is the set of all blocks B with $|\partial(B)| \leq k$.

► **Lemma 26.** *Let $f(n, k, s, a, b)$ be the function defined as follows.*

$$f(n, k, s, a, b) := \min\left\{\binom{a-1}{b}, \binom{n}{a}\right\} \cdot \binom{a-b}{s-b} \cdot \min\left\{2^{a-s}, \binom{s}{2k-s}\right\},$$

where the domain of each variable consists of integers that satisfy the following: $0 \leq k \leq n$, $k < s \leq 3k/2$, $s < a \leq n$, and $b \leq \min\{k, a-1\}$. Let $f^*(n, k)$ denote the maximum of $f(n, k, s, a, b)$ over all combinations of s, a , and b in the domain. Then, $|\mathcal{D}_k(G)| = \mathcal{O}^*(f^*(n, k) + 3^n)$ and $\mathcal{D}_k(G)$ can be computed in $\mathcal{O}^*(f^*(n, k) + 3^n)$ time.

Proof. Fix k . Based on Lemma 16, We first list all block derivations in G in $\mathcal{O}^*(3^n)$ time. For each block derivation D listed, if $|S(D)| \leq k$ then put D to $\mathcal{D}_k(G)$, since such D trivially has a mid-triple $(S(D), \emptyset, S(D))$ of order $|S(D)|$.

We then pick up block derivations D with $k < |S(D)| \leq 3k/2$ that are of order at most k as follows. For each $b \leq k$ and $a > b$, we compute the set $\mathcal{B}_{a,b}(G)$ of blocks B such that $|B| = a$ and $|\partial(B)| = b$, in time $\mathcal{O}^*(\min\{\binom{a-1}{b}, \binom{n}{n-a}\})$ due to Lemma 25. For all the combinations of s, a , and b such that $k < s \leq 3k/2$, $b \leq k$, $b < a$, and $s < a \leq n$, and for each $B \in \mathcal{B}_{a,b}(G)$, we try each subset S of B such that $|S| = s$ and $\partial(B) \subseteq S$, letting $\mathcal{C}$ be the set of components of $G[B \setminus S]$, letting $\mathcal{B} = \{\hat{C} \mid C \in \mathcal{C}\}$, and deciding if the order of the block derivation $D = (B, \mathcal{B})$ with $S(D) = S$ is at most k using Lemma 23; we add $(B, \mathcal{B})$ to $\mathcal{D}_k(G)$ if this is the case. We have $\binom{a-b}{s-b}$ choices for S and deciding if $(B, \mathcal{B})$ is of order at most k can be done in time $\mathcal{O}^*(\min\{2^{a-s}, \binom{s}{2k-s}\})$. The time for each combination of a, b , and s is at most $f(n, k, s, a, b)$ and hence the total time for processing all combinations is in $\mathcal{O}^*(f^*(n, k))$. ◀

► **Theorem 27.** *The running time of Algorithm 1 is in $\mathcal{O}(3.293^n)$.*

Proof. We can compute the set $\mathcal{B}_k$ of all blocks B in G such that $|\partial(B)| \leq k$ in $\mathcal{O}^*(2^n)$ time. By Lemma 26, $|\mathcal{D}_k(G)| = \mathcal{O}^*(f^*(n, k) + 3^n)$ and so is the running time of generating $\mathcal{D}_k(G)$. The dynamic programming step for computing $\mathcal{F}_k(G, i)$ can also be done in time $\mathcal{O}^*(f^*(n, k) + 3^n)$.

To evaluate $f^*(n, k)$, we use the well known upper bound on the binomial coefficient that $\binom{n}{k} \leq 2^{h(k/n)}$, where $h(x)$ is the binary entropy function (see [9], for example). The logarithm base two of the function f in Lemma 26 is bounded as

$$\log_2 f(n, k, s, a, b) \leq n \cdot g(k/n, s/n, a/n, b/n),$$

where

$$g(\kappa, \sigma, \alpha, \beta) = \min\{h(\beta/\alpha), h(\alpha)\} + h((\sigma - \beta)/(\alpha - \beta)) + \min\{\alpha - \sigma, h((2\kappa - \sigma)/\sigma)\}.$$

A numerical computation shows that the maximum of $g(\kappa, \sigma, \alpha, \beta)$ in the domain corresponding to the domain for f described in Lemma 26 is at most 1.719253. The code for this computation, implemented by Claude Code (Opus 4.6), uses the interval arithmetic provided by the `npmath` module of Python and therefore this upper bound is rigorous. As $2^{1.719253} < 3.2927$, we have $f^*(n, k) \leq 3.2927^n$ and therefore the running time of the algorithm is in $\mathcal{O}(3.293^n)$. ◀

This completes the proof of Theorem 2.

4.3 An alternative algorithm for graphs

In this subsection, we present an alternative to Algorithm 1. We conjecture that its running time is $\mathcal{O}(c^n)$ where c is a constant smaller than 3.293, the constant in the running time bound of Algorithm 1. See the partial analysis at the end of this subsection for some grounds of this conjecture. Regardless of the validity of this conjecture, its practical performance is similar to Algorithm 1 on most instances but significantly better on some instances that are hard for Algorithm 1.

The idea of the algorithm is to restrict blocks B for which we need to compute the branchwidth of $E(B)$. Call an edge set F of G *small* if $|\kappa(F)| \leq |V(G) \setminus V(F)|$. Call a block B *small* if $E(B)$ is small. Call a tripartition (E_1, E_2, E_3) of $E(G)$ *balanced* if E_i is small for $1 \leq i \leq 3$.

► **Proposition 28.** *Let G be a graph with at least three edges and of minimum degree at least 2. Then, there is a balanced tripartition (E_1, E_2, E_3) of $E(G)$ such that $\text{bw}(E_i) \leq \text{bw}(G)$.*

Proof. Let $\mathcal{T} = (T, \varphi)$ be an injective branch-decomposition of $E(G)$ of width $\text{bw}(G)$. Let T' be an undirected ternary tree² obtained from T by replacing the two edges incident to the root by an edge. Let p be an internal node of T' . The removal of p from T' naturally induces a tripartition of $E(G)$, which we call the tripartition associated with p . We show that there is an internal node r of T' such that the tripartition associated with r is balanced. For each edge $\{p, q\}$ of T' , orient this edge from p to q if the edge set on p 's side is small; from q to p if the edge set on q 's side is small, breaking ties arbitrarily. Under our assumption on G , each edge incident to a leaf of T' is oriented away from the leaf. Since every edge is oriented, there is a node r such that all three incident edges are oriented towards r . The tripartition associated with r is balanced. The subtrees of T' that result from removing r are branch-decompositions of E_1 , E_2 , and E_3 . It is straightforward to see that the width of each of them is at most the width of $\mathcal{T}$. ◀

In the following, we use similar but slightly different definitions from those used in the previous subsection. A *root derivation* of a graph G is a set $\mathcal{B}$ of blocks of G such that $\kappa(A_1) \cap \kappa(A_2) = \emptyset$ for each pair of distinct $A_1, A_2 \in \mathcal{B}$. We let $S(\mathcal{B}) = V(G) \setminus \kappa(\mathcal{B})$, where $\kappa(\mathcal{B}) = \bigcup_{A \in \mathcal{B}} \kappa(A)$ as before. A *mid-triple* of a root derivation $\mathcal{B}$ is a triple (M_1, M_2, M_3) of subsets of $S(\mathcal{B})$ such that $M_1 \cup M_2 = M_2 \cup M_3 = M_3 \cup M_1 = S(\mathcal{B})$. Let $(\mathcal{B}_1, \mathcal{B}_2, \mathcal{B}_3)$ be a tripartition of $\mathcal{B}$. We say that a mid-triple (M_1, M_2, M_3) *conforms to* this tripartition if $\partial(\mathcal{B}_i) \subseteq M_i$ for $1 \leq i \leq 3$. A mid-triple of $\mathcal{B}$ is *conforming* if it conforms to some tripartition of $\mathcal{B}$. The order of a mid-triple (M_1, M_2, M_3) is the largest of $|M_i|$ for $1 \leq i \leq 3$. The *order* of a root derivation $\mathcal{B}$ is the smallest k such that there is a conforming mid-triple of $\mathcal{B}$ of order k .

► **Lemma 29.** *Let G be a graph with at least two edges. Then, $\text{bw}(G) \leq k$ if and only if there is a root derivation $\mathcal{B}$ of order at most k such that, for each $A \in \mathcal{B}$, A is small and $\text{bw}(E(A)) \leq k$.*

Proof. The proof of the “if”-part is similar to the proof of Lemma 13 on block derivations. For the converse, suppose $\text{bw}(G) = k$. By Proposition 28, there is a balanced tripartition (E_1, E_2, E_3) of $E(G)$ such that $\text{bw}(E_i) \leq k$ for $1 \leq i \leq 3$. Let $M_i = \partial(E_i)$ for $1 \leq i \leq 3$ and let $S = M_1 \cup M_2 \cup M_3$. Note that $S = M_1 \cup M_2 = M_2 \cup M_3 = M_3 \cup M_1$. Let $\mathcal{C}$ denote the set of components of $G[V(G) \setminus S]$ and let $\mathcal{B} = \{\hat{C} \mid C \in \mathcal{C}\}$. Observe that $\partial(A)$ for each $A \in \mathcal{B}$ is contained in M_i for some $i \in \{1, 2, 3\}$. Let $(\mathcal{B}_1, \mathcal{B}_2, \mathcal{B}_3)$ be the tripartition of $\mathcal{B}$ obtained by putting each $A \in \mathcal{B}$ to $\mathcal{B}_i$ where i is the smallest such that $\partial(A) \subseteq M_i$. Then, (M_1, M_2, M_3) is a mid-triple of $\mathcal{B}$ conforming to the tripartition $(\mathcal{B}_1, \mathcal{B}_2, \mathcal{B}_3)$. As the order of this mid-triple is at most k , the order of the root derivation $\mathcal{B}$ is at most k . Each block in $\mathcal{B}_i$ is small since E_i is small. Finally, for each $A \in \mathcal{B}_i$, $\text{bw}(A) \leq k$ holds, since a branch-decomposition of $E(A)$ of width at most k can be obtained from the branch-decomposition of E_i of width at most k by removing leaves that map to edges not in $E(A)$. ◀

Algorithm 2 shows a pseudo-code of our alternative algorithm.

The correctness of this algorithm follows straightforwardly from Lemma 29. We conjecture that this algorithm can be implemented in such a way to run in time smaller than the upper

² A *ternary tree* is a (unrooted) tree such that every internal node has degree exactly 3.

■ **Algorithm 2** Decides if $\text{bw}(G) \leq k$.

Input: A graph G and an integer $k \geq 0$.

- 1 Compute the set $\mathcal{F}_k(G)$ of all small blocks A of G such that $\text{bw}(E(A)) \leq k$, using the method of Algorithm 1;
- 2 Generate root derivations $\mathcal{B}$ of G such that $\mathcal{B} \subseteq \mathcal{F}_k(G)$ and $|S(\mathcal{B})| \leq 3k/2$;
- 3 **for** $\mathcal{B}$ *generated* **do**
- 4 **if** *the order of $\mathcal{B}$ is at most k* **then**
- 5 Answer YES and halts;
- 6 Answer NO;

bound given in Theorem 27 on Algorithm 1. The following is a partial analysis of the algorithm that provides some grounds for the conjecture.

1. It is intuitively clear that the running time of generating $\mathcal{F}_k(G)$ is much smaller than that of Algorithm 1, since we compute the branchwidth of small blocks only. Indeed, it is not difficult to show that the running time of this step is in $\mathcal{O}^*(2.88^n)$.
2. For each $S \subseteq V(G)$, let $\mathcal{C}(S)$ denote the set of components of $G[V(G) \setminus S]$ and let $\mathcal{B}(S) = \{\hat{C} \mid C \in \mathcal{C}(S)\}$. Let $\mathcal{S}_k(G)$ denote the family of vertex sets S of G such that $|S| \leq 3k/2$ and, for every $A \in \mathcal{B}(S)$, A is small and $\text{bw}(A) \leq k$. Step 2 of the algorithm looks for $S \in \mathcal{S}_k(G)$ such that the order of the root derivation $\mathcal{B}(S)$ is at most k . Let $Q(S)$ be a hypergraph on S obtained from $G[S]$ by adding $\partial(A)$ for every $A \in \mathcal{B}(S)$ as a hyperedge. Then, deciding if the order of $\mathcal{B}(S)$ is at most k is equivalent to deciding if $\text{bw}(Q) \leq k$. We can use our algorithm given in Theorem 1 spending $\mathcal{O}^*(4^{|S|})$ time. We can also solve this problem in $\mathcal{O}^*(3^{|\mathcal{B}(S)|})$ time, deciding, for each tripartition of $\mathcal{B}(S)$, if there is a mid-triple of order at most k that conforms to the tripartition. Overall, the running time of the remaining steps is upper bounded by $\mathcal{O}^*\left(\sum_{S \in \mathcal{S}_k(G)} \min\{4^{|S|}, 3^{|\mathcal{B}(S)|}\}\right)$. Although the only upper bound we have on $|\mathcal{B}(S)|$ is the trivial $n - |S|$, this bound corresponds to an extremely rare case where every component in $\mathcal{C}(S)$ is a singleton. It would not be surprising if there is some useful combinatorial bound on the above sum. We also note that, as $k \geq 2|V(Q)|/3$, deciding if the branchwidth of Q is at most k might admit an algorithm that is faster than algorithms for general hypergraphs. This possibility would be a fascinating research topic. Positive results could lead to a proof of the conjecture as well as to a dramatically improved practical performance of Algorithm 2.

5 Computational experiment

In this section, we present the results of our computational experiment. Although our computational experiment is somewhat preliminary and further rigorous comparative evaluations, such as running existing algorithms in the exact same computational environment, are necessary, we can nevertheless observe that the proposed algorithms are highly efficient in practice.

In our experiment, we evaluated the SAT encoding approach [23] and our algorithm using “named graphs” [8]³, some of which have also been used in previous work [23], and the instances

³ <https://github.com/PACE-challenge/Treewidth>

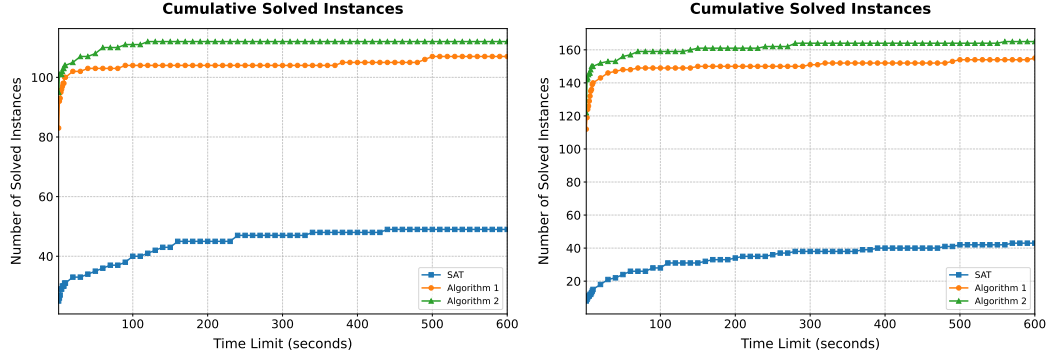


Figure 1 These plots illustrate how many instances each algorithm could solve within a given time limit. The left and right plots correspond to the results for named graphs and the treedepth instances, respectively.

for the exact track of the treedepth computation [22]⁴ in the PACE Challenge repository. We implemented our proposed algorithms in Java⁵ and used the authors' implementation⁶ of the SAT-encoding approach due to [23] with the Glucose 4.0 SAT solver. The experiment was conducted on a machine equipped with AMD Ryzen Threadripper 3990X 64-Core Processor and 64 GB of RAM, running Ubuntu 22.04.5 LTS. We ran Algorithm 2 (Ours) and the SAT-encoding approach (SAT) for each of the above instances in 10 minutes.

The implementations of our algorithms are mostly faithful, although, for some subtasks, they put priority on practical efficiency over theoretical time complexity. The most notable difference is in the algorithm to decide if the order of a given block derivation is at most k . Our implementation deviates from the procedure described in the proof of Lemma 23 in that it does not adopt the second method that goes through all subsets of the separator S of cardinality $2k - |S|$. It rather performs a backtrack search to generate candidate mid-triples. Although the running time can be larger than $\mathcal{O}\left(\binom{|S|}{2k-|S|}\right)$, it seems to perform well in practice with some simple pruning rules. We note, however, that it may be a good idea to incorporate, in future implementations, a mechanism to detect on the fly an unaffordable explosion of the backtrack search and switch to the theoretical method in Lemma 23.

Figure 1 shows the experimental results on the named graph instances (**named**) and the treedepth instances (**td**). Algorithm 1 and Algorithm 2 solve 110 and 112 instances out of 150 instances in **named** and 155 and 165 instances out of 200 instances in **td**, while the SAT-encoding approach solves 49 and 43 instances in **named** and **td**, respectively. Instance-wise speed-ups are also overwhelming. The minimum, maximum, and geometric average speed-ups of Algorithm 1 over the SAT approach are approximately 3.2, 3388, and 32.7 times among the instances that are solved by all the algorithms. Those numbers for Algorithm 2 are approximately 3.1, 3362, and 35.4 times. See Tables 2–10 in Section A for the full experimental results.

We also experimented on those instances that are used in [23]. Table 1 shows the results of our experiment alongside with the results reported in [23]. As [23] contains comparisons between the SAT-encoding approach and another state-of-the-art practical algorithm due to

⁴ <https://github.com/lkowalik/Treedepth-PACE-2020-instances/>

⁵ The source code is available at <https://github.com/twalgor/bw>.

⁶ <https://www.ac.tuwien.ac.at/research/branchlis/>

Hicks [16], our table allows us to indirectly compare our algorithms with Hicks's. Despite the difference of the computational platforms used, we can safely say that our algorithms overwhelmingly outperform Hicks's Algorithm as well, with the exception that, on small instances with at most 40 vertices and branchwidth at most 5, Hicks's algorithm is mostly comparable to, and sometimes outperforms, ours.

References

- 1 Stefan Arnborg, Jens Lagergren, and Detlef Seese. Easy Problems for Tree-Decomposable Graphs. *J. Algorithms*, 12(2):308–340, 1991. doi:10.1016/0196-6774(91)90006-K.
- 2 Zhengbing Bian, Qian-Ping Gu, and Mingzhe Zhu. Practical algorithms for branch-decompositions of planar graphs. *Discret. Appl. Math.*, 199:156–171, 2016. doi:10.1016/J.DAM.2014.12.017.
- 3 Hans L. Bodlaender. Dynamic programming on graphs with bounded treewidth. In Timo Lepistö and Arto Salomaa, editors, *Automata, Languages and Programming, 15th International Colloquium, ICALP88, Tampere, Finland, July 11-15, 1988, Proceedings*, Lecture Notes in Computer Science, pages 105–118. Springer, 1988. doi:10.1007/3-540-19488-6_110.
- 4 Hans L. Bodlaender. A linear-time algorithm for finding tree-decompositions of small treewidth. *SIAM J. Comput.*, 25(6):1305–1317, 1996. doi:10.1137/S0097539793251219.
- 5 Hans L. Bodlaender and Dimitrios M. Thilikos. Constructive linear time algorithms for branchwidth. In Pierpaolo Degano, Roberto Gorrieri, and Alberto Marchetti-Spaccamela, editors, *Proceedings of the 24th International Colloquium on Automata, Languages and Programming (ICALP'97)*, volume 1256 of *Lecture Notes in Computer Science*, pages 627–637. Springer, 1997. doi:10.1007/3-540-63165-8_217.
- 6 Vincent Bouchitté and Ioan Todinca. Treewidth and minimum fill-in: Grouping the minimal separators. *SIAM J. Comput.*, 31(1):212–232, 2001. doi:10.1137/S0097539799359683.
- 7 Bruno Courcelle. The Monadic Second-Order Logic of Graphs. I. Recognizable Sets of Finite Graphs. *Inf. Comput.*, 85(1):12–75, 1990. doi:10.1016/0890-5401(90)90043-H.
- 8 Holger Dell, Christian Komusiewicz, Nimrod Talmon, and Mathias Weller. The PACE 2017 parameterized algorithms and computational experiments challenge: The second iteration. In Daniel Lokshtanov and Naomi Nishimura, editors, *12th International Symposium on Parameterized and Exact Computation, IPEC 2017, Vienna, Austria, September 6-8, 2017, LIPIcs*, pages 30:1–30:12. Schloss Dagstuhl - Leibniz-Zentrum für Informatik, 2017. doi:10.4230/LIPICS.IPEC.2017.30.
- 9 Fedor V. Fomin and Dieter Kratsch. *Exact Exponential Algorithms*. Texts in Theoretical Computer Science. An EATCS Series. Springer, 2010. doi:10.1007/978-3-642-16533-7.
- 10 Fedor V. Fomin, Frédéric Mazoit, and Ioan Todinca. Computing branchwidth via efficient triangulations and blocks. *Discret. Appl. Math.*, 157(12):2726–2736, 2009. doi:10.1016/J.DAM.2008.08.009.
- 11 Fedor V. Fomin and Dimitrios M. Thilikos. Branchwidth of graphs. In *Encyclopedia of Algorithms*, pages 232–237. 2016. doi:10.1007/978-1-4939-2864-4_55.
- 12 Fedor V. Fomin, Ioan Todinca, and Yngve Villanger. Large induced subgraphs via triangulations and CMSO. *SIAM J. Comput.*, 44(1):54–87, 2015. doi:10.1137/140964801.
- 13 Fedor V. Fomin and Yngve Villanger. Treewidth computation and extremal combinatorics. *Comb.*, 32(3):289–308, 2012. doi:10.1007/S00493-012-2536-Z.
- 14 James F. Geelen, Bert Gerards, Neil Robertson, and Geoff Whittle. Obstructions to branch-decomposition of matroids. *J. Comb. Theory B*, 96(4):560–570, 2006. doi:10.1016/J.JCTB.2005.11.001.
- 15 Qian-Ping Gu and Hisao Tamaki. Optimal branch-decomposition of planar graphs in $O(n^3)$ time. *ACM Trans. Algorithms*, 4(3):30:1–30:13, 2008. doi:10.1145/1367064.1367070.
- 16 Illya V. Hicks. Graphs, branchwidth, and tangles! oh my! *Networks*, 45(2):55–60, 2005. doi:10.1002/NET.20050.

■ **Table 1** Experimental results for instances shown in Table 3 in [23]. We excluded the instance “Pmin” from this table, as its detail is unclear. The columns “Alg 1”, “Alg 2”, and “SAT” are the results for Algorithm 1, Algorithm 2, and the SAT-encoding of [23] executed on our computational environment and the columns “SAT*” and “Tangle*” are those for the SAT-encoding and the tangle-based algorithm of [16] that are reported in [23]. Note that the results in the two rightmost columns are obtained in a different computational environment with time limit 2,000 seconds from the others. The entries “*” and MO indicate that the branchwidth can be computed within 24 hours and cannot be computed due to an out-of-memory error, respectively.

instance	$ V $	$ E $	bw	Alg 1	Alg 2	SAT	SAT*	Tangle*
Ellingham	78	117	6	2.364	1.079	–	–	–
B10Cage	70	106	–	–	–	–	–	–
Watkin	50	75	6	1.731	0.624	–	–	–
Paley17	17	68	10	0.122	0.121	–	–	–
Kittell	23	63	6	0.123	0.123	–	–	315.88
Holt	27	54	9	0.844	0.259	–	*	MO
Shrikhande	16	48	8	0.120	0.121	–	*	*
Errera	17	45	6	0.108	0.118	–	1,384.21	3.70
Brinkmann	21	42	8	0.248	0.152	–	–	3,163.38
5x5-grid	25	40	5	0.188	0.159	233.19	13.45	0.06
Folkman	20	40	6	0.127	0.128	430.36	1,518.40	3.40
Clebsch	16	40	8	0.126	0.123	–	–	2,017.62
Poussin	15	39	6	0.117	0.115	–	645.63	4.75
Paley13	13	39	7	0.111	0.112	–	–	179.11
Robertson	19	38	8	0.168	0.144	–	–	3,906.94
McGee	24	36	7	0.929	0.282	–	–	177.92
Nauru	24	36	6	0.316	0.163	338.78	436.23	43.34
Hoffman	16	32	6	0.123	0.122	111.35	997.97	3.97
Desargues	20	30	6	0.204	0.159	123.13	474.72	2.10
Dodecahedron	20	30	6	0.261	0.159	239.67	152.96	2.29
Flower Snark	20	30	6	0.224	0.155	158.72	995.93	1.87
Pappus	18	27	6	0.210	0.147	86.39	241.12	1.76
Sousselier	16	27	5	0.124	0.118	5.528	18.47	0.12
Goldner–Harary	11	27	4	0.102	0.106	2.444	9.97	0.48
4x4-grid	16	24	4	0.128	0.120	1.015	3.77	0.10
Chvátal	12	24	6	0.115	0.113	49.98	81.20	0.82
Grötzsch	11	20	5	0.110	0.112	3.345	11.37	0.55
Dürer	12	18	4	0.115	0.116	0.655	2.45	0.01
Franklin	12	18	4	0.114	0.113	0.598	4.85	0.04
Frucht	12	18	3	0.108	0.107	0.452	2.16	0.41
Tietze	12	18	4	0.113	0.115	0.662	1.52	0.04
Herschel	11	18	4	0.110	0.107	0.642	8.49	0.08
Petersen	10	15	4	0.111	0.113	0.513	1.62	0.09
3x3-grid	9	12	3	0.108	0.105	0.349	1.10	0.02
Wagner	8	12	4	0.104	0.110	0.401	1.54	0.02
Moser spindle	7	11	3	0.104	0.091	0.354	1.05	0.014
Prism	6	9	3	0.104	0.103	0.313	1.33	0.03
Butterfly	5	6	2	0.097	0.100	0.300	2.11	0.02
Bull	5	5	2	0.087	0.090	0.300	0.00	0.00
Diamond	4	5	2	0.097	0.089	0.301	2.09	52.54

- 17 Illya V. Hicks. Planar branch decompositions I: the ratcatcher. *INFORMS J. Comput.*, 17(4):402–412, 2005. doi:10.1287/IJOC.1040.0075.
- 18 Jisu Jeong, Eun Jung Kim, and Sang-il Oum. Finding branch-decompositions of matroids, hypergraphs, and more. *SIAM J. Discret. Math.*, 35(4):2544–2617, 2021. doi:10.1137/19M1285895.
- 19 Ton Kloks, Jan Kratochvíl, and Haiko Müller. Computing the branchwidth of interval graphs. *Discret. Appl. Math.*, 145(2):266–275, 2005. doi:10.1016/J.DAM.2004.01.015.
- 20 Yasuaki Kobayashi and Yu Nakahata. A note on exponential-time algorithms for linearwidth. *CoRR*, abs/2010.02388, 2020. arXiv:2010.02388.
- 21 Tuukka Korhonen and Sang-il Oum. Branch-width of connectivity functions is fixed-parameter tractable. *CoRR*, abs/2601.04756, 2026. arXiv:2601.04756, doi:10.48550/ARXIV.2601.04756.
- 22 Łukasz Kowalik, Marcin Mucha, Wojciech Nadara, Marcin Pilipczuk, Manuel Sorge, and Piotr Wygocki. The PACE 2020 parameterized algorithms and computational experiments challenge: Treedepth. In Yixin Cao and Marcin Pilipczuk, editors, *15th International Symposium on Parameterized and Exact Computation, IPEC 2020, Hong Kong (Virtual Conference), December 14–18, 2020*, LIPIcs, pages 37:1–37:18. Schloss Dagstuhl - Leibniz-Zentrum für Informatik, 2020. doi:10.4230/LIPICS.IPEC.2020.37.
- 23 Neha Lodha, Sebastian Ordyniak, and Stefan Szeider. A SAT approach to branchwidth. *ACM Trans. Comput. Log.*, 20(3):15:1–15:24, 2019. doi:10.1145/3326159.
- 24 Sang-il Oum. Computing rank-width exactly. *Inf. Process. Lett.*, 109(13):745–748, 2009. doi:10.1016/J.IPL.2009.03.018.
- 25 Neil Robertson and Paul D. Seymour. Graph minors. x. obstructions to tree-decomposition. *J. Comb. Theory B*, 52(2):153–190, 1991. doi:10.1016/0095-8956(91)90061-N.
- 26 Paul D. Seymour and Robin Thomas. Call routing and the ratcatcher. *Comb.*, 14(2):217–241, 1994. doi:10.1007/BF01215352.
- 27 Hisao Tamaki. Positive-instance driven dynamic programming for treewidth. *J. Comb. Optim.*, 37(4):1283–1311, 2019. doi:10.1007/S10878-018-0353-Z.

A Further experimental results

Table 2 Performance comparison on named graphs (1/4).

Instance	$ V $	$ E $	bw	SAT	Alg 1	Alg 2
AhrensSzekeresGeneralizedQuadrangleGraph_3	27	135	16	–	0.277	0.383
Balaban10Cage	70	105	–	–	–	–
Balaban11Cage	112	168	–	–	–	–
BalancedTree_3_5	364	363	2	–	0.139	0.135
BarbellGraph_10_5	25	96	7	–	0.113	0.113
BidiakisCube	12	18	4	0.624	0.115	0.113
BiggsSmithGraph	102	153	–	–	–	–
BlanusaFirstSnarkGraph	18	27	5	8.163	0.14	0.135
BlanusaSecondSnarkGraph	18	27	4	1.542	0.126	0.118
BrinkmannGraph	21	42	8	–	0.248	0.152
BrouwerHaemersGraph	81	810	–	–	–	–
BubbleSortGraph_5	120	240	–	–	–	–
BuckyBall	60	90	–	–	–	–
CameronGraph	231	3465	–	–	–	–
Cell120	600	1200	–	–	–	–
ChvatalGraph	12	24	6	49.981	0.115	0.113
CirculantGraph_20_5	20	20	2	0.42	0.105	0.107
CircularLadderGraph_20	40	60	4	69.035	0.327	0.223
ClebschGraph	16	40	8	–	0.126	0.123
CompleteBipartiteGraph_25_20	45	500	20	–	0.244	0.225
CompleteGraph_15	15	105	10	–	0.101	0.099
CoxeterGraph	28	42	7	–	1.215	0.297
CubeGraph_6	64	192	–	–	–	–
CycleGraph_100	100	100	2	98.221	1.411	0.592
DejterGraph	112	336	–	–	–	–
DesarguesGraph	20	30	6	123.133	0.204	0.159
DodecahedralGraph	20	30	6	239.696	0.261	0.215
DorogovtsevGoltsevMendesGraph	3282	6561	–	–	–	–
DoubleStarSnark	30	45	6	–	0.501	0.225
DurerGraph	12	18	4	0.655	0.115	0.116
DyckGraph	32	48	8	–	5.05	1.525
EllinghamHorton54Graph	54	81	6	–	1.575	0.531
EllinghamHorton78Graph	78	117	6	–	2.364	1.079
ErreraGraph	17	45	6	–	0.108	0.118
F26AGraph	26	39	7	–	1.135	0.407
FibonacciTree_10	143	142	2	–	0.105	0.108
FlowerSnark	20	30	6	158.722	0.224	0.155
FoldedCubeGraph_7	64	224	–	–	–	–
FolkmanGraph	20	40	6	430.357	0.127	0.128
FosterGraph	90	135	–	–	–	–
FranklinGraph	12	18	4	0.598	0.114	0.113
FriendshipGraph_10	21	30	2	0.876	0.093	0.107
FruchtGraph	12	18	3	0.452	0.108	0.107
GeneralizedPetersenGraph_10_4	20	30	6	133.92	0.212	0.164
GoethalsSeidelGraph_2_3	16	72	10	–	0.118	0.121

Continued on next page

■ **Table 3** Performance comparison on named graphs (2/4) (continued).

Instance	$ V $	$ E $	bw	SAT	Alg 1	Alg 2
GoldnerHararyGraph	11	27	4	2.444	0.102	0.106
GossetGraph	56	756	36	–	0.638	0.833
GrayGraph	54	81	9	–	489.292	19.648
Grid2dGraph_20_40	800	1540	–	–	–	–
Grid2dGraph_5_5	25	40	5	233.19	0.188	0.159
GrotzschGraph	11	20	5	3.345	0.11	0.112
HallJankoGraph	100	1800	–	–	–	–
HanoiTowerGraph_4_3	64	168	12	–	494.091	49.575
HararyGraph_6_15	15	45	6	–	0.114	0.116
HarborthGraph	52	104	4	–	0.147	0.139
HarriesGraph	70	105	–	–	–	–
HarriesWongGraph	70	105	–	–	–	–
HeawoodGraph	14	21	5	3.103	0.125	0.123
HerschelGraph	11	18	4	0.642	0.11	0.107
HexahedralGraph	8	12	4	0.407	0.106	0.11
HigmanSimsGraph	100	1100	–	–	–	–
HoffmanGraph	16	32	6	111.353	0.123	0.122
HoffmanSingletonGraph	50	175	–	–	–	–
HoltGraph	27	54	9	–	0.844	0.259
HortonGraph	96	144	6	–	3.26	1.602
HouseGraph	5	6	2	0.327	0.102	0.105
HouseXGraph	5	8	3	0.342	0.098	0.101
HyperStarGraph_10_2	45	72	6	–	–	0.158
HyperStarGraph_10_5	252	630	–	–	–	–
IcosahedralGraph	12	30	6	158.176	0.115	0.116
JohnsonGraph_10_4	210	2520	–	–	–	–
JohnsonGraph_8_2	28	168	15	–	0.141	0.144
KittellGraph	23	63	6	–	0.123	0.123
Klein3RegularGraph	56	84	–	–	–	–
Klein7RegularGraph	24	84	12	–	0.241	0.223
KneserGraph_10_2	45	630	30	–	0.431	0.585
KneserGraph_8_3	56	280	–	–	–	–
KrackhardtKiteGraph	10	18	3	0.464	0.107	0.106
LadderGraph_20	40	58	2	38.487	0.116	0.115
LjubljanaGraph	112	168	–	–	–	–
LollipopGraph_7_5	12	26	5	18.837	0.1	0.089
M22Graph	77	616	–	–	–	–
MarkstroemGraph	24	36	4	13.61	0.15	0.137
McGeeGraph	24	36	7	–	0.929	0.282
MeredithGraph	70	140	6	–	1.195	0.57
MoebiusKantorGraph	16	24	6	58.467	0.191	0.171
MoserSpindle	7	11	3	0.354	0.104	0.091
NauruGraph	24	36	6	338.777	0.316	0.163
NKStarGraph_5_3	60	120	12	–	–	88.064
NKStarGraph_8_2	56	196	–	–	–	–

Continued on next page

■ **Table 4** Performance comparison on named graphs (3/4) (continued).

Instance	$ V $	$ E $	bw	SAT	Alg 1	Alg 2
NonisotropicOrthogonalPolarGraph_3_5	15	60	8	–	0.109	0.109
NonisotropicUnitaryPolarGraph_3_3	63	1008	40	–	0.611	0.978
NStarGraph_5	120	240	–	–	–	–
OctahedralGraph	6	12	4	0.411	0.103	0.104
OddGraph_3	10	15	4	0.508	0.101	0.1
OddGraph_4	35	70	12	–	88.59	5.502
OddGraph_5	126	315	–	–	–	–
OrthogonalArrayBlockGraph_4_3	9	36	6	–	0.092	0.089
OrthogonalPolarGraph_5_2	15	45	9	–	0.126	0.138
PaleyGraph_17	17	68	10	–	0.122	0.121
PappusGraph	18	27	6	86.388	0.21	0.147
PasechnikGraph_1	9	9	2	0.331	0.1	0.089
PasechnikGraph_2	49	441	30	–	3.739	6.75
PasechnikGraph_3	121	3025	–	–	–	–
PathGraph_100	100	99	2	94.348	0.104	0.105
PerkelGraph	57	171	–	–	–	–
PetersenGraph	10	15	4	0.513	0.111	0.113
PoussinGraph	15	39	6	–	0.117	0.115
RingedTree_10	1023	2043	–	–	–	–
RingedTree_6	63	123	7	–	4.485	1.131
RingedTree_8	255	507	–	–	–	–
RobertsonGraph	19	38	8	–	0.168	0.144
SchlaefliGraph	27	216	16	–	0.123	0.128
ShrikhandeGraph	16	48	8	–	0.12	0.121
SierpinskiGasketGraph_3	15	27	3	0.818	0.106	0.109
SierpinskiGasketGraph_5	123	243	4	–	0.473	0.291
SimsGewirtzGraph	56	280	–	–	–	–
SousselierGraph	16	27	5	5.528	0.124	0.118
SquaredSkewHadamardMatrixGraph_1	9	18	4	0.616	0.104	0.104
SquaredSkewHadamardMatrixGraph_2	49	588	32	–	0.501	0.895
SquaredSkewHadamardMatrixGraph_3	121	3630	80	–	10.039	51.771
StarGraph_100	101	100	1	–	0.094	0.095
SwitchedSquaredSkewHadamardMatrixGraph_1	10	15	4	0.479	0.11	0.111
SwitchedSquaredSkewHadamardMatrixGraph_2	50	525	32	–	0.99	1.203
SwitchedSquaredSkewHadamardMatrixGraph_3	122	3355	80	–	18.118	54.602
SylvesterGraph	36	90	15	–	378.549	117.714
SymplecticDualPolarGraph_4_3	40	240	23	–	6.651	8.028
SymplecticDualPolarGraph_4_4	85	850	–	–	–	–
SymplecticPolarGraph_4_3	40	240	24	–	8.548	24.009
SymplecticPolarGraph_4_4	85	850	–	–	–	–
SzekeresSnarkGraph	50	75	6	–	1.685	0.544
T2starGeneralizedQuadrangleGraph_2	8	16	4	0.478	0.103	0.107
T2starGeneralizedQuadrangleGraph_4	64	576	–	–	–	–
TaylorTwographDescendantSRG_3	27	135	16	–	0.248	0.384
TaylorTwographSRG_3	28	210	18	–	0.201	0.203

Continued on next page

■ **Table 5** Performance comparison on named graphs (4/4) (continued).

Instance	$ V $	$ E $	bw	SAT	Alg 1	Alg 2
TetrahedralGraph	4	6	3	0.333	0.1	0.099
ThomsenGraph	6	9	3	0.344	0.103	0.103
TietzeGraph	12	18	4	0.662	0.113	0.115
Toroidal6RegularGrid2dGraph_4_6	24	72	8	–	0.138	0.135
TruncatedIcosidodecahedralGraph	120	180	–	–	–	–
TruncatedTetrahedralGraph	12	18	4	0.913	0.118	0.117
Tutte12Cage	126	189	–	–	–	–
TutteCoxeterGraph	30	45	8	–	8.308	1.037
TutteGraph	46	69	5	–	0.35	0.267
WagnerGraph	8	12	4	0.401	0.104	0.11
WatkinsSnarkGraph	50	75	6	–	1.731	0.624
WellsGraph	32	80	14	–	34.231	26.103
WheelGraph_100	100	198	3	–	1.399	0.592
WienerArayaGraph	42	67	7	–	1.429	0.658
WorldMap	166	323	5	–	0.798	0.324

■ **Table 6** Performance comparison on treedepth instances (1/5).

Instance	$ V $	$ E $	bw	SAT	Alg 1	Alg 2
exact_001.gr	10	15	4	0.511	0.111	0.111
exact_002.gr	16	58	8	–	0.113	0.116
exact_003.gr	17	62	7	–	0.105	0.108
exact_004.gr	18	18	2	0.371	0.102	0.102
exact_005.gr	20	21	2	0.408	0.105	0.104
exact_006.gr	20	24	2	0.475	0.095	0.107
exact_007.gr	20	30	6	157.751	0.243	0.157
exact_008.gr	20	39	3	3.374	0.107	0.108
exact_009.gr	21	25	3	0.942	0.112	0.113
exact_010.gr	21	72	8	–	0.111	0.112
exact_011.gr	23	24	2	0.512	0.105	0.106
exact_012.gr	24	28	2	0.673	0.107	0.108
exact_013.gr	25	46	3	7.62	0.109	0.108
exact_014.gr	25	52	5	203.209	0.117	0.116
exact_015.gr	26	30	2	0.769	0.103	0.104
exact_016.gr	26	51	3	10.494	0.105	0.111
exact_017.gr	26	64	7	–	0.131	0.121
exact_018.gr	27	87	7	–	0.12	0.118
exact_019.gr	28	57	4	48.094	0.116	0.115
exact_020.gr	28	168	15	–	0.138	0.142
exact_021.gr	29	38	2	1.89	0.117	0.11
exact_022.gr	29	47	3	9.454	0.112	0.113
exact_023.gr	30	38	3	2.805	0.12	0.118
exact_024.gr	30	45	5	100.297	0.293	0.186
exact_025.gr	30	51	4	48.875	0.122	0.119
exact_026.gr	30	59	4	561.575	0.116	0.119
exact_027.gr	30	70	6	–	0.134	0.126
exact_028.gr	31	64	4	385.584	0.123	0.12
exact_029.gr	32	119	8	–	0.118	0.118
exact_030.gr	32	137	12	–	0.24	0.171
exact_031.gr	33	78	7	–	0.135	0.134
exact_032.gr	34	78	5	–	0.133	0.124
exact_033.gr	34	82	8	–	0.137	0.13
exact_034.gr	35	42	3	5.872	0.134	0.126
exact_035.gr	35	70	3	105.028	0.114	0.116
exact_036.gr	37	68	3	23.392	0.112	0.104
exact_037.gr	39	48	3	8.326	0.113	0.11
exact_038.gr	39	62	3	26.409	0.119	0.117
exact_039.gr	40	54	3	13.121	0.129	0.127
exact_040.gr	40	73	4	–	0.139	0.127
exact_041.gr	40	79	4	–	0.133	0.123
exact_042.gr	40	112	7	–	0.128	0.127
exact_043.gr	40	129	8	–	0.177	0.139
exact_044.gr	41	52	3	24.177	0.131	0.126
exact_045.gr	41	58	6	–	1.539	0.469

Continued on next page

■ **Table 7** Performance comparison on treedepth instances (2/5) (continued).

Instance	$ V $	$ E $	bw	SAT	Alg 1	Alg 2
exact_046.gr	41	76	4	–	0.124	0.117
exact_047.gr	41	256	19	–	1.055	0.388
exact_048.gr	42	67	7	–	1.436	0.667
exact_049.gr	42	73	6	–	0.912	0.243
exact_050.gr	43	53	3	13.815	0.152	0.139
exact_051.gr	45	91	5	–	0.175	0.145
exact_052.gr	45	630	30	493.793	0.436	0.563
exact_053.gr	46	63	3	53.679	0.115	0.122
exact_054.gr	47	67	4	160.085	0.178	0.142
exact_055.gr	49	85	4	–	0.125	0.119
exact_056.gr	50	59	3	83.7	0.117	0.118
exact_057.gr	50	75	7	–	8.855	1.251
exact_058.gr	50	98	5	–	0.176	0.142
exact_059.gr	50	525	32	366.016	1.015	1.127
exact_060.gr	51	151	8	–	0.173	0.143
exact_061.gr	53	100	7	–	0.552	0.239
exact_062.gr	54	66	4	–	0.228	0.17
exact_063.gr	55	100	5	–	0.256	0.183
exact_064.gr	57	79	3	87.537	0.138	0.131
exact_065.gr	57	153	6	–	0.165	0.139
exact_066.gr	59	154	6	–	0.139	0.134
exact_067.gr	60	72	3	107.222	0.14	0.132
exact_068.gr	60	90	10	–	–	552.296
exact_069.gr	60	119	4	–	0.168	0.139
exact_070.gr	60	176	10	–	7.414	1.294
exact_071.gr	61	151	10	–	0.264	0.169
exact_072.gr	62	108	4	–	0.159	0.138
exact_073.gr	62	159	9	–	0.693	0.266
exact_074.gr	63	1008	40	–	0.649	0.998
exact_075.gr	64	168	12	–	498.103	48.922
exact_076.gr	65	128	9	–	0.82	0.24
exact_077.gr	66	120	5	–	0.301	0.184
exact_078.gr	67	152	6	–	0.19	0.147
exact_079.gr	68	83	3	191.805	0.14	0.134
exact_080.gr	68	116	3	–	0.122	0.12
exact_081.gr	70	79	2	39.004	0.123	0.12
exact_082.gr	70	139	4	–	0.3	0.134
exact_083.gr	70	274	12	249.498	1.528	0.557
exact_084.gr	71	103	–	–	–	–
exact_085.gr	72	158	5	–	0.187	0.168
exact_086.gr	75	118	4	–	0.137	0.199
exact_087.gr	75	304	8	270.882	0.184	0.151
exact_088.gr	77	146	10	–	–	135.583
exact_089.gr	77	254	8	254.525	0.291	0.163
exact_090.gr	77	616	–	474.88	–	–

Continued on next page

■ **Table 8** Performance comparison on treedepth instances (3/5) (continued).

Instance	$ V $	$ E $	bw	SAT	Alg 1	Alg 2
exact_091.gr	80	98	3	–	0.143	0.139
exact_092.gr	80	120	–	–	–	–
exact_093.gr	80	159	4	–	0.321	0.16
exact_094.gr	81	810	–	–	–	–
exact_095.gr	82	100	2	59.071	0.169	0.15
exact_096.gr	84	339	9	–	0.414	0.238
exact_097.gr	86	123	4	–	0.156	0.132
exact_098.gr	87	406	12	–	0.994	0.324
exact_099.gr	88	133	5	–	1.43	0.637
exact_100.gr	90	135	–	–	–	–
exact_101.gr	90	135	–	–	–	–
exact_102.gr	92	104	3	–	0.174	0.153
exact_103.gr	92	131	6	–	8.079	1.63
exact_104.gr	92	285	8	–	0.333	0.2
exact_105.gr	93	111	4	–	0.231	0.174
exact_106.gr	94	118	4	–	0.269	0.191
exact_107.gr	95	121	5	–	2.265	0.702
exact_108.gr	96	153	8	–	29.653	2.06
exact_109.gr	98	109	3	–	0.222	0.169
exact_110.gr	99	119	3	–	0.194	0.162
exact_111.gr	100	384	9	–	0.581	0.246
exact_112.gr	100	1800	–	–	–	–
exact_113.gr	102	113	4	–	0.125	0.133
exact_114.gr	102	142	4	–	0.177	0.138
exact_115.gr	102	144	4	–	0.384	0.265
exact_116.gr	105	312	8	–	0.367	0.217
exact_117.gr	105	441	12	–	6.447	1.378
exact_118.gr	110	219	4	–	0.347	0.153
exact_119.gr	110	223	11	–	–	57.89
exact_120.gr	111	1029	27	–	148.875	18.422
exact_121.gr	112	168	–	–	–	–
exact_122.gr	112	425	–	–	–	–
exact_123.gr	113	164	5	–	3.239	1.241
exact_124.gr	113	168	–	–	–	–
exact_125.gr	115	161	4	–	0.192	0.144
exact_126.gr	117	146	4	–	0.182	0.154
exact_127.gr	119	147	4	–	0.138	0.126
exact_128.gr	120	157	5	–	5.073	1.615
exact_129.gr	120	240	–	–	–	–
exact_130.gr	120	479	6	–	2.442	0.621
exact_131.gr	121	220	–	–	–	–
exact_132.gr	123	243	4	–	0.476	0.315
exact_133.gr	123	409	8	–	0.996	0.284
exact_134.gr	125	141	4	–	17.289	3.517
exact_135.gr	126	189	–	–	–	–

Continued on next page

■ **Table 9** Performance comparison on treedepth instances (4/5) (continued).

Instance	$ V $	$ E $	bw	SAT	Alg 1	Alg 2
exact_136.gr	126	315	–	–	–	–
exact_137.gr	126	4100	47	–	–	43.924
exact_138.gr	127	189	–	–	–	–
exact_139.gr	128	266	11	–	–	275.225
exact_140.gr	131	193	–	–	–	–
exact_141.gr	132	191	5	–	4.299	1.29
exact_142.gr	133	167	4	–	0.248	0.202
exact_143.gr	138	447	8	–	0.79	0.306
exact_144.gr	138	493	12	–	–	1.323
exact_145.gr	140	279	5	–	0.957	0.309
exact_146.gr	141	214	–	–	–	–
exact_147.gr	142	196	5	–	4.808	1.461
exact_148.gr	145	2512	44	–	297.415	11.615
exact_149.gr	146	250	7	–	45.87	6.271
exact_150.gr	148	198	5	–	6.98	1.939
exact_151.gr	150	599	6	–	2.026	0.258
exact_152.gr	151	223	–	–	–	–
exact_153.gr	152	476	9	–	5.739	1.251
exact_154.gr	157	3541	31	–	–	278.625
exact_155.gr	160	240	–	–	–	–
exact_156.gr	160	319	4	–	0.533	0.274
exact_157.gr	163	195	4	–	0.744	0.319
exact_158.gr	163	278	8	–	–	63.475
exact_159.gr	165	522	9	–	4.06	1.089
exact_160.gr	167	213	5	–	0.375	0.211
exact_161.gr	167	328	5	–	0.79	0.327
exact_162.gr	170	218	6	–	316.127	25.113
exact_163.gr	170	255	–	–	–	–
exact_164.gr	170	679	6	–	2.949	1.369
exact_165.gr	176	186	3	–	0.531	0.303
exact_166.gr	176	3973	29	–	3.252	1.333
exact_167.gr	180	270	–	–	–	–
exact_168.gr	180	359	5	–	2.145	0.368
exact_169.gr	181	253	6	–	60.95	7.893
exact_170.gr	184	268	–	–	–	–
exact_171.gr	191	283	–	–	–	–
exact_172.gr	195	342	6	–	27.777	4.688
exact_173.gr	198	692	9	–	8.168	1.318
exact_174.gr	199	265	5	–	18.844	3.585
exact_175.gr	200	300	–	–	–	–
exact_176.gr	200	799	6	–	22.262	6.238
exact_177.gr	204	248	4	–	0.942	0.26
exact_178.gr	210	2520	–	–	–	–
exact_179.gr	212	257	5	–	6.501	1.964
exact_180.gr	214	785	9	–	9.719	1.574

Continued on next page

■ **Table 10** Performance comparison on treedepth instances (5/5) (continued).

Instance	$ V $	$ E $	bw	SAT	Alg 1	Alg 2
exact_181.gr	223	265	4	–	0.495	0.211
exact_182.gr	225	771	9	–	1.713	0.769
exact_183.gr	231	3465	–	–	–	–
exact_184.gr	244	290	4	–	0.544	0.217
exact_185.gr	276	1187	10	–	10.02	1.928
exact_186.gr	280	360	4	–	5.347	1.277
exact_187.gr	300	450	–	–	–	–
exact_188.gr	300	508	–	–	–	–
exact_189.gr	300	1199	6	–	35.1	7.161
exact_190.gr	352	440	6	–	–	62.734
exact_191.gr	439	873	–	–	–	–
exact_192.gr	441	1638	–	–	–	–
exact_193.gr	449	2213	13	–	488.196	40.182
exact_194.gr	450	1799	7	–	595.01	232.541
exact_195.gr	451	587	–	–	–	–
exact_196.gr	457	684	–	–	–	–
exact_197.gr	469	614	8	–	–	145.815
exact_198.gr	479	638	–	–	–	–
exact_199.gr	491	645	–	–	–	–
exact_200.gr	498	702	–	–	–	–