

Data Mining on Dota 2 Matches

Abstract

Dota (Defense of the Ancient) 2 is a combination of RTS including perspective and a heavy requirement of tactics and team co-ordination and RPG including itemization and leveling up. This paper applies different model to generate analysis of the skill stats in the match and draws a series conclusions to help players and teams to establish their strategy. In the future, with the result in this paper, it is possible to get a model for match predicting. The model can calculate a static score for the teams. And then, apply to statistical model.

Background

Dota (Defense of the Ancient) 2 is a combination of RTS including perspective and a heavy requirement of tactics and team co-ordination and RPG including itemization and leveling up. Players are split into two competing teams (Radiant and Dire), each consisting of up to five players. The main objective in Dota 2 is to destroy the enemy Ancient inside their stronghold. These strongholds are protected by multiple towers down 3 lanes. The player controls a Hero, a strategically-powerful unit with unique abilities and characteristics, which fights for them and gains strength by leveling up and buying items with gold. Experience is earned when creeps and heroes die. Gold is gained passively over time, by killing creeps, by killing enemy heroes and by destroying buildings.

Heroes are all unique characters within Dota 2. At the start of each game, players select a Hero from the Hero Pool. Heroes are split into 3 categories: strength, agility and intelligence. Dota 2 has currently implemented 111 of the 112 Heroes.

It is a multiplayer online battle arena video game published by Valve Corporation. Every year Valve hosts a great electronic sports Dota 2 championship tournament: The International. It attracts many different players from all over the world, with a large prize pool (In 2015, it was \$18 million). Also, millions of players played the game online every day. It is a team fight between two five-player teams, each of which occupies a stronghold in a corner of the map. Who destroy the Ancient on the other side wins the game. It has more than 100 heroes and complicated item system. So, for this big game, players need a data analysis report to guide them to play it well. All the teams need data mining process to see how to play against their opponent including which hero should be banned, which should be picked and how to make a strategy to form a hero group. Currently, teams has their data analyzer help to make a basic statistic on which hero has higher win rate and how to combine a strategy with hero picked in a game. They may also try to study their opponent's preference on hero selecting. But in whole Dota field, it lacks a deeper data mining

with professional statistic methods applied in economy or other serious subject. Players always use their own feeling to pick hero in a match or just make a simple ban/pick strategy. So, in this project, we will use machine learning method to find out those important factors and make a prediction for the match. In this way, if the result is satisfactory, it can generate a model for teams to build up their strategy when facing different opponents.

Data Collection and Description

I collected match data from <http://www.dotabuff.com/esports/matches>. It contains the details of matches of the game and some important statistics such as damage, experience and gold of each hero. I picked the data only from recent esports games, so it reflects the high level skill players' strategy, which can give us more confident machine learning result. These matches are under the newest version of Dota 2 6.86f.

The attribute information is shown as below:

1. Match ID - Describe the identification of the match.
2. Region - The match server location.
3. Duration - The time period of the match, excluding the ban/pick time.
4. Winner - Radiant or Dire.
5. Hero - The hero picked in the game.
6. K - For one hero, the number of enemy hero he kills in the game.
7. D - For one hero, the time he dies in the game.
8. A - For one hero, the time he assists to kill an enemy hero in the game.
9. XPM - The experience per minute of one hero.
10. GPM - The gold per minute of one hero.
11. DMG - The total damage of one hero deals in the game.

(From 5 to 11, these numbers describe one hero's performance in a game. Since it has 10 heroes, 5 vs 5, in the match, we use number 1 to 10 to express each group of statistics of one hero. And 1 to 5 means radiant hero, whereas 6 to 10 dire.)

Algorithm and Model

For the data, we are going to apply different algorithms to analyze what are the main factors that influence the match. Hence, we can draw conclusions of how to win the game and how to operate different kind heroes.

0. Data Preprocessing

The raw data lacks some hero in the game, so we should do some work to uniform the hero levels, which can help when we apply the hero analysis.

```
dota.ordin <- read.csv(file = "D:/dotabuff.csv",header = T)
summary(dota.ordin)
```

```
##          ID              Region      Duration      Winner
##  Min.    :2.274e+09   China         :318   15:09   :   3   Dire    :472
##  1st Qu.:2.277e+09   Europe West :335   18:47   :   3   Radiant:494
##  Median :2.283e+09   Russia      :   6   23:09   :   3
##  Mean    :2.282e+09   SE Asia     :  92   23:27   :   3
##  3rd Qu.:2.286e+09   South America: 30   25:11   :   3
##  Max.    :2.291e+09   US East     :165   27:40   :   3
##                      US West      :  20   (Other):948
##
##          Hero1          K1          D1          A1
##  invoker          : 37   Min.    : 0.000   Min.    : 0.000   Min.    :
##  0.00
##  death-prophet   : 36   1st Qu.: 2.000   1st Qu.: 3.000   1st Qu.:
##  6.00
##  lion            : 35   Median   : 4.000   Median   : 5.000   Median
##  :10.00
##  vengeful-spirit: 34   Mean     : 5.101   Mean     : 5.521   Mean
##  :11.09
##  witch-doctor    : 33   3rd Qu.: 7.000   3rd Qu.: 8.000   3rd
##  Qu.:16.00
##  earth-spirit    : 26   Max.     :31.000   Max.     :23.000   Max.
##  :41.00
##  (Other)         :765
##
##          XPM1          GPM1          DMG1          Hero2
##  -            : 14   Min.    :109.0   4.9k     : 20   witch-doctor : 41
##  332          :   9   1st Qu.:277.0   6.2k     : 18   invoker      : 39
##  396          :   9   Median   :358.0   -         : 16   lion         : 37
##  194          :   7   Mean     :387.5   5.6k     : 15   vengeful-spirit: 35
##  285          :   7   3rd Qu.:494.2   4.2k     : 14   doom         : 29
##  246          :   6   Max.     :986.0   4.3k     : 12   spectre      : 27
##  (Other):914          (Other):871   (Other)   :758
##
##          K2          D2          A2          XPM2
##  Min.    : 0.000   Min.    : 0.000   Min.    : 0.00   -         : 13
##  1st Qu.: 2.000   1st Qu.: 3.000   1st Qu.: 5.00   369        :   9
##  Median : 4.000   Median   : 5.000   Median :10.00   392        :   7
##  Mean    : 5.245   Mean     : 5.171   Mean    :11.16   400        :   7
##  3rd Qu.: 7.000   3rd Qu.: 7.000   3rd Qu.:16.00   401        :   7
##  Max.    :32.000   Max.     :22.000   Max.     :46.00   279        :   6
##                      (Other):917
##
##          GPM2          DMG2          Hero3          K3
##  328          :   8   -         : 15   invoker      : 47   Min.    : 0.000
##  368          :   7   4.7k     : 15   zeus         : 33   1st Qu.: 2.000
##  231          :   6   5.3k     : 15   witch-doctor : 32   Median   : 4.000
##  306          :   6   3.8k     : 14   spectre      : 30   Mean     : 5.306
##  325          :   6   7.9k     : 14   vengeful-spirit: 29   3rd Qu.: 8.000
##  377          :   6   4.1k     : 13   natures-prophet: 28   Max.     :26.000
##  (Other):927   (Other):880   (Other)      :767
##
##          D3          A3          XPM3          GPM3
```

```

## Min.      : 0.000    Min.      : 0.00    -      : 13    301      : 8
## 1st Qu.: 3.000    1st Qu.: 5.25    336     : 10    276      : 7
## Median : 5.000    Median :10.00    513     : 8    464      : 7
## Mean    : 5.306    Mean    :11.06    434     : 7    231      : 6
## 3rd Qu.: 7.000    3rd Qu.:15.00    249     : 6    275      : 6
## Max.     :21.000    Max.     :39.00    296     : 6    395      : 6
##                                     (Other):916    (Other):926
##
##           DMG3                Hero4                K4                D4
## -          : 14    witch-doctor      : 38    Min.      : 0.00    Min.      : 0.000
## 5.9k       : 13    invoker            : 35    1st Qu.: 2.00    1st Qu.: 3.000
## 6.2k       : 13    vengeful-spirit: 33    Median : 4.00    Median : 5.000
## 6.4k       : 13    lion              : 31    Mean    : 5.18    Mean    : 5.287
## 4.3k       : 12    spectre             : 31    3rd Qu.: 8.00    3rd Qu.: 8.000
## 4.4k       : 12    sven                : 29    Max.     :30.00    Max.     :18.000
## (Other):889    (Other)              :769
##
##           A4                XPM4                GPM4                DMG4
## Min.      : 0.00    -          : 13    266     : 8    -          : 15
## 1st Qu.: 5.00    315         : 7    347     : 8    4.1k       : 15
## Median :10.00    178         : 6    245     : 7    5k         : 15
## Mean    :10.76    270         : 6    256     : 7    4.4k       : 14
## 3rd Qu.:15.00    272         : 6    326     : 7    3.7k       : 13
## Max.     :45.00    297         : 6    231     : 6    4.5k       : 13
##                                     (Other):922    (Other):923    (Other):881
##
##           Hero5                K5                D5                A5
## invoker      : 37    Min.      : 0.000    Min.      : 0.000    Min.      :
## 0.00
## beastmaster  : 33    1st Qu.: 2.000    1st Qu.: 3.000    1st Qu.:
## 5.00
## vengeful-spirit: 32    Median : 4.000    Median : 5.000    Median
## :10.00
## lion         : 29    Mean    : 4.873    Mean    : 5.212    Mean
## :10.91
## witch-doctor : 29    3rd Qu.: 7.000    3rd Qu.: 7.000    3rd
## Qu.:15.00
## faceless-void : 26    Max.     :32.000    Max.     :17.000    Max.
## :54.00
## (Other)      :780
##
##           XPM5                GPM5                DMG5                Hero6
## -          : 12    Min.      :116.0    4.5k     : 16    invoker      : 38
## 338        : 7    1st Qu.:279.0    -         : 14    lion         : 36
## 201        : 6    Median :367.0    4.3k     : 14    witch-doctor : 33
## 276        : 6    Mean    :387.7    3.2k     : 13    vengeful-spirit: 32
## 320        : 6    3rd Qu.:489.0    3.9k     : 13    death-prophet : 27
## 376        : 6    Max.     :877.0    9.3k     : 13    faceless-void : 26
## (Other):923                (Other):883    (Other)      :774
##
##           K6                D6                A6                XPM6
## Min.      : 0.000    Min.      : 0.000    Min.      : 0.00    -          : 12
## 1st Qu.: 2.000    1st Qu.: 3.000    1st Qu.: 5.00    386        : 7
## Median : 4.000    Median : 5.000    Median :10.00    303        : 6
## Mean    : 5.081    Mean    : 5.407    Mean    :11.24    334        : 6

```

```

## 3rd Qu.: 7.000 3rd Qu.: 7.750 3rd Qu.:16.00 359 : 6
## Max. :34.000 Max. :21.000 Max. :48.00 513 : 6
## (Other):923
## GPM6 DMG6 Hero7 K7
## 279 : 7 6.5k : 20 invoker : 43 Min. : 0.000
## 239 : 6 - : 15 outworld-devourer: 36 1st Qu.: 2.000
## 296 : 6 6.2k : 15 witch-doctor : 35 Median : 4.000
## 323 : 6 4.6k : 13 juggernaut : 31 Mean : 5.827
## 338 : 6 5.4k : 13 lion : 31 3rd Qu.: 8.000
## 373 : 6 5k : 13 beastmaster : 30 Max. :34.000
## (Other):929 (Other):877 (Other) :760
## D7 A7 XPM7 GPM7
## Min. : 0.000 Min. : 0.00 - : 13 Min. :105.0
## 1st Qu.: 3.000 1st Qu.: 5.00 359 : 7 1st Qu.:289.0
## Median : 5.000 Median :10.00 345 : 6 Median :392.5
## Mean : 5.163 Mean :10.73 397 : 6 Mean :412.1
## 3rd Qu.: 7.000 3rd Qu.:15.00 489 : 6 3rd Qu.:528.0
## Max. :18.000 Max. :38.00 564 : 6 Max. :960.0
## (Other):922
## DMG7 Hero8 K8 D8
## - : 15 lion : 46 Min. : 0.000 Min. : 0.000
## 4.5k : 13 invoker : 42 1st Qu.: 2.000 1st Qu.: 3.000
## 5k : 13 zeus : 41 Median : 4.000 Median : 5.000
## 9.4k : 12 doom : 33 Mean : 5.112 Mean : 5.353
## 2.9k : 11 natures-prophet: 27 3rd Qu.: 7.000 3rd Qu.: 7.000
## 3.8k : 11 beastmaster : 26 Max. :27.000 Max. :17.000
## (Other):891 (Other) :751
## A8 XPM8 GPM8 DMG8
## Min. : 0 - : 11 Min. :105.0 - : 15
## 1st Qu.: 5 317 : 7 1st Qu.:285.0 8.7k : 15
## Median :10 376 : 7 Median :369.0 4.8k : 14
## Mean :11 379 : 7 Mean :392.4 4.5k : 13
## 3rd Qu.:15 340 : 6 3rd Qu.:491.0 5.8k : 13
## Max. :47 344 : 6 Max. :941.0 9.3k : 13
## (Other):922 (Other):883
## Hero9 K9 D9 A9
## lion : 51 Min. : 0.000 Min. : 0.000 Min. :
0.00
## witch-doctor : 40 1st Qu.: 2.000 1st Qu.: 3.000 1st Qu.:
5.00
## faceless-void : 37 Median : 4.000 Median : 5.000 Median
:10.00
## invoker : 33 Mean : 4.757 Mean : 5.232 Mean
:11.02
## vengeful-spirit: 26 3rd Qu.: 7.000 3rd Qu.: 7.000 3rd
Qu.:16.00
## doom : 25 Max. :28.000 Max. :21.000 Max.
:40.00
## (Other) :754
## XPM9 GPM9 DMG9 Hero10

```

```
## -      : 12   Min.    :100.0   3.8k    : 16   witch-doctor   : 38
## 288    : 7    1st Qu.:272.0   4.1k    : 16   beastmaster    : 36
## 240    : 6    Median  :355.0   7.9k    : 15   faceless-void  : 34
## 276    : 6    Mean     :381.0   -        : 14   lion           : 34
## 284    : 6    3rd Qu.:468.2   4.2k    : 14   bounty-hunter  : 28
## 290    : 6    Max.     :955.0   4.8k    : 13   vengeful-spirit: 27
## (Other):923              (Other):878   (Other)   :769
##      K10      D10      A10      XPM10
## Min.    : 0.000   Min.    : 0.000   Min.    : 0.00   -        : 12
## 1st Qu.: 2.000   1st Qu.: 3.000   1st Qu.: 5.00   398      : 7
## Median : 4.000   Median : 5.000   Median :10.00   284      : 6
## Mean    : 4.925   Mean     : 5.299   Mean     :11.26   294      : 6
## 3rd Qu.: 7.000   3rd Qu.: 7.000   3rd Qu.:16.00   359      : 6
## Max.    :26.000   Max.     :19.000   Max.     :49.00   360      : 6
##                                     (Other):923
##      GPM10      DMG10
## 375      : 9    -        : 15
## 252      : 7    4.5k    : 15
## 331      : 7    4.1k    : 14
## 282      : 6    4k      : 14
## 320      : 6    6.1k    : 14
## 357      : 6    6.6k    : 14
## (Other):925   (Other):880
```

```
lvl <- c("abaddon", "alchemist", "ancient-apparition", "anti-mage",
"arc-warden", "axe", "bane", "batrider", "beastmaster",
"bloodseeker", "bounty-hunter", "brewmaster", "bristleback",
"broodmother", "centaur-warrunner", "chaos-knight", "chen", "clinkz",
"clockwerk", "crystal-maiden", "dark-seer", "dazzle", "death-prophet",
"disruptor", "doom", "dragon-knight", "drow-ranger", "earth-spirit",
"earthshaker", "elder-titan", "ember-spirit", "enchantress", "enigma",
"faceless-void", "gyrocopter", "huskar", "invoker", "io", "jakiro",
"juggernaut", "keeper-of-the-light", "kunkka", "legion-commander",
"leshrac", "lich", "lifestealer", "lina", "lion", "lone-druid", "luna",
"lycan", "magnus", "medusa", "meepo", "mirana", "morphling", "naga-
siren", "natures-prophet", "necrophos", "night-stalker", "nyx-
assassin", "ogre-magi", "omniknight", "oracle", "outworld-
devourer", "phantom-assassin", "phantom-lancer", "phoenix", "puck",
"pudge", "pugna", "queen-of-pain", "razor", "riki", "rubick",
"sand-king", "shadow-demon", "shadow-fiend", "shadow-shaman",
"silencer", "skywrath-mage", "slardar", "slark", "sniper", "spectre",
"spirit-breaker", "storm-spirit", "sven", "techies", "templar-
assassin", "terrorblade", "tidehunter", "timbersaw", "tinker", "tiny",
"treant-protector", "troll-warlord", "tusk", "undying", "ursa",
"vengeful-spirit", "venomancer", "viper", "visage", "warlock",
"weaver", "windranger", "winter-wyvern", "witch-doctor", "wraith-
king", "zeus")
```

```
dota.orgin$Hero1 <- factor(as.character(dota.orgin$Hero1),levels = lvl)
dota.orgin$Hero2 <- factor(as.character(dota.orgin$Hero2),levels = lvl)
```

```
dota.orgin$Hero3 <- factor(as.character(dota.orgin$Hero3),levels = lvl)
dota.orgin$Hero4 <- factor(as.character(dota.orgin$Hero4),levels = lvl)
dota.orgin$Hero5 <- factor(as.character(dota.orgin$Hero5),levels = lvl)
dota.orgin$Hero6 <- factor(as.character(dota.orgin$Hero6),levels = lvl)
dota.orgin$Hero7 <- factor(as.character(dota.orgin$Hero7),levels = lvl)
dota.orgin$Hero8 <- factor(as.character(dota.orgin$Hero8),levels = lvl)
dota.orgin$Hero9 <- factor(as.character(dota.orgin$Hero9),levels = lvl)
dota.orgin$Hero10 <- factor(as.character(dota.orgin$Hero10),levels =
lvl)
```

1. Logistic Resgression

From basic observation, I want to try linear regression to find out which parameters affect the match result mostly. It is a simple model to observe the inner relationship of duration, KDA, experience and gold with the win rate. Basically, we think the game has rationship with all the factors, especially the kda and the gold they earn from enemy heroes and minions.

Data conversion

First, we convert the data to numeric.

```
#convert duration to numeric
dota.orgin$Duration <- as.character(dota.orgin$Duration)
shortformat <- "^[0-9]{2}:[0-9]{2}$"
mark <- grep(shortformat,dota.orgin$Duration)
for(i in mark){
  dota.orgin$Duration[i] <- paste("00:",dota.orgin$Duration[i])
}
library(chron)

## Warning: package 'chron' was built under R version 3.2.4

duration <- chron(times = as.character(dota.orgin$Duration))
class(duration)

## [1] "times"

duration <-
data.frame(matrix(unlist(strsplit(as.character(dota.orgin$Duration),
split = ":")),ncol = 3,byrow = T))
colnames(duration) <- c("hour","minute","second")
minutes <-
as.numeric(as.character(duration$hour))*60+as.numeric(as.character(dura
tion$minute))

#convert skill statistics to numeric format
dota.parameters <- dota.orgin[,c(-1:-5,-11,-12,-18,-19,-25,-26,-32,-
33,-39,-40,-46,-47,-53,-54,-60,-61,-67,-68,-74)]
for(i in 1:50){
```

```
dota.parameters[,i] <- as.numeric(as.character(dota.parameters[,i]))  
}  
  
## Warning: NAs introduced by coercion  
## Warning: NAs introduced by coercion  
## Warning: NAs introduced by coercion  
## Warning: NAs introduced by coercion  
## Warning: NAs introduced by coercion  
## Warning: NAs introduced by coercion  
## Warning: NAs introduced by coercion  
## Warning: NAs introduced by coercion  
## Warning: NAs introduced by coercion  
## Warning: NAs introduced by coercion  
## Warning: NAs introduced by coercion  
## Warning: NAs introduced by coercion  
## Warning: NAs introduced by coercion  
## Warning: NAs introduced by coercion  
## Warning: NAs introduced by coercion  
  
dota.parameters <-  
cbind(Winner=dota.orgin$Winner,duration=minutes,dota.parameters)  
dota.parameters <- na.omit(dota.parameters)
```

Logistic regression for all factors

It is easily to run logistic regression model with all the parameters. But since the sum of statistics for Hero1 to Hero5 have collinearity with Hero6 to Hero10, we separate them into 2 groups to generate 2 models.

```
dota.lm.radiant <- lm(as.numeric(Winner)~duration+
                        K1+D1+A1+XPM1+GPM1+
                        K2+D2+A2+XPM2+GPM2+
                        K3+D3+A3+XPM3+GPM3+
                        K4+D4+A4+XPM4+GPM4+
                        K5+D5+A5+XPM5+GPM5
                        #K6+D6+A6+XPM6+GPM6+)
```



```

#K7+D7+A7+XPM7+GPM7+
#K8+D8+A8+XPM8+GPM8+
#K9+D9+A9+XPM9+GPM9+
#K10+D10+A10+XPM10+GPM10
, data = dota.parameters)
summary(dota.lm.radiant)

##
## Call:
## lm(formula = as.numeric(Winner) ~ duration + K1 + D1 + A1 + XPM1 +
##      GPM1 + K2 + D2 + A2 + XPM2 + GPM2 + K3 + D3 + A3 + XPM3 +
##      GPM3 + K4 + D4 + A4 + XPM4 + GPM4 + K5 + D5 + A5 + XPM5 +
##      GPM5, data = dota.parameters)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.92157 -0.17712  0.00345  0.17395  0.73901
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)  8.104e-01  6.733e-02  12.036 < 2e-16 ***
## duration    -1.924e-03  1.051e-03  -1.831 0.067393 .
## K1           4.486e-03  3.306e-03   1.357 0.175181
## D1          -1.052e-02  4.059e-03  -2.591 0.009718 **
## A1           2.339e-03  2.304e-03   1.015 0.310340
## XPM1         2.133e-04  1.363e-04   1.565 0.117928
## GPM1         2.846e-04  1.433e-04   1.985 0.047402 *
## K2           1.015e-02  3.229e-03   3.144 0.001720 **
## D2          -2.387e-02  4.148e-03  -5.755 1.18e-08 ***
## A2           4.303e-03  2.379e-03   1.808 0.070862 .
## XPM2        -2.147e-04  1.477e-04  -1.454 0.146404
## GPM2         4.859e-04  1.579e-04   3.077 0.002153 **
## K3           8.288e-03  3.302e-03   2.510 0.012257 *
## D3          -1.240e-02  3.879e-03  -3.196 0.001441 **
## A3           7.345e-03  2.369e-03   3.101 0.001989 **
## XPM3         6.890e-05  1.541e-04   0.447 0.654836
## GPM3         4.341e-04  1.609e-04   2.699 0.007090 **
## K4          -4.578e-04  3.498e-03  -0.131 0.895920
## D4          -1.995e-02  4.004e-03  -4.982 7.53e-07 ***
## A4           4.977e-04  2.313e-03   0.215 0.829675
## XPM4         1.192e-05  1.409e-04   0.085 0.932606
## GPM4         5.413e-04  1.469e-04   3.686 0.000241 ***
## K5           8.213e-04  3.296e-03   0.249 0.803269
## D5          -1.716e-02  4.169e-03  -4.116 4.20e-05 ***
## A5           2.350e-03  2.220e-03   1.059 0.290048
## XPM5         6.924e-05  1.443e-04   0.480 0.631465
## GPM5         3.821e-04  1.558e-04   2.453 0.014364 *
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##

```

```
## Residual standard error: 0.2583 on 913 degrees of freedom
## Multiple R-squared: 0.7407, Adjusted R-squared: 0.7333
## F-statistic: 100.3 on 26 and 913 DF, p-value: < 2.2e-16

dota.lm.dire <- lm(as.numeric(Winner)~duration+
                  #K1+D1+A1+XPM1+GPM1+
                  #K2+D2+A2+XPM2+GPM2+
                  #K3+D3+A3+XPM3+GPM3+
                  #K4+D4+A4+XPM4+GPM4+
                  #K5+D5+A5+XPM5+GPM5+
                  K6+D6+A6+XPM6+GPM6+
                  K7+D7+A7+XPM7+GPM7+
                  K8+D8+A8+XPM8+GPM8+
                  K9+D9+A9+XPM9+GPM9+
                  K10+D10+A10+XPM10+GPM10
                  , data = dota.parameters)

summary(dota.lm.dire)

##
## Call:
## lm(formula = as.numeric(Winner) ~ duration + K6 + D6 + A6 + XPM6 +
##      GPM6 + K7 + D7 + A7 + XPM7 + GPM7 + K8 + D8 + A8 + XPM8 +
##      GPM8 + K9 + D9 + A9 + XPM9 + GPM9 + K10 + D10 + A10 + XPM10 +
##      GPM10, data = dota.parameters)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -1.07088 -0.16209 -0.00186  0.17025  0.72162
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)  2.335e+00  6.014e-02  38.823 < 2e-16 ***
## duration      2.016e-03  1.037e-03   1.945 0.052128 .
## K6            -8.686e-03  3.198e-03  -2.716 0.006729 **
## D6             1.946e-02  3.976e-03   4.894 1.17e-06 ***
## A6            -7.185e-03  2.252e-03  -3.191 0.001465 **
## XPM6          -4.163e-05  1.369e-04  -0.304 0.761165
## GPM6          -4.198e-04  1.425e-04  -2.945 0.003311 **
## K7            -5.169e-03  2.966e-03  -1.743 0.081743 .
## D7             1.395e-02  3.915e-03   3.563 0.000386 ***
## A7            -3.774e-03  2.372e-03  -1.591 0.112012
## XPM7          -1.542e-04  1.316e-04  -1.172 0.241573
## GPM7          -3.038e-04  1.385e-04  -2.193 0.028536 *
## K8            -2.230e-04  3.213e-03  -0.069 0.944691
## D8             1.838e-02  3.945e-03   4.658 3.67e-06 ***
## A8            -1.043e-03  2.204e-03  -0.473 0.636072
## XPM8          -8.555e-05  1.473e-04  -0.581 0.561577
## GPM8          -3.966e-04  1.479e-04  -2.682 0.007448 **
## K9             1.408e-03  3.423e-03   0.411 0.680913
## D9             9.473e-03  4.162e-03   2.276 0.023076 *
```

```

## A9          -4.294e-03  2.169e-03  -1.980 0.047986 *
## XPM9        -8.472e-05  1.442e-04  -0.588 0.556905
## GPM9        -4.334e-04  1.471e-04  -2.946 0.003296 **
## K10         1.953e-03  3.312e-03   0.590 0.555634
## D10         1.416e-02  4.106e-03   3.450 0.000587 ***
## A10        -5.203e-03  2.286e-03  -2.276 0.023069 *
## XPM10       1.378e-04  1.514e-04   0.910 0.362841
## GPM10      -7.479e-04  1.527e-04  -4.898 1.14e-06 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.2535 on 913 degrees of freedom
## Multiple R-squared:  0.7502, Adjusted R-squared:  0.7431
## F-statistic: 105.5 on 26 and 913 DF,  p-value: < 2.2e-16

cbind(dota.lm.radiant$coefficients,dota.lm.dire$coefficients)

##              [,1]      [,2]
## (Intercept) 8.103815e-01 2.334638e+00
## duration    -1.923817e-03 2.016363e-03
## K1           4.486091e-03 -8.685770e-03
## D1          -1.051634e-02 1.945700e-02
## A1           2.338824e-03 -7.185042e-03
## XPM1         2.133061e-04 -4.163440e-05
## GPM1         2.845958e-04 -4.198036e-04
## K2           1.015251e-02 -5.168833e-03
## D2          -2.387342e-02 1.394935e-02
## A2           4.302589e-03 -3.773848e-03
## XPM2        -2.147067e-04 -1.542373e-04
## GPM2         4.859343e-04 -3.038542e-04
## K3           8.287641e-03 -2.229677e-04
## D3          -1.239904e-02 1.837801e-02
## A3           7.345335e-03 -1.043328e-03
## XPM3         6.889725e-05 -8.555047e-05
## GPM3         4.341229e-04 -3.966236e-04
## K4          -4.577703e-04 1.407874e-03
## D4          -1.994647e-02 9.473012e-03
## A4           4.976812e-04 -4.294130e-03
## XPM4         1.191759e-05 -8.472471e-05
## GPM4         5.412925e-04 -4.334022e-04
## K5           8.212783e-04 1.952820e-03
## D5          -1.716082e-02 1.416268e-02
## A5           2.350322e-03 -5.203336e-03
## XPM5         6.924266e-05 1.378226e-04
## GPM5         3.821186e-04 -7.479295e-04

```

From this two linear model, we can know the duration and XPM are not significant to the win rate, though the skill numbers get larger when the game last longer. It is not a good model for us to anlysis, but anyway, at least we know the GPM and Death number are important. After comparing the coefficients of both side, I think the

distribution of the skill statistics is not balance, for one hero from a certain side may get all the killings and earn much more gold than his teammates.

To avoid this bias, we should add the numbers together to get the total number for each side.

Logistic regression for sums

```
#the sum for radiant heroes
Kradiant <-
dota.parameters$K1+dota.parameters$K2+dota.parameters$K3+dota.parameters$K4+dota.parameters$K5
Dradiant <-
dota.parameters$D1+dota.parameters$D2+dota.parameters$D3+dota.parameters$D4+dota.parameters$D5
Aradiant <-
dota.parameters$A1+dota.parameters$A2+dota.parameters$A3+dota.parameters$A4+dota.parameters$A5
Xradiant <-
dota.parameters$XPM1+dota.parameters$XPM2+dota.parameters$XPM3+dota.parameters$XPM4+dota.parameters$XPM5
Gradiant <-
dota.parameters$GPM1+dota.parameters$GPM2+dota.parameters$GPM3+dota.parameters$GPM4+dota.parameters$GPM5
#the sum for dire heroes
Kdire <-
dota.parameters$K6+dota.parameters$K7+dota.parameters$K8+dota.parameters$K9+dota.parameters$K10
Ddire <-
dota.parameters$D6+dota.parameters$D7+dota.parameters$D8+dota.parameters$D9+dota.parameters$D10
Adire <-
dota.parameters$A6+dota.parameters$A7+dota.parameters$A8+dota.parameters$A9+dota.parameters$A10
Xdire <-
dota.parameters$XPM6+dota.parameters$XPM7+dota.parameters$XPM8+dota.parameters$XPM9+dota.parameters$XPM10
Gdire <-
dota.parameters$GPM6+dota.parameters$GPM7+dota.parameters$GPM8+dota.parameters$GPM9+dota.parameters$GPM10

dota.sum <-
cbind(dota.parameters[,1:2],Kradiant,Dradiant,Aradiant,Xradiant,Gradiant,Kdire,Ddire,Adire,Xdire,Gdire)
head(dota.sum)

##      Winner duration Kradiant Dradiant Aradiant Xradiant Gradiant
Kdire
## 1      Dire         23         12         27         24        1520        1619
26
```

```
## 2 Radiant      50      55      30      113      2496      2162
30
## 3 Radiant      43      27      16      70      2100      1981
15
## 4   Dire       28       8      34      15      1174      1160
34
## 5 Radiant      26      25       9      69      2115      2218
9
## 6 Radiant      45      54      46      65      2831      2477
45
##   Ddire Adire Xdire Gdire
## 1    13    79 2318 2389
## 2    56    62 2066 1771
## 3    27    36 1895 1903
## 4     8    94 1972 2105
## 5    25    24 1589 1590
## 6    54    96 2864 2366
```

Now we get the sum data frame for new linear regression models:

```
dota.lm.radiant.sum <-
lm(as.numeric(Winner)~duration+Kradiant+Dradiant+Aradiant+Xradiant+Grad
iant,dota.sum)
summary(dota.lm.radiant.sum)

##
## Call:
## lm(formula = as.numeric(Winner) ~ duration + Kradiant + Dradiant +
##   Aradiant + Xradiant + Gradient, data = dota.sum)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.90877 -0.17316  0.00172  0.16895  0.73958
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)  8.018e-01  6.721e-02  11.929 < 2e-16 ***
## duration    -1.691e-03  1.028e-03  -1.645  0.10026
## Kradiant      5.281e-03  1.999e-03   2.641  0.00839 **
## Dradiant     -1.671e-02  8.871e-04 -18.833 < 2e-16 ***
## Aradiant      3.225e-03  7.665e-04   4.208 2.83e-05 ***
## Xradiant      2.489e-05  4.452e-05   0.559  0.57624
## Gradient     4.283e-04  4.395e-05   9.745 < 2e-16 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.259 on 933 degrees of freedom
## Multiple R-squared:  0.7335, Adjusted R-squared:  0.7318
## F-statistic:  428 on 6 and 933 DF,  p-value: < 2.2e-16
```

```
dota.lm.dire.sum <-
lm(as.numeric(Winner)~duration+Kdire+Ddire+Adire+Xdire+Gdire,dota.sum)
summary(dota.lm.dire.sum)

##
## Call:
## lm(formula = as.numeric(Winner) ~ duration + Kdire + Ddire +
##     Adire + Xdire + Gdire, data = dota.sum)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -1.25516 -0.17583 -0.00279  0.17169  0.70191
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)  2.319e+00  5.977e-02  38.799  < 2e-16 ***
## duration      2.371e-03  1.020e-03   2.325  0.0203 *
## Kdire        -2.902e-03  1.868e-03  -1.554  0.1205
## Ddire         1.509e-02  8.792e-04  17.169  < 2e-16 ***
## Adire        -4.195e-03  6.880e-04  -6.098  1.57e-09 ***
## Xdire        -5.286e-05  4.471e-05  -1.182  0.2374
## Gdire        -4.452e-04  4.416e-05 -10.083  < 2e-16 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.2538 on 933 degrees of freedom
## Multiple R-squared:  0.7442, Adjusted R-squared:  0.7426
## F-statistic: 452.4 on 6 and 933 DF,  p-value: < 2.2e-16
```

From this two models, we get the knowledge that only KDA and GPM are important for a match. Now, we have confidence to eliminate duration and XPM from the model:

```
dota.lm.radiant.sum.reduced <-
lm(as.numeric(Winner)~Dradiant+Aradiant+Gradiant,dota.sum)
summary(dota.lm.radiant.sum.reduced)

##
## Call:
## lm(formula = as.numeric(Winner) ~ Dradiant + Aradiant + Gradiant,
##     data = dota.sum)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.94318 -0.17522  0.00061  0.17770  0.77555
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)  7.312e-01  5.993e-02  12.20  <2e-16 ***
## Dradiant     -1.683e-02  7.228e-04 -23.29  <2e-16 ***
## Aradiant      4.666e-03  4.053e-04  11.51  <2e-16 ***
```

```
## Gradient      4.898e-04  3.099e-05  15.80  <2e-16 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.2602 on 936 degrees of freedom
## Multiple R-squared:  0.7303, Adjusted R-squared:  0.7294
## F-statistic: 844.8 on 3 and 936 DF,  p-value: < 2.2e-16

dota.lm.dire.sum.reduced <-
lm(as.numeric(Winner)~Ddire+Adire+Gdire,dota.sum)
summary(dota.lm.dire.sum.reduced)

##
## Call:
## lm(formula = as.numeric(Winner) ~ Ddire + Adire + Gdire, data =
dota.sum)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -1.14231 -0.18271 -0.00451  0.17207  0.69035
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)  2.365e+00  5.246e-02  45.09  <2e-16 ***
## Ddire       1.568e-02  6.999e-04  22.41  <2e-16 ***
## Adire      -4.743e-03  3.725e-04 -12.73  <2e-16 ***
## Gdire      -5.111e-04  2.734e-05 -18.69  <2e-16 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.2548 on 936 degrees of freedom
## Multiple R-squared:  0.7414, Adjusted R-squared:  0.7405
## F-statistic: 894.3 on 3 and 936 DF,  p-value: < 2.2e-16

cbind(dota.lm.radiant.sum.reduced$coefficients,dota.lm.dire.sum.reduced
$coefficients)

##              [,1]      [,2]
## (Intercept)  0.7312274553  2.3653101343
## Dradiant     -0.0168302406  0.0156843651
## Aradiant      0.0046659680 -0.0047433077
## Gradient     0.0004898199 -0.0005110709
```

Final logistic regression model

In the final model for either radiant or dire, we can see the most significant factors are Death, Assistance and GPM. The coefficients are opposite number pairs, which indicates that the result of the game are very fair.

Further, we are curious about whay if we put the factors together for both side.

```
dota.lm <-
lm(as.numeric(Winner)~Kradiant+Kdire+Dradiant+Ddire+Aradiant+Adire+Grad
iant+Gdire,dota.sum)
summary(dota.lm)

##
## Call:
## lm(formula = as.numeric(Winner) ~ Kradiant + Kdire + Dradiant +
##      Ddire + Aradiant + Adire + Gradient + Gdire, data = dota.sum)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.90038 -0.15467 -0.00072  0.15205  0.63811
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)  1.556e+00  7.325e-02  21.241  < 2e-16 ***
## Kradiant      2.720e-03  8.032e-03   0.339   0.7350
## Kdire         1.651e-02  7.237e-03   2.281   0.0228 *
## Dradiant     -1.268e-02  7.296e-03  -1.738   0.0826 .
## Ddire        -4.906e-03  8.207e-03  -0.598   0.5501
## Aradiant      3.828e-03  6.798e-04   5.631 2.37e-08 ***
## Adire        -4.344e-03  6.072e-04  -7.154 1.71e-12 ***
## Gradient      4.447e-04  3.057e-05  14.543  < 2e-16 ***
## Gdire        -4.685e-04  2.914e-05 -16.081  < 2e-16 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.2265 on 931 degrees of freedom
## Multiple R-squared:  0.7966, Adjusted R-squared:  0.7949
## F-statistic: 455.8 on 8 and 931 DF, p-value: < 2.2e-16

dota.lm <-
lm(as.numeric(Winner)~Dradiant+Ddire+Aradiant+Adire+Gradient+Gdire,dota
.sum)
summary(dota.lm)

##
## Call:
## lm(formula = as.numeric(Winner) ~ Dradiant + Ddire + Aradiant +
##      Adire + Gradient + Gdire, data = dota.sum)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.88136 -0.15254 -0.00191  0.15272  0.63135
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)  1.557e+00  7.337e-02  21.217  < 2e-16 ***
## Dradiant      3.424e-03  1.696e-03   2.020   0.0437 *
## Ddire        -2.882e-03  1.798e-03  -1.603   0.1093
```



```

## Aradiant      3.990e-03  6.767e-04   5.896 5.21e-09 ***
## Adire        -4.270e-03  6.040e-04  -7.069 3.06e-12 ***
## Gradient     4.457e-04  3.062e-05  14.555 < 2e-16 ***
## Gdire       -4.692e-04  2.918e-05 -16.079 < 2e-16 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.2269 on 933 degrees of freedom
## Multiple R-squared:  0.7955, Adjusted R-squared:  0.7942
## F-statistic: 604.8 on 6 and 933 DF,  p-value: < 2.2e-16

dota.lm <-
lm(as.numeric(Winner)~Aradiant+Adire+Gradient+Gdire,dota.sum)
summary(dota.lm)

##
## Call:
## lm(formula = as.numeric(Winner) ~ Aradiant + Adire + Gradient +
##      Gdire, data = dota.sum)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.9053 -0.1538 -0.0047  0.1538  0.6155
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)  1.551e+00  7.212e-02  21.506 <2e-16 ***
## Aradiant     3.227e-03  3.610e-04   8.938 <2e-16 ***
## Adire       -3.336e-03  3.490e-04  -9.559 <2e-16 ***
## Gradient     4.194e-04  2.722e-05  15.405 <2e-16 ***
## Gdire       -4.375e-04  2.483e-05 -17.620 <2e-16 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.2273 on 935 degrees of freedom
## Multiple R-squared:  0.7944, Adjusted R-squared:  0.7935
## F-statistic: 903.2 on 4 and 935 DF,  p-value: < 2.2e-16

```

After reduced, the linear model falls to only 4 factors: Assistance and GPM of both sides. Acutally, it can be concluded as two factors, the differences of assistance and GPM, since we have opposite numbers as the coefficients. It is surprising to find the killing and death numbers are not so important we they are put together. This might because they have strong collinearity.

Anyway, we eventually get a model to describe the winner of the game which has an acceptable Adjusted R^2 and low p-value for all the coefficients. F-test also shows the model does well in total. The model can explain more than 79% of the variance. We can estimate this model, when extended to larger samples, will probably get a high accuracy.

Conclusion

The model we get from logistic regression fits our expectation on somewhere and also brings us some surprise. The assistance looks like more important than the killing and death. This result, in some extent, suggests the players join combat more to assist their teammates and farm more money for the whole team. In the game, it is hard to do both of farming money and joining the battle. The team who can get the balance of this two factors will have higher probability to win the game.

Also, the intercept of the model shows that the game is quite fair for both sides, because the intercept is almost at the center of 1 and 2 which presents the numeric position for Radiant and Dire.

The model still has some inaccurate part. What we consider next is how they conform these factors. Do they have inner connections or public components in different factors? We can use Principal Components Analysis to get more information.

2. Principal Components Analysis

In PCA process, we care more about what are the main factors that influence the data. It is probably separated into two sets: Radiant and Dire. PCA is good for us to comprehend how a factor weights in the model.

PCA for all factors

First, we apply the PCA for all numbers in dota.parameters to get a general impression of the data.

```
library(psych)
dota.fit <- prcomp(dota.parameters[, -1], retx=TRUE, center=TRUE,
scale.=TRUE)
summary(dota.fit)

## Importance of components:
##               PC1    PC2    PC3    PC4    PC5    PC6
PC7
## Standard deviation    3.4402 3.326 1.5791 1.56352 1.53211 1.49888
1.45372
## Proportion of Variance 0.2321 0.217 0.0489 0.04793 0.04603 0.04405
0.04144
## Cumulative Proportion 0.2321 0.449 0.4979 0.54585 0.59187 0.63592
0.67736
##               PC8    PC9    PC10    PC11    PC12
PC13
## Standard deviation    1.40453 1.37963 1.3341 1.05526 0.79469
0.69737
## Proportion of Variance 0.03868 0.03732 0.0349 0.02183 0.01238
0.00954
## Cumulative Proportion 0.71604 0.75336 0.7883 0.81010 0.82248
```


```

0.83202
##          PC14      PC15      PC16      PC17      PC18
PC19
## Standard deviation    0.68651 0.67574 0.66866 0.66046 0.64181
0.63807
## Proportion of Variance 0.00924 0.00895 0.00877 0.00855 0.00808
0.00798
## Cumulative Proportion 0.84126 0.85021 0.85898 0.86753 0.87561
0.88359
##          PC20      PC21      PC22      PC23      PC24
PC25
## Standard deviation    0.62621 0.61806 0.57848 0.56831 0.56031
0.53967
## Proportion of Variance 0.00769 0.00749 0.00656 0.00633 0.00616
0.00571
## Cumulative Proportion 0.89128 0.89877 0.90533 0.91166 0.91782
0.92353
##          PC26      PC27      PC28      PC29      PC30
PC31
## Standard deviation    0.53218 0.52763 0.51533 0.50178 0.49905
0.48117
## Proportion of Variance 0.00555 0.00546 0.00521 0.00494 0.00488
0.00454
## Cumulative Proportion 0.92908 0.93454 0.93975 0.94469 0.94957
0.95411
##          PC32      PC33      PC34      PC35      PC36
PC37
## Standard deviation    0.47569 0.46106 0.44804 0.44437 0.43344
0.43103
## Proportion of Variance 0.00444 0.00417 0.00394 0.00387 0.00368
0.00364
## Cumulative Proportion 0.95855 0.96272 0.96665 0.97052 0.97421
0.97785
##          PC38      PC39      PC40      PC41      PC42
PC43
## Standard deviation    0.41760 0.41448 0.38743 0.30341 0.27823
0.27131
## Proportion of Variance 0.00342 0.00337 0.00294 0.00181 0.00152
0.00144
## Cumulative Proportion 0.98127 0.98464 0.98758 0.98939 0.99090
0.99235
##          PC44      PC45      PC46      PC47      PC48
PC49
## Standard deviation    0.2671 0.25977 0.25358 0.24896 0.24291
0.23561
## Proportion of Variance 0.0014 0.00132 0.00126 0.00122 0.00116
0.00109
## Cumulative Proportion 0.9938 0.99507 0.99633 0.99755 0.99870
0.99979
##          PC50      PC51


```

```
## Standard deviation      0.07651 0.06937  
## Proportion of Variance 0.00011 0.00009  
## Cumulative Proportion  0.99991 1.00000
```

```
screepplot(dota.fit)
```

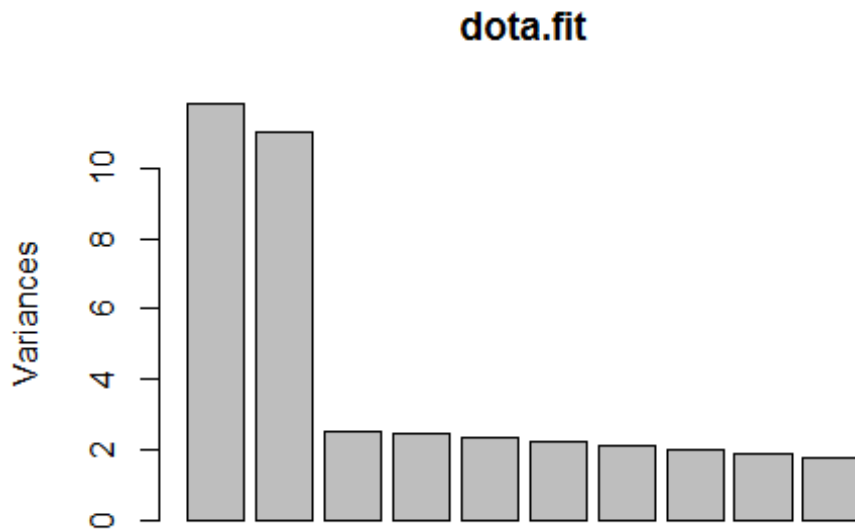

```
plot(cumsum(dota.fit$sdev^2)/sum(dota.fit$sdev^2),ylim=c(0,1))
```

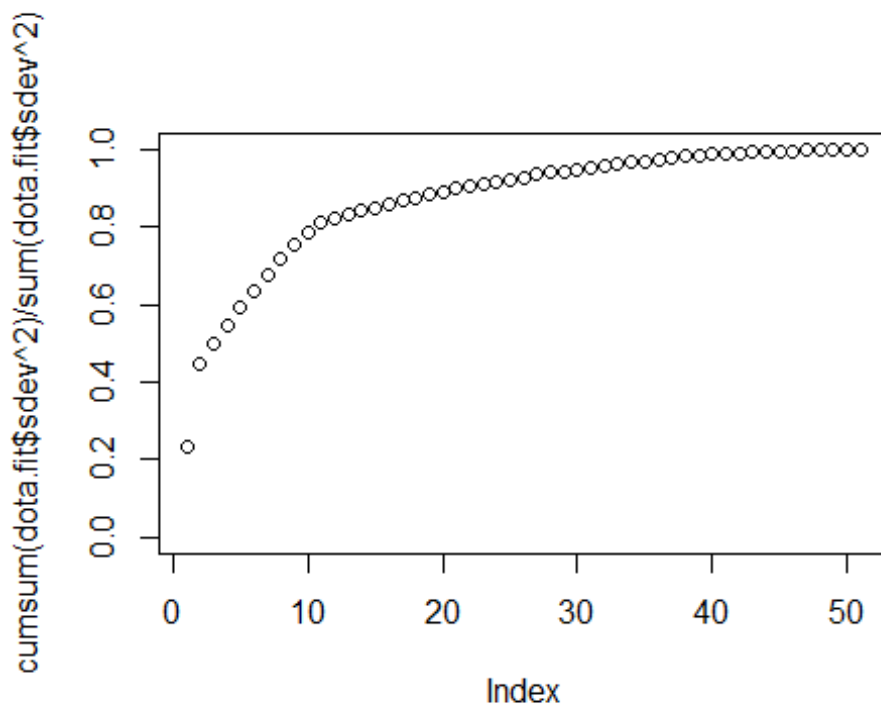

As expected, the first two components are large and share close weight. It indicates that there are important factors can influence the result strongly. Also, the screeplot and the summary show the variance value of the result. from which we can see the first 11 components explains 80% of the variance we want to retain.

For the same reason, the separated elements of heroes skill statistics cannot behave a balance model in all. We are curious about what the sum say in the data.

PCA for sums

```
dota.fit.sum <- prcomp(dota.sum[, -1], retx=TRUE, center=TRUE,
scale.=TRUE)
dota.fit.sum

## Standard deviations:
## [1] 2.19854286 2.14931547 0.77274864 0.57619354 0.50725405
## [7] 0.31358856 0.25956768 0.22986338 0.05069199 0.04680645
##
## Rotation:
##          PC1          PC2          PC3          PC4          PC5
## duration  0.1770165 -0.34429066 -0.31991279  0.84377756 -0.004304666
## Kradiant  -0.1210998 -0.43656535 -0.07820759 -0.21147409  0.228499606
## Dradiant   0.4060622 -0.18122489 -0.06815799 -0.26606621 -0.187938696
## Aradiant  -0.1033753 -0.42581671 -0.18592643 -0.09718973  0.356763988
## Xradiant  -0.1950360 -0.36410069  0.49134691  0.07287626 -0.166746843
## Gradiant  -0.2932018 -0.28745897  0.36789287  0.08812806 -0.518717302
```

```

## Kdire      0.4087741 -0.17488052 -0.07149599 -0.24678430 -0.197049646
## Ddire      -0.1134160 -0.43841297 -0.07320500 -0.24074537  0.228810443
## Adire       0.3860106 -0.17879760 -0.22098080 -0.10874627 -0.440504660
## Xdire       0.3994869 -0.08105241  0.50259854  0.10932891  0.152248571
## Gdire       0.4072680  0.01353238  0.40453655  0.08581481  0.424133221
##           PC6           PC7           PC8           PC9
PC10
## duration -0.04614128  0.176520209 -0.007023268  0.04499484 -
0.0090152046
## Kradiant -0.03237937  0.243818772  0.372353746 -0.08083013 -
0.0534311486
## Dradiant -0.05730428  0.282976633 -0.285950397  0.12119918 -
0.7128624711
## Aradiant  0.20089029 -0.530529261 -0.549687146 -0.10913348 -
0.0173320937
## Xradiant -0.47250381 -0.234985174 -0.018507553  0.52533779 -
0.0073468875
## Gradiant  0.56003473  0.172672785 -0.110692651 -0.25200439 -
0.0003822309
## Kdire     -0.06395752  0.275603532 -0.335233683  0.13265530
0.6921433073
## Ddire     -0.02677872  0.236041944  0.322085832 -0.07665220
0.0961188525
## Adire      0.12151241 -0.569871438  0.473081215 -0.02741448
0.0134577497
## Xdire     -0.31462457 -0.079956031 -0.009002366 -0.66379822
0.0034904912
## Gdire      0.54563868 -0.001580704  0.157405836  0.40062946
0.0064749661
##           PC11
## duration -0.0190335100
## Kradiant  0.6951000098
## Dradiant -0.0593632990
## Aradiant  0.0226707910
## Xradiant  0.0004659391
## Gradiant  0.0025805916
## Kdire     0.0915886808
## Ddire     -0.7099103989
## Adire     -0.0082086817
## Xdire     -0.0002550337
## Gdire     0.0003885424

```

`summary(dota.fit.sum)`

Importance of components:


```

##           PC1      PC2      PC3      PC4      PC5      PC6
## Standard deviation  2.1985 2.1493 0.77275 0.57619 0.50725 0.37026
## Proportion of Variance 0.4394 0.4200 0.05429 0.03018 0.02339 0.01246
## Cumulative Proportion 0.4394 0.8594 0.91366 0.94384 0.96724 0.97970
##           PC7      PC8      PC9      PC10      PC11

```

```
## Standard deviation      0.31359 0.25957 0.2299 0.05069 0.04681
## Proportion of Variance 0.00894 0.00613 0.0048 0.00023 0.00020
## Cumulative Proportion  0.98864 0.99476 0.9996 0.99980 1.00000

screplot(dota.fit.sum)
```

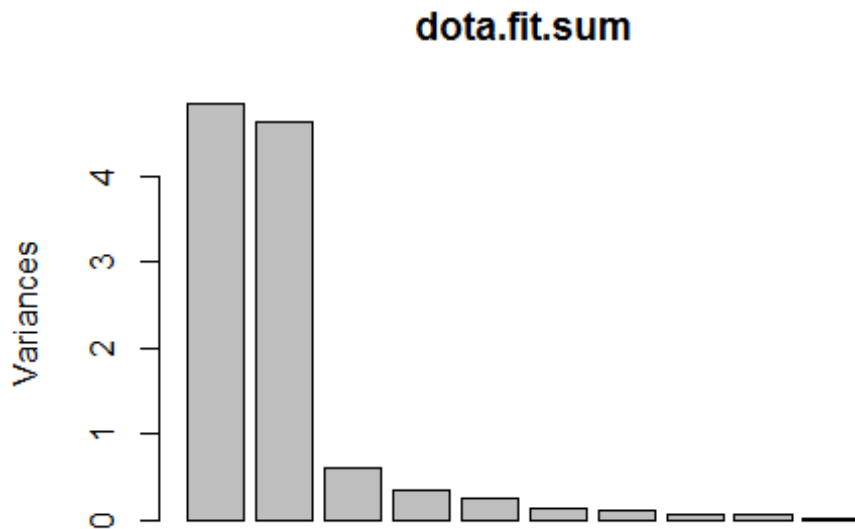

Now, the sums do a great improvement to the model that first two components explain more than 85% of the variance. It is a very good sign when we want to reduce the factors. Also, we notice that this two components have close standard deviation and proportion of variance. It is like what we predicted before the test, they are probably the performance of Radiant and Dire teams.

To prove this view, we can make a comparison of the coefficients of the two components.

```
sort(dota.fit.sum$rotation[,1])

##   Gradient   Xradiant   Kradiant      Ddire   Aradiant   duration
## -0.2932018 -0.1950360 -0.1210998 -0.1134160 -0.1033753  0.1770165
##      Adire      Xdire   Dradiant      Gdire      Kdire
##  0.3860106  0.3994869  0.4060622  0.4072680  0.4087741

sort(dota.fit.sum$rotation[,2])

##      Ddire   Kradiant   Aradiant   Xradiant   duration
Gradient
## -0.43841297 -0.43656535 -0.42581671 -0.36410069 -0.34429066 -
0.28745897
```

```
##      Dradiant      Adire      Kdire      Xdire      Gdire
## -0.18122489 -0.17879760 -0.17488052 -0.08105241  0.01353238

sort(abs(dota.fit.sum$rotation[,1]))

## Aradiant      Ddire      Kradiant      duration      Xradiant      Gradient
## 0.1033753 0.1134160 0.1210998 0.1770165 0.1950360 0.2932018
## 0.3860106
##      Xdire      Dradiant      Gdire      Kdire
## 0.3994869 0.4060622 0.4072680 0.4087741

sort(abs(dota.fit.sum$rotation[,2]))

##      Gdire      Xdire      Kdire      Adire      Dradiant      Gradient
## 0.01353238 0.08105241 0.17488052 0.17879760 0.18122489 0.28745897
##      duration      Xradiant      Aradiant      Kradiant      Ddire
## 0.34429066 0.36410069 0.42581671 0.43656535 0.43841297
```

From the sort of the abstract value of the rotation, the order of these factors is very interesting. We can see similar orders of PC1 and opposite PC2 and close values for Radiant in PC1 against Dire in PC2. It means they are orthogonal and function importantly.

From my own guess:

PC1 is mostly influenced by killings and assistance in the game. It reflects how a team performed in the match which can be explained as their positiveness in this game.

PC2, on the opposite, is almost negative estimates, and the largest coefficients are deaths. This component shows their opponent's performance, or their mistakes in the game. So, I call this factor negativeness of the team.

This discovery is helpful. It removes out other noise from the match. If we use the coefficients to weight of these numbers for a team, we can easily tell them how should perform to get a balance strategy in game and how can they beat their opponents by analyzing enemies' skill characteristics.

Biplot

```
biplot(dota.fit)
```


interesting thing is the duration, no matter in dota.fit or dota.fit.sum, it locates on the center of the two components. It is a indirect proof for our guess that each PC1 and PC2 presents one side of the game.

Conclusion

PCA analysis is not a clear supervised learning, so we cannot give a certain conclusion of what the components are. But we can still dig out some data traits from all factors. When we get the ingredients of the main components, the next step is to compose the principal components with the coefficients. With them, it is easy to analyze the teams and players' behavior. And it can be a criteria to guide them.

3. Cluster Analysis

K-means

First use k-means and examine the centers.

Since we have two results of the match, it is reasonable to set k=2 for clustering.

```
library(cluster)
k<-2
dota.k<-kmeans(dota.parameters[, -1], k)
dota.k$centers
```

##	duration	K1	D1	A1	XPM1	GPM1	K2
D2							
## 1	35.56989	3.933333	7.324731	8.273118	341.3957	327.5075	4.027957
	7.017204						
## 2	33.73474	6.433684	3.945263	14.290526	445.8358	454.1074	6.614737
	3.526316						
##	A2	XPM2	GPM2	K3	D3	A3	XPM3
## 1	8.283871	353.5634	337.7118	3.763441	7.126882	8.348387	336.2731
## 2	14.412632	447.1011	460.6463	6.983158	3.688421	14.115789	461.6905
##	GPM3	K4	D4	A4	XPM4	GPM4	K5
D5							
## 1	328.8839	3.845161	7.126882	8.27957	337.6000	326.0387	3.741935
	6.879570						
## 2	471.4126	6.616842	3.656842	13.59158	449.5747	465.9432	6.162105
	3.730526						
##	A5	XPM5	GPM5	K6	D6	A6	XPM6
## 1	8.137634	344.5011	335.7763	7.002151	4.008602	15.219355	464.9699
## 2	14.000000	440.5095	445.9642	3.391579	6.964211	7.757895	325.9705
##	GPM6	K7	D7	A7	XPM7	GPM7	K8
D8							
## 1	470.1075	8.075269	3.875269	14.395699	491.5699	499.3978	6.720430
	4.184946						
## 2	316.6021	3.823158	6.593684	7.528421	345.3074	336.6695	3.701053
	6.663158						
##	A8	XPM8	GPM8	K9	D9	A9	XPM9

```
## 1 15.021505 462.4473 464.0817 6.346237 4.045161 14.987097 444.6839
## 2 7.456842 338.4653 329.8526 3.351579 6.547368 7.545263 330.4632
##      GPM9      K10      D10      A10      XPM10      GPM10
## 1 448.4129 6.531183 4.070968 15.490323 447.6516 451.8151
## 2 323.2084 3.498947 6.661053 7.505263 334.0505 321.6400
```

As above, these centers show symmetry for Radiant and Dire if we compare K1 and K6, D1 and D6 etc. in the two clusters.

We can compare the k-means clustering with the winner of the game, the result can show that the clustering in some extent presents who wins the game.

```
table(dota.parameters$winner,dota.k$cluster)
```


```
##
##           1    2
##  Dire    455    6
##  Radiant 10 469
```

The k-means clustering gets a $(455+469)/966=95.65\%$ correct rate. However, it is not that useful if we recognize it is a review of the game rather than a prediction. If we get the stats of the game, it is not meaningful to infer the result from it.


What we care most here is the prediction of the game. It is rather tough to achieve. A further discussion will be illustrated in the SVM model.

```
sos <- (nrow(dota.sum[, -1]) - 1) * sum(apply(dota.sum[, -1], 2, var))
for (i in 2:10) sos[i] <- sum(kmeans(dota.sum[, -1],
centers=i)$withinss)
plot(1:10, sos, type="b", xlab="Number of Clusters", ylab="Sum of
Squares")
library(useful)

## Warning: package 'useful' was built under R version 3.2.4
## Loading required package: ggplot2
##
## Attaching package: 'ggplot2'
##
## The following objects are masked from 'package:psych':
##
##      %+%, alpha
```

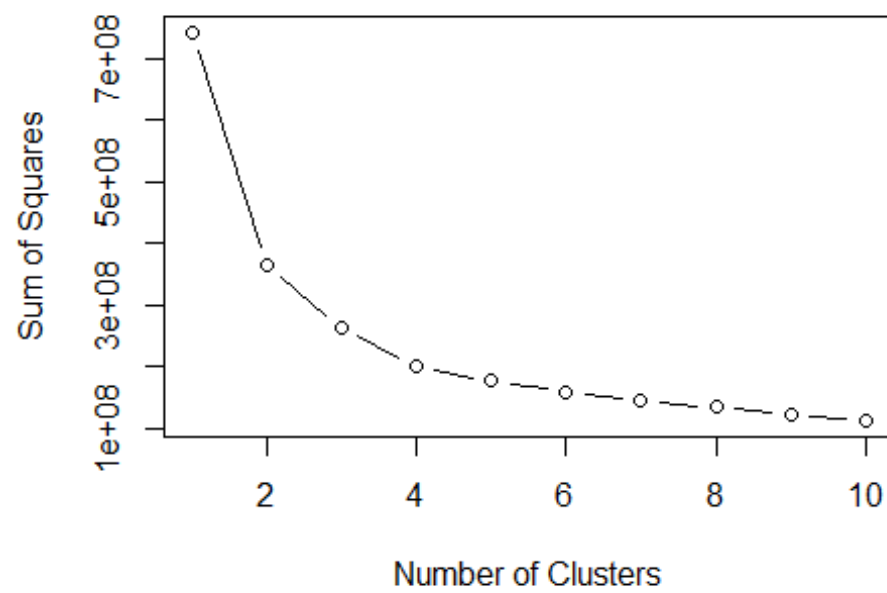

```
best<-FitKMeans(dota.sum[,-1],max.clusters=10, seed=111)  
PlotHartigan(best)
```

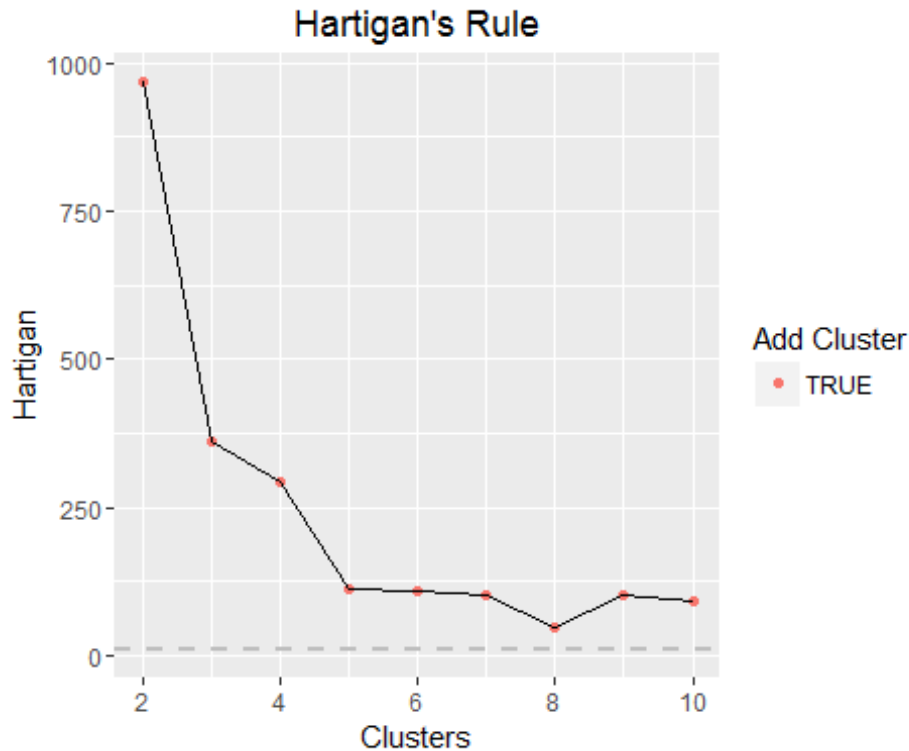

```
k<-5
dota.k.sum<-kmeans(dota.sum[, -1],k)
dota.k.sum$centers
```

	duration	Kradiant	Dradiant	Aradiant	Xradiant	Gradiant	Kdire
## 1	38.43220	20.966102	36.54661	45.14831	1785.860	1734.691	35.627119
## 2	46.66667	37.184211	42.33333	77.87719	2364.763	2147.570	41.254386
## 3	25.17327	27.584158	10.13366	57.34653	2053.946	2236.639	9.529703
## 4	25.56376	8.791946	29.06711	19.04698	1296.698	1323.913	28.536913
## 5	38.82845	35.548117	22.91632	78.26360	2358.941	2336.038	22.071130

	Ddire	Adire	Xdire	Gdire
## 1	21.944915	78.49576	2369.047	2373.805
## 2	38.122807	87.43860	2547.798	2355.596
## 3	28.069307	20.44059	1340.634	1359.183
## 4	9.409396	59.93289	2055.913	2212.685
## 5	36.267782	47.39749	1855.038	1780.377

But we can use larger k for clustering. The Hartigan graph shows that using k=5 is a good number for clustering. Though the result is hard to explicitly explain, we can still name them as short match(one side overwhelming) and long match(well-matched). Based on the duration centers, we can conclude the 25 minutes clusters are short games won by both sides; 38, longer matches and 46, longest games. It indicates if the game duration is over 46 minutes, it is hard to predict who wins.

Conclusion

The Clustering analysis indicates that the game result can be predicted by technical statistics. If we gather player's match data and use an algorithm to get his average performance in a match, we can generate predictions before the game.

4. Elastic Net Model

Since we do not only care the winner, but also the duration. It is meaningful to see how can the stats of teams determine the duration. Here, we can use lasso and ridge regression for the test.

Actually, the XPM and GPM cannot affect the duration strongly, since they are already divided by time(per minute). And the kill number of Dire equals the death number of radiant. So we can remove the Kdire, Ddire and XPM and GPM for both sides.

Set up the train and test sample

```
set.seed(1013)
train <- sample(1:nrow(dota.sum), nrow(dota.sum)/2)
test <- (-train)
in_sample <- dota.sum[train,]
out_sample <- dota.sum[test,]
trainx <- as.matrix(in_sample[,c(3:5,10)])
trainy <- in_sample$duration
testx <- as.matrix(out_sample[,c(3:5,10)])
testy <- out_sample$duration
```

Lasso and ridge regression

```
library(glmnet)

## Warning: package 'glmnet' was built under R version 3.2.5
## Loading required package: Matrix
## Loading required package: foreach
## Warning: package 'foreach' was built under R version 3.2.4
##
## Attaching package: 'foreach'
## The following object is masked from 'package:chron':
##
##      times
## Loaded glmnet 2.0-5

lambdalevels <- 10^seq(7,-2,length=100)
dota.cv.mod<-NULL
```

```

bestlambda<-NULL
yhat<-NULL
mse<-NULL
i<-0
for(a in seq(0,1,0.1)){
  i<-i+1
  dota.cv.mod[[i]]=cv.glmnet(trainx,trainy,alpha=a,lambda=lambdalevels)
  bestlambda[i] <- dota.cv.mod[[i]]$lambda.min
  yhat[[i]] <- predict(dota.cv.mod[[i]]$glmnet.fit,
s=dota.cv.mod[[i]]$lambda.min, newx=trainx)
  mse[i] <- sum((trainy - yhat[[i]])^2)/nrow(trainx)
}
mse

## [1] 59.99502 59.90998 59.93437 59.89970 59.93392 59.89978 59.90927
## [8] 59.90232 59.88802 59.88434 59.88440

best<-order(mse)[1]
best

## [1] 10

bestalpha<-(best-1)*0.1
bestalpha

## [1] 0.9

bestlambdafinal<-bestlambda[best]
bestlambdafinal


## [1] 0.01

#so, the best alpha is 1, best lambda is 0.01
mod=glmnet(trainx,trainy,alpha=bestalpha,lambda=lambdalevels)
coef(mod)[,100]

## (Intercept)      Kradiant      Dradiant      Aradiant      Adire
##  9.92794291  0.12142973  0.06546708  0.15990349  0.18624061

plot(mod,xvar="lambda")

```

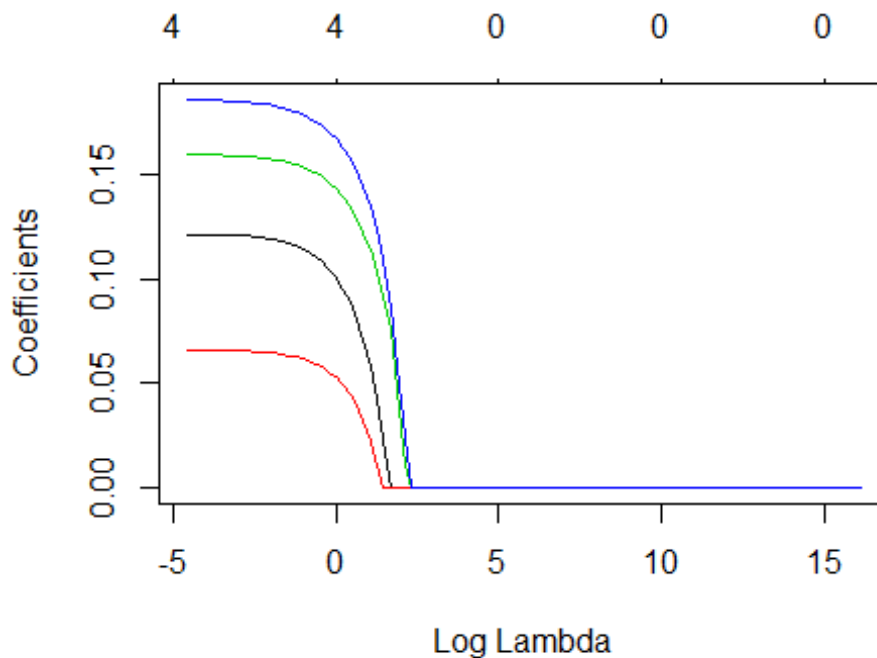

We can use R^2 to evaluate the model:

```
yhat.test <- predict(dota.cv.mod[[best]]$glmnet.fit, s=bestlambdafinal,
newx=testx)
mse.test <- sum((testy - yhat.test)^2)/nrow(testx)
mse.test

## [1] 64.81355

tss <- sum((testy - mean(testy))^2)
sse <- sum((testy - yhat.test)^2)
r2 <- (tss - sse) / tss
r2

## [1] 0.602968
```

This result is acceptable, but not very good in predicting the duration. It explains about 60% of the variance here.

The coefficients are shown as below:

```
predict(mod, type="coefficients",s=bestlambdafinal)

## 5 x 1 sparse Matrix of class "dgCMatrix"
##              1
## (Intercept) 9.92794291
## Kradiant    0.12142973
```



```
## Dradiant      0.06546708
## Aradiant      0.15990349
## Adire         0.18624061
```

Conclusion

It seems the game will always last longer than 10 minutes and can be predicted by the skill stats.

With the increasing of the time, according to the model, the death number and assistance number grow gradually. It, in some extent, is a indicator in evaluating a team's performance in future.

5. Support Vector Machine

Set up the train and test sample

```
library(e1071)

## Warning: package 'e1071' was built under R version 3.2.4

library(kernlab)

##
## Attaching package: 'kernlab'

## The following object is masked from 'package:ggplot2':
##
##      alpha

## The following object is masked from 'package:psych':
##
##      alpha

trainset <- dota.sum[train,]
trainx <- dota.sum[train,-1]
trainy <- dota.sum[train,1]
testx <- dota.sum[test,-1]
testy <- dota.sum[test,1]
```

Choosing kernel

Radial kernel

```
costvalues <- 10^seq(-3,2,1)
tuned.svm <- tune(svm, Winner~., data=trainset,
  ranges=list(cost=costvalues), kernel="radial")
summary(tuned.svm)

##
## Parameter tuning of 'svm':
##
```

```
## - sampling method: 10-fold cross validation
##
## - best parameters:
##   cost
##     1
##
## - best performance: 0.01276596
##
## - Detailed performance results:
##   cost      error dispersion
## 1 1e-03 0.55531915 0.04423395
## 2 1e-02 0.04042553 0.03393897
## 3 1e-01 0.03191489 0.04043175
## 4 1e+00 0.01276596 0.02055514
## 5 1e+01 0.02127660 0.01737227
## 6 1e+02 0.01914894 0.01862968

##the best performance is when we set cost as 1, we get 5% of the points
incorrectly classified.
svmfit <- svm(Winner~. , kernel = "radial",cost = 100,data=trainset)
summary(svmfit)

##
## Call:
## svm(formula = Winner ~ ., data = trainset, kernel = "radial",
##      cost = 100)
##
##
## Parameters:
##   SVM-Type:  C-classification
##   SVM-Kernel: radial
##         cost:  100
##        gamma: 0.09090909
##
## Number of Support Vectors:  32
##
## ( 16 16 )
##
##
## Number of Classes:  2
##
## Levels:
##   Dire Radiant
```

Linear kernel

```
tuned.svm <- tune(svm, Winner~., data=trainset,
ranges=list(cost=costvalues), kernel="linear")
summary(tuned.svm)
```

```
##
## Parameter tuning of 'svm':
##
## - sampling method: 10-fold cross validation
##
## - best parameters:
##   cost
##     1
##
## - best performance: 0.0106383
##
## - Detailed performance results:
##   cost      error dispersion
## 1 1e-03 0.02978723 0.02497421
## 2 1e-02 0.01914894 0.01569925
## 3 1e-01 0.01276596 0.01487672
## 4 1e+00 0.01063830 0.01121375
## 5 1e+01 0.01489362 0.01436061
## 6 1e+02 0.02127660 0.01418440

#the best cost is 1, where we get only 4.2% is wrong
svmfit <- svm(Winner~. , kernel = "linear",cost = 1,data=trainset)
summary(svmfit)

##
## Call:
## svm(formula = Winner ~ ., data = trainset, kernel = "linear",
##      cost = 1)
##
##
## Parameters:
##   SVM-Type:  C-classification
##   SVM-Kernel: linear
##         cost:  1
##        gamma: 0.09090909
##
## Number of Support Vectors:  27
##
## ( 13 14 )
##
##
## Number of Classes:  2
##
## Levels:
##   Dire Radiant
```

Polynomial kernel

```
tuned.svm <- tune(svm, Winner~., data=trainset,
ranges=list(cost=costvalues), kernel="polynomial")
summary(tuned.svm)
```

```
##
## Parameter tuning of 'svm':
##
## - sampling method: 10-fold cross validation
##
## - best parameters:
##   cost
##     10
##
## - best performance: 0.01276596
##
## - Detailed performance results:
##   cost      error dispersion
## 1 1e-03 0.53191489 0.05673759
## 2 1e-02 0.05744681 0.03179647
## 3 1e-01 0.02127660 0.02653658
## 4 1e+00 0.01914894 0.02115806
## 5 1e+01 0.01276596 0.02055514
## 6 1e+02 0.01702128 0.02197437

##the best cost is 100, where we get only 4.2% is wrong
svmfit <- svm(Winner~. , kernel = "polynomial",cost =
100,data=trainset)
summary(svmfit)

##
## Call:
## svm(formula = Winner ~ ., data = trainset, kernel = "polynomial",
##      cost = 100)
##
##
## Parameters:
##   SVM-Type:  C-classification
##   SVM-Kernel: polynomial
##       cost:  100
##   degree:    3
##   gamma:    0.09090909
##   coef.0:    0
##
## Number of Support Vectors:  31
##
##   ( 18 13 )
##
##
## Number of Classes:  2
##
## Levels:
##   Dire Radiant
```

Sigmoid kernel

```

tuned.svm <- tune(svm, Winner~., data=trainset,
ranges=list(cost=costvalues), kernel="sigmoid")
summary(tuned.svm)

##
## Parameter tuning of 'svm':
##
## - sampling method: 10-fold cross validation
##
## - best parameters:
##   cost
##   0.1
##
## - best performance: 0.02340426
##
## - Detailed performance results:
##   cost      error dispersion
## 1 1e-03 0.59148936 0.05094549
## 2 1e-02 0.03191489 0.02700629
## 3 1e-01 0.02340426 0.02115806
## 4 1e+00 0.03617021 0.02845731
## 5 1e+01 0.06382979 0.03884557
## 6 1e+02 0.06808511 0.03725936

#the best cost is 0.1, where we get only 4.2% is wrong
svmfit <- svm(Winner~. , kernel = "sigmoid",cost = 0.1,data=trainset)
summary(svmfit)

##
## Call:
## svm(formula = Winner ~ ., data = trainset, kernel = "sigmoid",
##     cost = 0.1)
##
##
## Parameters:
##   SVM-Type:  C-classification
##   SVM-Kernel:  sigmoid
##     cost:  0.1
##     gamma: 0.09090909
##   coef.0:  0
##
## Number of Support Vectors: 132
##
## ( 66 66 )
##
##
## Number of Classes: 2
##
## Levels:
## Dire Radiant

```

Prediction for test samples

It seems that the linear kernel gives the best result. So, we use linear kernel to test the out-sample.

```
prediction <- predict(tuned.svm$best.model, testx)
table(prediction, truth=testy)

##           truth
## prediction Dire Radiant
##   Dire      216      4
##   Radiant    9     241

sum(yhat==testy)/length(testy)

## Warning in is.na(e1) | is.na(e2): longer object length is not a
## multiple of
## shorter object length

## Warning in `==.default`(yhat, testy): longer object length is not a
## multiple of shorter object length

## [1] 0
```

The SVM is satisfactory, a high correct rate more than 97% is a very excellent result in statistics.

Conclusion

In SVM model, we tested different kernels and costs for the dataset. It gives a very good response with almost 95% correct to the test data. This result may indicate that the SVM is a good tool to analyze or predict matches with enough number of samples. The statistical points of the players in dota can truly show the trend of the game. With the different method of kernel, SVM can easily do classification work in different dataset, especially when we cannot summarize the trait of the data in lower dimension. Also, if we want to improve the performance, choosing the right parameters and the model is important. And maybe changing the scale of the data can help to make a better result.

6. Association Rule

Set up transactions

```
library(arules)

## Warning: package 'arules' was built under R version 3.2.4

##
## Attaching package: 'arules'
```

```

## The following object is masked from 'package:kernlab':
##
##      size

## The following objects are masked from 'package:base':
##
##      abbreviate, write

library(arulesViz)

## Warning: package 'arulesViz' was built under R version 3.2.4

## Loading required package: grid

## Warning: replacing previous import by 'utils::head' when loading
## 'arulesViz'

dota.tran <-
as(dota.origin[,c(4,5,12,19,26,33,40,47,54,61,68)],"transactions")
summary(dota.tran)

## transactions as itemMatrix in sparse format with
## 966 rows (elements/itemsets/transactions) and
## 1112 columns (items) and a density of 0.009892086
##
## most frequent items:
## Winner=Radiant      Winner=Dire      Hero9=lion  Hero3=invoker
Hero8=lion
##           494           472           51           47
46
##      (Other)
##           9516
##
## element (itemset/transaction) length distribution:
## sizes
## 11
## 966
##
##      Min. 1st Qu.  Median    Mean 3rd Qu.    Max.
##      11      11      11      11      11      11
##
## includes extended item information - examples:
##      labels variables levels
## 1      Winner=Dire      Winner      Dire
## 2 Winner=Radiant      Winner Radiant
## 3  Hero1=abaddon      Hero1 abaddon
##
## includes extended transaction information - examples:
##      transactionID
## 1                  1
## 2                  2
## 3                  3

```

```
inspect(dota.tran[1:3])
```

```
## items transactionID
## 1 {Winner=Dire,
##   Hero1=spirit-breaker,
##   Hero2=necrophos,
##   Hero3=enchantress,
##   Hero4=natures-prophet,
##   Hero5=phantom-lancer,
##   Hero6=bounty-hunter,
##   Hero7=invoker,
##   Hero8=lion,
##   Hero9=tidehunter,
##   Hero10=spectre} 1
## 2 {Winner=Radiant,
##   Hero1=spectre,
##   Hero2=doom,
##   Hero3=zeus,
##   Hero4=vengeful-spirit,
##   Hero5=nyx-assassin,
##   Hero6=mirana,
##   Hero7=outworld-devourer,
##   Hero8=gyrocopter,
##   Hero9=faceless-void,
##   Hero10=lion} 2
## 3 {Winner=Radiant,
##   Hero1=ogre-magi,
##   Hero2=outworld-devourer,
##   Hero3=zeus,
##   Hero4=enigma,
##   Hero5=batrider,
##   Hero6=weaver,
##   Hero7=alchemist,
##   Hero8=night-stalker,
##   Hero9=io,
##   Hero10=keeper-of-the-light} 3
```

```
itemFrequency(dota.tran[, 1:10])
```

```
## Winner=Dire Winner=Radiant
Hero1=abaddon
## 0.488612836 0.511387164
0.002070393
## Hero1=alchemist Hero1=ancient-apparition
Hero1=anti-mage
## 0.014492754 0.006211180
0.008281573
## Hero1=arc-warden Hero1=axe
Hero1=bane
## 0.000000000 0.003105590
0.012422360
```



```
##          Hero1=batrider
##          0.010351967
```

Finding raw rules

It is very difficult to find rules in small sample data like this, the support is not high enough to form big set.

```
rule.dota <- apriori(dota.tran, parameter = list(support=0.005,
confidence=0.7, minlen=3))

## Apriori
##
## Parameter specification:
## confidence minval  smax  arem  aval originalSupport support minlen
maxlen
##          0.7      0.1    1 none FALSE                TRUE   0.005      3
10
## target    ext
## rules FALSE
##
## Algorithmic control:
## filter tree heap memopt load sort verbose
##    0.1 TRUE TRUE  FALSE TRUE    2    TRUE
##
## Absolute minimum support count: 4
##
## set item appearances ...[0 item(s)] done [0.00s].
## set transactions ...[1023 item(s), 966 transaction(s)] done [0.00s].
## sorting and recoding items ... [648 item(s)] done [0.00s].
## creating transaction tree ... done [0.00s].
## checking subsets of size 1 2 3 done [0.00s].
## writing ... [4 rule(s)] done [0.00s].
## creating S4 object ... done [0.00s].

summary(rule.dota)

## set of 4 rules
##
## rule length distribution (lhs + rhs):sizes
## 3
## 4
##
##      Min. 1st Qu.  Median    Mean 3rd Qu.    Max.
##       3       3       3       3       3       3
##
## summary of quality measures:
##      support      confidence      lift
## Min.   :0.005176  Min.   :0.8333  Min.   :1.706
## 1st Qu.:0.005176  1st Qu.:0.8333  1st Qu.:1.706
## Median :0.005176  Median :0.9167  Median :1.876
```

```
## Mean      :0.005176   Mean      :0.9167   Mean      :1.876
## 3rd Qu.   :0.005176   3rd Qu.:1.0000   3rd Qu.:2.047
## Max.      :0.005176   Max.      :1.0000   Max.      :2.047
##
## mining info:
##      data ntransactions support confidence
## dota.tran      966      0.005      0.7
```

```
inspect(rule.dota)
```

```
##   lhs                                rhs          support
## 1 {Hero3=invoker,Hero9=bounty-hunter} => {Winner=Dire} 0.005175983
## 2 {Hero6=zeus,Hero7=spectre}         => {Winner=Dire} 0.005175983
## 3 {Hero3=witch-doctor,Hero8=invoker}  => {Winner=Dire} 0.005175983
## 4 {Hero8=doom,Hero9=witch-doctor}    => {Winner=Dire} 0.005175983
## confidence lift
## 1 0.8333333 1.705508
## 2 1.0000000 2.046610
## 3 0.8333333 1.705508
## 4 1.0000000 2.046610
```

Conclusion

These rules are very interesting and valuable. For example,

```
{Hero6=zeus,Hero7=spectre} => {Winner=Dire}
```

This rule shows that when dire get zeus and spectre together, they can win the game in a high expectation. It is a known rule for players called universal strategy since both zeus and spectre have skill can hit enemies wherever they are. It proves that the rule analysis fits the realistic strategy, thus we can use rules we do not know from the set.

If we have more samples, we can generate more rules for the game which can guide the players in a large range and help them accumulate tips against their opponents.

By decreasing the support, we can get more rules:

```
rule.dota <- apriori(dota.tran, parameter = list(support=0.003,
confidence=0.7, minlen=3))

## Apriori
##
## Parameter specification:
## confidence minval smax arem aval originalSupport support minlen
## maxlen
##           0.7    0.1    1 none FALSE                TRUE    0.003    3
## 10
## target  ext
## rules FALSE
##
```

```

## Algorithmic control:
## filter tree heap memopt load sort verbose
## 0.1 TRUE TRUE FALSE TRUE 2 TRUE
##
## Absolute minimum support count: 2
##
## set item appearances ...[0 item(s)] done [0.00s].
## set transactions ...[1023 item(s), 966 transaction(s)] done [0.00s].
## sorting and recoding items ... [821 item(s)] done [0.00s].
## creating transaction tree ... done [0.00s].
## checking subsets of size 1 2 3 4 5 6 7 done [0.01s].
## writing ... [735 rule(s)] done [0.00s].
## creating S4 object ... done [0.00s].

summary(rule.dota)

## set of 735 rules
##
## rule length distribution (lhs + rhs):sizes
## 3 4 5 6 7
## 437 144 105 42 7
##
## Min. 1st Qu. Median Mean 3rd Qu. Max.
## 3.000 3.000 3.000 3.691 4.000 7.000
##
## summary of quality measures:
## support confidence lift
## Min. :0.003106 Min. :0.7500 Min. : 1.467
## 1st Qu.:0.003106 1st Qu.:1.0000 1st Qu.: 1.955
## Median :0.003106 Median :1.0000 Median : 30.188
## Mean :0.003169 Mean :0.9551 Mean : 31.973
## 3rd Qu.:0.003106 3rd Qu.:1.0000 3rd Qu.: 48.300
## Max. :0.005176 Max. :1.0000 Max. :120.750
##
## mining info:
## data ntransactions support confidence
## dota.tran 966 0.003 0.7

inspect(sort(rule.dota, by = "lift")[1:10])

## lhs rhs support confidence lift
## 1 {Hero3=batrider, Hero5=spectre} => {Hero9=mirana} 0.00310559 0.75 120.75
## 2 {Hero8=earthshaker, Hero10=dark-seer} => {Hero4=bane} 0.00310559 1.00 96.60
## 3 {Hero2=natures-prophet, Hero8=earthshaker} => {Hero4=bane} 0.00310559 1.00 96.60

```

```

## 4 {Hero8=earthshaker,
##   Hero9=outworld-devourer} => {Hero4=bane} 0.00310559 1.00
96.60
## 5 {Hero6=vengeful-spirit,
##   Hero8=earthshaker} => {Hero4=bane} 0.00310559 1.00
96.60
## 6 {Hero7=spectre,
##   Hero10=dark-seer} => {Hero4=bane} 0.00310559 1.00
96.60
## 7 {Hero6=vengeful-spirit,
##   Hero10=dark-seer} => {Hero4=bane} 0.00310559 1.00
96.60
## 8 {Hero2=natures-prophet,
##   Hero9=outworld-devourer} => {Hero4=bane} 0.00310559 1.00
96.60
## 9 {Hero2=natures-prophet,
##   Hero7=spectre} => {Hero4=bane} 0.00310559 1.00
96.60
## 10 {Hero7=spectre,
##   Hero9=outworld-devourer} => {Hero4=bane} 0.00310559 1.00
96.60

rulesdataframe<- as(rule.dota, "data.frame")
subset.matrix <- is.subset(rule.dota, rule.dota)
subset.matrix[lower.tri(subset.matrix, diag=T)] <- NA
redundant <- colSums(subset.matrix, na.rm=T) >= 1
rules.pruned <- rule.dota[!redundant]
summary(rules.pruned)

## set of 350 rules
##
## rule length distribution (lhs + rhs):sizes
## 3
## 350
##
##      Min. 1st Qu.  Median    Mean 3rd Qu.    Max.
##      3      3      3      3      3      3
##
## summary of quality measures:
##      support      confidence      lift
## Min.   :0.003106 Min.   :0.7500 Min.   : 1.467
## 1st Qu.:0.003106 1st Qu.:0.7500 1st Qu.: 1.637
## Median :0.003106 Median :1.0000 Median : 1.955
## Mean   :0.003233 Mean   :0.9292 Mean   : 5.734
## 3rd Qu.:0.003106 3rd Qu.:1.0000 3rd Qu.: 2.047
## Max.   :0.005176 Max.   :1.0000 Max.   :53.667
##
## mining info:
##      data ntransactions support confidence
## dota.tran      966    0.003      0.7

```

```
inspect(sort(rules.pruned[1:10],by = "lift"))
```

	lhs	rhs	support
confidence	lift		
## 1	{Hero3=batrider,	=> {Hero5=spectre}	0.00310559
##	Hero9=mirana}		
1.00	48.300000		
## 2	{Hero9=vengeful-spirit,	=> {Winner=Dire}	0.00310559
##	Hero10=templar-assassin}		
1.00	2.046610		
## 3	{Hero2=invoker,	=> {Winner=Dire}	0.00310559
##	Hero10=templar-assassin}		
1.00	2.046610		
## 4	{Hero5=death-prophet,	=> {Winner=Dire}	0.00310559
##	Hero7=broodmother}		
1.00	2.046610		
## 5	{Hero1=zeus,	=> {Winner=Dire}	0.00310559
##	Hero2=rubick}		
1.00	2.046610		
## 6	{Hero1=lion,	=> {Winner=Dire}	0.00310559
##	Hero3=ancient-apparition}		
1.00	2.046610		
## 7	{Hero3=invoker,	=> {Winner=Radiant}	0.00310559
##	Hero8=omniknight}		
1.00	1.955466		
## 8	{Hero2=invoker,	=> {Winner=Radiant}	0.00310559
##	Hero9=chen}		
1.00	1.955466		
## 9	{Hero1=doom,	=> {Winner=Radiant}	0.00310559
##	Hero4=batrider}		
1.00	1.955466		
## 10	{Hero3=juggernaut,	=> {Winner=Radiant}	0.00310559
##	Hero5=shadow-shaman}		
0.75	1.466599		

7. More Analysis on Heroes

Aside matches, we can do more analysis on heroes with these algorithms and models

Preprocessing

```
hero <- NULL
for(i in seq(5,68,7)){
  heroseq <- dota.orgin[,i:(i+6)]
  colnames(heroseq) <- c("Hero","K","D","A","XPM","GPM","DMG")
  hero <- rbind(hero,heroseq)
}
for(i in 2:6){
```

```

hero[,i]<-as.numeric(hero[,i])
}

## Warning: NAs introduced by coercion

damage<-sub("k","",as.character(hero$DMG))
damage <- 1000*as.numeric(damage)

## Warning: NAs introduced by coercion

hero.parameters <- cbind(hero[, -7],DMG=damage)
head(hero.parameters)

##           Hero  K D  A XPM GPM   DMG
## 1  spirit-breaker  2 7  9 110 256 4600
## 2      spectre 18 7 20 418 661 25600
## 3   ogre-magi  0 4 18 117 223  4700
## 4 treant-protector  0 4  6  28 175  2300
## 5          doom  3 3 14 133 329  6900
## 6 outworld-devourer 14 6 10 410 522 18300

```

Win rate stats

```

result <- NULL
for(i in 1:nrow(dota.orgin)){
  if(dota.orgin[i,4]=="Dire"){
    radiant.result <- rep("lose",5)
    dire.result <- rep("win",5)
  }
  else{
    radiant.result <- rep("win",5)
    dire.result <- rep("lose",5)
  }
  result <- c(result,radiant.result,dire.result)
}

hero.win <- cbind(hero.parameters,result)

table(hero.win$Hero,hero.win$result)

##
##           lose win
##  abaddon           23 16
##  alchemist          41 38
##  ancient-apparition 26 17
##  anti-mage          26 32
##  arc-warden          1  0
##  axe                6  7
##  bane               44 35
##  batrider           67 67
##  beastmaster       120 127
##  bloodseeker        3  5

```

##	bounty-hunter	105	97
##	brewmaster	3	4
##	bristleback	31	27
##	broodmother	25	21
##	centaur-warrunner	4	8
##	chaos-knight	27	28
##	chen	34	23
##	clinkz	52	45
##	clockwerk	23	13
##	crystal-maiden	24	23
##	dark-seer	55	56
##	dazzle	55	46
##	death-prophet	105	92
##	disruptor	64	87
##	doom	122	117
##	dragon-knight	9	11
##	drow-ranger	24	21
##	earth-spirit	94	90
##	earthshaker	63	83
##	elder-titan	1	4
##	ember-spirit	56	61
##	enchantress	86	69
##	enigma	31	27
##	faceless-void	121	127
##	gyrocopter	85	101
##	huskar	7	5
##	invoker	188	188
##	io	30	33
##	jakiro	31	27
##	juggernaut	107	95
##	keeper-of-the-light	10	5
##	kunkka	11	16
##	legion-commander	19	22
##	leshrac	9	3
##	lich	47	32
##	lifestealer	27	18
##	lina	60	51
##	lion	166	191
##	lone-druid	71	72
##	luna	13	11
##	lycan	10	13
##	magnus	19	21
##	medusa	23	43
##	meepo	9	8
##	mirana	18	28
##	morphling	17	36
##	naga-siren	8	4
##	natures-prophet	105	89
##	necrophos	26	30
##	night-stalker	52	50

##	nyx-assassin	25	27
##	ogre-magi	26	33
##	omniknight	44	47
##	oracle	63	78
##	outworld-devourer	104	99
##	phantom-assassin	14	16
##	phantom-lancer	55	52
##	phoenix	53	45
##	puck	59	59
##	pudge	28	25
##	pugna	11	12
##	queen-of-pain	50	39
##	razor	14	7
##	riki	3	0
##	rubick	39	47
##	sand-king	14	19
##	shadow-demon	9	8
##	shadow-fiend	6	13
##	shadow-shaman	47	43
##	silencer	41	39
##	skywrath-mage	10	17
##	slardar	50	46
##	slark	64	74
##	sniper	7	7
##	spectre	112	104
##	spirit-breaker	52	63
##	storm-spirit	2	6
##	sven	107	108
##	techies	5	6
##	templar-assassin	24	22
##	terrorblade	3	2
##	tidehunter	88	70
##	timbersaw	6	16
##	tinker	20	15
##	tiny	16	16
##	treant-protector	7	14
##	troll-warlord	4	4
##	tusk	31	31
##	undying	49	50
##	ursa	65	66
##	vengeful-spirit	137	158
##	venomancer	20	22
##	viper	38	37
##	visage	6	5
##	warlock	18	15
##	weaver	24	27
##	windranger	73	74
##	winter-wyvern	28	20
##	witch-doctor	169	176


```
##   wraith-king           20  17
##   zeus                  131 118

hero.wintable <- data.frame(table(hero.win$Hero,hero.win$result))
lose <- hero.wintable[1:111,]
win <- hero.wintable[112:222,]
hero.winrate <- cbind(lose[,2],win[,3])
hero.winrate <- cbind(hero.winrate,hero.winrate[,2]+hero.winrate[,3])
hero.winrate <- cbind(hero.winrate,hero.winrate[,3]/hero.winrate[,4])
colnames(hero.winrate) <- c("Hero","Lose","Win","Total","WinRate")

hero.winrate[order(hero.winrate$WinRate,decreasing = T),c(1,5,4)]
```

	Hero	WinRate	Total
## 30	elder-titan	0.8000000	5
## 87	storm-spirit	0.7500000	8
## 93	timbersaw	0.7272727	22
## 78	shadow-fiend	0.6842105	19
## 56	morphling	0.6792453	53
## 15	centaur-warrunner	0.6666667	12
## 96	treant-protector	0.6666667	21
## 53	medusa	0.6515152	66
## 81	skywrath-mage	0.6296296	27
## 10	bloodseeker	0.6250000	8
## 55	mirana	0.6086957	46
## 42	kunkka	0.5925926	27
## 24	disruptor	0.5761589	151
## 76	sand-king	0.5757576	33
## 12	brewmaster	0.5714286	7
## 29	earthshaker	0.5684932	146
## 51	lycan	0.5652174	23
## 62	ogre-magi	0.5593220	59
## 64	oracle	0.5531915	141
## 4	anti-mage	0.5517241	58
## 26	dragon-knight	0.5500000	20
## 86	spirit-breaker	0.5478261	115
## 75	rubick	0.5465116	86
## 89	techies	0.5454545	11
## 35	gyrocopter	0.5430108	186
## 6	axe	0.5384615	13
## 43	legion-commander	0.5365854	41
## 83	slark	0.5362319	138
## 59	necrophos	0.5357143	56
## 101	vengeful-spirit	0.5355932	295
## 48	lion	0.5350140	357
## 66	phantom-assassin	0.5333333	30
## 106	weaver	0.5294118	51
## 52	magnus	0.5250000	40
## 38	io	0.5238095	63
## 102	venomancer	0.5238095	42

## 71	pugna	0.5217391	23
## 31	ember-spirit	0.5213675	117
## 61	nyx-assassin	0.5192308	52
## 63	omniknight	0.5164835	91
## 9	beastmaster	0.5141700	247
## 34	faceless-void	0.5120968	248
## 109	witch-doctor	0.5101449	345
## 16	chaos-knight	0.5090909	55
## 99	undying	0.5050505	99
## 21	dark-seer	0.5045045	111
## 100	ursa	0.5038168	131
## 49	lone-druoid	0.5034965	143
## 107	windranger	0.5034014	147
## 88	sven	0.5023256	215
## 8	batrider	0.5000000	134
## 37	invoker	0.5000000	376
## 69	puck	0.5000000	118
## 84	sniper	0.5000000	14
## 95	tiny	0.5000000	32
## 97	troll-warlord	0.5000000	8
## 98	tusk	0.5000000	62
## 103	viper	0.4933333	75
## 60	night-stalker	0.4901961	102
## 25	doom	0.4895397	239
## 20	crystal-maiden	0.4893617	47
## 28	earth-spirit	0.4891304	184
## 65	outworld-devourer	0.4876847	203
## 80	silencer	0.4875000	80
## 67	phantom-lancer	0.4859813	107
## 85	spectre	0.4814815	216
## 2	alchemist	0.4810127	79
## 11	bounty-hunter	0.4801980	202
## 82	slardar	0.4791667	96
## 90	templar-assassin	0.4782609	46
## 79	shadow-shaman	0.4777778	90
## 111	zeus	0.4738956	249
## 70	pudge	0.4716981	53
## 54	meepo	0.4705882	17
## 77	shadow-demon	0.4705882	17
## 40	juggernaut	0.4702970	202
## 23	death-prophet	0.4670051	197
## 27	drow-ranger	0.4666667	45
## 13	bristleback	0.4655172	58
## 33	enigma	0.4655172	58
## 39	jakiro	0.4655172	58
## 18	clinkz	0.4639175	97
## 47	lina	0.4594595	111
## 110	wraith-king	0.4594595	37
## 68	phoenix	0.4591837	98
## 58	natures-prophet	0.4587629	194

```
## 50          luna 0.4583333 24
## 14      broodmother 0.4565217 46
## 22          dazzle 0.4554455 101
## 104         visage 0.4545455 11
## 105         warlock 0.4545455 33
## 32      enchantress 0.4451613 155
## 7          bane 0.4430380 79
## 92      tidehunter 0.4430380 158
## 72      queen-of-pain 0.4382022 89
## 94          tinker 0.4285714 35
## 36          huskar 0.4166667 12
## 108     winter-wyvern 0.4166667 48
## 1          abaddon 0.4102564 39
## 45          lich 0.4050633 79
## 17          chen 0.4035088 57
## 46      lifestealer 0.4000000 45
## 91      terrorblade 0.4000000 5
## 3      ancient-apparition 0.3953488 43
## 19          clockwerk 0.3611111 36
## 41  keeper-of-the-light 0.3333333 15
## 57          naga-siren 0.3333333 12
## 73          razor 0.3333333 21
## 44          leshrac 0.2500000 12
## 5          arc-warden 0.0000000 1
## 74          riki 0.0000000 3
```

```
herotemp <- hero.winrate[order(hero.winrate$WinRate,decreasing =
T),c(1,5,4)]
subset(herotemp,herotemp$WinRate>=0.5&herotemp$Total>=80)
```

```
##          Hero  WinRate Total
## 24      disruptor 0.5761589 151
## 29      earthshaker 0.5684932 146
## 64          oracle 0.5531915 141
## 86  spirit-breaker 0.5478261 115
## 75          rubick 0.5465116 86
## 35      gyrocopter 0.5430108 186
## 83          slark 0.5362319 138
## 101 vengeful-spirit 0.5355932 295
## 48          lion 0.5350140 357
## 31      ember-spirit 0.5213675 117
## 63      omniknight 0.5164835 91
## 9          beastmaster 0.5141700 247
## 34      faceless-void 0.5120968 248
## 109     witch-doctor 0.5101449 345
## 99          undying 0.5050505 99
## 21      dark-seer 0.5045045 111
## 100         ursa 0.5038168 131
## 49      lone-druid 0.5034965 143
## 107     windranger 0.5034014 147
```

```
## 88          sven 0.5023256    215
## 8          batrider 0.5000000    134
## 37          invoker 0.5000000    376
## 69          puck 0.5000000    118
```

By displaying the table, we can find the heroes with higher win rate with large number of matches. Those are the heroes fit for the current version of the game.

Linear Model

```
hero.parameters <- na.omit(hero.parameters)
hero.parameters <- subset(hero.parameters,DMG<50000)
hero.lm <- lm(as.numeric(Hero)~.,hero.parameters)
summary(hero.lm)

##
## Call:
## lm(formula = as.numeric(Hero) ~ ., data = hero.parameters)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -75.068 -27.295  -2.946   28.656   69.378
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept) 73.2246340   1.4053193   52.105 < 2e-16 ***
## K            0.4595924   0.1414332    3.250 0.001160 **
## D           -0.8102599   0.1097028   -7.386 1.64e-13 ***
## A           -0.1898594   0.0489850   -3.876 0.000107 ***
## XPM          0.0047206   0.0023758    1.987 0.046953 *
## GPM          -0.0669091   0.0036123  -18.523 < 2e-16 ***
## DMG          0.0013246   0.0001071   12.371 < 2e-16 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 31.46 on 9424 degrees of freedom
## Multiple R-squared:  0.0493, Adjusted R-squared:  0.0487
## F-statistic: 81.45 on 6 and 9424 DF,  p-value: < 2.2e-16
```

From the result, we know it is hard to regress the data with linear model, which means the stats of different heroes are very close to each other. We may want to cluster these heroes into several sets.

K-means

Since we have 5 position for a team, so we choose k=5

```
k <- 5
hero.k <- kmeans(hero.parameters[, -1],k)
hero.k$centers
```

```
##           K           D           A           XPM           GPM           DMG
## 1  1.971182  5.304336  8.093725  204.4199  295.6989  4054.511
## 2 12.307068  5.387022 15.235226  431.4009  568.2804 19835.458
## 3  4.645608  5.513176 12.324662  270.5848  398.6723  8377.162
## 4  8.198667  5.205330 13.344640  365.8552  501.9703 13461.357
## 5 17.754098  6.545082 18.778689  421.0943  597.5328 30631.557
```

```
table(hero.parameters$Hero,hero.k$cluster)
```

```
##
##           1    2    3    4    5
## abaddon      19    3   10    6    0
## alchemist     11   16   18   23    4
## ancient-apparition 19    0   20    2    0
## anti-mage     23    7   13    9    2
## arc-warden     0    1    0    0    0
## axe           6    1    3    3    0
## bane          56    0   18    0    0
## batrider      42    6   65   20    0
## beastmaster   120    4   92   26    0
## bloodseeker    4    0    2    1    0
## bounty-hunter  94    1   89   14    0
## brewmaster     3    0    3    1    0
## bristleback   10   11   17   18    1
## broodmother   11    3   18   13    0
## centaur-warrunner 1    0    5    4    0
## chaos-knight  11    9   19   14    2
## chen          44    0   11    1    0
## clinkz        10   24   32   26    4
## clockwerk      7    6   13   10    0
## crystal-maiden 25    0   15    7    0
## dark-seer     34    4   53   15    1
## dazzle        92    0    4    0    0
## death-prophet 26   32   66   65    6
## disruptor     105    0   42    1    0
## doom          77   13  103   41    1
## dragon-knight  7    1    6    6    0
## drow-ranger    24    1   15    4    0
## earth-spirit   76    2   87   14    0
## earthshaker    73    3   58    9    0
## elder-titan     0    0    3    1    0
## ember-spirit   20   27   24   32   12
## enchantress    53    5   60   32    1
## enigma         34    1   17    5    0
## faceless-void  164    4   60   11    0
## gyrocopter     23   41   45   64   12
## huskar         2    1    4    5    0
## invoker        53   67  124  117   10
## io             49    0   12    0    0
## jakiro         31    0   18    8    0
```

##	juggernaut	49	29	65	54	2
##	keeper-of-the-light	7	0	7	1	0
##	kunkka	11	1	10	5	0
##	legion-commander	17	3	10	11	0
##	leshrac	4	1	4	2	0
##	lich	24	1	33	20	0
##	lifestealer	15	9	10	10	0
##	lina	25	13	36	34	3
##	lion	255	0	81	9	0
##	lone-druid	48	10	45	35	0
##	luna	5	5	5	5	2
##	lycan	7	1	10	5	0
##	magnus	19	0	18	3	0
##	medusa	10	9	30	13	1
##	meepo	6	0	5	5	1
##	mirana	18	2	20	4	0
##	morphling	7	9	18	12	4
##	naga-siren	9	0	2	1	0
##	natures-prophet	35	14	86	53	1
##	necrophos	25	3	17	11	0
##	night-stalker	56	1	39	6	0
##	nyx-assassin	14	6	20	11	0
##	ogre-magi	36	0	18	4	0
##	omniknight	74	0	9	0	0
##	oracle	87	0	44	5	0
##	outworld-devourer	42	37	54	53	11
##	phantom-assassin	10	5	8	5	1
##	phantom-lancer	25	14	36	28	3
##	phoenix	28	9	39	18	0
##	puck	13	20	37	44	2
##	pudge	11	5	22	12	2
##	pugna	4	2	11	6	0
##	queen-of-pain	7	17	27	35	3
##	razor	3	5	7	6	0
##	riki	2	0	0	1	0
##	rubick	53	1	27	5	0
##	sand-king	16	0	12	3	0
##	shadow-demon	9	1	5	2	0
##	shadow-fiend	4	5	2	5	3
##	shadow-shaman	55	0	26	4	0
##	silencer	27	1	35	14	1
##	skywrath-mage	5	4	12	6	0
##	slardar	50	0	35	6	0
##	slark	27	28	32	40	10
##	sniper	3	4	3	2	2
##	spectre	37	44	51	49	27
##	spirit-breaker	53	0	52	7	0
##	storm-spirit	0	1	5	1	1
##	sven	62	25	62	55	4
##	techies	2	0	3	5	0

##	templar-assassin	8	13	8	16	1
##	terrorblade	1	1	1	2	0
##	tidehunter	68	0	70	17	0
##	timbersaw	6	3	3	7	3
##	tinker	2	12	5	9	7
##	tiny	9	9	9	5	0
##	treant-protector	19	0	0	0	0
##	troll-warlord	1	1	3	3	0
##	tusk	33	1	19	7	0
##	undying	67	0	24	5	1
##	ursa	23	26	34	35	9
##	vengeful-spirit	233	1	52	4	0
##	venomancer	10	7	11	11	3
##	viper	11	8	27	26	2
##	visage	4	1	4	2	0
##	warlock	11	4	11	6	1
##	weaver	12	8	11	18	1
##	windranger	34	28	33	43	4
##	winter-wyvern	36	0	10	2	0
##	witch-doctor	238	0	77	22	0
##	wraith-king	7	3	14	10	3
##	zeus	10	98	25	42	69

It is very clear with the centers of clusters that the heroes' stats can be divided into different classes which represent different positions in a team. 2 carries, 1 control and 2 supports. This classification is significant with KDA, XPM, GPM as well as Damage. All factors have obvious difference.

Future Research Discussion

The whole result of the project is acceptable. From different perspective with these model, we get some interesting analysis of the Dota 2 game. It can generate specific strategies for teams and common players of how to select heroes and how to behave in a match.

According to the conclusion we get above, the future task of our research is the prediction of a match for two certain teams. We can separate this process into 2 questions:

- (1). The prediction with certain teams before match.
- (2). The prediction with certain teams after ban/pick.

The difference is whether we know the hero build of one match.

In fact, in my view, with the result we get in logistic regression, elastic net model and SVM, it is optimistic to get a model for match predicting. The next step is to collect professional player's information such as which hero he play often and what is his performance. With the average behavior of all team players, we can calculate

the static score for the team. When two teams meet, we can put their past match results in a model to generate a fix coefficient for this score. And then, we use this score or the set of stats to apply our regression or SVM model. The computer will tell us who has higher probability to win the game eventually. For my own estimation, this model may get about 60% to 65% accuracy. It is quite high in a e-sport bet.

References

1. War and Picks <http://www.datdota.com/blog/?p=1323>
2. Analysis of the Time Aspect of the Matches at The International 3 (Dota 2 Tournament) <http://www.r-bloggers.com/analysis-of-the-time-aspect-of-the-matches-at-the-international-3-dota-2-tournament/>
3. Result Prediction by Mining Replays in Dota 2 <https://www.diva-portal.org/smash/get/diva2:829556/FULLTEXT01.pdf>
4. Identifying Patterns in Combat that are Predictive of Success in MOBA Games <http://ciigar.csc.ncsu.edu/files/bib/Yang2014-MOBASuccessPatterns.pdf>