



Introduction to Programming

Python Fundamentals

Name of presenter

Date

© 2020, Amazon Web Services, Inc. or its affiliates. All rights reserved.

Welcome to Introduction to Programming.



What is programming?

What you will learn

At the core of the lesson

You will learn how to:

- Define programming
- Explain the function and features of an integrated development environment (IDE)
- Describe the cycle of programming



In this lesson, you will learn how to:

- Define programming
- Explain the function and features of an integrated development environment (IDE)
- Describe the cycle of programming

A purpose for programming: Automation

Automation refers to any technology that removes human interaction from a system, equipment, or process.

Scripts are often written to automate labor-intensive tasks and streamline workflows.

Before you automate a process, consider the following:



What is a programming language?

A programming language is a language that communicates instructions to a computer.

Possible instructions are:

Perform calculations.

Analyze some text.

Read and write files.

Display an image on
the screen.

Accept input from
the user.



How is software written?

Software is written by using text files.

Software is written by using a computer language.

Software is written by using text files

- Some text editors* include features that help programmers write code.
- Examples:
 - Microsoft Visual Studio Code
 - Sublime Text
 - Vi or Vim
 - nano
 - GNU emacs
 - Notepad++
 - TextEdit

Software is written by using text files.

Software is written by using a computer language.

***Microsoft Word is not a text editor.**

Software is written by using a computer language


- Many different languages exist
- Each language has its own:
 - Grammar and syntax
 - Common uses
 - Community
- Examples:
 - Python
 - JavaScript
 - C#
 - C/C++

Software is written by using text files.

Software is written by using a computer language.

Programming language elements

Like human languages,
programming languages have:

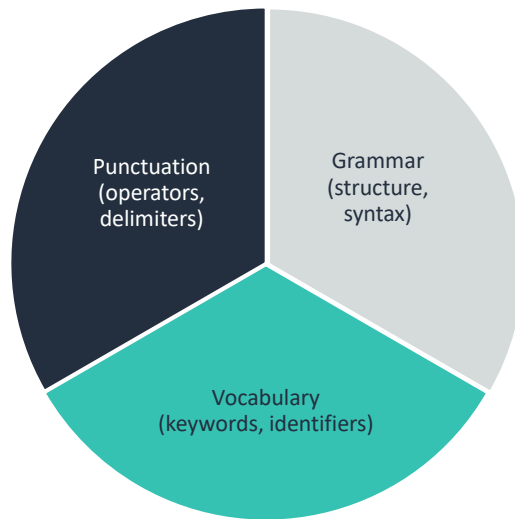


Integrated development environment (IDE)

An IDE can tell you which words are spelled incorrectly, which phrases are unclear, and syntax that you wrote incorrectly.

Most IDEs will suggest a fix for the issue.

Some IDEs work with only one language, such as PyCharm for Python. It will not show syntax errors for Java or C# to you.

Compilers and interpreters

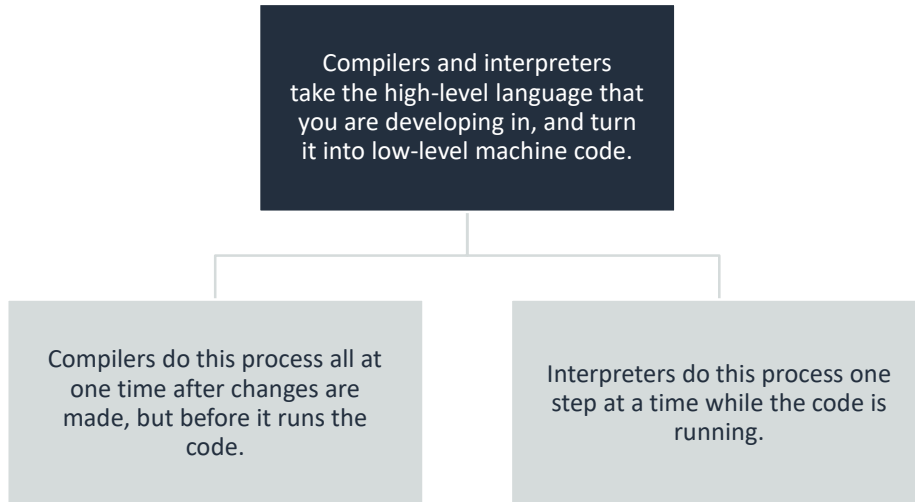

Compiled and interpreted languages

- C/C++
- Basic
- GoLang (the language that Google developed)


Compiled languages

- Python
- Ruby
- JavaScript


Interpreted languages

JavaScript is *interpreted* when it is loaded into a webpage.
Java is *compiled* before the program runs on a computer.

Run, debug, and correct software

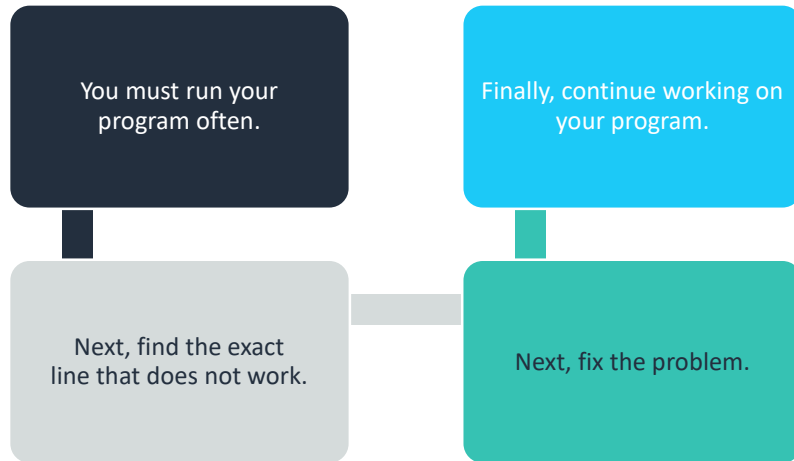

Software is written iteratively

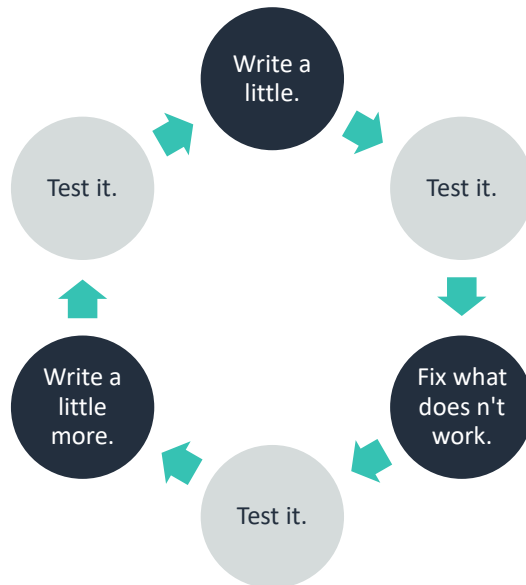



Categorize a value as a data type

What you will learn

At the core of the lesson

You will learn how to:

- Define the term *data type*
- Correctly match data types to data
- Assign values to variables and variables to data types



In this lesson, you will learn how to:

- Define the term *data type*
- Correctly match data types to data
- Assign values to variables and variables to data types

What is a data type?


A data type is the classification of a value that tells the computer how the programmer intends the data to be interpreted.

Examples:

Data Value	Data Type
45	Integer
290578L	Long
1.02	Float
True	Boolean
"My dog is on the bed."	String
"45"	String

Why must the type of data be tagged?

- In memory, everything consists of 0s and 1s.
- Data typing tells the computer how to:
 - Encode a data value into memory
 - Decode a data value out of memory

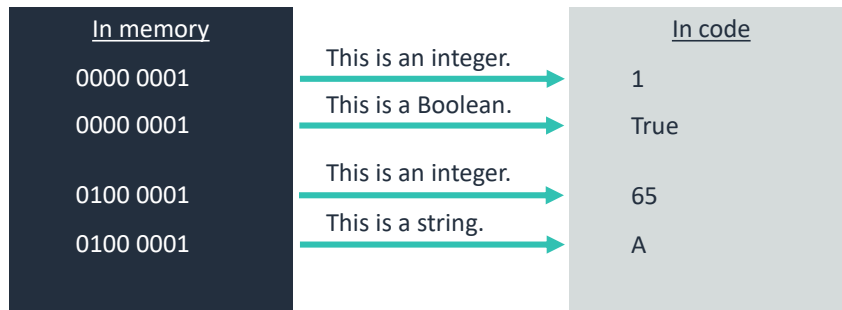

Activity: Identify Data Types



19

Instructions

1. For each value, identify the data type:

1. "The Martian"
2. 1.618
3. 10082L
4. False
5. "True"

"The Martian" - String

1.618 - Float


10082L - Long

False - Boolean

"True" - String

What is a variable?

- A variable is an identifier in your code that represents a value in memory.
- The variable name helps humans to remember what the value means.

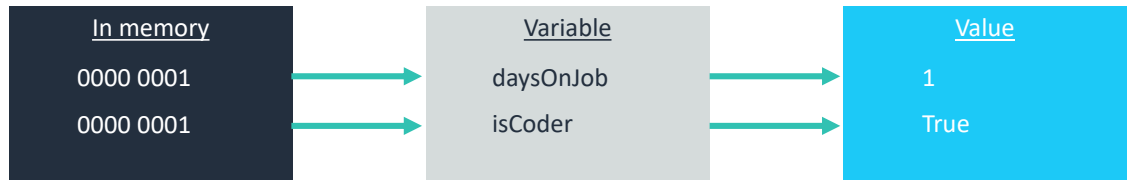

Assigning a variable to a value

- Nearly all languages have an *assignment operator*.
- Most languages use the equal sign (=).

Python
isCoder = True

VB.NET
daysOnJob = 1

F#
daysOnJob <- 1

Pascal
isCoder := true

Assigning a data type to a variable

- Some languages **expect** the data type to be included when first using the variable.

Objective C

```
int daysOnJob = 1
```

Java

```
boolean isCoder = true
```

Assigning a data type to a variable, continued

- Some languages *infer* the data type based on the value that is assigned.

Python
count = 10

Swift
var daysOnJob = 1


TypeScript
let isCoder = true

Activity: Represent letters as numbers

American Standards Association for Information Interchange (ASCII) is a system that associates encoding characters into computers.

Use the ASCII table at [ASCII Table](#) to decipher the following message:

72 – 97 – 118 – 101 – 32 – 121 – 111 – 117 – 32 – 115 – 101 – 101 – 110 – 32

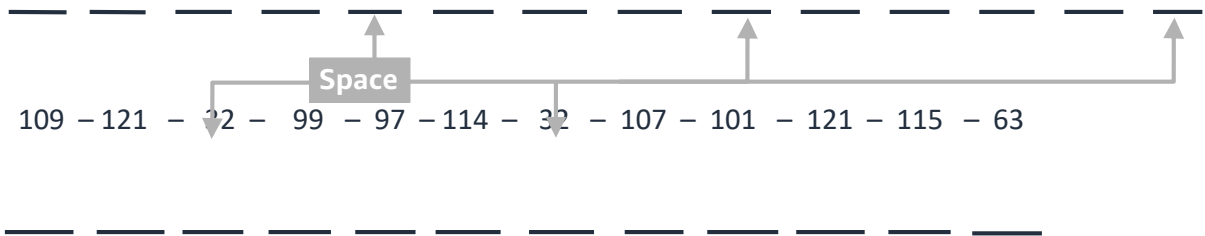

Activity: Represent letters as numbers

American Standards Association for Information Interchange (ASCII) is a system that associates encoding characters into computers.

Use the ASCII table at [ASCII Table](#) to decipher the following message:

72 – 97 – 118 – 101 – 32 – 121 – 111 – 117 – 32 – 115 – 101 – 101 – 110 – 32

H a v e y o u s e e n

109 – 121 – 22 – 99 – 97 – 114 – 32 – 107 – 101 – 121 – 115 – 63

m y c a r k e y s ?

Answer: Have you seen my car keys?



Combine values into composite data types

What you will learn

At the core of the lesson

You will learn how to:

- Define composite data types
- Identify composite data types from a list of properties
- List the attributes of a function
- Define different types of collections
- Combine values into a composite data type




In this lesson, you will learn how to:

- Define composite data types
- Identify composite data types from a list of properties
- List the attributes of a function
- Define different types of collections
- Combine values into a composite data type

What is a composite data type?

Until now, you have used primitive data types.

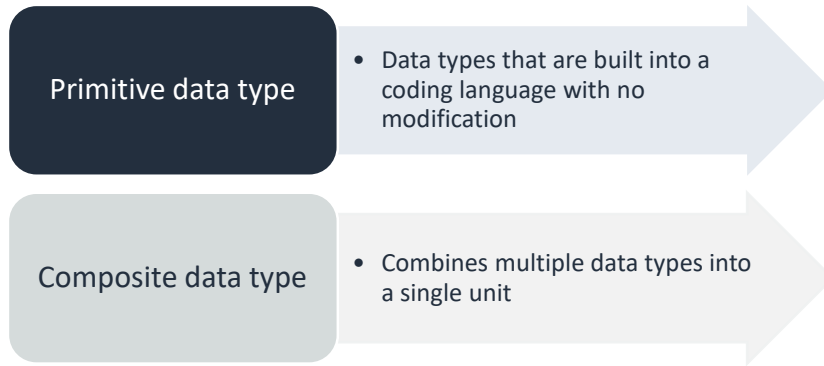


All modern programming languages have a way to create composite data types.


Composite data type example: Movie

Each movie could be described with:


- A *name* (data type would be a *string*)
- A *year* that it was released (data type would be a *number*, or *integer*)
- A *flag* to indicate whether you have seen it or not (data type would be a *Boolean*)

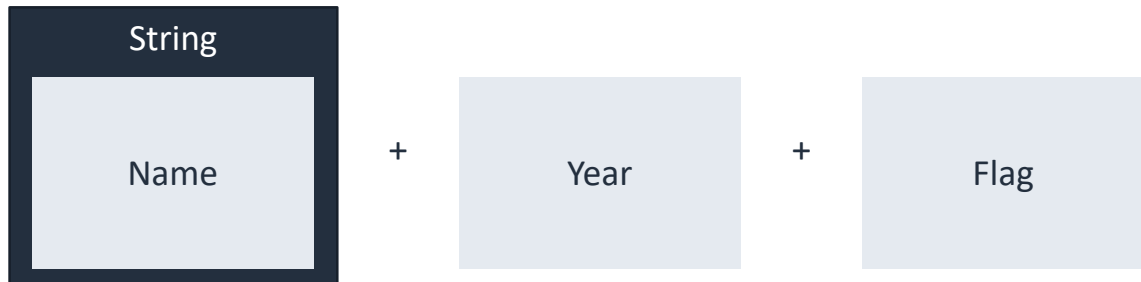


Composite data type 1

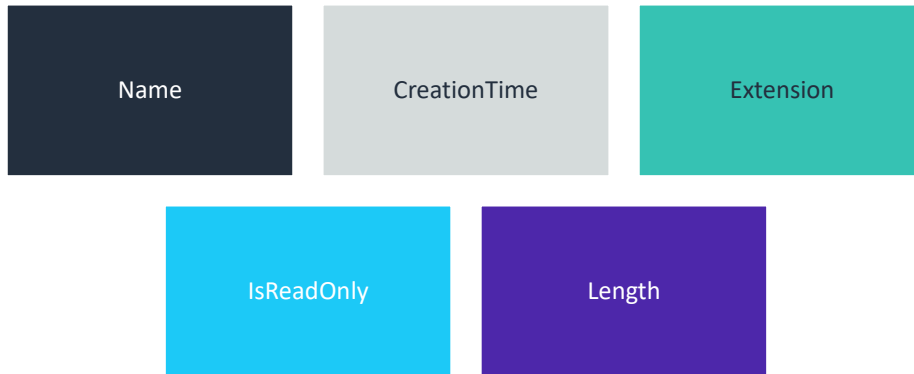

Composite data type 2

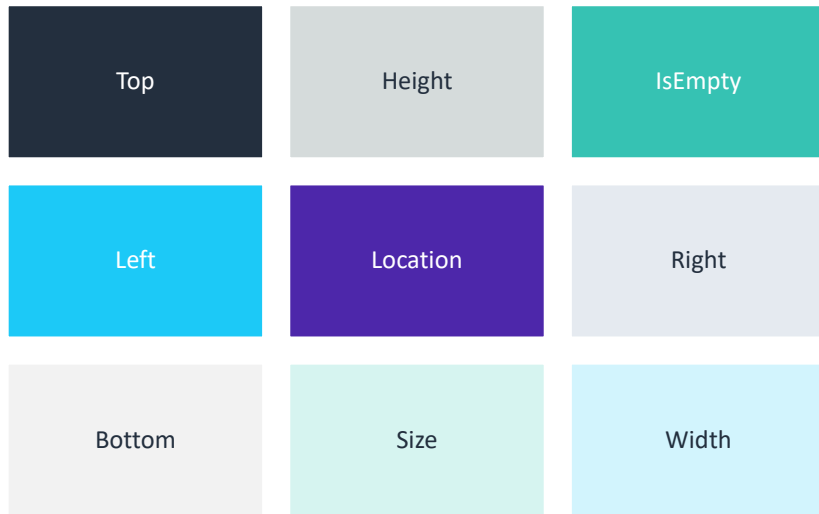

Composite data type 3

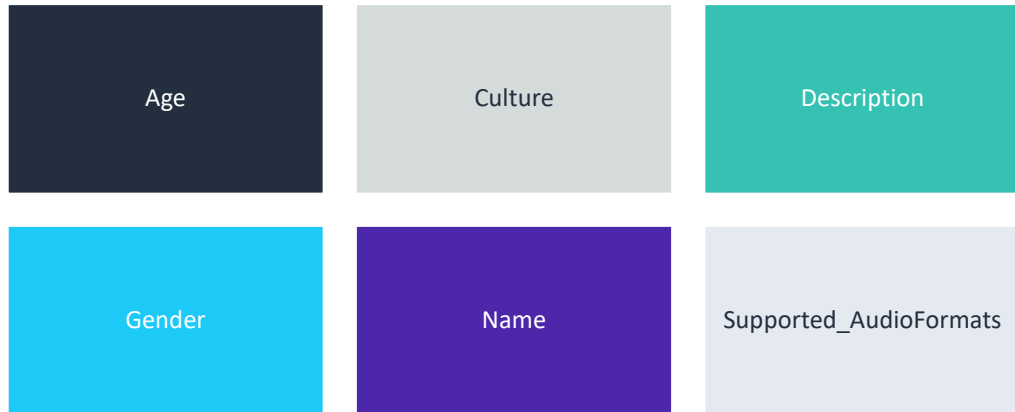



Functions

Functions

Functions do something useful.

Functions can return a value (to be stored in a variable).

Functions can return a value based on input values.

Functions can accept values as input.

Functions can accept many values as input.

Or, a developer can create a composite data type.

Composite data types can be returned.

Composite data types can be in an array.

- The following slides provide examples of each of these attributes.

Functions, continued

Functions do something useful.

`clearScreen()`

Functions can return a value (to be stored in a variable).

Functions can return a value based on input values.

Functions can accept values as input.

Functions can accept many values as input.

Or, a developer can create a composite data type.

Composite data types can be returned.

Composite data types can be in an array.

Functions, continued

Functions do something useful.

Functions can return a value (to be stored in a variable).

```
pi = calculatePi()
```

Functions can return a value based on input values.

Functions can accept values as input.

Functions can accept many values as input.

Or, a developer can create a composite data type.

Composite data types can be returned.

Composite data types can be in an array.

Functions, continued

Functions do something useful.

Functions can return a value (to be stored in a variable).

Functions can return a value based on input values.

```
area = calculateArea(pi, 4)
```

Functions can accept values as input.

Functions can accept many values as input.

Or, a developer can create a composite data type.

Composite data types can be returned.

Composite data types can be in an array.

Functions, continued

Functions do something useful.

Functions can return a value (to be stored in a variable).

Functions can return a value based on input values.

Functions can accept values as input.

`showValue(area)`

Functions can accept many values as input.

Or, a developer can create a composite data type.

Composite data types can be returned.

Composite data types can be in an array.

Functions, continued

Functions do something useful.

Functions can return a value (to be stored in a variable).

Functions can return a value based on input values.

Functions can accept values as input.

Functions can accept many values as input.

```
fly(lat, lon, spd, hdg,  
    vspd, wspd, wdir)
```

Or, a developer can create a composite data type.

Composite data types can be returned.

Composite data types can be in an array.

Functions, continued

Functions do something useful.

Functions can return a value (to be stored in a variable).

Functions can return a value based on input values.

Functions can accept values as input.

Functions can accept many values as input.

Or, a developer can create a composite data type.

Composite data types can be returned.

Composite data types can be in an array.

`fly(aircraft)`

`latitude`

`longitude`

`speed`

`heading`

`verticalSpeed`

`windSpeed`

`windDirection`

Functions, continued

Functions do something useful.

Functions can return a value (to be stored in a variable).

Functions can return a value based on input values.

Functions can accept values as input.

Functions can accept many values as input.

Or, a developer can create a composite data type.

Composite data types can be returned.

Composite data types can be in an array.

```
aircraftFuture =  
predict(aircraftNow, 60)
```

```
latitude  
longitude  
speed  
heading  
verticalSpeed  
windSpeed  
windDirection
```



Functions, continued

Functions do something useful.

Functions can return a value (to be stored in a variable).

Functions can return a value based on input values.

Functions can accept values as input.

Functions can accept many values as input.

Or, a developer can create a composite data type.

Composite data types can be returned.

Composite data types can be in an array.

```
collisions =  
predict(allAircraft)
```

```
latitude  
longitude  
speed  
heading  
verticalSpeed  
windSpeed  
windDirection
```

Collections

A *collection* groups multiple values in a single variable. Different types of collections are available:

Arrays

Vector

Lists

Set

Queue

Deque
(double-ended
queue)

Hashes

Dictionaries

The next few slides provides examples of collections.

Example collection: Array

The table shows a basic *array* of ages. Each age is assigned a slot, is of the same data type, and is adjacent to the previous age and the next age in memory.

- The first slot is almost always 0 in every language.
- Notice that the values do not need to be in any order.

Slot	Data Type	Value
0	Integer	87
1	Integer	10
2	Integer	2
3	Integer	46
4	Integer	22
5	Integer	19
6	Integer	66

Python collection example: List

A Python *List* is an **ordered** collection of items.

- Each item can be of a different data type.
- Items can be accessed using an *index*.
- Items can have duplicate values.

Index	Data Type	Value
0	String	"John"
1	Integer	55
2	Boolean	True
3	String	"male"
4	String	"Carlos"
5	Integer	22
6	String	"male"

A Python list is ordered because each new item is added to the end of the list.



Follow the execution path of a program

What you will learn

At the core of the lesson

You will learn how to:

- Explain what an execution path is
- Describe the use of different types of flow control mechanisms, including loops, conditionals, and switches



In this lesson, you will learn how to:

- Explain what an execution path is
- Describe the use of different types of flow control mechanisms, including loops, conditionals, and switches

What does *execution path* mean?

- The sequence of steps that the program performs when it runs
- The program might ...
 - Come to an either-or choice
 - Come to multiple choices
 - Perform work on each item in a loop
- The programmer must be able to predict what those steps will be...
 - When they write the code initially
 - When they debug problems that they encounter

Conditionals

- All programming languages have a way to choose an either-or path in the code.

```
if (guess > number):  
    print("Too high!")  
elif (guess < number):  
    print("Too low!")  
else  
    print("Exactly right!")
```

Example from Python

```
if(name == 'Juan'):  
    bonus = 300  
else:  
    bonus = salary * 0.1
```

Switches

- Most programming languages have a way to conveniently handle multiple possible cases of a value.

```
switch(sign):  
    case "Stop":    pressBreak()  
    case "Merge":   accelerate()  
    case "Exit":    decelerate()  
    default:        ignore()
```

Loops

- All programming languages have a way to do something on each item in a collection.

```
names = {"wei", "nikki", "akua"}  
  
for name in names:  
    newName = capitalize(name)  
    print newName
```

Example from Python

```
for(employee in employees):  
    employee.bonus = employee.salary * 0.1;
```



Version control

What you will learn

At the core of the lesson

You will learn how to:

- Explain the need for version control
- Explain the basics of Git
- Explain the difference between Git and GitHub



In this lesson, you will learn how to:

- Explain the need for version control
- Explain the basics of Git
- Explain the difference between Git and GitHub


Version control and collaboration

A version control system is software that tracks versions of your code and documents as you update them.

Version control can be done locally on your computer or by using a website that is dedicated to saving these versions.

Collaboration is doing version control, but in the cloud or on a dedicated website so that multiple people can work on a project.

Advantages of version control

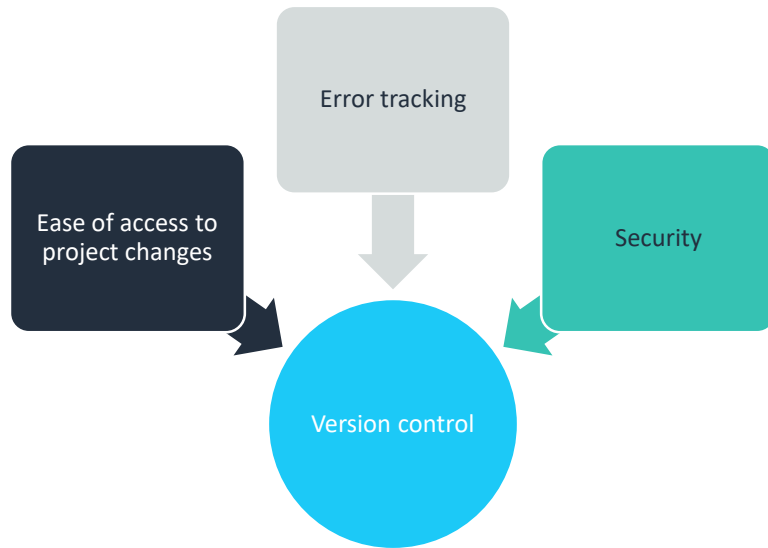


Utilizing cloud infrastructure

The cloud, or a dedicated website, is useful for storing changes in code.

Version control that is only on a local computer can be easily lost, even if it is more secure than saving multiple versions of a file.

Data that is stored in the cloud has a reduced risk of being lost.



Version control tools

Several version control tools are available:


- Git and GitHub
- GNU arch
- Mercurial

More version control tools exist, but the one that this course focuses on is Git and GitHub.



Git Logo by [Jason Long](#) is licensed under the [Creative Commons Attribution 3.0 Unported License](#).

Git

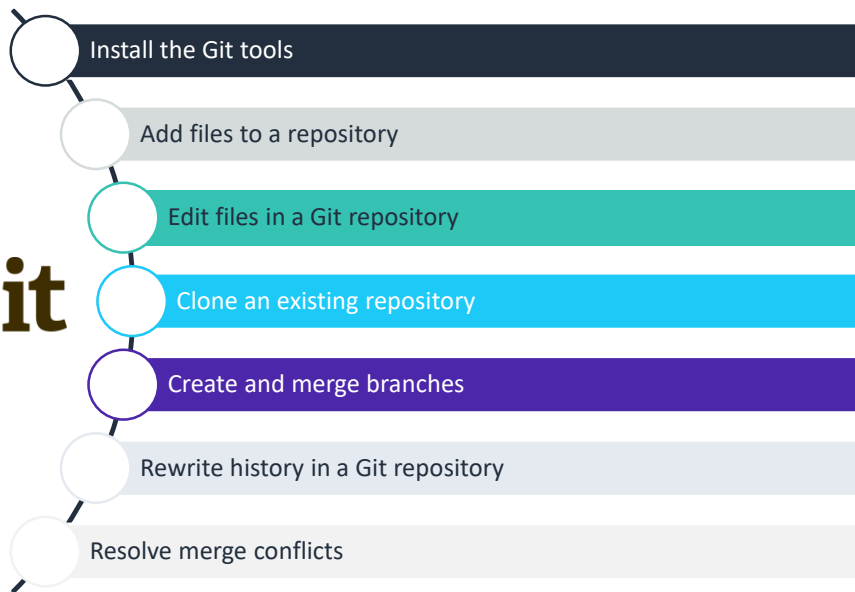

Git, continued

The best way to learn Git is to experience it.

1. Install the Git Tools from the website: [About Git](#).
2. After you install the Git Tools, open the Git Bash program.
3. In the Bash terminal, create a folder or directory that is named *GitTest* by entering: `mkdir GitTest`
4. Change directories by entering: `cd GitTest`
5. Create a local Git repository by entering: `git init`
6. Confirm that a new repository is there, by entering `ls -ldF .*` and looking for the `.git` repository.
7. Next, create a new file by entering: `touch newFile.txt`
8. Open the new file by entering: `nano newFile.txt`

Git, continued

9. Enter any text that you want.
10. To exit from nano, press CTRL+X.
11. In the terminal, enter: `git status`
You should see newFile.txt in red characters.
12. Now, add newFile.txt to the local Git repository by entering `git add newFile.txt` and then `git status`
You should see that newFile.txt is now in green characters, which means that it is ready to be committed.
13. To finish the process, enter `git commit -m "Initial commit"` followed by `git status` to confirm that Git is not tracking any new changes.

Git, continued

If the commit message did not work, you most likely saw a message that said *Please tell me who you are* in the terminal.

14. To clear this message, in the terminal, enter the following two commands :

- `git config --global user.email "<you@example.com>"`
 - » Replace `<you@example.com>` with an email address that you actually own and want to use for this course.
 - » The rest of the command is entered exactly, including the quotation marks (" ").
- `git config --global user.name "<Your name>"`
 - » Replace `<Your name>` with a user name that you want to use for this course. Make it unique.
 - » The rest of the command is entered exactly, including the quotation marks.

Git, continued

15. After you are finished, enter `git commit -m "Initial commit"` again, followed by `git status` to confirm that Git is not tracking any new changes.


GitHub

GitHub is a repository hosting service. It uses repositories and the same commands as the terminal.

To prepare for the lab, create a GitHub account on [GitHub](#), if you don't already have one.

Sites like GitHub are also a good way to exhibit your code to developers and potential employers.

Checkpoint questions

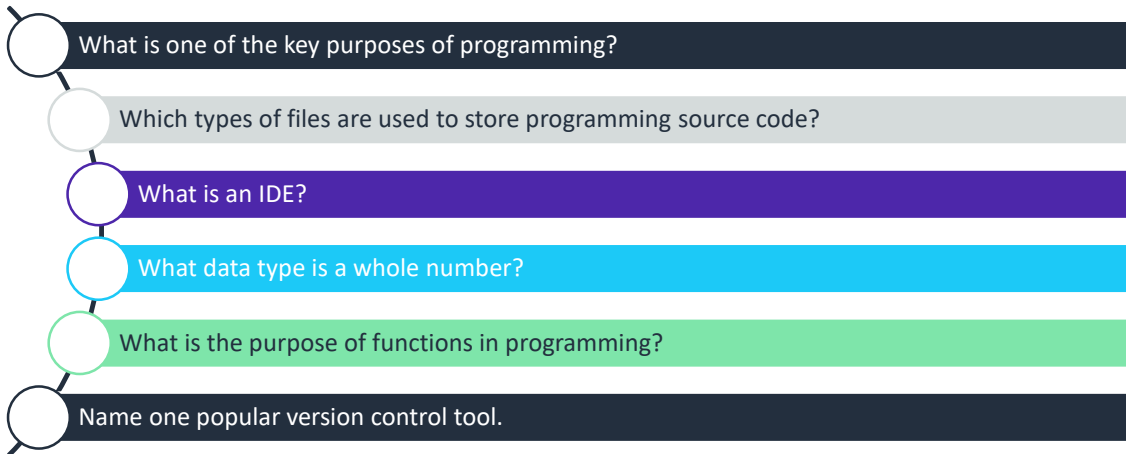- 
- What is one of the key purposes of programming?
 - Which types of files are used to store programming source code?
 - What is an IDE?
 - What data type is a whole number?
 - What is the purpose of functions in programming?
 - Name one popular version control tool.

Answers:

1. From the lesson, it was shown that automation is one of the uses of programming.
2. Programs are written in text files.
3. An IDE is an integrated development environment that helps with writing code.
4. Whole numbers are typically stored as integers.
5. Functions enable developers to create discrete sections of code that can be called by using the function's name. The resulting function is then available to the rest of the source code.
6. Git.

Key takeaways



© 2020, Amazon Web Services, Inc. or its affiliates. All rights reserved.

67

- Programming is a way to automate processes.
- Programming languages specify a way to communicate directions to a computer.
- Software is written into a text file by using a programming language, which is either interpreted or compiled when it is run.
- Data is *typed* so that the interpreter or compiler knows whether it is a string, integer, Boolean, or other data type.
- A composite data type stores different types of data in a single variable.
- Functions are collections of instructions that can be called repeatedly in a program.
- Version control manages changes to computer programs, documents, or other collections of information.

aws re/start

Some key takeaways from this lesson include:

- Programming is a way to automate processes.
- Programming languages specify a way to communicate directions to a computer.
- Software is written into a text file by using a programming language, which is either interpreted or compiled when it is run.
- Data is *typed* so that the interpreter or compiler knows whether it is a string, integer, Boolean, or other data type.
- A composite data type stores different types of data in a single variable.
- Functions are collections of instructions that can be called repeatedly in a program.
- Version control manages changes to computer programs, documents, or other collections of information.