

Open API Specification

Version	Date	Writer	Content updated
V1.0	2017/03/29	Yao Jianping	The initial release
V1.1	2017/04/18	Yao Jianping	Modify the interface parameter description
V1.2	2017/04/27	Yao Jianping	Unify all interface url; Perfect interface return attributes description; Add return examples
V1.2	2017/05/09	Yao Jianping	Add external power voltage attributes in 7.8 and 7.9; Add api type in chapter 6; Delete alarm push interface; Add 7.17
V1.3	2017/06/15	Yao Jianping	Modify 7.5. Add refreshToken and time in returned json; Add 7.6: refresh accessToken Add 7.7: create sub-account; Add 7.19: acquire device location map
V1.4	2017/07/20	Yao Jianping	Midify 4, add the error code Modify the 7.3 section, 0.9 version added in the general parameters v Modify Section 7.7 , user type attribute added Add Device Transfer in section 7.20
V1.5	2017-07-31	Yao Jianping	Add API Add 7.21 7.22 7.23
V1.6	2017-10-24	Jeff Wang	make document more readable.
V1.6.1	2018-04-22	Jeff Wang	Add field distance for jimi.device.location.get.
V1.6.2	2018-09-08	Jeff Wang	Add device_status parameter for jimi.open.device.update interface to disable/enable device.
V1.6.3	2018-09-10	Jeff Wang	Add jimi.track.device.detail interface
V1.6.4	2018-10-2	Jeff Wang	Add create account & remove account interface.
V1.6.5	2018-12-6	Jeff Wang	Add get sharing location URL interface. Add move account interface. Add additional fields for get device info interface. Add update user expiration date interface.
V1.6.6	2018-03-08	Jeff Wang	Add get mileage interface.
V1.6.7	2019-04-24	Jeff Wang	Add DVR live streaming page URL Add get alarm list
V2.1	2019-05-15	Jeff Wang	Add Scooter API support
V2.2	2019-06-20	Jeff Wang	Add camera photo URL & video URL interface
V2.3	2019-11-07	Jeff Wang	Add send/receive raw command interface.
V2.4	2020-02-11	Zou Zeliang	Add camera photo or video instructions interface
V2.5	2020-07-28	dengjie	Add get video rtmp url interface
v2.5	2020-1209	chenkuan	Add temperature and oil sense fields to the device real-time data API interface
V2.6	2021-01-28	chenkuan	Add API Add 7.38

V2.7	2021-04-09	darcy	Add optional attributes (modelName) of model alias, Modified interface: jimi.user.device.list □ 7.11 □ jimi.track.device.detail □ 7.12 □
V2.7.1	2022-07-04	Lin Wen Jun	Add API: jimi.user.child.update
V2.7.2	2023-01-10	Li Qinye	Add API: 7.40: Get parking/idling data of devices 7.41: Create platform Geo-fence 7.42: Edit platform Geo-fence 7.43: Delete platform Geo-fence 7.44: Geo-fence related device Add currentMileage parameter for jimi.track.device.detail to get the current mileage of the device
V2.7.3	2023-02-15	Li Qinye	Deprecated API: 7.33: Send command (for scooter device) 7.34: Get detail information of scooter
V2.7.4	2023-04-07	Li Qinye	Add API: 7.14: Get the location of device(s) Add gpsNum □ currentMileage □ trackerOil parameter
V2.7.5	2023-05-24	Li Qinye	Add API: 7.17: Get the mileage data of devices Add totalMileage parameter
V2.7.6	2023-07-20	Li Qinye	Add API: 7.45: List platform geofences of an account
V2.7.7	2024-04-17	Li Qinye	Add API: 7.46: Move devices 7.47: Get RFID reporting information
V2.7.8	2024-06-07	Li Qinye	Updated some fields Add API: 7.48: Query single fence information 7.49: Bind app user 7.50: Unbind app user 7.51: Get the trips report data of devices 7.52: Get entry and exit fence data of devices
V2.7.9	2024-06-25	Li Qinye	7.18 Get the track data of device □ Add mileage and acc status fields
V2.7.10	2024-08-01	Li Qinye	Add API: 7.53: Get the OBD data of devices 7.54: Get the OBD fault data of devices
V2.7.11	2024-08-13	Li Qinye	7.32 Get device alarm list □ Add imeis □ page_no □ page_size fields
V2.7.12	2024-12-05	Li Qinye	7.53 Get the OBD data of devices □ Add vin field
V2.7.13	2024-12-25	Li Qinye	Add API: 7.55 Get the location of TAG device 7.12 Get device detail information/7.14 Get the location of device(s) □ Add account □ customerName field
V2.7.14	2025-01-08	Chen HaiHong	Add API: 7.56 Create device group 7.57 Edit device group 7.58 Delete device group 7.59 Delete device group Updated some fields: 7.11 List all devices of sub-account/7.12 Get device detail information Added

			deviceGroupId and deviceGroup fields to API results 7.19 Update vehicle information by IMEI Add deviceGroupId parameter
--	--	--	---

1 Contents

OPEN API SPECIFICATION.....	1
1 CONTENTS.....	3
2 OVERVIEW.....	8
3 USAGE.....	9
4 CONVENTIONS.....	9
4.1 ENCODING, FORMAT & TIMEZONE.....	9
4.2 COMMON RESPONSE FIELDS.....	9
5 WORK FLOW.....	12
5.1 APIWORKFLOW	12
6 API FEATURES.....	12
7 API DESCRIPTION.....	13
7.1 REQUESTURL.....	13
7.2 SECURITY.....	14
7.3 COMMON PARAMETERS.....	14
7.4 SIGNATURE	15
7.5 GETACCESS TOKEN.....	16
7.5.1 Description	16
7.5.2 Request URL	17
7.5.3 HTTP request method	17
7.5.4 Request parameter	17
7.5.5 Response	17
7.6 REFRESHACCESS TOKEN.....	18
7.6.1 Description	18
7.6.2 Request URL	19
7.6.3 HTTP Request method	19
7.6.4 Request parameters	19
7.6.5 Response	19
7.7 LIST ALL SUBACCOUNT.....	20
7.7.1 Description	20
7.7.2 Request URL	20
7.7.3 HTTP request method	20
7.7.4 Request parameters	20
7.7.5 Response	20
7.8 CREATE SUBACCOUNT	22
7.8.1 Description	22
7.8.2 Request URL	22
7.8.3 HTTP request method	22
7.8.4 Request parameters	22
7.8.5 Response	23

7.9 REMOVE SUB-ACCOUNT	23
7.9.1 Description	23
7.9.2 Request URL	23
7.9.3 HTTP request method	23
7.9.4 Request parameters	24
7.9.5 Response	24
7.10 MOVE ACCOUNT.....	24
7.10.1 Description	24
7.10.2 Request URL	24
7.10.3 HTTP request method	25
7.10.4 Request parameters	25
7.10.5 Response	25
7.11 LIST ALL DEVICES OF SUB-ACCOUNT.....	25
7.11.1 Description	25
7.11.2 Request URL	26
7.11.3 HTTP request method	26
7.11.4 Request parameters	26
7.11.5 Response	26
7.12 GET DEVICE DETAIL INFORMATION.....	27
7.12.1 Description	27
7.12.2 Request URL	28
7.12.3 HTTP request method	28
7.12.4 Request parameters	28
7.12.5 Response	28
7.13 GET LOCATION OF DEVICES BY ACCOUNT.....	30
7.13.1 Description	30
7.13.2 Request URL	30
7.13.3 HTTP request method	30
7.13.4 Request parameters	30
7.13.5 Response	31
7.14 GET THE LOCATION OF DEVICES.....	32
7.14.1 Description	32
7.14.2 Request URL	32
7.14.3 HTTP request method	32
7.14.4 Request parameters	33
7.14.5 Response	33
7.15 GET SHARING LOCATION.....	35
7.15.1 Description	35
7.15.2 Request URL	35
7.15.3 HTTP request method	35
7.15.4 Request parameters	35
7.15.5 Response	35
7.16 UPDATE USER EXPIRATION DATE.....	36
7.16.1 Description	36
7.16.2 Request URL	36
7.16.3 HTTP request method	36
7.16.4 Request parameters	36
7.16.5 Response	37
7.17 GET THE MILEAGE DATA OF DEVICES.....	37
7.17.1 Description	37
7.17.2 Request URL	38
7.17.3 HTTP request method	38
7.17.4 Request parameters	38
7.17.5 Response	38
7.18 GET THE TRACK DATA OF DEVICE.....	40
7.18.1 Description	40
7.18.2 Request URL	40
7.18.3 HTTP request method	40
7.18.4 Request parameters	40
7.18.5 Response	40
7.19 UPDATE VEHICLE INFORMATION BY VIN.....	42

7.19.1 Description	42
7.19.2 Request URL	42
7.19.3 HTTP request method	42
7.19.4 Request parameters	42
7.19.5 Response	43
7.20 GETDEVICEPHOTO OR VIDEOURL	43
7.20.1 Description	43
7.20.2 Request URL	44
7.20.3 HTTP request method	44
7.20.4 Request parameters	44
7.20.5 Response	44
7.21 GETDEVICELIVESTEAMINGPAGEURL	45
7.21.1 Description	45
7.21.2 Request URL	45
7.21.3 HTTP request method	46
7.21.4 Request parameters	46
7.21.5 Response	46
7.22 WI-FI, BASESTATION LOCATING ANALYSIS	47
7.22.1 Description	47
7.22.2 Request URL	47
7.22.3 HTTP request method	47
7.22.4 Request parameters	47
7.22.5 Response	48
7.23 CREATEGEO-FENCE FORIMEI	48
7.23.1 Description	48
7.23.2 Request URL	49
7.23.3 HTTP request method	49
7.23.4 Request parameters	49
7.23.5 Response	49
7.24 DELETEGEO-FENCE FOR DEVICE	50
7.24.1 Description	50
7.24.2 Request URL	50
7.24.3 HTTP request method	50
7.24.4 Request parameters	50
7.24.5 Response	50
7.25 GET COMMAND LIST SUPPORTED BY DEVICE	51
7.25.1 Description	51
7.25.2 Request URL URL	51
7.25.3 HTTP request method	51
7.25.4 Request parameters	51
7.25.5 Response	52
7.26 SEND COMMAND TO DEVICE	52
7.26.1 Description	52
7.26.2 Request URL	53
7.26.3 HTTP request method	53
7.26.4 Request parameters	53
7.26.5 Response	53
7.27 GET RESULTS OF COMMAND EXECUTION	54
7.27.1 Description	54
7.27.2 Request URL	54
7.27.3 HTTP request method	54
7.27.4 Request parameters	54
7.27.5 Response	55
7.28 SEND RAW COMMAND DATA TO DEVICE	56
7.28.1 Description	56
7.28.2 Request URL	56
7.28.3 HTTP request method	56
7.28.4 Request parameters	56
7.28.5 Response	56
7.29 PUSH RECEIVEDRAW DATA	57
7.29.1 Description	57

7.29.2 Message service List	57
7.29.3 Message content (jimi.open.instruction.raw.receive)	57
7.30 SEND MEDIA INSTRUCTION	58
7.30.1 Description	58
7.30.2 Request URL	58
7.30.3 HTTP request method	58
7.30.4 Request parameters	58
7.30.5 Response	59
7.31 RECEIVE NOTIFICATION	59
7.31.1 Description	59
7.31.2 Message service List	59
7.31.3 Message content (jimi.push.device.alarm)	60
7.32 GET DEVICE ALARM LIST	60
7.32.1 Description	60
7.32.2 Request URL	61
7.32.3 HTTP request method	61
7.32.4 Request parameters	61
7.32.5 Response	61
7.33 (DEPRECATED) SEND COMMAND (FOR SCOOTER DEVICE)	62
7.34 (DEPRECATED) GET DETAIL INFORMATION OF SCOOTER	63
7.35 GET HISTORY VIDEO LIST	63
7.35.1 Description	63
7.35.2 Request URL	63
7.35.3 HTTP request method	63
7.35.4 Request parameters	63
7.35.5 Response	63
7.36 SEND HISTORY VIDEO INSTRUCTION	64
7.36.1 Description	64
7.36.2 Request URL	64
7.36.3 HTTP request method	65
7.36.4 Request parameters	65
7.36.5 Response	65
7.37 GET VIDEO RTMP URL	66
7.37.1 Description	66
7.37.2 Request URL	66
7.37.3 HTTP request method	66
7.37.4 Request parameters	66
7.37.5 Response	66
7.38 GET DEVICE JIMI PHOTO OR VIDEO URL	67
7.38.1 Description	67
7.38.2 Request URL	67
7.38.3 HTTP request method	68
7.38.4 Request parameters	68
7.38.5 Response	68
7.39 EDIT USER INFORMATION	69
7.39.1 Description	69
7.39.2 Request URL	69
7.39.3 HTTP Request method	70
7.39.4 Request parameters	70
7.39.5 Response	71
7.40 GET PARKING/ IDLING DATA OF DEVICES	71
7.40.1 Description	71
7.40.2 Request URL	71
7.40.3 HTTP Request method	71
7.40.4 Request parameters	72
7.40.5 Response	72
7.41 CREATE PLATFORM GEO-FENCE	75
7.41.1 Description	75
7.41.2 Request URL	75
7.41.3 HTTP Request method	75
7.41.4 Request parameters	75

7.41.5 Response	76.....
7.42 EDIT PLATFORMGEO-FENCE.....	77
7.42.1 Description	77.....
7.42.2 Request URL	77.....
7.42.3 HTTP Request method	77.....
7.42.4 Request parameters	77.....
7.42.5 Response	78.....
7.43 DELETE PLATFORMGEO-FENCE	79
7.43.1 Description	79.....
7.43.2 Request URL	79.....
7.43.3 HTTP Request method	79.....
7.43.4 Request parameters	79.....
7.43.5 Response	80.....
7.44 GEO-FENCE RELATED DEVICE.....	80
7.44.1 Description	80.....
7.44.2 Request URL	81.....
7.44.3 HTTP Request method	81.....
7.44.4 Request parameters	81.....
7.44.5 Response	82.....
7.45 LIST PLATFORM GEOFENCESOF AN ACCOUNT	82
7.45.1 Description	82.....
7.45.2 Request URL	83.....
7.45.3 HTTP Request method	83.....
7.45.4 Request parameters	83.....
7.45.5 Response	83.....
7.46 MOVE DEVICES.....	86
7.46.1 Description	86.....
7.46.2 Request URL	86.....
7.46.3 HTTP Request method	86.....
7.46.4 Request parameters	86.....
7.46.5 Response	86.....
7.47 GETRFIDREPORTING INFORMATION.....	87
7.47.1 Description	87.....
7.47.2 Request URL	87.....
7.47.3 HTTP Request method	88.....
7.47.4 Request parameters	88.....
7.47.5 Response	89.....
7.48 QUERY SINGLE FENCE INFORMATION.....	90
7.48.1 Description	90.....
7.48.2 Request URL	90.....
7.48.3 HTTP Request method	90.....
7.48.4 Request parameters	90.....
7.48.5 Response	91.....
7.49 BIND APP USER	93
7.49.1 Description	93.....
7.49.2 Request URL	93.....
7.49.3 HTTP Request method	93.....
7.49.4 Request parameters	93.....
7.49.5 Response	93.....
7.50 UNBIND APP USER.....	94
7.50.1 Description	94.....
7.50.2 Request URL	94.....
7.50.3 HTTP Request method	94.....
7.50.4 Request parameters	94.....
7.50.5 Response	95.....
7.51 GET THE TRIPS REPORT DATA OF DEVICES.....	96
7.51.1 Description	96.....
7.51.2 Request URL	96.....
7.51.3 HTTP Request method	96.....
7.51.4 Request parameters	96.....
7.51.5 Response	97.....

7.52 GET ENTRY AND EXIT FENCE DATA OF DEVICES.....	100
7.52.1 Description	100
7.52.2 Request URL	100
7.52.3 HTTP Request method	100
7.52.4 Request parameters	100
7.52.5 Response	101
7.53 GET THE OBD DATA OF DEVICES.....	103
7.53.1 Description	103
7.53.2 Request URL	103
7.53.3 HTTP Request method	103
7.53.4 Request parameters	103
7.53.5 Response	104
7.54 GET THE OBD FAULT DATA OF DEVICES.....	106
7.54.1 Description	106
7.54.2 Request URL	107
1.1.1 HTTP Request method	107
7.54.3 Request parameters	107
7.54.4 Response	108
7.55 GET THE LOCATION OF TAG DEVICE.....	110
7.55.1 Description	110
7.55.2 Request URL	110
1.1.2 HTTP Request method	110
7.55.3 Request parameters	110
7.55.4 Response	111
7.56 CREATE DEVICE GROUP.....	112
7.56.1 Description	112
7.56.2 Request URL	112
7.56.3 HTTP Request method	112
7.56.4 Request parameters	112
7.56.5 Response	113
7.57 EDIT DEVICE GROUP.....	114
7.57.1 Description	114
7.57.2 Request URL	114
7.57.3 HTTP Request method	114
7.57.4 Request parameters	114
7.57.5 Response	114
7.58 DELETE DEVICE GROUP.....	115
7.58.1 Description	115
7.58.2 Request URL	115
7.58.3 HTTP Request method	115
7.58.4 Request parameters	115
7.58.5 Response	116
7.59 GET DEVICE GROUP LIST OF AN ACCOUNT.....	116
7.59.1 Description	116
7.59.2 Request URL	116
7.59.3 HTTP Request method	116
7.59.4 Request parameters	116
7.58.5 Response	117
8 APPENDIX.....	118
8.1 DEVICE ALARM TYPE (ALARM TYPE ID).....	118

2 Overview

- Benefit of JIMI Open API, distributor or application vendor could provide tracking service to customers by calling the API and use your own GUI client, App or Website, this might improve the localization or user experience.
- Your App or web client should connect to your application server, rather than connect to JIMI API Server directly , use your application server connect to JIMI Server instead.

3 Usage

1. Contact us to apply your appKey and appSecret, you need to provide your account.
2. According to this document to implement your application server to obtain access_token.
3. Calling other interfaces with access_token to fulfil your business logic.

4 Conventions

4.1 Encoding, format & Timezone

- UTF-8 and JSON is used by default.
- Context-Type: default application/json charset=utf-8
- The API use **UTC(GMT +0)**time in default: format yyyy-MM-dd HH:mm:ss

4.2 Common response fields

Key	Type	Required	Description
code	int	Yes	result code
message	string	No	Description

Result code description

Code	Value	Description
-1	-1	The system is busy
0	0	success
1XXX	1001	Parameter error (lack of required parameters or format error). See interface description for details
	1002	Illegal user/illegal device (not their own or subordinate account or device)
	1003	Repeat operation
	1004	Illegal access, token exception! (Token failure or nonexistent)

	1005	Illegal access, IP access exceeds limit!
	1006	Illegal access, too frequently request!
	1007	Illegal access, request method error!
	1008	Illegal access, abnormal incoming!
	12001	platform account creation failed
	12002	device transfer failed
	12003	Geo-fence creation failed
	12004	Geo-fence deletion failed
	12005	Fail to send command

Error code ☐


Code	Value	Description	
Create account	213	Account already exist	
	214	Account does not exist	
	215	User type error. Possible reasons: 1.User type is empty; 2. User type does not exist; 3. Current login user do not have permission to create new type of user.	
Device transfer	217	Target user does not exist	
	218	User can only transfer/sale devices to sub-account	
	219	IMEI list is illegal	
	220	Number of IMEI exceeds limitation.	
Geo-fence	41001	Exceed max number of Geo-fences supported	
	41002	Fence name is already exists	
	41003	The device is not online	
	41004	Geo-fence operation failed	
Command	225	time out	
	226	Parameter error	
	227	The command is not executed correctly	
	228	The device is not online	
	229	Network error, connection error, etc.	
	238	Device interrupted	
	240	Data format error	
	243	Not supported by device	

252

The device is busy

5 Work Flow

5.1 API Work Flow

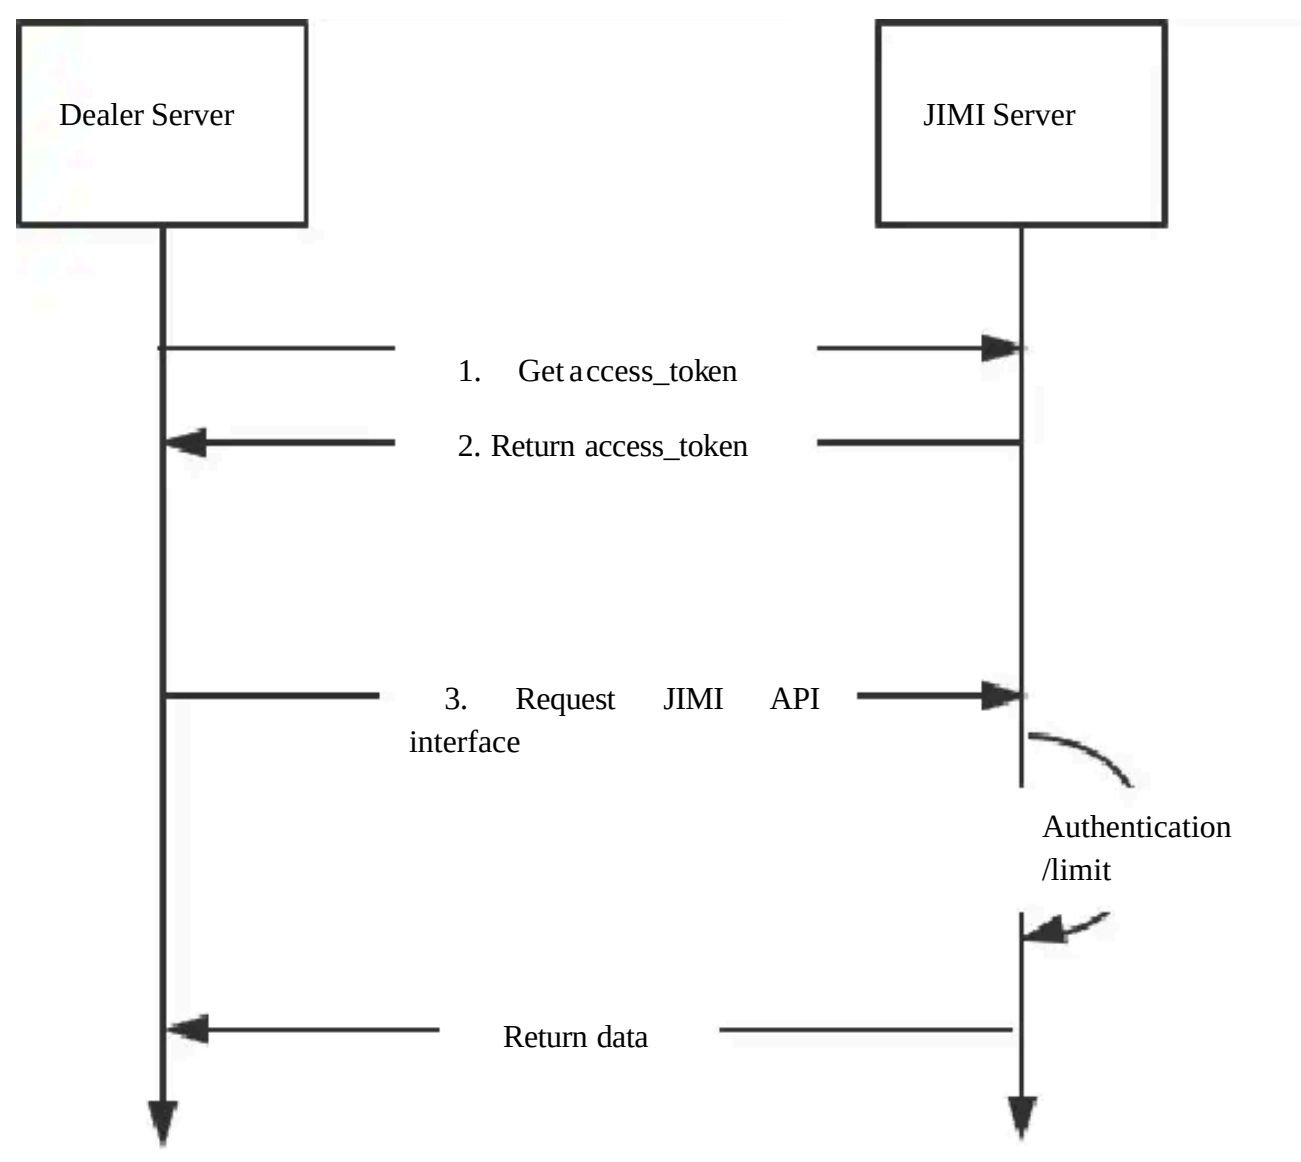

6 API Features

Interface type	Method	Description
Access token	jimi.oauth.token.get	Get access_token.
	jimi.oauth.token.refresh	Refresh access_token.
	jimi.user.child.list	List all sub-account.
	jimi.user.device.list	List all devices of current account.
	jimi.user.child.create	Create sub-account
	jimi.user.child.del	Remove sub-account
User API		

	jimi.user.child.move	Move sub-account to another account.
	jimi.track.device.detail	Get device detail information for specific IMEI
	jimi.user.device.location.list	Get the latest location for all devices.
Device API	jimi.device.location.get	Get the latest location data for specific IMEI.
	jimi.device.location.URL.share	Get URL for showing location on the Map.
	jimi.user.device.expiration.update	Change user expiration date for devices
	jimi.device.track.list	Obtain track data according to IMEI.
	jimi.device.track.mileage	Get mileage report for devices.
	jimi.open.device.update	Modify the vehicle information for device.
	Jimi.device.media.URL	Get URL of photo or video capture by camera.
	jimi.device.live.page.url	Get device live streaming page URL
Command API	jimi.open.instruction.list	Gets commands supported by the device.
	jimi.open.instruction.send	Send command to device.
	jimi.open.instruction.result	Get the command result.
	jimi.open.instruction.raw.send	Send raw command data to device
	jimi.open.instruction.raw.receive	Jimi push raw data to specified client's server URL.
	jimi.device.meida.cmd.send	Send media instruction
Geo-fence API	jimi.open.device.fence.delete	Remove the Geo fence for the device.
	jimi.open.device.fence.create	Create an Geo fence for the device.
LBS-API	jimi.lbs.address.get	Wi-Fi base station location analysis.
Message	jimi.push.device.alarm	Push alarm notification.
	jimi.device.alarm.list	Get alarm list for device
Scooter API (Deprecated)	jimi.scooter.instruction.send	Send command to scooter device.
	jimi.scooter.device.detail	Get scooter status and other detail information.

7 API Description

7.1 Request URL

The unique request URL is:
Please use the URL of the corresponding node according to the node to which your OPEN API account belongs

TS☐ <http://open.10000track.com/route/rest>
TSP HK: <https://hk-open.tracksolidpro.com/route/rest>
TSP EU: <https://eu-open.tracksolidpro.com/route/rest>
TSP US: <https://us-open.tracksolidpro.com/route/rest>

Different interfaces are identified by request parameter method.

7.2 Security

Client should get access_token first before calling the interface, which is generated by JIMI Server by calling jimi.oauth.token.get interface(method=jimi.oauth.token.get) with provided appKey and appSecret.

appKey and access_token are required to sign request parameters when calling API. JIMI server will validate the the request parameters by checking the sign value.

7.3 Common Parameters

The parameters of each request should include common parameters and interface private parameters. For example, if you call the “jimi.oauth.token.get” interface, you need to provide :

7(common parameters) + 3(private parameters) = 10 (parameters, key/value)

Following are the common parameters:

Name	Type	Required	Description	Remark	Default
method	string	Yes	API interface name		
timestamp	string	Yes	Timestamp, format:yyy-MM-dd HH:mm:ss. Plus or minus10 minutes is allowed. e.g: 2012-03-25 20:00:00	GMT(UTC) time.	
app_key	string	Yes	appKey	from JIMI	
sign	string	Yes	A signature base on parameters, appKey, a ppSecret.		
sign_method	string	Yes	Optional, signature method. Available value: md5	md5	md5
v	string	Yes	Optional, specify the API version. System default 1.0, support version: 0.9, 1.0	0.9: no signature checking 1.0: check signature	
format	string	Yes	Optional, specify response format.		json

- The parameter V uses a difference of 0.9 and 1.0:
- ☐ Using 0.9 will not perform Sign signature verification
 - ☐ Using 1.0 will verify the Sign signature

Function description of Sign signature verification:

The data receiving end gets the transmission text, but needs to confirm whether the text is the content sent by the sender, and whether it has been tampered with in the middle. Therefore, the receiver uses its own public key to decrypt the signature and obtains the digest of the text, then uses the same method as the sender to calculate the digest value of the text, and compares it with the decrypted digest, and finds that the two are exactly the same. It means that the text has not been tampered with.

7.4 Signature

To protect API calling from hacked, any API calling needs to be with a signature. JIMI server will check signature based on request parameters. Illegal signature request will be rejected. Signature algorithms supported is: md5 (sign_method is a common parameter mentioned above). Following is the algorithm of signature:

- Sort all request parameters with parameter key in alphabetical order (including common parameters and method specific parameters, but **NOT** include **sign** and byte type parameter.

For example:

foo=1, bar=2, foo_bar=3, foobar=4

Result: **bar=2, foo=1, foo_bar=3, foobar=4**

- Remove all equal sign and comma:

bar2foo1foo_bar3foobar4

- Then concatenate appSecret to the before and end of the result string and get the md5 value. E.g

md5(**appSecret**+bar2foo1foo_bar3foobar4+ **appSecret**), the real string should like:
md5(h9lri085eachcz4sn7gwnkh6j0jt0yz4 bar2foo1foo_bar3foobar4 h9lri085eachcz4sn7gwnkh6j0jt0yz4)

Note that the string should be in UTF-8 encoding.

Note that the sign should be upper case string

- If the parameter value is a byte stream, it should be converted to hexadecimal. For example
hex(“helloworld”.getBytes(“utf-8”)) = “68656C6C6F776F726C64”

MD5 is the 128-bit summary algorithm and is in hexadecimal. a hexadecimal character can represent four bits, so the signature string length is 32 hexadecimal characters.

JAVA example

algorithm

```
public static String signTopRequest(Map<String, String> params, String seccode, String signMethod) throws IOException {
    // 1 sort parameter key
    String[] keys = params.keySet().toArray(new String[0]);
    Arrays.sort(keys);

    // 2:: Put all parameter names and parameter values together
    StringBuilder query = new StringBuilder();
    if (Constants.SIGN_METHOD_MD5.equals(signMethod)) {
        query.append(seccode);
    }
    for (String key : keys) {
        String value = params.get(key);
        if (StringUtils.isNotEmpty(key, value)) {
            query.append(key).append(value);
        }
    }
}
```

```

// 3: use MD5/HMAC to encrypt
byte[] bytes;
if (Constants.SIGN_METHOD_HMAC.equals(signMethod)) {
    bytes = encryptHMAC(query.toString(), seccode);
} else {
    query.append(seccode);
    bytes = encryptMD5(query.toString());
}

// 4: convert binary to uppercase hexadecimal
return byte2hex(bytes);
}

public static byte[] encryptHMAC(String data, String seccode) throws IOException {
    byte[] bytes = null;
    try {
        seccodeKey seccodeKey = new seccodeKeySpec(seccode.getBytes(Constants.CHARSET_UTF8), "HmacMD5");
        Mac mac = Mac.getInstance(seccodeKey.getAlgorithm());
        mac.init(seccodeKey);
        bytes = mac.doFinal(data.getBytes(Constants.CHARSET_UTF8));
    } catch (GeneralSecurityException gse) {
        throw new IOException(gse.toString());
    }
    return bytes;
}

public static byte[] encryptMD5(String data) throws IOException {
    return encryptMD5(data.getBytes(Constants.CHARSET_UTF8));
}

public static String byte2hex(byte[] bytes) {
    StringBuilder sign = new StringBuilder();
    for (int i = 0; i < bytes.length; i++) {
        String hex = Integer.toHexString(bytes[i] & 0xFF);
        if (hex.length() == 1) {
            sign.append("0");
        }
        sign.append(hex.toUpperCase());
    }
    return sign.toString();
}

```

7.5 Get access token

7.5.1 Description

Client(distributor's server) should stored the access_token locally, do NOT get access_token per request, instead, use the local access_token before it become invalid. JIMI server will not allow to access if the request frequency is too high from client.

The access token can be used for about 2 hours(depend on the value for expires_in parameter), do NOT try to get token for every request.

7.5.2 Request URL

See the unique request URL.
Method = jimi.oauth.token.get

7.5.3 HTTP request method

POST

7.5.4 Request parameter

- ☐ 1 [Common parameters](#)
- ☐ 2 Private parameters as follow:

Name	Type	Required	Description	Remark	Default
user_id	String	Yes	User ID	User’s account	
user_pwd_md5	String	Yes	user’s password (md5)		Lowercase md5 value.
expires_in	number	Yes	access token expired seconds.	60-7200	

7.5.5 Response

Key	Type	Description
code	int	Return code: 0: return correctly Other: failure. Refer to the error code description
message	string	If code is not 0, there will be a corresponding error message
result	String	Result

Key	Type	Description
accessToken	string	access token, required by any other following interfaces.
expiresIn	string	access token expired seconds.
account	String	user’s account.
appKey	string	appKey from JIMI.
refreshToken	String	Refresh token, which is used for updating accessToken
time	String	Token generated time.


```
{
  "code": 0,
  "message": "success",
  "result": {
    "appKey": "8FB345B8693CCD003CC2DAB61EC8791D" ,
    "account": "jimitest" ,
    "accessToken": "7da3330ec28e3996b6ef4a7e3390ba71" ,
    "expiresIn": 60
    "refreshToken": "7da3330ec28e3996b6ef4a7e3390ba71",
    "time": "2017-06-15 10:00:00"

  }
}
```

Return error example ☐

```
{"code":xxx,"message":"Incorrect user name or password"}
```

Postman demo:

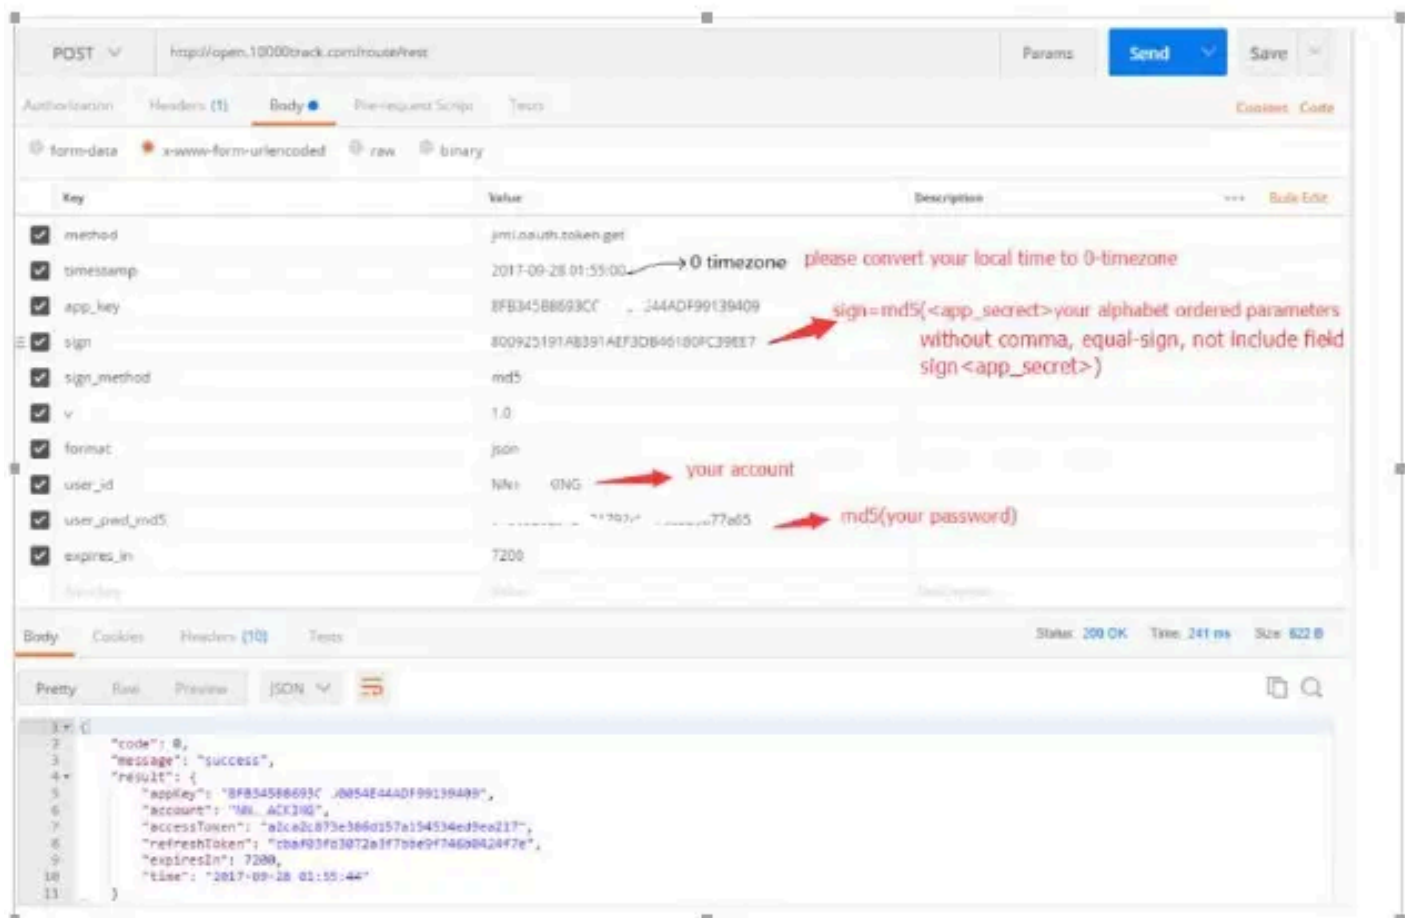

user_id = your tracksolid account.

user_pwd_md5 = md5(your tracksolid account password).

Sign = md5(<app_secret>your alphabet ordered parameters keyvalue, without equal-sign, comma and not include sign field<app_secret>).

Note that sign is a 32-length upper case string.

For example:

```
<app_secret> app_key9FB345B8693CCD0054E44ADF99139409expires_in7200formatjsonmethodjimi.
oauth.token.getsign_methodmd5timestamp2017-09-28
01:55:00user_id<account>user_pwd_md5<password_md5>v1.0      <app_secret>
```

7.6 Refresh access token

7.6.1 Description

This interface is used to update token manually when access token is about to be invalid.

7.6.2 Request URL

See the unique request URL.
Method = jimi.oauth.token.refresh

7.6.3 HTTP Request method

POST

7.6.4 Request parameters

- ☐ 1 [Common parameters](#)
- ☐ 2 Private parameters

Parameter	Type	Required	Description	Remark	Default
access_token	String	YES	Access token		
refresh_token	String	YES	Authorized refresh access token		
expires_in	number	YES	access token expired seconds	60-7200	

7.6.5 Response

Key	Type	Description
code	int	Return code: 0: return correctly Other: failure. Refer to the error code description
message	string	If code is not 0, there will be a corresponding error message
result	string	result

Key	Type	Description
accessToken	string	Access token, required for subsequently interface access.
expiresIn	string	Access token expired seconds.
account	string	Requested account
appKey	string	From JIMI
refreshToken	string	Refresh token for updating access token
time	string	Token generated time

Example for correct Response ☐

```
{
  "code": 0,
  "message": "success",
  "result": {
```

```
"appKey": "8FB345B8693CCD003CC2DAB61EC8791D",
"account": "jimitest",
"accessToken": "7da3330ec28e3996b6ef4a7e3390ba71",
"expiresIn": 60,
"refreshToken": "7da3330ec28e3996b6ef4a7e3390ba71",
"time": "2017-06-15 10:00:00"
}
}
Return error example      □
{"code":xxx,"message":"Illegal request      □ token is invalid"}
```

7.7 List all sub-account

7.7.1 Description

List all sub-account of a specified account.

7.7.2 Request URL

See the unique request URL.
Method = **jimi.user.child.list**

7.7.3 HTTP request method

POST

7.7.4 Request parameters

- 1 Common parameters
- 2 private parameters

Parameter	Type	Required	Remark	Description
access_token	string	Yes	-	Access token for security access JIMI Server.
target	string	Yes	-	The specified account for inquired.

7.7.5 Response

Key	Type	Description
code	int	Return code: 0: return correctly Other: failure. Refer to the error code description
message	string	If code is not 0, there will be a corresponding error message

result	string	The returned parameters
--------	--------	-------------------------

Result ☐

Key	Type	Description
account	string	log in account
name	string	name
type	Int	Account Type 3 ☐ App user 8 ☐ Distributor 9 ☐ ordinary users 10 ☐ ordinary distributor 11 ☐ sales
displayFlag	Int	Available or not (1:Available,0:not available)
address	string	location
birth	string	birthday
companyName	string	Company Name
email	string	mailbox
phone	string	contact number
language	string	Language (zh,en)
sex	int	Gender 0 male ☐ 1 female
enabledFlag	Int	Flag:1 Available, 0not available
remark	string	Remark

Correct return example ☐

```
{
  "code": 0,
  "message": "success",
  "result": [
    {
      "account": "123123",
      "name": "test",
      "type": 8,
      "displayFlag": 1,
      "address": null,
      "birth": "2017-04-22 00:00:00",
      "companyName": "",
      "email": "",
      "phone": "",
      "language": "zh",
      "sex": 0,
      "enabledFlag": 1,
      "remark": null
    }
  ]
}
```

Wrong return example ☐

```
{ "code":xxx,"message":"The account does not exist" }
```

7.8 Create sub-account

7.8.1 Description

Create a sub-account of a specified account.

7.8.2 Request URL

See the unique request URL.

Method = `jimi.user.child.create`

7.8.3 HTTP request method

POST

7.8.4 Request parameters

☐ 1 [Common parameters](#)

☐ 2 private parameters

Parameter	Type	Required	Remark	Description
access_token	string	Yes	-	Access token for security access JIMI Server.
super_account	string	No	-	The specified parent account. If not provided, use API account instead.
account_id	string	Yes		Account id, length of 3~30 characters. Support special characters like “_@.” as well as a-Z, 0-9.
nick_name	string	Yes		Nick name or customer name
account_type	int	Yes		1-Distributor 2-End User 3-Sales
password	string	Yes		Password with md5.
telephone	string	No		
Email	string	Yes		User could retrieve password if forgot it.
contact_person	string	No		
company_name	string	No		

permissions	string	Yes	6 permissions can be set: ☐ Web Login ☐ App Login ☐ Send Command ☐ Set Working Mode ☐ Edit by Web ☐ Edit by App 0-disable, 1-enable, 6 digital represents 6 kinds of permissions enable/disable perssion. For example, 111000
-------------	--------	-----	---

7.8.5 Response

Key	Type	Description
code	int	Return code: 0: return correctly Other: failure. Refer to the error code description
message	string	If code is not 0, there will be a corresponding error message
result	string	The returned parameters

Correct return example ☐

```
{
  "code": 0,
  "message": "Vehicle information modification successful",
  "result": null
}
```

Wrong return example ☐

```
{"code":xxx,"message":"The account does not exist"}
```

7.9 Remove sub-account

7.9.1 Description

Remove a sub-account of a specified account.

7.9.2 Request URL

See the unique request URL.
Method = **jimi.user.child.del**

7.9.3 HTTP request method

POST

7.9.4 Request parameters

- ☐ 1 [Common parameters](#)
- ☐ 2 private parameters

Parameter	Type	Required	Remark	Description
access_token	string	Yes	-	Access token for security access JIMI Server.
super_account	string	No	-	The specified parent account. If not provided, use API account instead.
account_id	string	Yes		Account id, length of 3~30 characters. Support special characters like “_@.” as well as a-Z, 0-9.

7.9.5 Response

Key	Type	Description
code	int	Return code: 0: return correctly Other: failure. Refer to the error code description
message	string	If code is not 0, there will be a corresponding error message
result	string	The returned parameters

Correct return example ☐

```
{
  "code": 0,
  "message": "Vehicle information modification successful",
  "result": null
}
```

Wrong return example ☐

```
{"code":xxx,"message":"no permissions"}
```

7.10 Move account

7.10.1 Description

Move account from one sub-account to another sub-account.

7.10.2 Request URL

See the [unique request URL](#).
Method = **jimi.userchild.move**

7.10.3 HTTP request method

POST

7.10.4 Request parameters

- ☐ 1 [Common parameters](#)
- ☐ 2 private parameters

Parameter	Type	Required	Remark	Description
access_token	string	Yes	-	Access token for security access JIMI Server.
account	string	Yes	-	The account will be moved.
target_account	string	Yes		The target account to move in.

7.10.5 Response

Key	Type	Description
code	int	Return code: 0: return correctly Other: failure. Refer to the error code description
message	string	If code is not 0, there will be a corresponding error message
result	string	The returned parameters

Correct return example ☐

```
{
  "code": 0,
  "message": "Vehicle information modification successful",
  "result": null
}
```

Wrong return example ☐

```
{"code":xxx,"message":"no permissions"}
```

7.11 List all devices of sub-account

7.11.1 Description

Query all devices of a specified account.

7.11.2 Request URL

See the unique request URL.
Method = `jimi.user.device.list`

7.11.3 HTTP request method

POST

7.11.4 Request parameters

- ☐ 1 [Common parameters](#)
- ☐ 2 Private parameters

Parameter	Type	Required	Remark	Description
access_token	string	Yes		Access token for security access JIMI Server.
target	string	Yes	-	The specified account for inquired.

7.11.5 Response

Key	Type	Description
code	int	Return code: 0: return correctly Other: failure. Refer to the error code description
message	string	If code is not 0, there will be a corresponding error message
result	string	The returned data

Result ☐

Key	Type	Description
imei	string	Device IMEI
deviceName	string	Device name
mcType	string	Device model
mcTypeUseScope	string	Automobile, electromobile, personal, pet, plane, others
sim	string	Sim card number
expiration	string	Platform expiration date
activationTime	string	Activation time
reMark	string	Remarks
vehicleName	string	Vehicle name
vehicleIcon	string	Vehicle icon
vehicleNumber	string	License plate number

vehicleModels	string	Brand
carFrame	string	VIN
driverName	string	Driver name
driverPhone	string	Driver phone number
enabledFlag	int	Available or not (1:Available,0:not available)
engineNumber	string	Engine number
deviceGroupId	string	Device group ID
deviceGroup	string	Device group name

Correct return example:

```
{
  "code": 0,
  "message": "success" ,
  "result": [
    {
      "imei": "868120145233604",
      "deviceName": "868120145233604",
      "mcType": "GT300L",
      "mcTypeUseScope": "personal",
      "sim": "415451",
      "expiration": "2037-04-01 23:59:59",
      "activationTime": "2017-04-01 11:02:20",
      "reMark": "test",
      "vehicleName": null,
      "vehicleIcon": "bus",
      "vehicleNumber": " B3604",
      "vehicleModels": null,
      "carFrame": "2235",
      "driverName": "driver",
      "driverPhone": "13825036579",
      "enabledFlag": 1,
      "engineNumber": "8565674",
      "deviceGroupId": "b54ab3c430864e31a64e54de44c79a1d",
      "deviceGroup": "default group"
    }
  ]
}
```

Return error example

```
{"code":xxx,"message":"Account queried doesn't exist"}
```

7.12 Get device detail information

7.12.1 Description

Get device detail information for specific IMEI.

7.12.2 Request URL

See the [unique request URL](#).
Method = `jimi.track.device.detail`

7.12.3 HTTP request method

POST

7.12.4 Request parameters

- 1 [Common parameters](#)
- 2 Private parameters

Parameter	Type	Required	Remark	Description
access_token	string	Yes		Access token for security access JIMI Server.
imei	string	Yes	-	The specified IMEI for inquired.

7.12.5 Response

Key	Type	Description
code	int	Return code: 0: return correctly Other: failure. Refer to the error code description
message	string	If code is not 0, there will be a corresponding error message
result	string	The returned data

Result

Key	Type	Description
imei	string	Device IMEI
deviceName	string	Device name
account	string	The account the device belongs to
customerName	string	The customer name of the account that the device belongs to
mcType	string	Device model
mcTypeUseScope	string	Automobile, electromobile, personal, pet, plane, others
sim	string	Sim card number
expiration	string	Platform expiration date
user_expiration	string	User expiration date, format as: account1,2019-01-01 account2,2019-02-02

activationTime	string	Activation time
reMark	string	Remarks
vehicleName	string	Vehicle name
vehicleIcon	string	Vehicle icon
vehicleNumber	string	License plate number
vehicleModels	string	Vehicle Model
carFrame	string	VIN
driverName	string	Driver name
driverPhone	string	Driver phone number
enabledFlag	int	Available or not (1:Available,0:not available)
engineNumber	string	Engine number
iccid	string	
importTime	string	
imsi	string	
licensePlatNo	string	
vin	string	Vehicle frame number
vehicleBrand	string	
fuel_100km	string	Fuel consumption for per 100km.
status	string	0-disable 1-enable
currentMileage	string	The current mileage of the device (km)
deviceGroupId	string	Device group ID
deviceGroup	string	Device group name

Correcl return example:

```
{
  "code": 0,
  "message": "success" ,
  "result":
    {
      "imei": "868120145233604",
      "deviceName": "868120145233604",
      "mcType": "GT300L",
      "mcTypeUseScope": "personal",
      "sim": "415451",
      "expiration": "2037-04-01 23:59:59",
      "activationTime": "2017-04-01 11:02:20",
      "reMark": "test",
      "vehicleName": null,
      "vehicleIcon": "bus",
      "vehicleNumber": " B3604",
      "vehicleModels": null,
      "carFrame": "2235",
      "driverName": "driver",
      "driverPhone": "13825036579",
      "enabledFlag": 1,
      "engineNumber": "8565674",
```

```
    "iccid": "xxxxxxx",
    "imsi": "xxxx",
    "importTime": "2017-04-01 11:02:20",
    "licensePlatNo": "8565674",
    "VIN": "xxxxxxx",
    "vehicleBrand": "xxxx",
    "fuel_100km": "9",
    "status": "8565674",
    "currentMileage": "102.5",
    "deviceGroupId": "b54ab3c430864e31a64e54de44c79a1d",
    "deviceGroup": "default group"
  }
}
```

Return error example ☐

```
{ "code":xxx,"message":"Account queried doesn't exist" }
```

7.13 Get location of devices by account

7.13.1 Description

Get the latest location for all devices under an account.

7.13.2 Request URL

See the unique request URL.
Method = **jimi.user.device.location.list**

7.13.3 HTTP request method

POST

7.13.4 Request parameters

- ☐ 1 [Common parameters](#)
- ☐ 2 private parameters

Parameter	Type	Required	Remark	Description
access_token	string	Yes		Access token for security access JIMI Server.
target	string	Yes	-	Specify the account for inquired.
map_type	string	No	-	map_type=GOOGLE, calibrated by google calibration. map_type=null, return origin latitude and longitude

7.13.5 Response

Key	Type	Description
code	int	Return code: 0: return correctly Other: failure. Refer to the error code description
message	string	If code is not 0, there will be a corresponding error message The returned data
result	string	The returned data

Result data:

Key	Type	Description
imei	string	Device IMEI
deviceName	string	Device name
icon	string	Vehicle icon
status	string	Device status 0 - offline; 1 - online
lat	double	Longitude (if the device is expired, the value is 0)
lng	double	Latitude (if the device is expired, the value is 0)
expireFlag	string	Expired or not: 1- not expired; 0 - expired
activationFlag	string	Activate or not :1 - Activate; 0 - Not active
posType	string	GPS, LBS, WIFI,BEACON
locDesc	string	Location information while the device is positioned by Bluetooth
gpsTime	string	GPS positioning time
hbTime	string	Heartbeat time
speed	string	Speed (unit: km / h)
accStatus	string	ACC 0-OFF; 1-ON
electQuantity	string	The power will be calculated based on the model configuration and voltage.
powerValue	string	External voltage(0-100), some models are not supported
distance	string	distance from device.
temperature	string	temperature (unit: °C)
trackerOil	string	Oil quantity of the car □ Original voltage value □
gpsSignal	string	GSM signal strength level 0 - No signal 1 - Extremely week 2 - Week 3 - Strong 4 - Extremely strong
gpsNum	string	Number of satellites
direction	string	Moving azimuth angle, 0-360, -1 represents unknown, for example: 100.12

currentMileage	string	Current mileage
batteryPowerVal	String	Internal voltage

Correct return example ☐

```
{
  "code": 0,
  "message": "success" ,
  "result": [
    {
      "imei": "868120145233604",
      "deviceName": "868120145233604",
      "icon": "bus",
      "status": "0",
      "posType": "GPS",
      "lat": 22.577282,
      "lng": 113.916604,
      "hbTime": "2017-04-26 09:14:50",
      "accStatus": "0",
      "speed": "0",
      "gpsTime": "2017-04-26 09:17:46",
      "activationFlag": "1",
      "expireFlag": "1",
      "electQuantity": "60",
      "locDesc": null
      "powerValue": null,
      "temperature": "86.5",
      "trackerOil": null
    }
  ]
}
```

Wrong return example ☐

```
{"code":xxx,"message":"The account does not exist"}
```

7.14 Get the location of device(s)

7.14.1 Description

Get the latest location for one or multiple devices.

7.14.2 Request URL

See the unique request URL.
Method = **jimi.device.location.get**

7.14.3 HTTP request method

POST

7.14.4 Request parameters

- ☐ 1 [Common parameters](#)
- ☐ 2 private parameters

Parameter	Type	Required	Remark	Description
access_token	string	Yes		access token: used to security access JIMI server.
imeis	string	Yes	—	Device IMEI. Separate imei by comma; POST is recommended if too many devices (maximum 100 IMEI)
map_type	string	No	—	map_type=GOOGLE, calibrated by google calibration. map_type=null, return origin latitude and longitude

7.14.5 Response

Key	Type	Description
code	int	Return code: 0: return correctly Other: failure. Refer to the error code description
message	string	If code is not 0, there will be a corresponding error message
result	string	The returned data

Result list ☐

Key	Type	Description
imei	string	Device IMEI
deviceName	string	Device name
account	string	The account the device belongs to
customerName	string	The customer name of the account that the device belongs to
icon	string	Vehicle icon
status	string	Device status 0, offline; 1, online
lat	double	Longitude (if the device expires, the value is 0)
lng	double	Latitude (if the device expires, the value is 0)
expireFlag	string	1- not expired; 0 - expired
activationFlag	string	1 - Activate; 0 - Not active
posType	string	GPS, LBS, WIFI, BEACON
locDesc	string	Location information
gpsTime	string	GPS positioning time
hbTime	string	Heartbeat time

speed	string	Speed (unit: km / h)
accStatus	string	ACC 0- off ;1- on
batteryPowerVal	string	battery 0-100 , Some device models are not supported
powerValue	string	External voltage (0-100), Some device models are not supported
distance	string	distance from device.
temperature	string	temperature unit:
trackerOil	string	Vehicle remaining fuel
currentMileage	string	The current mileage of the device (km)
gpsNum	string	Number of satellites
gpsSignal	string	GSM signal strength level 0 - No signal 1 - Extremely week 2 - Week 3 - Strong 4 - Extremely strong
direction	string	Moving azimuth angle, 0-360, -1 represents unknown, for example: 100.12
electQuantity	string	The power will be calculated based on the model configuration and voltage.

Correct return example

```
{
  "code": 0,
  "message": "success" ,
  "result": [
    {
      "imei": "868120145233604",
      "deviceName": "868120145233604",
      "icon": "bus",
      "status": "0",
      "posType": "GPS",
      "lat": 22.577282,
      "lng": 113.916604,
      "hbTime": "2017-04-26 09:14:50",
      "accStatus": "0",
      "speed": "0",
      "gpsNum": "11",
      "gpsTime": "2017-04-26 09:17:46",
      "activationFlag": "1",
      "expireFlag": "1",
      "electQuantity": "60",
      "locDesc": null
      "powerValue": null,
      "temperature": "86.5",
      "trackerOil": null,
      "currentMileage": "86.5",
    }
  ]
}
```

Wrong return example

```
{"code":xxx,"message":"Illegal device"}
```

7.15 Get sharing location URL

7.15.1 Description

Get the URL of device location showing on the Map.

7.15.2 Request URL

See the unique request URL.

Method = `jimi.device.location.URL.share`

7.15.3 HTTP request method

POST

7.15.4 Request parameters

☐ 1 [Common parameters](#)

☐ 2 private parameters

Parameter	Type	Required	Remark	Description
access_token	string	Yes		access token: used to security access JIMI server.
imei	string	Yes	—	Device IMEI

7.15.5 Response

Key	Type	Description
code	int	Return code: 0: return correctly Other: failure. Refer to the error code description
message	string	If code is not 0, there will be a corresponding error message
result	string	The returned data contains URL information.

result Object ☐

Key	Type	Description
URL	string	Device location sharing link

Correct return example ☐

```
{
  "code": 0,
  "message": "success",
  "result": {
    "URL":
"data.16180track.com/api/share?ver=2&method=trackDevice_abr&deviceinfo=7ae7c62385f2067f164002db3
15854a969a40e3888021cb01dc8f2183ca08dbbd8581f6bb86df4c2e3e1b887cb67c21039b4c0ced18fdf8dd08e0460c
5edd13ad87e16dca9702ce6 ",
  }
}
```

Wrong return example ☐

```
{"code":xxx,"message":"Illegal device"}
```

7.16 Update user expiration date

7.16.1 Description

Update user expiration date of devices.

7.16.2 Request URL

See the unique request URL.
Method = jimi.user.device.expiration.update

7.16.3 HTTP request method

POST

7.16.4 Request parameters

- ☐ 1 Common parameters
- ☐ 2 private parameters

Parameter	Type	Required	Remark	Description
access_token	string	Yes		access token: used to security access JIMI server.
imei_list	string	Yes	-	One or multiple devices IMEI.
new_expiration	string	Yes		New user expiration date for devices.

7.16.5 Response

Key	Type	Description
code	int	Return code: 0: return correctly Other: failure. Refer to the error code description
message	string	If code is not 0, there will be a corresponding error message
result	string	The returned data

result list ☐

Key	Type	Description
imei	string	IMEI of device
update_result	string	0-success, 1-failure
update_msg	string	Result information, success and failure reasons

Correct return example ☐

```
{
  "code": 0,
  "message": "success" ,
  "result": [
    {
      "imei": "868120145233604",
      "update_result": "0",
      "update_msg": "update success"
    },
    {
      "imei": "868120145233605",
      "update_result": "1",
      "update_msg": "update failed, reason:xxxxxx"
    }
  ]
}
```

Wrong return example ☐

```
{"code":xxx,"message":"Illegal device"}
```

7.17 Get the mileage data of devices

7.17.1 Description

Get device(s) trips data of specified time range.

7.17.2 Request URL

See the unique request URL.
Method = `jimi.device.track.mileage`

7.17.3 HTTP request method

POST

7.17.4 Request parameters

- 1 Common parameters
- 2 Private parameters

Parameter	Type	Required	Remark	Description
access_token	string	Yes	-	Access token: used to identify legal client.
imeis	string	Yes	-	Device imeis, separate by comma.
begin_time	number	Yes	-	Start time Format: yyyy-MM-dd HH:mm:ss
end_time	number	Yes	-	End time Format: yyyy-MM-dd HH:mm:ss end_time should be earlier than current time
start_row	number	No	-	Row number of result set.
page_size	number	No		Records in one page.

7.17.5 Response

Key	Type	Description
code	int	Return code: 0: return correctly Other: failure. Refer to the error code description
message	string	If code is not 0, there will be a corresponding error message
result	string	The returned data
data	string	Summary information IMEI IMEI of device totalMileage The sum of the total mileage of all trips made by the device within the specified time period

result list

Key	Type	Description
imei	string	IMEI of device

startTime	string	Start time
endTime	string	End time
startLat	string	Latitude of start position.
startLng	string	Longitude of start position.
endLat	string	Latitude of end position.
endLng	string	Longitude of end position.
runTimeSecond	int	Second of elapsed between start and end position.
distance	double	Distance(meter) between start and end position.
avgSpeed	double	Average speed

Correct return example ☐

```
{
  "code": 0,
  "message": "success" ,
  "result": [
    {
      "imei": "3505831983422342" ,
      "startTime": "2017-04-26 00:00:58" ,
      "endTime": "2017-04-26 00:03:58" ,
      "startLat": 22.577144898887813 ,
      "startLng": 113.91674845964586 ,
      "endLat": 22.677144898887813 ,
      "endLng": 113.92674845964586 ,

      "elapsed ": 213 0,
      "distance": 25000,
      "avgSpeed": 90
    }
    {
      "imei": "3505831983422342" ,
      "startTime": "2017-04-26 00:00:58" ,
      "endTime": "2017-04-26 00:03:58" ,
      "startLat": 22.577144898887813 ,
      "startLng": 113.91674845964586 ,
      "endLat": 22.677144898887813 ,
      "endLng": 113.92674845964586 ,

      "elapsed ": 213 0,
      "distance": 25000,
      "avgSpeed": 90
    }
  ]

  "data": [
    {
      "imei": "3505831983422342" ,
      "totalMileage": 60000,
    }
    {
      "imei": "3505831983422342" ,
      "totalMileage": 60000,
    }
  ]
}
```

7.18 Get the track data of device

7.18.1 Description

Get device track data of not more than 7 days, within 3 months.

7.18.2 Request URL

See the [unique request URL](#).
Method = `jimi.device.track.list`

7.18.3 HTTP request method

POST

7.18.4 Request parameters

- ☐ 1 [Common parameters](#)
- ☐ 2 Private parameters

Parameter	Type	Required	Remark	Description
access_token	string	Yes	-	Access token: used to identify legal client.
imei	string	Yes	-	Device imei(only 1 each time)
begin_time	number	Yes	-	Start time Format: yyyy-MM-dd HH:mm:ss
end_time	number	Yes	-	End time Format: yyyy-MM-dd HH:mm:ss end_time should be earlier than current time
map_type	string	No	-	map_type=GOOGLE, calibrated by google calibration. map_type=null, return origin latitude and longitude

7.18.5 Response

Key	Type	Description
code	int	Return code: 0: return correctly Other: failure. Refer to the error code description
message	string	If code is not 0, there will be a corresponding error message

result	object	The returned data
data	object	The returned data

result list ☐

Key	Type	Description
lng	double	longitude
lat	double	latitude
gpsTime	string	GPS positioning time. Format yyyy-MM-dd HH: mm: ss
direction	string	Direction, polar coordinates started from due north
gpsSpeed	string	GPS speed
posType	string	1-GPS, 2-LBS, 3-WIFI
satellite	string	GPS antenna signal strength
ignition	string	Ignition status ☐ ON-ACC ON, OFF-ACC OFF
accStatus	string	Acc status

data list ☐

Key	Type	Description
mileage	string	The mileage of the track within the query time

Correct return example ☐

```
{
  "code": 0,
  "message": "success" ,
  "result": [
    {
      "lat": 22.577144898887813 ,
      "lng": 113.91674845964586 ,
      "gpsTime": "2017-04-26 00:00:58" ,
      "direction": 0,
      "gpsSpeed": - 1,
      "posType": 3
      "satellite": 0,
      "ignition": "ON",
      "accStatus": "ON"
    },
    {
      "lat": 22.57708 ,
      "lng": 113.916631 ,
      "gpsTime": "2017-04-26 00:01:30" ,
      "direction": 184,
      "gpsSpeed": 0,
      "posType": 1,
      "satellite": 0,
      "ignition": "ON",
      "accStatus": "ON"
    }
  ],
  "data": {
    "mileage": 0
  }
}
```

Return error example ☐

```
{ "code":xxx,"message":"IMEI does not exist{353419031939627}" }
{ "code " :xxx,"message":"The device has expired{353419031939627}" }
```

7.19 Update vehicle information by IMEI

7.19.1 Description

Update vehicle information by IMEI

7.19.2 Request URL

See the unique request URL.
Method = **jimi.open.device.update**

7.19.3 HTTP request method

POST

7.19.4 Request parameters

- ☐ 1 Common parameters
- ☐ 2 Private parameters

Parameter	Type	Required	Remark	Description
access_token	string	Yes		Access token: used to identify legal client.
imei	string	Yes	-	Device IMEI
device_name	string	No	-	Device name
vehicle_name	string	No	-	Vehicle name
vehicle_icon	string	No	-	Vehicle icon
vehicle_number	string	No	-	Vehicle plate number
vehicle_models	string	No	-	Vehicle brand
driver_name	string	No	-	Driver name
driver_phone	string	No	-	Driver phone
device_status	string	No		0 - disable/1-enable. Enable/Disable devices.
sim	string	No		SIM card number
remarks	string	No		Remarks
oilWear	string	No		Fuel consumption per 100 kilometers
deviceGroupId	string	No		Device group id

7.19.5 Response

Key	Type	Description
code	int	Return code: 0: return correctly Other: failure. Refer to the error code description
message	string	If code is not 0, there will be a corresponding error message
result	string	The returned data

Correct return example ☐

```
{
  "code": 0,
  "message": "Vehicle information modification successful",
  "result": null
}
```

Wrong return example ☐

```
{"code":xxx,"message":"imei doesn't exists"}
```

Vehicle Icon

Icon key	Description
automobile	Car
bus	Bus
per	People
mtc	Motorcycle
truck	
taxi	
plane	
schoolBus	
excavator	
ship	
tricycle	
policeMtc	Police Motorcycle
tractor	
policeCar	
cow	
other	

7.20 Get Device Photo or Video URL

7.20.1 Description

Get device photo or video URL which capture by camera.

REMARK: ONLY GET THE VIDEO OR PHOTO WHICH CREATED BY REMOTE COMMAND.
TO GET ALL TYPE PHOTO OR VIDEO,PLEASE USE 7.38 API

7.20.2 Request URL

See the unique request URL.
Method = `jimi.device.media.URL`

7.20.3 HTTP request method

POST

7.20.4 Request parameters

- ☐ 1 [Common parameters](#)
- ☐ 2 Private parameters

Parameter	Type	Required	Remark	Description
access_token	string	Yes		Access token: used to identify legal client.
imei	string	Yes	-	Device IMEI
camera	string	Yes		1-front 2- inward 3 both
media_type	string	Yes		1 -photo 2-video 3-both
start_time	date	No		Start time of photo or video created.
end_time	date	No		End time of photo or video created.
token	string	No		Token used to validate whether can access photo or video or not.
page_no	int	No		Zero indexed, 0 by default.
page_size	int	No		10 rows by default.

7.20.5 Response

Key	Type	Description
code	int	Return code: 0: return correctly Other: failure. Refer to the error code description
message	string	If code is not 0, there will be a corresponding error message
result	string	The returned data,could be multiple rows.

result list ☐

Key	Type	Description
thumb_URL	string	URL of video or photo thumbnail.
file_URL	string	URL of video or photo.
mime_type	string	Mime type of video or photo

create_time	date	Create time of video or photo.
alarm_time	date	Time when the alarm occurred
media_type	string	1-photo 2-video
camera	string	0-front camera 1-inward camera
file_size	int	File size of photo or video.

Correct return example ☐

```
{
  "code": 0,
  "message": "Operation successful" ,
  "result":
  [
    {
      "thumb_URL": "Q9GLAFFqfCrYF6YfQAcON4w4Ezs=/lhWse7ie3wtFrjuQZ22dLak5CSaR" ,
      "file_URL": "357730090345670_3949477_2019_04_29_12_32_38_01" ,
      "mime_type": "video/mp4" ,
      "create_time": 2019-04-29 10:32:43 ,
      "media_type": 2,
      "camera": 1,
      "file_size": 9949087
    },
    {
      "thumb_URL": "Q9GLAFFqfCrYF6YfQAcON4w4Ezs=/FhCrZEIy3518sR_ylOlqDg7w3Ju -",
      "file_URL": "351609080120911_3949476_2019_04_29_18_32_12" ,
      "mime_type": "video/3gpp" ,
      "create_time": 2019-04-29 10:32:42 ,
      "media_type": 2,
      "camera": 1,
      "file_size": 2411318
    }
  ]
}
```

Wrong return example ☐

```
{"code":xxx,"message":"imei doesn't exists"}
```

7.21 Get Device Live Steaming Page URL

7.21.1 Description

Get device live streaming page URL& last position information.

7.21.2 Request URL

See the unique request URL.
Method = **jimi.device.live.page.url**

7.21.3 HTTP request method

POST

7.21.4 Request parameters

- ☐ 1 [Common parameters](#)
- ☐ 2 Private parameters

Parameter	Type	Required	Remark	Description
access_token	string	Yes		Access token: used to identify legal client.
imei	string	Yes	-	Device IMEI
type	string	No	Default type=1	Type=1 real-time video Type=2 Historical video
voice	string	No	Default 1	0 is disable; 1 is enable

7.21.5 Response

Key	Type	Description
code	int	Return code: 0: return correctly Other: failure. Refer to the error code description
message	string	If code is not 0, there will be a corresponding error message
result	String	The returned data

result object ☐

Key	Type	Description
lng	double	longitude
lat	double	latitude
gpsTime	string	GPS positioning time. Format yyyy-MM-dd HH: mm: ss
direction	string	Direction, polar coordinates started from due north
gpsSpeed	string	GPS speed
posType	string	1-GPS, 2-LBS, 3-WIFI
satellite	string	GPS antenna signal strength
VIN	string	VIN
plateNo	string	License Plate Number
UrlCamera	string	Live streaming page URL

Correct return example ☐

```
{
  "code": 0,
  "message": "Vehicle information modification successful" ,
```

```
"result":
{
  "lat": 22.577144898887813 ,
  "lng": 113.91674845964586 ,
  "gpsTime": "2017-04-26 00:00:58" ,
  "direction": 0,
  "gpsSpeed": - 1,
  "posType": 3,
  "satellite ": 11,
  "VIN": "V12345",
  "plateNo ":"ABC-12345",
  "UrlCamera ": "https://www.domain.com/device/video/35408343202342345" ,
}

}
Wrong return example  □
```

```
{"code":xxx,"message":"imei doesn't exists"}
```

7.22 Wi-Fi, Base Station locating analysis

7.22.1 Description

Allocate by total devices under the account (10 times/day/device. All sub-accounts included)

7.22.2 Request URL

See the unique request URL.
Method = **jimi.lbs.address.get**

7.22.3 HTTP request method

POST

7.22.4 Request parameters

- 1□ [Common parameters](#)
- 2□ Private parameters

Parameter	Type	Required	Remark	Description
access_token	string	Yes		access token: used to identify legal client.
imei	number	Yes	-	Device Imei
lbs	number	No	-	□ wifi/LBS: at least one □ LBS inforamtion group (mcc,mnc,lac,cell,rssi) □ max 7. Each

				group has five, which should not be null and sorted in order. MCC, China: 460 MNC LAC information, 2312 23222 CELL code: 23222 RSSI Semaphore-70
wifi	string	No	-	☐ wifi/LBS: at least one ☐ mac1,rsi1 mac2,rsi2 Mac address, no colon in between. Rssi signal strength

7.22.5 Response

Key	Type	Description
code	int	Return code: 0: return correctly Other: failure. Refer to the error code description
message	string	If code is not 0, there will be a corresponding error message
result	string	The returned data

Result list ☐

Key	Type	Description
lng	string	longitude
lat	string	latitude
accuracy	string	Accuracy, the greater the value the better

Correct return example ☐

```
{
  "code": 0,
  "message": "success" ,
  "result": {
    "lat": 40.65615416521587 ,
    "lng": 109.89894039833524 ,
    "accuracy": 0
  }
}
```

Wrong return example ☐

```
{"code":xxx,"message":"illegal device"}
```

7.23 Create Geo-fence for IMEI

7.23.1 Description

Create Geo-fence for IMEI

7.23.2 Request URL

See the unique request URL. _____

Method = `jimi.open.device.fence.create`

7.23.3 HTTP request method

POST

7.23.4 Request parameters

☐ 1 [Common parameters](#)

☐ 2 Private parameters

Parameter	Type	Required	Remark	Description
access_token	string	Yes		accesstoken: used for identifying legal third party
imei	string	Yes	-	Device Imei
fence_name	string	Yes	-	Geo-fence name
alarm_type	string	Yes	-	Alarm type (in / out / in, out)
report_mode	string	Yes	-	Alarm reporting mode, 0: GPRS,1: SMS+GPRS
alarm_switch	string	Yes	-	Fence alarm switch(ON/OFF)
lng	string	Yes	-	Longitude
lat	string	Yes	-	latitude
radius	string	Yes	-	Fence radius(1 ≤ 9999 ≤ unit: 100 meters)
zoom_level	string	Yes	-	Zoom level (3-19)
map_type	string	Yes	-	Map (GOOGLE)

7.23.5 Response

Key	Type	Description
code	int	Return code: 0: return correctly Other: failure. Refer to the error code description
message	string	If code is not 0, there will be a corresponding error message
result	string	The returned data. Fence serial number returned if succeed.

Correct return example ☐

```
{
  "code": 0,
  "message": "Successfully create geo-fence." ,
  "result": "5"
}
```

Wrong return example ☐

```
{
  "code": 41003,
  "message": "Device is not online, geo-fence creation failed ",
  "result": null
}
```

7.24 Delete Geo-fence for device

7.24.1 Description

Delete Geo-fence for device.

7.24.2 Request URL

See the [unique request URL](#).

Method = `jimi.open.device.fence.delete`

7.24.3 HTTP request method

POST

7.24.4 Request parameters

☐ 1 [Common parameters](#)

☐ 2 Private parameters

Parameter	Type	Required	Remark	Description
access_token	string	Yes		accesstoken: used for identifying legal third party
imei	string	Yes	-	Device imei
instruct_no	string	Yes	-	Geo-fence command serial number

7.24.5 Response

Key	Type	Description
code	int	Return code: 0: return correctly Other: failure. Refer to the error code description
message	string	If code is not 0, there will be a corresponding error message

	result	string	The returned data
--	--------	--------	-------------------

Correct return example ☐

```
{
  "code": 0,
  "message": "delete the geo-fence successfully" ,
  "result": null
}
```

Return error example ☐

```
{
  "code": 41003 ,
  "message": "The device is not online and geo-fence can't be deleted" ,
  "result": null
}
```

7.25 Get command list supported by device

7.25.1 Description

Get command list supported by device

7.25.2 Request URL URL

See the [unique request URL](#).
Method = **jimi.open.instruction.list**

7.25.3 HTTP request method

POST

7.25.4 Request parameters

- ☐ 1 [Common parameters](#)
- ☐ 2 Private parameters

Parameter	Type	Required	Remark	Description
access_token	string	Yes		accesstoken: used for identifying legal third party
imei	string	Yes	-	Device imei

7.25.5 Response

Key	Type	Description
code	int	Return code: 0: return correctly Other: failure. Refer to the error code description
message	string	If code is not 0, there will be a corresponding error message
result	string	The returned parameters

Result list ☐

Key	Type	Description
id	string	Command code
orderName	string	Command name
orderContent	string	Command template
orderExplain	string	Command explanation
orderMsg	string	prompt
isOffLine	string	if support offline command 0-no; 1-yes

Correct return example ☐

```
{
  "code": 0,
  "message": "success",
  "result": [
    {
      "id": 81,
      "orderName": "SOS setting",
      "orderContent": "SOS,A,{0},{1},{2}##",
      "orderExplain": "SOS is used for receive alerts and SOS alerts. SOS number should
have 3-20 numbers.",
      "orderMsg": "",
      "isOffLine": "1"
    }
    ...
  ]
}
```

Return error example ☐

```
{"code":xxx,"message":"Illegal device"}
```

7.26 Send command to device

7.26.1 Description

Send command to device.

7.26.2 Request URL

See the unique request URL.

Method = `jimi.open.instruction.send`

7.26.3 HTTP request method

POST

7.26.4 Request parameters

1 [Common parameters](#)

2 private parameters

Parameter	Type	Required	Remark	Description
access_token	string	Yes		accesstoken: used for identifying legal third party
imei	string	Yes	-	Device imei
inst_param_json	string	Yes	-	Command message json character string

inst_param_json description

Parameter	Type	Required	Remark	Description
inst_id	string	Yes		Command code
inst_template	string	Yes	-	Command template
params	Array<string>	Yes	-	Command params string Array
is_cover	Boolean	NO	false	Whether cover the existed offline command or not true-cover false-not cover

Example:

```
{
  "inst_id": "113",
  "inst_template": "RELAY,1#",
  "params": [],
  "is_cover": "true"
}
{
  "inst_id": "114",
  "inst_template": "RELAY,0#",
  "params": [],
  "is_cover": "true"
}
```

User-defined command:

```
{
  "inst_id": "96",
  "inst_template": "{0}",
  "params": ["STATUS#"],
  "is_cover": "true"
}
```

7.26.5 Response

Key	Type	Description
code	int	Return code: 0: return correctly Other: failure. Refer to the error code description
message	string	If code is not 0, there will be a corresponding error message

	result	string	The returned parameters
--	--------	--------	-------------------------

Correct return example ☐

```
{
  "code": 0,
  "message": "command is successfully sent.",
  "result": null
}
```

Return error example ☐

```
{
  "code": 12005,
  "message": "Fail to send command. Result code ☐ 226",
  "result": null
}
```

7.27 Get results of command execution

7.27.1 Description

Get results of sending command.

7.27.2 Request URL

See the unique request URL.
Method = **jimi.open.instruction.result**

7.27.3 HTTP request method

POST

7.27.4 Request parameters

- ☐ 1 Common parameters
- ☐ 2 Private parameters

Parameter	Type	Required	Remark	Description
access_token	string	Yes		accesstoken: used for identifying legal third party
imei	string	Yes	-	Device imei

7.27.5 Response

Key	Type	Description
code	int	Return code: 0: return correctly Other: failure. Refer to the error code description
message	string	If code is not 0, there will be a corresponding error message
result	string	The returned data

Result list ☐

Key	Type	Description
codeId	string	Command code
code	string	Command sent
content	string	Content replied by device
isExecute	string	command status 0: execution failed, 1: successful execution, 3: to be sent, 4: canceled
sendTime	string	Time, format ☐ yyyy-MM-dd HH:mm:ss
sender	string	sender
receiveDevice	string	Received imei
isOffLine	string	0: online 1: offline
idsource	string	Command description

Correct return example:

```
{
  "code": 0,
  "message": "success",
  "result": [
    {
      "codeId": "99",
      "code": "status#",
      "content": "Parameter error",
      "isExecute": "4",
      "sendTime": "2017-06-19 11:46:00",
      "sender": "jimitest",
      "receiveDevice": "86812011111117",
      "isOffLine": "1",
      "idsource": "User-defined command"
    }
  ]
}
```

Return error example ☐

```
{"code":xxx,"message":"Illegal device"}
```

7.28 Send raw command data to device

7.28.1 Description

Send raw command to device.

7.28.2 Request URL

See the unique request URL.

Method = `jimi.open.instruction.raw.send`

7.28.3 HTTP request method

POST

7.28.4 Request parameters

☐ 1 [Common parameters](#)

☐ 2 ☐ private parameters

Parameter	Type	Required	Remark	Description
access_token	string	Yes		accesstoken: used for identifying legal third party
imei	String	Yes	-	Device imei
raw_cmd	string	Yes	-	Raw command data(hex string)

Raw Command Example:

0B02C3A405060708

7.28.5 Response

Key	Type	Description
code	int	Return code: 0: return correctly Other: failure. Refer to the error code description
message	string	If code is not 0, there will be a corresponding error message
result	string	The returned parameters

Correct return example ☐

```
{  
  "code": 0,
```

```
"message": "command is successfully sent.",
"result": null
}
```

Return error example ☐

```
{
  "code": 12005,
  "message": "Fail to send command. Result code ☐ 226",
  "result": null
}
```

7.29 Push Received Raw Data

7.29.1 Description

Third-party platform should provide an URL(same as messages push URL) to receive the raw data(please contact us and provide the URL manually), JIMI server will push the raw data by sending a HTTP request using this URL.

7.29.2 Message service List

Message Type	Description
jimi.open.instruction.raw.receive	Raw data receive message type, different from alarm message.

Request content ☐

Key	Type	Description
msgType	string	Message type, corresponding to the message service list
data	string	The content of the message, corresponding to msgType

7.29.3 Message content (**jimi.open.instruction.raw.receive**)

Alarms pushed are as follows ☐

Key	Type	Description
imei	string	Device imei

deviceName	string	Device name
raw_data	string	raw data from device.(hex string)

E.g

```

Parameter1:
  Key = msgType
  Value = jimi.open.instruction.raw.receive

```

```

Parameter2:
  Key = data
  Value = {
    "imei": "868120145233604",
    "deviceName": "868120145233604",
    "raw_data": "0A0C0F01182E0101"
  }

```

7.30 Send media instruction

7.30.1 Description

Send video or photo command to device.

7.30.2 Request URL

See the unique request URL.
Method = jimi.device.meida.cmd.send

7.30.3 HTTP request method

POST

7.30.4 Request parameters

- 1 [Common parameters](#)
- 2 private parameters

Parameter	Type	Required	Remark	Description
access_token	string	Yes		Access token: used to identify legal client.
imei	string	Yes	-	Device IMEI
camera	string	Yes	mediaType=1 Only limited 1 or 2	1-front camera 2- inward camera 3- front + inward camera
mediaType	string	Yes		1 -photo 2-video
shootTime	string	No	0 or 3-10	mediaType=2 Recording duration 3-10

7.30.5 Response

Key	Type	Description
code	int	Return code: 0: Success other □ failure. Refer to the error code description
Result	JSON	<code>{"code": "100", "data": "1.3.3", "msg": "Communication successful response", "cmdSeqNo": "1"}</code> Return code: 225: time out 226: Parameter error 227: The command is not executed correctly 228: The device is not online 229: Network error, connection error, etc. 238: Device interrupted 240: Data format error
message	string	Description of sending command result.

Success example □

```
{
  "code": 0,
  "message": "Operation successful" ,
  "result": {"code": "255", "data": "1.3.3", "msg": "□□□□□□", "cmdSeqNo": "1"}
}
```

Exception example □

```
{
  "code": -1,
  "message": "Operation successful" ,
  "result": {"code": "228", "data": "1.3.3", "msg": "□□□□□□", "cmdSeqNo": "1"}
}
```

7.31 Receive Notification

7.31.1 Description

Third-party platform should provide an URL address to receive the notification(please contact us and provide the URL manually), JIMI server will push the notification by sending a HTTP request using this URL.

7.31.2 Message service List

Message Type	Description
--------------	-------------

jimi.push.device.alarm	Alarm data
------------------------	------------

Request content ☐

Key	Type	Description
msgType	String	Message type, corresponding to the message service list
data	String	The content of the message, corresponding to msgType

7.31.3 Message content (jimi.push.device.alarm)

Alarms pushed are as follows ☐

Key	Type	Description
imei	string	Device imei
deviceName	string	Device name
alarmType	string	Alarm type
alarmName	string	Alarm name
lat	string	Latitude
lng	string	Longitude
alarmTime	string	Alarm time, format (yyyy-MM-dd HH: mm: ss)

E.g ☐

Parameter1:
Key = msgType
Value = jimi.push.device.alarm

Parameter2:
Key = data
Value = {
 "imei": "868120145233604",
 "deviceName": "868120145233604",
 "alarmType": "2",
 "alarmName": "Power off alarm",
 "lat": 40.65615416521587,
 "lng": 109.89894039833524,
 "alarmTime": "2017-05-08 12:00:00"
}

7.32 Get device alarm list

7.32.1 Description

Get device alarm list.

Time range of searching criteria should be within 1 month.
Return maximum 1000 rows.

7.32.2 Request URL

See the [unique request URL](#).
Method = jimi.device.alarm.list

7.32.3 HTTP request method

POST

7.32.4 Request parameters

- ☐ 1 [Common parameters](#)
- ☐ 2 Private parameters

Parameter	Type	Required	Remark	Description
access_token	string	Yes		accesstoken: used for identifying legal third party
imei	string	Yes	-	Device imei This field can be used when querying a single device.
alertTypeId	string	No		If not specify alertTypeId, all alert type will return.
begin_time	date	No		if not provide begin_time & end_time, returns latest 50 alerts of last 1 month.
end_time	date	No		
imeis	string	Yes		Device imei(s), separate by comma.Query single or multiple devices No more than 100 each time. Select one of the IMEI and IMEIS fields to fill in.
page_no	int	Yes	>=1 default:1	Page number
page_size	int	Yes	1-100 default:50	Recordsin one page.

7.32.5 Response

Key	Type	Description
code	int	Return code: 0: return correctly Other: failure. Refer to the error code description

message	string	If code is not 0, there will be a corresponding error message
result	string	The returned data

Result list ☐

Key	Type	Description
deviceName	string	Device Name
imei	string	IMEI
model	string	Device Model
account	string	Account
alertTypeId	string	Alert type ID
alertTypeName	string	Alert type name
alertTime	string	Alert time
positioningTime	string	Time of alert positioning
lng	double	longitude
lat	double	latitude
speed	string	speed
geoid	string	Fence ID

Correct return example:

```
{
  "code": 0,
  "message": "success",
  "result": [
    {
      "deviceName": "ABC-34352",
      "imei": "343503422910345",
      "model": "GT06N",
      "account": "test1234",
      "alertTypeId": "1002",
      "alarmTypeName": "ACC On",
      "alertTime": "2019-03-14 14:02:03",
      "positioningTime": "2019-03-14 14:02:03",
      "lat": 22.577144898887813,
      "lng": 113.91674845964586,
      "speed": "10",
      "geoid": "se8yg081p0qh5vnniqrakr1nr0tdh6a0"
    }
  ]
}
```

Return error example ☐

```
{"code":xxx,"message":"Illegal device"}
```

7.33 (Deprecated)Send command (for scooter device)

7.34 (Deprecated)Get detail information of scooter

7.35 Get history video list

7.35.1 Description

Send Historical video file list upload command to device or query file list.
This API interface is only applicable to the old firmware of the JC200 and JC400 models of the Tracksolid platform.
Other models of devices can use API : [7.21 Get Device Live Steaming Page URL](#)

7.35.2 Request URL

See the unique request URL.
Method = `jimi.device.history.file.list`

7.35.3 HTTP request method

POST

7.35.4 Request parameters

- ☐ 1 [Common parameters](#)
- ☐ 2 private parameters

Parameter	Type	Required	Remark	Description
access_token	string	Yes		Access token: used to identify legal client.
imei	string	Yes	-	Device IMEI
type	string	Yes		1-upload 2- query

7.35.5 Response

Key	Type	Description
code	int	Return code: 0: Success other ☐ failure. Refer to the error code description

Result	JSON	type=1 {"code": "100", "data": "1.3.3", "msg": "Successful response", "cmdSeqNo": "1"} Return code: 225: time out 226: Parameter error 227: The command is not executed correctly 228: The device is not online 229: Network error, connection error, etc. 238: Device interrupted 240: Data format error type=2 {" 2018_03_29_16_51_45.mp4,2018_03_29_16_52_46.mp4,"}
message	string	Description of sending command result.

type=1

Success example ☐

```
{
  "code": 0,
  "message": "Operation successful" ,
  "result": {"code": "255", "data": "1.3.3", "msg": "Successful response", "cmdSeqNo": "1"}
}
```

Exception example ☐

```
{
  "code": -1,
  "message": "Operation successful" ,
  "result": {"code": "228", "data": "1.3.3", "msg": "Device is offline", "cmdSeqNo": "1"}
}
```

type=2

```
{
  "code": 0,
  "message": "Operation successful" ,
  "result": "2018_03_29_16_51_45.mp4,2018_03_29_16_52_46.mp4,"
}
```

7.36 Send history video instruction

7.36.1 Description

Send upload history video file command to device.

7.36.2 Request URL

See the unique request URL.

Method = `jimi.device.history.cmd.send`

7.36.3 HTTP request method

POST

7.36.4 Request parameters

- ☐ 1 [Common parameters](#)
- ☐ 2 private parameters

Parameter	Type	Required	Remark	Description
access_token	string	Yes		Access token: used to identify legal client.
imei	string	Yes	-	Device IMEI
type	string	Yes		1-Full fragment 2-Event fragment
camera	string	Yes		1-out 2-in
fileName	string	No	type=1 is not null	Historical video file name
time	string	No	type=2 is not null	Event time point, time format yyyy-MM-dd HH:mm:ss

7.36.5 Response

Key	Type	Description
code	int	Return code: 0: Success other ☐ failure. Refer to the error code description
Result	JSON	{ "code": "100", "data": "1.3.3", "msg": "Successful response", "cmdSeqNo": "1" } Return code: 225: time out 226: Parameter error 227: The command is not executed correctly 228: The device is not online 229: Network error, connection error, etc. 238: Device interrupted 240: Data format error
message	string	Description of sending command result.

Success example ☐

```
{  
  "code": 0,
```

```
"message": "Operation successful" ,
"result": {"code":"255","data":"1.3.3","msg":"Successful response","cmdSeqNo":"1"}
}
```

Exception example ☐

```
{
"code": -1,
"message": "Operation successful" ,
"result":{"code":"228","data":"1.3.3","msg":"Device is offline","cmdSeqNo":"1"}
}
```

7.37 Get video rtmp url

7.37.1 Description

Get video rtmp url

7.37.2 Request URL

See the unique request URL.

Method = **jimi.open.video.rtmp.url**

7.37.3 HTTP request method

POST

7.37.4 Request parameters

☐ 1 [Common parameters](#)

☐ 2 ☐ private parameters

Parameter	Type	Required	Remark	Description
access_token	string	Yes		Access token: used to identify legal client.
imei	string	Yes	-	Device IMEI

7.37.5 Response

Key	Type	Description
code	int	Return code: 0: Success other ☐ failure. Refer to the error code description

Result	JSON	<pre>{ "code": 0,"message": "success", "result": “rtmp://36.133.0.208:1935/0/353376110035950?uId=openapi 8b7914c3e4c188def67edd6b4a743146&vhost=8&user=172&ex pire_stamp=1595923486798&ext=&channel=0&token=25b422 283ff824461b33d8c5059d” } Return code: 225: time out 226: Parameter error 227: The command is not executed correctly 228: The device is not online 229: Network error, connection error, etc. 238: Device interrupted 240: Data format error</pre>
message	string	Description of sending command result.

Success example ☐

```
{
  "code": 0,
  "message": "success",
  "result":
“rtmp://36.133.0.208:1935/0/353376110035950?uId=openapi8b7914c3e4c188def67edd6b4a743146&vhost=8&user=
172&expire_stamp=1595923486798&ext=&channel=0&token=25b422283ff824461b33d8c5059d”
}
```

Exception example ☐

```
{
  "code": 228,
  "message": "The device is not online ",
  "result ": “null”
}
```

7.38 Get Device JIMI Photo or Video URL

7.38.1 Description

Get device photo or video URL which capture by camera.

7.38.2 Request URL

See the unique request URL.

Method = **jimi.device.jimi.media.URL**

7.38.3 HTTP request method

POST

7.38.4 Request parameters

- ☐ 1 [Common parameters](#)
- ☐ 2 Private parameters

Parameter	Type	Required	Remark	Description
access_token	string	Yes		Access token: used to identify legal client.
imei	string	Yes	-	Device IMEI
camera	string	Yes		1-front camera 2- inward camera 3 both
media_type	string	Yes		1 -photo 2-video 3-both
start_time	date	No		Start time of photo or video created.
end_time	date	No		End time of photo or video created.
token	string	No		Token used to validate whether can access photo or video or not.
page_no	int	No		Zero indexed, 0 by default.
page_size	int	No		10 rows by default.

7.38.5 Response

Key	Type	Description
code	int	Return code: 0: return correctly Other: failure. Refer to the error code description
message	string	If code is not 0, there will be a corresponding error message
result	string	The returned data,could be multiple rows.

result list ☐

Key	Type	Description
thumb_URL	string	URL of video or photo thumbnail.
file_URL	string	URL of video or photo.
mime_type	string	Mime type of video or photo
create_time	long	Create time of video or photo.Unix timestamp format
alarm_time	long	The time at which the alarm was triggered, Unix timestamp format
media_type	string	1-photo 2-video
camera	string	0-front camera 1-inward camera

	file_size	int	File size of photo or video.
--	-----------	-----	------------------------------

Remark: Unix timestamp; Example: 1611105520 = 2021-01-20 09:18:40

Correct return example ☐

```
{
  "code": 0,
  "message": "Operation successful" ,
  "result":
    [
      {
        "thumb_URL" : "http://8.210.205.58:8081/normal/get?fileKey=2021_01_20_09_17_49_I_28.jpg" ,
        "file_URL": "http://8.210.205.58:8081/normal/get?fileKey=357730090564767_29057540_2021_01_20_09_17_49_I_28_128.mp4" ,
        "create_time" : 1611105520 ,
        "mime_type" : "video/mp4" ,
        "media_type" : 2,
        "alarm_time" : 1611105469 ,
        "camera" : 0,
        "file_size" : "12108649"
      },
      {
        "thumb_URL" : "http://8.210.205.58:8081/normal/get?fileKey=2021_01_20_08_06_13_I_56.jpg" ,
        "file_URL": "http://8.210.205.58:8081/normal/get?fileKey=357730090564767_00000000_2021_01_20_08_06_13_I_56_146.mp4" ,
        "create_time" : 1611101264 ,
        "mime_type" : "video/mp4" ,
        "media_type" : 2,
        "alarm_time" : 1611101173 ,
        "camera" : 0,
        "file_size" : "48452069"
      }
    ]
}
```

Wrong return example ☐

```
{"code":xxx,"message":"imei doesn't exists"}
```

7.39 Edit user information

7.39.1 Description

Edit the user information of the platform, only edit the user's nickname, mobile phone number, email address, contact person, company name and permissions.

7.39.2 Request URL

See the unique request URL._____

Method = **jimi.user.child.update**

7.39.3 HTTP Request method

POST

7.39.4 Request parameters

- ☐ 1 [Common parameters](#)
- ☐ 2 Private parameters

Parameter	Type	Required	Remark	Description
access_token	string	Yes	-	Access token for security access JIMI Server.
edit_account	String	Yes		Account name, length of 3~30 characters. Support special characters like ` _@.` as well as a-Z, 0-9.
nick_name	String	Yes		Nick name or customer name
telephone	String	No		
Email	String	Yes		User could retrieve password if forgot it.
contact_person	String	No		contact
company_name	String	No		Company name
permissions	String	Yes		Web Login App Login Send Command Set Working Mode Edit by Web Edit by App

6 digital represents enable/disable perssion.

7.39.5 Response

Key	Type	Description
code	int	Return code: 0: return correctly Other: failure. Refer to the error code description
message	string	If code is not 0, there will be a corresponding error message
result	string	The returned data,could be multiple rows.

Correct return example ☐

```
{
  "code" : 0,
  "message" : "Account update success!" ,
  "result" : null ,
  "data" : null
}
```

7.40 Get parking/idling data of devices

7.40.1 Description

Get device(s) parking/idling data of specified time range.

7.40.2 Request URL

See the unique request URL.

Method = **jimi.open.platform.report.parking**

7.40.3 HTTP Request method

POST

7.40.4 Request parameters

1 Common parameters

2 private parameters as follow:

Parameter	Type	Required	Remark	Description
access_token	string	Yes	-	accesstoken: used for identifying legal third party
account	string	Yes	-	The account to which the new fence belongs
imeis	string	Yes	-	Example values: 869247060001770,869247060001259,869247060001804
start_time	string	Yes	-	Start time Format: yyyy-MM-dd HH:mm:ss
end_time	string	Yes	-	End time Format: yyyy-MM-dd HH:mm:ss end_time should be earlier than current time
start_row	string	Yes	-	Row number of result set.
page_size	string	Yes	-	Recordsin one page.
acc_type	string	Yes	-	on: get the lding data; off: get the parking data;

7.40.5 Response

key	Type	Description
code	int	Return code: 0: return correctly 1100:Business exception Other: failure. Refer to the error code description
message	string	If code is not 0, there will be a corresponding error message
result	string	null
data	object	The returned data.

data list ☐

key	Type	Description
totalTime	string	Request processing time
dataTotalRows	string	Total rows
rows	array[object]	Data details

rows list ☐

key	Type	Description
imei	string	Imei of device
startTime	string	Start time
endTime	string	End time
durSecond	string	Parking time
lng	number	Longitude
lat	number	Latitude
addr	string	Address
deviceName	string	Device name
mcType	string	Device model
acc	string	Acc status
stopSecond	string	Length of parking

Correct return example ☐

```
{
  "code": 0,
  "message": "success" ,
  "result": null ,
  "data": {
```

```
"totalTime": "185641" ,
"dataTotalRows": "2" ,
"rows":[
  {
    "imei": "869247060001739" ,
    "startTime": "2022-12-10T01:05:33.000Z" ,
    "endTime": "2022-12-10T04:17:48.000Z" ,
    "durSecond": "11535" ,
    "lng": 113.943093 ,
    "lat": 22.576748 ,
    "addr": "Shigu Road,  , Xili Sub-district, Nanshan distri..." ,
    "deviceName": "JC450Pro-01739" ,
    "mcType": "JC450Pro" ,
    "acc": "on" ,
    "stopSecond": "11535"
  },
  {
    "imei": "869247060001739" ,
    "startTime": "2022-12-09T22:13:16.000Z" ,
    "endTime": "2022-12-10T01:04:25.000Z" ,
    "durSecond": "10269" ,
    "lng": 113.943002 ,
    "lat": 22.57649 ,
    "addr": "Shigu Road,  , Xili Sub-district, Nanshan distri..." ,
    "deviceName": "JC450Pro-01739" ,
    "mcType": "JC450Pro" ,
    "acc": "on" ,
    "stopSecond": "10269"
  }
]
```

Wrong return example

```
{
  "code": 1100 ,
  "message": "Business exception " ,
  "result": null ,
  "data": null ,
}
```

7.41 Create platform Geo-fence

7.41.1 Description

Create a platform geofence,the newly created platform geofence belongs to the default group.

7.41.2 Request URL

See the unique request URL.

Method = `jimi.open.platform.fence.create`

7.41.3 HTTP Request method

POST

7.41.4 Request parameters

☐ 1 [Common parameters](#)

☐ 2 ☐ private parameters as follow:

Parameter	Type	Required	Remark	Description
access_token	string	Yes	-	accesstoken: used for identifying legal third party
account	string	Yes	-	The account to which the new fence belongs
fence_name	string	Yes	-	The name of the new fence
fence_type	string	Yes	circle or polygon	Fence type (circle/polygon)
fence_color	string	No	default: #3B7AFF	Fence color, standard RGB16 color column such as red #FF0000
geom	string	Yes	-	Collection of coordinate points Polygon: Latitude and longitude are separated by commas, and multiple locations are separated by '#', such as: 22.581714259546697,113.89460067944759#22.57323797629247,113.92341832019817 (Need to transcode to

				Mars coordinate system) Round: 22.57540001979625, 113.88814802356858 Note: latitude comes before longitude
radius	string	No	200-5000 default: 200	Fence radius, in m, range 200m~5000m,When it is a circle, it needs to be passed in, otherwise it will become a polygon
description	string	No	-	fence description

7.41.5 Response

key	Type	Description
code	int	Return code: 0: return correctly 1114: Fence name already exists -1:The system is busy Other: failure. Refer to the error code description
message	string	If code is not 0, there will be a corresponding error message
result	string	null
data	string	The returned data. fence_id returned if succeed.

Correct return example ☐

```
{  
  "code": 0,  
  "message": "success" ,  
  "result": null ,  
  "data": " c33b80d46d2b41d588a5afbd6f8b6285"  
}
```

Wrong return example ☐

```
{  
  "code": 1114 ,  
  "message": "That name already exists " ,  
}
```

```
"result": null ,
"data": null ,
}
```

7.42 Edit platform Geo-fence

7.42.1 Description

Edit platform geofence informatio.

7.42.2 Request URL

See the unique request URL.

Method = **jimi.open.platform.fence.create**

7.42.3 HTTP Request method

POST

7.42.4 Request parameters

☐ 1 [Common parameters](#)

☐ 2 ☐ private parameters as follow:

Parameter	Type	Required	Remark	Description
access_token	string	Yes	-	accesstoken: used for identifying legal third party
account	string	Yes	-	The account to which the fence belongs
fence_id	string	Yes	-	Fence id that needs to be edited
fence_name	string	Yes	-	The name of the new fence
fence_type	string	Yes	circle or polygon	Fence type (circle/polygon)
fence_color	string	No	default: #3B7AFF	Fence color, standard RGB16 color column such as red #FF0000

geom	string	Yes	-	Collection of coordinate points Polygon: Latitude and longitude are separated by commas, and multiple locations are separated by '#', such as: 22.581714259546697,113.89460067944759#22.57323797629247,113.92341832019817 (Need to transcode to Mars coordinate system) Round: 22.57540001979625,113.88814802356858 Note: latitude comes before longitude
radius	string	No	200-5000 default: 200	Fence radius, in m, range 200m~5000m,When it is a circle, it needs to be passed in, otherwise it will become a polygon
description	string	No	-	fence description

7.42.5 Response

key	Type	Description
code	int	Return code: 0: return correctly -1:The system is busy Other: failure. Refer to the error code description
message	string	If code is not 0, there will be a corresponding error message
result	string	null
data	string	The returned data. fence_id returned if succeed.

Correct return example ☐

```
{
"code": 0,
"message": "success" ,
"result": null ,
"data": "c33b80d46d2b41d588a5afbd6f8b6285"
}
```

Wrong return example ☐

```
{
  "code": -1 ,
  "message": "The system is busy ",
  "result": null ,
  "data": null ,
}
```

7.43 Delete platform Geo-fence

7.43.1 Description

Delete platform geofence.

7.43.2 Request URL

See the unique request URL.

Method = **jimi.open.platform.fence.delete**

7.43.3 HTTP Request method

POST

7.43.4 Request parameters

☐ 1 ☐ Common parameters

☐ 2 ☐ private parameters as follow:

Parameter	Type	Required	Remark	Description
access_token	string	Yes	-	accesstoken: used for identifying legal third party
account	string	Yes	-	The account to which the new fence belongs
fence_id	string	Yes	-	Fence id that needs to be deleted

7.43.5 Response

key	Type	Description
code	int	Return code: 0: return correctly -1:The system is busy Other: failure. Refer to the error code description
message	string	If code is not 0, there will be a corresponding error message
result	string	null
data	string	null

Correct return example ☐

```
{
"code": 0,
"message": "success" ,
"result": null ,
"data": null
}
```

Wrong return example ☐

```
{
"code": -1 ,
"message": " The system is busy " ,
"result": null ,
"data": null
}
```

7.44 Geo-fence related device

7.44.1 Description

Geofence related device.

7.44.2 Request URL

See the unique request URL.

Method = `jimi.open.platform.fence.bind`

7.44.3 HTTP Request method

POST

7.44.4 Request parameters

1 Common parameters

2 private parameters as follow:

Parameter	Type	Required	Remark	Description
access_token	string	Yes	-	accesstoken: used for identifying legal third party
fence_id	string	Yes	-	
imeis	string	No	-	Example values: 869247060001770,869247060001259,869247060001804
alert_type	string	No	-	Alarm types, if multiple alarms are configured at the same time, separate them with commas "," 1. in: into the fence; 2. out: out of the fence; 3. stayTimeIn: If you do not enter the fence for more than N days, the alarm will be triggered; 4. stayTimeOut: If you do not leave the fence for more than N days, the alarm will be triggered;
stay_time_in	int	No	-	Do not enter the fence for more than N days to trigger an alarm. When there is a value here, you need to pass in stayTimeIn in the alert_type.
stay_time_out	int	No		Do not leave the fence for more than N days to trigger an alarm. When there is a value here, you need to pass in stayTimeOut in alert_type.

7.44.5 Response

key	Type	Description
code	int	Return code: 0: return correctly 1100:Business exception Other: failure. Refer to the error code description
message	string	If code is not 0, there will be a corresponding error message
result	string	null
data	string	The returned data. the number of related devices returned if succeed.

Correct return example ☐

```
{
  "code": 0,
  "message": "success" ,
  "result": null ,
  "data": "3"
}
```

Wrong return example ☐

```
{
  "code": 1100 ,
  "message": "Business exception " ,
  "result": null ,
  "data": null ,
}
```

7.45 Listplatform geofences of an account

7.45.1 Description

Query platform geofences of a specified account.

7.45.2 Request URL

See the unique request URL.

Method = `jimi.open.platform.fence.list`

7.45.3 HTTP Request method

POST

7.45.4 Request parameters

1 [Common parameters](#)

2 private parameters as follow:

Parameter	Type	Required	Remark	Description
access_token	string	Yes	-	accesstoken: used for identifying legal third party
account	string	Yes	-	The account to which the geofences belong
page_no	number	No	>=1 default:1	Page number
page_size	number	No	1-50 default:10	Records in one page.

7.45.5 Response

key	Type	Description
code	int	Return code: 0: return correctly 1100:Business exception Other: failure. Refer to the error code description
message	string	If code is not 0, there will be a corresponding error message
result	object	Number of fences belonging to the account and details of each fence

result:

Parameter	Type	Description
total	string	Number of fences belonging to the account
rows	Array[Object]	The returned data

Rows list:

Parameter	Type	Description
fence_id	string	Fence_id
fence_name	string	The name of the geofence
fence_type	string	Fence type (circle/polygon)
fence_color	string	default: #3B7AFF
coordinates	string	Collection of coordinate points Polygon: Latitude and longitude are separated by commas, and multiple locations are separated by ';', such as: 22.581714259546697,113.89460067944759;22.57323797629247,113.92 341832019817 (Need to transcode to Mars coordinate system) Round: 22.57540001979625, 113.88814802356858 Note: latitude comes before longitude
radius	string	Fence radius, in m, range 200m~5000m,When it is a circle, it needs to be passed in, otherwise it will become a polygon
description	string	fence description
imeis	string	Example values: 869247060001770,869247060001259,869247060001804
alert_type	string	Alarm types, separated by commas in: into the fence; out: out of the fence; stayTimeIn: If you do not enter the fence for more than N days, the alarm will be triggered; stayTimeOut: If you do not leave the fence for more than N days, the alarm will be triggered;
stay_time_in	int	Do not enter the fence for more than N days to trigger an alarm. When there is a value here, you need to pass in stayTimeIn in the alert_type.

stay_time_out	int	Do not leave the fence for more than N days to trigger an alarm. When there is a value here, you need to pass in stayTimeOut in alert_type.
account	string	account

Correct return example ☐

```
{
  "code": 0,
  "message": "success" ,
  "result": {
    "total": 294,
    "rows": [
      {
        "fence_id": "dfab43ea3e7a40e987056c857cccae7b",
        "fence_name": "test fence",
        "fence_type": "circle",
        "fence_color": "#3b7aff",
        "coordinates": "22.544382,114.004037",
        "radius": "4153",
        "description": "",
        "imeis": "231011234567990,869247060001655,868598060001827,869247060001259",
        "alert_type": "in",
        "stay_time_out": null,
        "stay_time_in": null,
        "account": "hao001"
      }
    ]
  }
}
```

Wrong return example ☐

```
{
  "code": -1,
  "message": "The system is busy ",
  "result": null ,
  "data": null ,
}
```

7.46 Move devices

7.46.1 Description

Move devices from one sub-account to another sub-account.

7.46.2 Request URL

See the unique request URL.

Method = **jimi.open.device.move**

7.46.3 HTTP Request method

POST

7.46.4 Request parameters

☐ 1 [Common parameters](#)

☐ 2 ☐ private parameters as follow:

Parameter	Type	Required	Remark	Description
access_token	string	Yes	-	accesstoken: used for identifying legal third party
src_account	string	Yes	-	Transfer device from account
dest_account	string	Yes	-	Transfer device to account
imeis	string	Yes	-	Device imei
cleanBindFlag	string	No	-	1: clear data, 0: Do not clear data

7.46.5 Response

key	Type	Description
-----	------	-------------

code	int	Return code: 0: return correctly Other: failure. Refer to the error code description
message	string	If code is not 0, there will be a corresponding error message
result	string	The returned parameters

Correct return example ☐

```
{
  "code" : 1112 ,
  "message" : " device already exists " ,
  "result" : [
    "202205454545454"
  ],
  "data" : null
}
Or:
{
  "code" : 0,
  "message" : " Transfer/Sell Equipment Successfully " ,
  "result" : null,
  "data" : null
}
```

Wrong return example ☐

```
{"code":xxx,"message":"no permissions"}
```

7.47 Get RFID reporting information

7.47.1 Description

Query the RFID information reported within a certain period of time.

7.47.2 Request URL

See the unique request URL.

Method = **jimi.open.device.rfid.list**

7.47.3 HTTP Request method

POST

7.47.4 Request parameters

- ☐ 1 [Common parameters](#)
- ☐ 2 private parameters as follow:

Parameter	Type	Required	Remark	Description
access_token	string	Yes	-	accesstoken: used for identifying legal third party
account	string	Yes	-	The account to which the device belongs. If the device to be queried belongs to multiple different users, please enter the common superior account of these users here.
imeis	string	No	-	Device imei(s), separate by comma. No more than 100 each time If neither imei nor card id is entered, all RFID reporting records within the query time period will be queried.
card_ids	string	No	-	RFID(s),separate by comma. No more than 100 each time If neither imei nor card id is entered, all RFID reporting records within the query time period will be queried.
begin_time	number	Yes	-	Start time Format: yyyy-MM-dd HH:mm:ss
end_time	number	Yes	-	End time Format: yyyy-MM-dd HH:mm:ss end_time should be earlier than current time Query up to 1 month of data at a time
page_no	int	no	>=1 default:1	Page number
page_size	int	no	1-100 default:1 0	Records in one page.

7.47.5 Response

key	Type	Description
code	int	Return code: 0: return correctly Other: failure. Refer to the error code description
message	string	If code is not 0, there will be a corresponding error message
data	object	The returned parameters

data object ☐

Key	Type	Description
currentPage	number	Current page code
pageSize	number	Records in one page.
totalRecord	number	Total amount of data that meets the conditions
result	Array[Object]	The returned data

result list ☐

Key	Type	Description
cardId	string	The corresponding RFID in the reporting record
imei	string	RFID record reporting corresponding imei
photo	string	Photo taken by the device during RFID reporting
operationTime	string	RFID record reporting time

Correct return example ☐

```
{
  "code": 0,
  "message": "success" ,
  "data": {
    "currentPage": 1,
    "pageSize": 10,
    "startRow": 1,
    "endRow": 10,
    "totalRecord": 34,
    "totalPage": 4,
    "result": [
      {
        "imei ": "890768902346789" ,
        "cardId ": "278907" ,
```

```
      "operationTime  ": "2024-04-22 09:12:23"  ,
      "photo  ":
    }
  ]
}
}
```

Wrong return example ☐

```
{ "code":xxx,"message":"no permissions" }
```

7.48 Query single fence information

7.48.1 Description

Query single fence information based on fence id

7.48.2 Request URL

See the unique request URL.

Method =jimi.open.platform.fence.detail

7.48.3 HTTP Request method

POST

7.48.4 Request parameters

☐ 1 ☐ Common parameters

☐ 2 ☐ private parameters as follow:

Parameter	Type	Required	Remark	Description
access_token	string	Yes	-	accesstoken: used for identifying legal third party
fence_id	string	Yes	-	Unique id of fence

7.48.5 Response

key	Type	Description
code	int	Return code: 0: return correctly 1100:Business exception Other: failure. Refer to the error code description
message	string	If code is not 0, there will be a corresponding error message
result	object	Detailed information of fence

result:

Parameter	Type	Description
fence_id	string	Fence_id
fence_name	string	The name of the geofence
fence_type	string	Fence type (circle/polygon)
fence_color	string	default: #3B7AFF
coordinates	string	Collection of coordinate points Polygon: Latitude and longitude are separated by commas, and multiple locations are separated by ';', such as: 22.581714259546697,113.89460067944759;22.57323797629247,113.92 341832019817 (Need to transcode to Mars coordinate system) Round: 22.57540001979625, 113.88814802356858 Note: latitude comes before longitude
radius	string	Fence radius, in m, range 200m~5000m,When it is a circle, it needs to be passed in, otherwise it will become a polygon
description	string	fence description
imeis	string	Example values: 869247060001770,869247060001259,869247060001804
alert_type	string	Alarm types, separated by commas in: into the fence; out: out of the fence; stayTimeIn: If you do not enter the fence for more than N days, the

		alarm will be triggered; stayTimeOut: If you do not leave the fence for more than N days, the alarm will be triggered;
stay_time_in	int	Do not enter the fence for more than N days to trigger an alarm. When there is a value here, you need to pass in stayTimeIn in the alert_type.
stay_time_out	int	Do not leave the fence for more than N days to trigger an alarm. When there is a value here, you need to pass in stayTimeOut in alert_type.
account	string	account

Correct return example ☐

```
{
  "code": 0,
  "message": "success",
  "result": {
    "fence_id": "dfab43ea3e7a40e987056c857cccae7b",
    "fence_name": "test fence",
    "fence_type": "circle",
    "fence_color": "#3b7aff",
    "coordinates": "22.544382,114.004037",
    "radius": "4153",
    "description": "",
    "imeis": "231011234567990,869247060001655,868598060001827,869247060001259",
    "alert_type": "in",
    "stay_time_out": null,
    "stay_time_in": null,
    "account": "hao001"
  }
}
```

Wrong return example ☐

```
{
  "code": -1,
  "message": "The system is busy ",
  "result": null ,
  "data": null ,
}
```

7.49 Bind app user

7.49.1 Description

Bind the device to the app user.

7.49.2 Request URL

[See the unique request URL.](#)

Method = `jimi.open.device.bind`

7.49.3 HTTP Request method

POST

7.49.4 Request parameters

☐ 1 [Common parameters](#)

☐ 2 ☐ private parameters as follow:

Parameter	Type	Required	Remark	Description
access_token	string	Yes	-	accesstoken: used for identifying legal third party
imei	string	Yes	-	The account to which the geofences belong
user_id	string	Yes	-	The app user account to be bound

7.49.5 Response

key	Type	Description
code	int	Return code: 0: return correctly 10:The device has been bound to a user 1001: Illegal parameters 1002: User or device is incorrect, see message for specific errors 1100: Business exception

		Other: failure. Refer to the error code description
message	string	If code is not 0, there will be a corresponding error message

Correct return example ☐

```
{
  "code": 0,
  "message": "success" ,
}
```

Wrong return example ☐

```
{
  "code": 1100 ,
  "message": "The system is busy ",
  "result": null ,
  "data": null ,
}
```

7.50 Unbind app user

7.50.1 Description

Unbind the device from the app use

7.50.2 Request URL

[See the unique request URL.](#)

Method = jimi.open.device.unbind

7.50.3 HTTP Request method

POST

7.50.4 Request parameters

- ☐ 1 [Common parameters](#)
- ☐ 2 [private parameters](#) as follow:

Parameter	Type	Required	Remark	Description
access_token	string	Yes	-	accesstoken: used for identifying legal third party
imei	string	Yes	-	The account to which the geofences belong
user_id	string	yes	-	The app user account you want to unbind

7.50.5 Response

key	Type	Description
code	int	Return code: 0: return correctly 10: The device is not bound to this user, so the unbinding failed. 1001: Illegal parameters 1002: User or device is incorrect, see message for specific errors 1100:Business exception Other: failure. Refer to the error code description
message	string	If code is not 0, there will be a corresponding error message

Correct return example ☐

```
{
  "code": 0,
  "message": "success" ,
}
```

Wrong return example ☐

```
{
  "code": 1100 ,
  "message": "The system is busy ",
  "result": null ,
  "data": null ,
}
```

7.51 **Get the trips report data of devices**

7.51.1 **Description**

Query the trips report data of devices.

7.51.2 **Request URL**

[See the unique request URL.](#)

Method = `jimi.open.platform.report.trips`

7.51.3 **HTTP Request method**

POST

7.51.4 **Request parameters**

☐ 1 [Common parameters](#)

☐ 2 ☐ private parameters as follow:

Parameter	Type	Required	Remark	Description
access_token	string	Yes	-	accesstoken: used for identifying legal third party
account	string	Yes	-	The account to which the new fence belongs
imeis	string	Yes	-	Example values: 869247060001770,869247060001259,869247060001804
type	string	Yes	-	day/list When type is day, the device itinerary data is assembled by day. When it is list, the detailed data of the device itinerary is summarized and returned.
start_time	string	Yes	-	Start time Format: yyyy-MM-dd HH:mm:ss

end_time	string	Yes	-	End time Format: yyyy-MM-dd HH:mm:ss end_time should be earlier than current time
start_row	string	Yes	-	Row number of result set.
page_size	string	Yes	-	Recordsin one page.

7.51.5 Response

key	Type	Description
code	int	Return code: 0: return correctly 1100:Business exception Other: failure. Refer to the error code description
message	string	If code is not 0, there will be a corresponding error message
data	object	The returned data.

data list ☐

key	Type	Description
dayList	array[object]	When type = list, the array is returned
datDatas	array[object]	When type = day, the array is returned

datDatas list:

key	Type	Description
deviceName	string	Device Name
deviceImei	string	Device imei
data	object	

datDatas.data:

key	Type	Description
date	string	Date
totalTrips	string	Total number of trips on the day
averageSpeed	string	Average speed
fuel	string	Fuel consumption
maxSpeed	string	Maximum speed
oilWear	string	Fuel consumption per 100 kilometers
totalMileage	string	Total mileage
travelTime	string	Total trip time

dayList list 

key	Type	Description
imei	string	Imei of device
deviceName	string	Device name
tripsData	Array[object]	Trip information, see the table below for details
inTotal	object	Trip information summary: allTrips: total number of trips totalDis: total mileage travelTime: total running time totalTime: formatted total running time totalAvgSpeed: average speed allTotalMaxSpeed: maximum average speed totalFuel: total fuel consumption oilWear: fuel consumption per 100 kilometers

dayList.tripsData 

key	Type	Description
Searchdate	string	date

tripNum	number	Number of trips on the day
inTotal	object	Data summary for the day - totalDis: total mileage - travelTime: total running time - totalTime: formatted total running time - totalAvgSpeed: average speed - allTotalMaxSpeed: maximum average speed - totalFuel: total fuel consumption - oilWear: fuel consumption per 100 kilometers
dayData	Array[object]	For each itinerary information, please see the table below for detailed information

dayList.tripsData.dayData:

key	Type	Description
imei	string	Device imei
startTime	string	Start time of the trip
endTime	string	End time of the trip
startLat	string	Start latitude of the trip
startLng	string	Start longitude of the trip
endLat	string	End latitude of the trip
endLng	string	End longitude of the trip
totalMileage	string	Mileage of the trip
travelTime	string	Time
averageSpeed	string	Average speed
maxSpeed	string	Maximum speed
oilWear	string	Fuel consumption per 100 kilometers
fuel	string	Fuel consumption

startMileage	string	Start mileage
endMileage	string	End mileage

Correct return example ☐

☐☐

Wrong return example ☐

```
{
"code": 1100 ,
"message": "Business exception " ,
"result": null ,
"data": null ,
}
```

7.52 Get entry and exit fence data of devices

7.52.1 Description

Query the report data of the device's entry and exit fence.

7.52.2 Request URL

See the unique request URL.

Method = jimi.open.platform.fence.duration

7.52.3 HTTP Request method

POST

7.52.4 Request parameters

☐ 1 ☐ Common parameters

☐ 2 ☐ private parameters as follow:

Parameter	Type	Required	Remark	Description
-----------	------	----------	--------	-------------

access_token	string	Yes	-	accesstoken: used for identifying legal third party
account	string	Yes	-	The account to which the new fence belongs
imeis	string	Yes	-	Example values: 869247060001770,869247060001259,869247060001804
start_time	string	Yes	-	Start time Format: yyyy-MM-dd HH:mm:ss
end_time	string	Yes	-	End time Format: yyyy-MM-dd HH:mm:ss end_time should be earlier than current time
start_row	string	Yes	-	Row number of result set.
page_size	string	Yes	-	Recordsin one page.

7.52.5 Response

key	Type	Description
code	int	Return code: 0: return correctly 1100:Business exception Other: failure. Refer to the error code description
message	string	If code is not 0, there will be a corresponding error message
data	object	The returned data.

data list ☐

key	Type	Description
totalTime	string	Request processing time
dataTotalRows	string	Total rows
rows	array[object]	Data details

rows list ☐

key	Type	Description
imei	string	Imei of device
deviceName	string	Device name
fenceName	string	Fence name
enterTime	string	Enter fence time
exitTime	number	Leave fence time
duration	number	Duration

Correct return example ☐

```
{
  "code": 0,
  "message": "success",
  "result": null,
  "data": {
    "totalTime": "0",
    "dataTotalRows": "2",
    "rows": [
      {
        "imei": "869247060001739",
        "deviceName": "JC450Pro-01739",
        "fenceName": "geofence1",
        "enterTime": "2022-12-10T01:05:33.000Z",
        "exitTime": "2022-12-10T04:17:48.000Z",
        "duration": "11535"
      },
      {
        "imei": "869247060001739",
        "deviceName": "JC450Pro-01739",
        "fenceName": "geofence1",
        "enterTime": "2022-12-10T01:05:33.000Z"
      }
    ]
  }
}
```

Wrong return example ☐

```
{
"code": 1100 ,
"message": "Business exception " ,
"result": null ,
"data": null ,
}
```

7.53 Get the OBD data of devices

7.53.1 Description

Query CAN bus diagnosis data reported by OBD device.

7.53.2 Request URL

[See the unique request URL.](#)

Method = jimi.device.obd.list

7.53.3 HTTP Request method

POST

7.53.4 Request parameters

- ☐ 1 [Common parameters](#)
- ☐ 2 private parameters as follow:

Parameter	Type	Required	Remark	Description
access_token	string	Yes	-	accesstoken: used for identifying legal third party
account	string	Yes	-	The account to which the new fence belongs
imeis	string	Yes	-	Device imei(s), separate by comma. No more than 100 each time. Supports querying the data of the account and its sub-account devices. Example values: 869247060001770,869247060001259,8692

				47060001804
start_time	string	Yes	-	Start time Format: yyyy-MM-dd HH:mm:ss
end_time	string	Yes	-	End time Format: yyyy-MM-dd HH:mm:ss End_time should be earlier than current time. Query up to 31 days of data at a time.
page_no	int	Yes	>=1 default:1	Page number
page_size	int	Yes	1-100 default:10	Recordsin one page.

7.53.5 Response

key	Type	Description
code	int	Return code: 0: return correctly 1100:Business exception Other: failure. Refer to the error code description
message	string	If code is not 0, there will be a corresponding error message
data	object	The returned data.

data list ☐

key	Type	Description
currentPage	int	The current page, same as page_no.
pageSize	int	Recordsin one page, same as page_size.
totalRecord	int	Total rows
result	array[object]	Data details

rows list ☐

key	Type	Description
imei	string	Imei of device
dataReportTime	string	The time the data was reported
odometerReading	string	Vehicle meter mileage(Unit: KM)
deviceAccumulatedMileage	string	Mileage counted by the device
remainingFuel	string	Oil volume
remainingFuelPercentage	string	Oil percentage The data reported by different vehicles and devices are different. The Oil volume or Oil percentage is displayed based on the data actually reported by the device.
coolantTemperature	string	Coolant temperature(Unit: °C)
vehicleBatterVoltage	string	External input voltage
currentRPM	string	Instantaneous engine speed
currentSpeed	string	Current driving speed
vin	string	Vehicle Identification Number

Correct return example □

```
{
  "code": 0,
  "message": "success",
  "data": {
    "currentPage": 1,
    "pageSize": 2,
    "startRow": 0,
    "endRow": 0,
    "totalRecord": 2684,
    "totalPage": 0,
    "result": [
      {
        "imei": "158511020000028",
        "dataReportTime": "2024-05-09 10:25:00",
```

```
        "odometerReading": "2049.6",
        "deviceAccumulatedMileage": "142.9",
        "remainingFuel": null,
        "remainingFuelPercentage": "58",
        "coolantTemperature": "77",
        "vehicleBatterVoltage": "118",
        "currentRPM": "5016",
        "currentSpeed": "88.5"
        "vin": "LC0CG4CF1H0029191"
    },
    {
        "imei": "158511020000028",
        "dataReportTime": "2024-05-09 1:27:23",
        "odometerReading": "2048.6",
        "deviceAccumulatedMileage": "143.9",
        "remainingFuel": null,
        "remainingFuelPercentage": "56",
        "coolantTemperature": "78",
        "vehicleBatterVoltage": "118",
        "currentRPM": "5016",
        "currentSpeed": "95.5"
        "vin": "LC0CG4CF1H0029191"
    }
]
}
```

Wrong return example ☐

```
{
"code": 1100 ,
"message": "Business exception " ,
"result": null ,
"data": null ,
}
```

7.54 Get the OBD fault data of devices

7.54.1 Description

Query CAN bus fault code information reported by OBD device.

7.54.2 Request URL

[See the unique request URL.](#)

Method = jimi.device.obd.fault

1.1.1 HTTP Request method

POST

7.54.3 Request parameters

☐ 1 [Common parameters](#)

☐ 2 ☐ private parameters as follow:

Parameter	Type	Required	Remark	Description
access_token	string	Yes	-	accesstoken: used for identifying legal third party
account	string	Yes	-	The account to which the new fence belongs
imeis	string	Yes	-	Device imei(s), separate by comma. No more than 100 each time. Supports querying the data of the account and its sub-account devices. Example values: 869247060001770,869247060001259,869247060001804
start_time	string	Yes	-	Start time Format: yyyy-MM-dd HH:mm:ss
end_time	string	Yes	-	End time Format: yyyy-MM-dd HH:mm:ss End_time should be earlier than current time. Query up to 31 days of data at a time.
page_no	int	Yes	>=1 default:1	Page number
page_size	int	Yes	1-100 default:10	Recordsin one page.

7.54.4 Response

key	Type	Description
code	int	Return code: 0: return correctly 1100:Business exception Other: failure. Refer to the error code description
message	string	If code is not 0, there will be a corresponding error message
data	object	The returned data.

data list ☐

key	Type	Description
currentPage	int	The current page, same as page_no.
pageSize	int	Recordsin one page, same as page_size.
totalRecord	int	Total rows
result	array[object]	Data details

rows list ☐

key	Type	Description
imei	string	Imei of device
deviceName	string	Device name
faultCode	string	The fault code of the fault
faultDetail	string	Fault detailed description
eventTime	string	Time when the fault was reported

Correct return example ☐

```
{
  "code": 0,
```

```
"message": "success",
"result": null,
"data": {
  "currentPage": 1,
  "pageSize": 4,
  "startRow": 0,
  "endRow": 0,
  "totalRecord": 6,
  "totalPage": 0,
  "result": [
    {
      "imei": "202509999999994",
      "deviceName": "VL502_E-99994",
      "faultCode": "P1502",
      "faultDetail": "High speed state of the vehicle - the front axle is faster than the rear axle",
      "eventTime": "2024-07-03 08:16:49"
    },
    {
      "imei": "202509999999994",
      "deviceName": "VL502_E-99994",
      "faultCode": "B0074",
      "faultDetail": "2nd row center seat belt pretensioner - start control (sub-error)",
      "eventTime": "2024-07-03 08:26:49"
    },
    {
      "imei": "202509999999994",
      "deviceName": "VL502_E-99994",
      "faultCode": "P2407",
      "faultDetail": "Fuel evaporative emission system leak detection pump sensing circuit is
intermittent/unstable",
      "eventTime": "2024-07-03 08:36:49"
    },
    {
      "imei": "202509999999994",
      "deviceName": "VL502_E-99994",
      "faultCode": "U0464",
      "faultDetail": "Invalid data received from the navigation control module",
      "eventTime": "2024-07-03 08:46:49"
    }
  ]
}
```

```
{
"code": 1100 ,
"message": "Business exception " ,
"result": null ,
"data": null ,
}
```

7.55 Get the location of TAG device

7.55.1 Description

Query the latest location of TAG.

7.55.2 Request URL

[See the unique request URL.](#)

Method = jimi.device.location.getTagMsg

1.1.2 HTTP Request method

POST

7.55.3 Request parameters

☐ 1 [Common parameters](#)

☐ 2 ☐ private parameters as follow:

Parameter	Type	Required	Remark	Description
access_token	string	Yes	-	accesstoken: used for identifying legal third party
imeis	string	Yes	-	Imei of TAG device

7.55.4 Response

key	Type	Description
code	int	Return code: 0: return correctly 1100:Business exception Other: failure. Refer to the error code description
message	string	If code is not 0, there will be a corresponding error message
data	object	The returned data.

result list ☐

key	Type	Description
lng	double	Longitude
lat	double	Latitude
gpsTime	Long	GPS positioning time
directions	String	Number of satellites
gpsSpeed	int	Speed
positionType	String	GPS, LBS, WIFI,BEACON
gpsNum	int	Number of satellites

Correct return example ☐

```
{
  "code": 0,
  "message": "success",
  "result": [
    {
      "lng":113.943054,
      "lat":22.576609,
      "gpsTime":1734593340,
      "directions":"0",
      "gpsSpeed": -1.0,
```

```
        "positionType":"5",
        "gpsNum"  3
    }
  ]
}
```

Wrong return example

```
{
"code": 1100 ,
"message": "Business exception " ,
"result": null ,
"data": null ,
}
```

7.56 Create device group

7.56.1 Description

Add device groups.
Users can divide devices into different groups for easier management.

7.56.2 Request URL

[See the unique request URL.](#)
Method = jimi.device.group.create

7.56.3HTTP Request method

POST

7.56.4Request parameters

- 1 [Common parameters](#)
2 private parameters as follow:

Parameter	Type	Required	Remark	Description
access_token	string	Yes	-	accesstoken: used for identifying legal third party

account	string	Yes	-	The account that the created device group belongs to
group_name	string	Yes		group name

7.56.5Response

key	Type	Description
code	int	Return code: 0: return correctly 1100:Business exception Other: failure. Refer to the error code description
message	string	If code is not 0, there will be a corresponding error message
result	object	The returned data.

result ☐

Key	Type	scription
group_id	string	ID of the new device group
group_name	string	Name of the new device group

Correct return example ☐

```
{
  "code" : 0,
  "message" : "success" ,
  "result" : {
    "group_id" : "534d23f1b28c44319f4f8ba0cda5b7e6" ,
    "group_name" : "device group 1"
  }
}
```

7.57 Edit device group

7.57.1 Description

Edit device groups.

7.57.2 Request URL

[See the unique request URL.](#)

Method = jimi.device.group.update

7.57.3HTTP Request method

POST

7.57.4Request parameters

☐ 1 [Common parameters](#)

☐ 2 ☐ private parameters as follow:

Parameter	Type	Required	Remark	Description
access_token	string	Yes	-	accesstoken: used for identifying legal third party
group_id	string	Yes	-	ID of the device group being edited
group_name	string	Yes		Name of the device group being edited

7.57.5Response

key	Type	Description
code	int	Return code: 0: return correctly 1100:Business exception Other: failure. Refer to the error code description

message string If code is not 0, there will be a corresponding error message

Correct return example 

```
{
  "code" : 0,
  "message" : "success"
}
```

7.58 Delete device group

7.58.1 Description

Delete device groups.

7.58.2 Request URL

[See the unique request URL.](#)

Method = jimi.device.group.delete

7.58.3HTTP Request method

POST

7.58.4Request parameters

 1 [Common parameters](#)

 2  private parameters as follow:

Parameter	Type	Required	Remark	Description
access_token	string	Yes	-	accesstoken: used for identifying legal third party
group_id	string	Yes	-	ID of the device group being deleted

7.58.5Response

key	Type	Description
code	int	Return code: 0: return correctly 1100:Business exception Other: failure. Refer to the error code description
message	string	If code is not 0, there will be a corresponding error message

Correct return example ☐

```
{
  "code" : 0,
  "message" : "success"
}
```

7.59 Get device group list of an account

7.59.1 Description

Query the device groups of an account.

7.59.2 Request URL

[See the unique request URL.](#)

Method = jimi.device.group.list

7.59.3HTTP Request method

POST

7.59.4Request parameters

☐ 1 [Common parameters](#)

☐ 2 ☐ private parameters as follow:

Parameter	Type	Required	Remark	Description
-----------	------	----------	--------	-------------

access_token	string	Yes	-	accesstoken: used for identifying legal third party
account	string	Yes	-	The account that the device groups belong to

7.58.5Response

key	Type	Description
code	int	Return code: 0: return correctly 1100:Business exception Other: failure. Refer to the error code description
message	string	If code is not 0, there will be a corresponding error message
result	array[object]	The returned data.

rows list

key	Type	Description
group_id	string	ID of the new device group
group_name	string	Name of the new device group

Correct return example

```
{
  "code" : 0,
  "message" : "success" ,
  "result" : [
    {
      "group_id" : "b2ac10536171474eb0c151c7bb606f3d" ,
      "group_name" : "Default group"
    },
    {
      "group_id" : "298b949bacbb4badae597ba1fdb629be" ,
      "group_name" : "22221"
    }
  ]
}
```

```
        "group_id" : "05cbdd380ca14c2e89b2ab59904f51b7"      ,
        "group_name" : "CVCVXCV"
    }
]
}
```

8 Appendix

8.1 Device alarm type(alarm type Id)

The alarm type ID of the alarm type actively reported by the device is a number.

The alarm type ID of the alarm generated after platform logic judgment is English text.

alertTypeId	alertType
1	SOS alert
10	Enter GPS blind zone alert
100	Cancel Notification for Temperature Alert
101	Cancel Notification for Collision Alert
11	Exit GPS blind zone alert
113	Increase in oil level
114	Install alert
115	Oil Sence Timeout
119	High voltage at ADC1
12	Booting notification
120	Low voltage at ADC1
126	High humidity
127	Low humidity
128	DVR vibration alert
13	GPS first fix notification
135	Overspeed alert(DVR)
136	Power off alert(DVR)
138	Immobilization ON
139	Immobilization OFF
14	Low external power alert
140	Close eyes Alert
141	Switch Land Transport Mode Alarm
142	Environmental Anomaly Alarm

143	Distraction Alert
144	Sudden Acceleration Alert(DVR)
145	Sudden Deceleration Alert(DVR)
146	Sharp Turn Alert(DVR)
147	Collision Alert(DVR)
148	No Face Alert
149	Switch Ocean Transport Mode Alarm
15	Low power protection alert
150	Switch Static Transport Mode Alarm
151	Phone Calling Alert
154	Smoking Alert
16	Sim card change alert
160	Yawn Alert
163	Head lowered
165	RFID reporting event
168	Engine failure
169	Undervoltage
17	Power off alert
170	Drinking
171	Light detected alert
172	Bluetooth MAC searched
173	Bluetooth MAC lost
18	Airplane mode after low power protection
19	Disassembly alert
191	Device Plug-out Alert
197	Engine ON
198	Engine OFF
199	Overtime driving alert
2	Power cut off alert
20	Door detection alert
202	overspeed warning
203	Overtime parking warning
204	Forward collision warning
205	Lane departure warning
206	Vehicle too close warning
207	pedestrian collision warning
208	DMS fatigue warning
21	Battery low power shutdown
22	Voice alarm
224	Device Plug-in Alert

227	Overheating
230	INPUT1 was activated
231	INPUT1 was deactivated
232	INPUT2 was activated
233	INPUT2 was deactivated
24	Cover Move Alert
25	Internal low battery alert
254	Ignition on
256	Fence entry alarm (Bluetooth)
257	Exit fence alarm (Bluetooth)
258	Fence entry alarm (WIFI)
259	Exit fence alarm (WIFI)
260	long periods of stillness
261	Start exercise reminder
262	Stop exercise reminder
263	LTE Jamming Detected
266	LTE Jamming Ended
267	GPS Jamming Detected
268	GPS Jamming Ended
28	Door open alert
29	Door close alert
3	Vibration alert
35	Fall Alert
36	Plug in charger
39	Unauthorized Open Alert
4	Enter geo-fence(terminal)
40	Initiative Offline(Power Off) Alert
41	Sudden Acceleration Alert
42	Sharp Turn Left Alert
43	Sharp Turn Right Alert
44	Collision Alert
45	Vehicle Turn Over Alarm
48	Sudden Deceleration Alert
5	Exit geo-fence(terminal)
50	Device Pull Out Alarm
55	Collision Alert
58	Cancel Notification for Unauthorized Open Alert
6	Overspeed alert(terminal)
71	Fatigue driving alert
76	Sharp turn alarm

77	Abrupt lane switching alarm
78	Vehicle stability
79	Vehicle angle abnormality
80	Door close alert
81	Door open alert
82	Temperature Alert
83	Stealing oil alarm
86	Start charging
87	Stop charging/remove charger
89	full of reminders
9	Displacement alert(terminal)
90	Low battery alert
91	High Temperature Alert(terminal)
92	Low Temperature Alert(terminal)
ACC_OFF	ACC OFF
ACC_ON	ACC ON
burglarStatus_0	Disarm
burglarStatus_1	Arm
burglarStatus_2	Alert
carFault	Vehicle fault alert
displacementAlarm	Night Driving Alert
DMSAlert	DMS Alert
drivingBehaviorAlert	Driving Behavior Alert
drivingBehaviorAlertDVR	Driving Behavior Alert(DVR)
fenceOverspeed	Fence Overspeed alert
geozone	Geo-fence alert
high_temp_alarm	High Temperature Alert(platform)
in	Enter geo-fence
laneshift	Route Deviation Alert
low_temp_alarm	Low Temperature Alert(platform)
mileageAlarm	Maintenance alert
obd	OBD alert
offline	Offline alert
other	Other alerts
out	Exit geo-fence
overSpeed	Overspeed alert(platform)
sensitiveAreasFence	Sensitive areas fence
statusLeftFrontDoors_0	Left front door close
statusLeftFrontDoors_1	Left front door open
statusLeftFrontWindows_0	Left front window close

statusLeftFrontWindows_1	Left front window open
statusLeftRearWindows_0	Left rear door close
statusLeftRearWindows_1	Left rear door open
statusRightFrontDoors_0	Right front door close
statusRightFrontDoors_1	Right front door open
statusRightFrontWindows_0	Right front window close
statusRightFrontWindows_1	Right front window open
statusRightRearDoors_0	Right rear door close
statusRightRearDoors_1	Right rear door open
statusRightRearWindows_0	Right rear window close
statusRightRearWindows_1	Right rear window open
statusTrunk_0	Trunk close
statusTrunk_1	Trunk open
stayAlert	Parking alert
stayAlertOn	Idling alert
stayTimeIn	Long time not enter the Geo-fence
stayTimeOut	Long time not exit the Geo-fence
ubiAcce	Harsh acceleration
ubiColl	Collision
ubiDece	Harsh braking
ubiLane	Sudden lane change
ubiRoll	Rollover
ubiSatt	Roll and pitch
ubiStab	Skidding
ubiTurn	Harsh cornering