

## NahamStore: Setup


### Intro

The first thing that we must do is setting up our attacker machine adding an entry into our **/etc/hosts** with the IP Address and the domain name.

```
GNU nano 8.7
127.0.0.1    localhost
127.0.1.1    kali.kali    kali

# The following lines are desirable for IPv6 capable hosts
::1         localhost ip6-localhost ip6-loopback
ff02::1     ip6-allnodes
ff02::2     ip6-allrouters
10.65.170.203 nahamstore.thm
```

If we access to the domain name “***nahamstore.thm***” on our browser we must see this

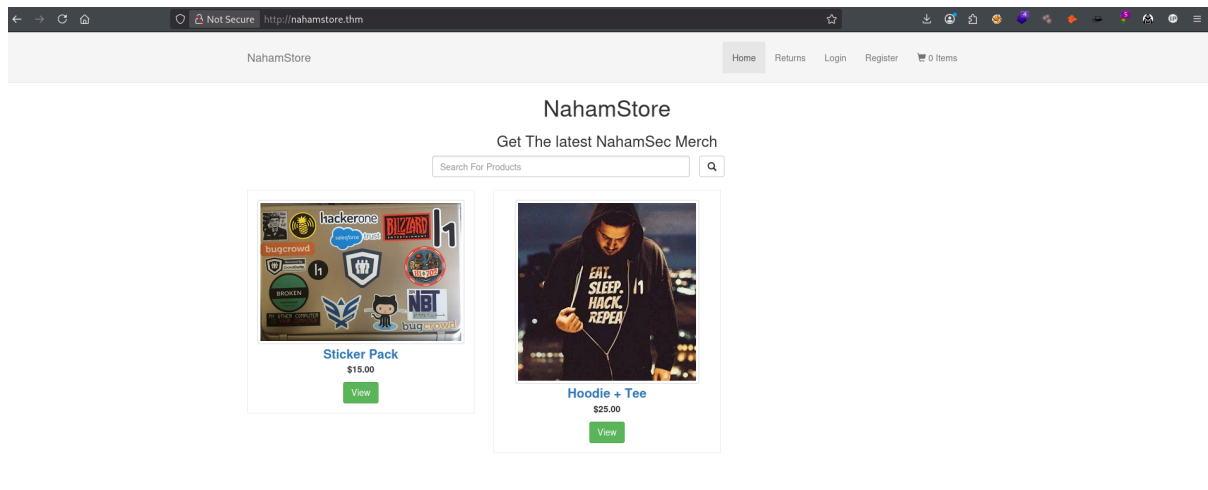

Now we are ready to continue