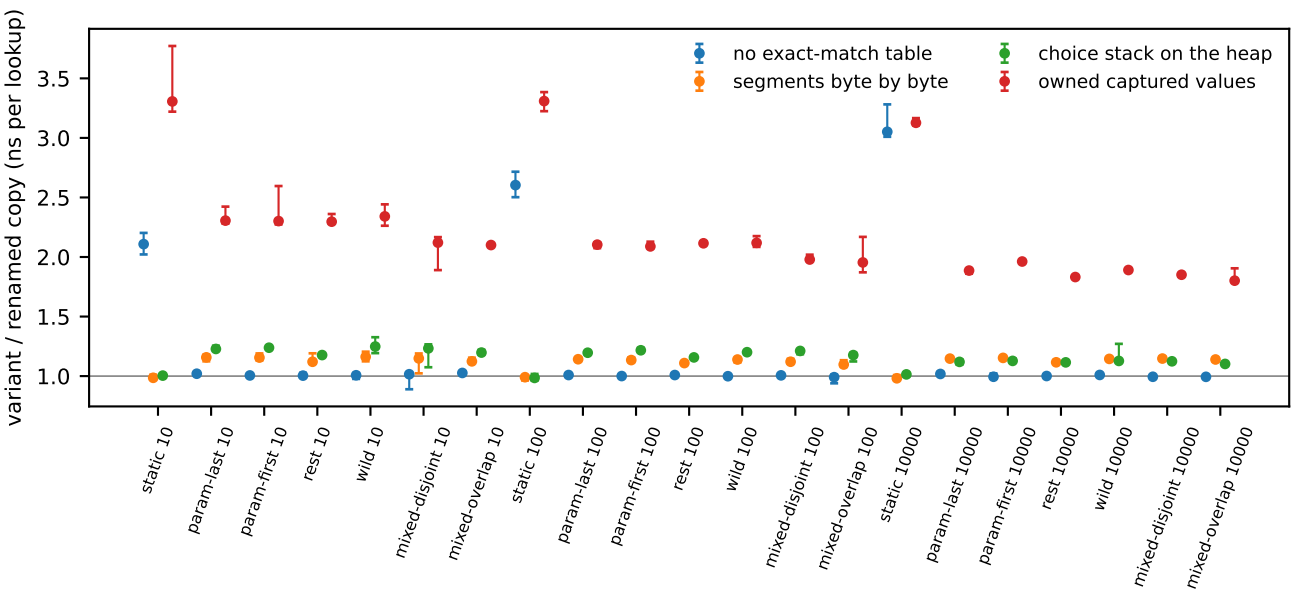
variant / renamed copy (ns per lookup)
3.5
3.0
2.5
2.0
1.5
1.0
no exact-match table
segments byte by byte
choice stack on the heap
owned captured values
static 10
param-last 10
param-first 10
rest 10
wild 10
mixed-disjoint 10
mixed-overlap 10
static 100
param-last 100
param-first 100
rest 100
wild 100
mixed-disjoint 100
mixed-overlap 100
static 10000
param-last 10000
param-first 10000
rest 10000
wild 10000
mixed-disjoint 10000
mixed-overlap 10000