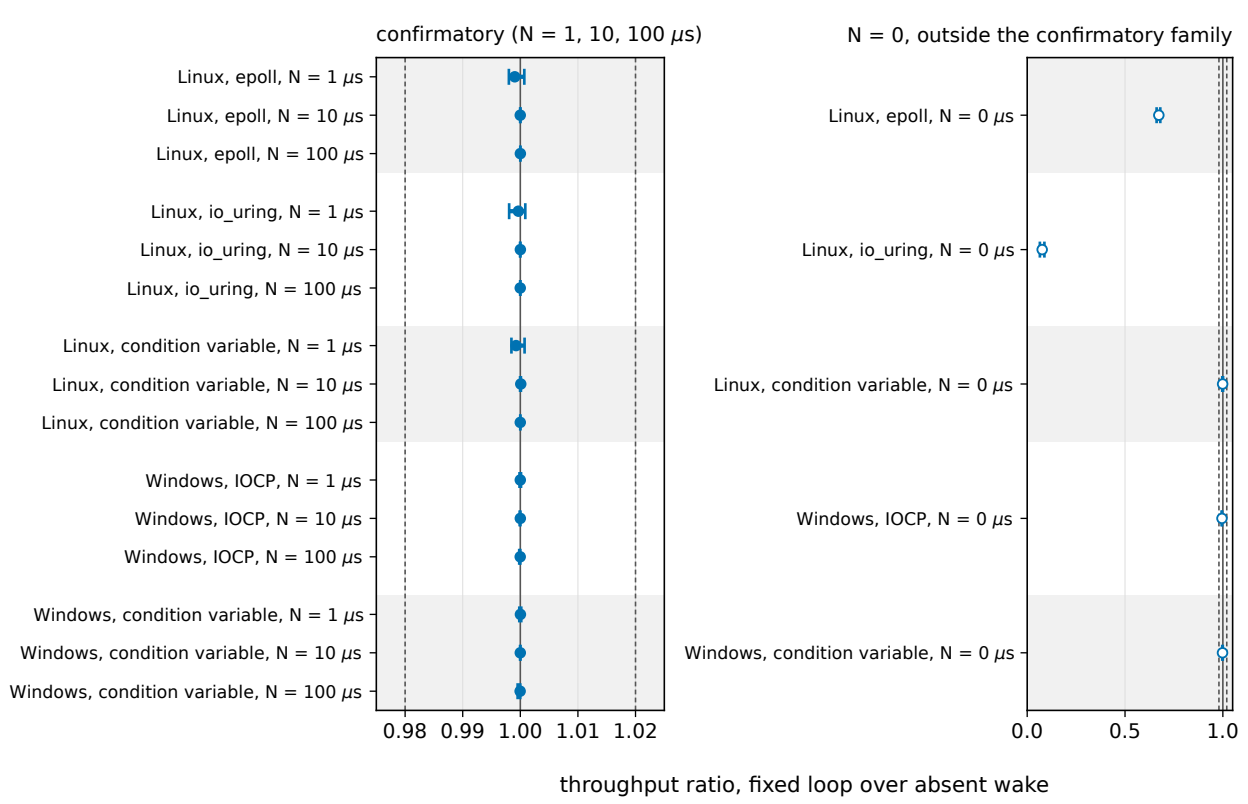
confirmatory (N = 1, 10, 100 μs)
N = 0, outside the confirmatory family
Linux, epoll, N = 1 μs
Linux, epoll, N = 10 μs
Linux, epoll, N = 100 μs
Linux, io_uring, N = 1 μs
Linux, io_uring, N = 10 μs
Linux, io_uring, N = 100 μs
Linux, condition variable, N = 1 μs
Linux, condition variable, N = 10 μs
Linux, condition variable, N = 100 μs
Windows, IOCP, N = 1 μs
Windows, IOCP, N = 10 μs
Windows, IOCP, N = 100 μs
Windows, condition variable, N = 1 μs
Windows, condition variable, N = 10 μs
Windows, condition variable, N = 100 μs
Linux, epoll, N = 0 μs
Linux, io_uring, N = 0 μs
Linux, condition variable, N = 0 μs
Windows, IOCP, N = 0 μs
Windows, condition variable, N = 0 μs
0.98
0.99
1.00
1.01
1.02
0.0
0.5
1.0
throughput ratio, fixed loop over absent wake
median pair ratio, confirmatory (N = 1, 10, 100)
median pair ratio, N = 0, outside the family
clustered 95% interval of the mean pair ratio
equivalence margins, 0.98 and 1.02