carpet_hold → table: interventions (sim)

Reward per step (1-min mean)

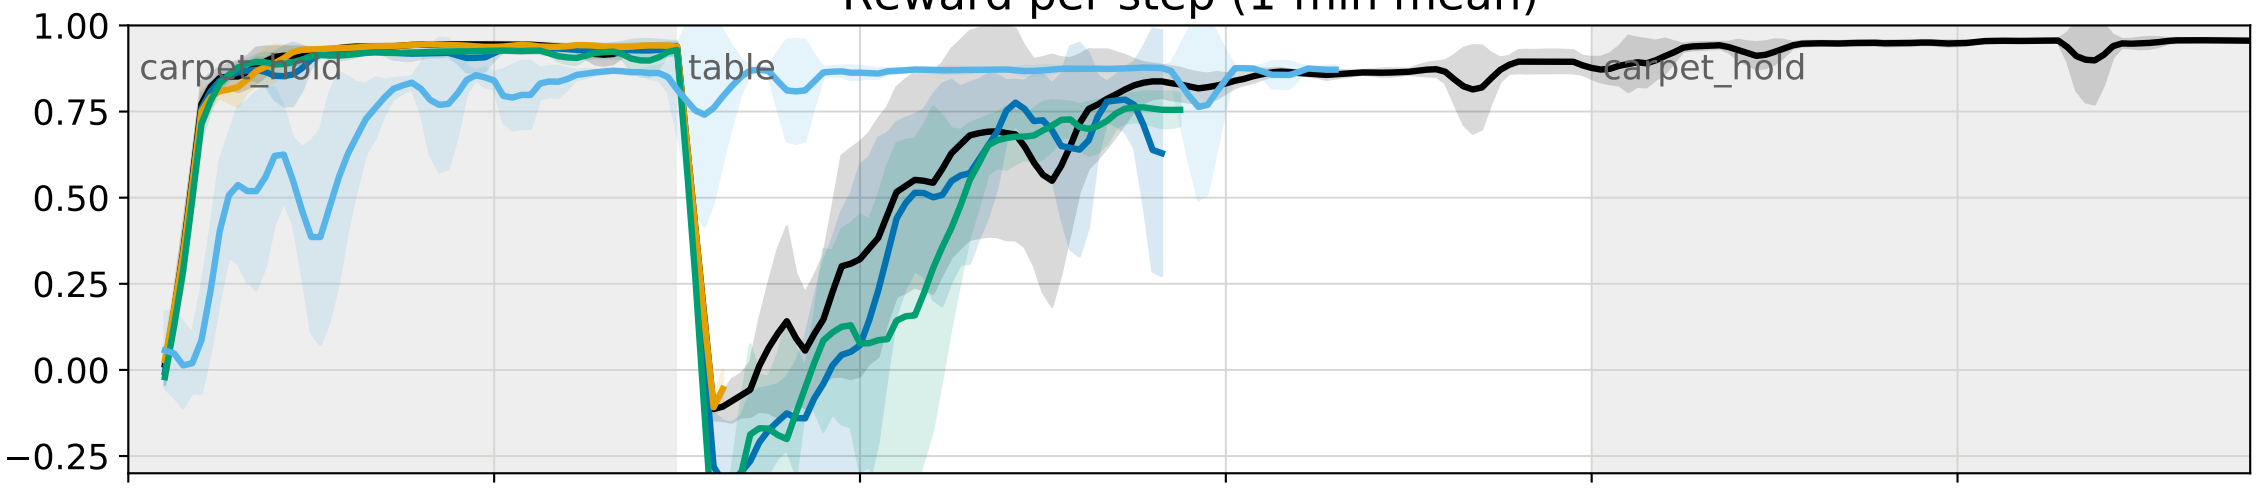

Time at a bumper

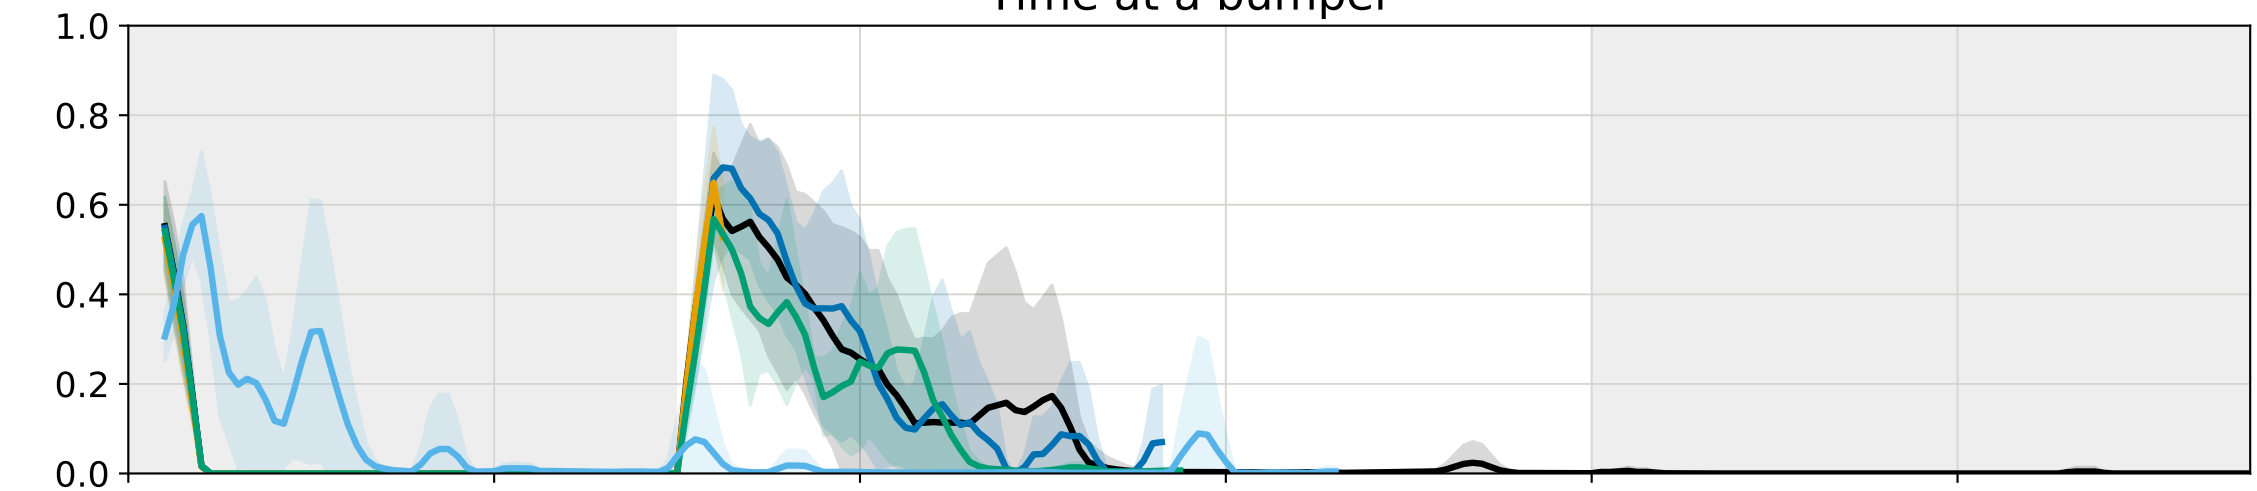

Median |wheel speed| (phone mm/s)

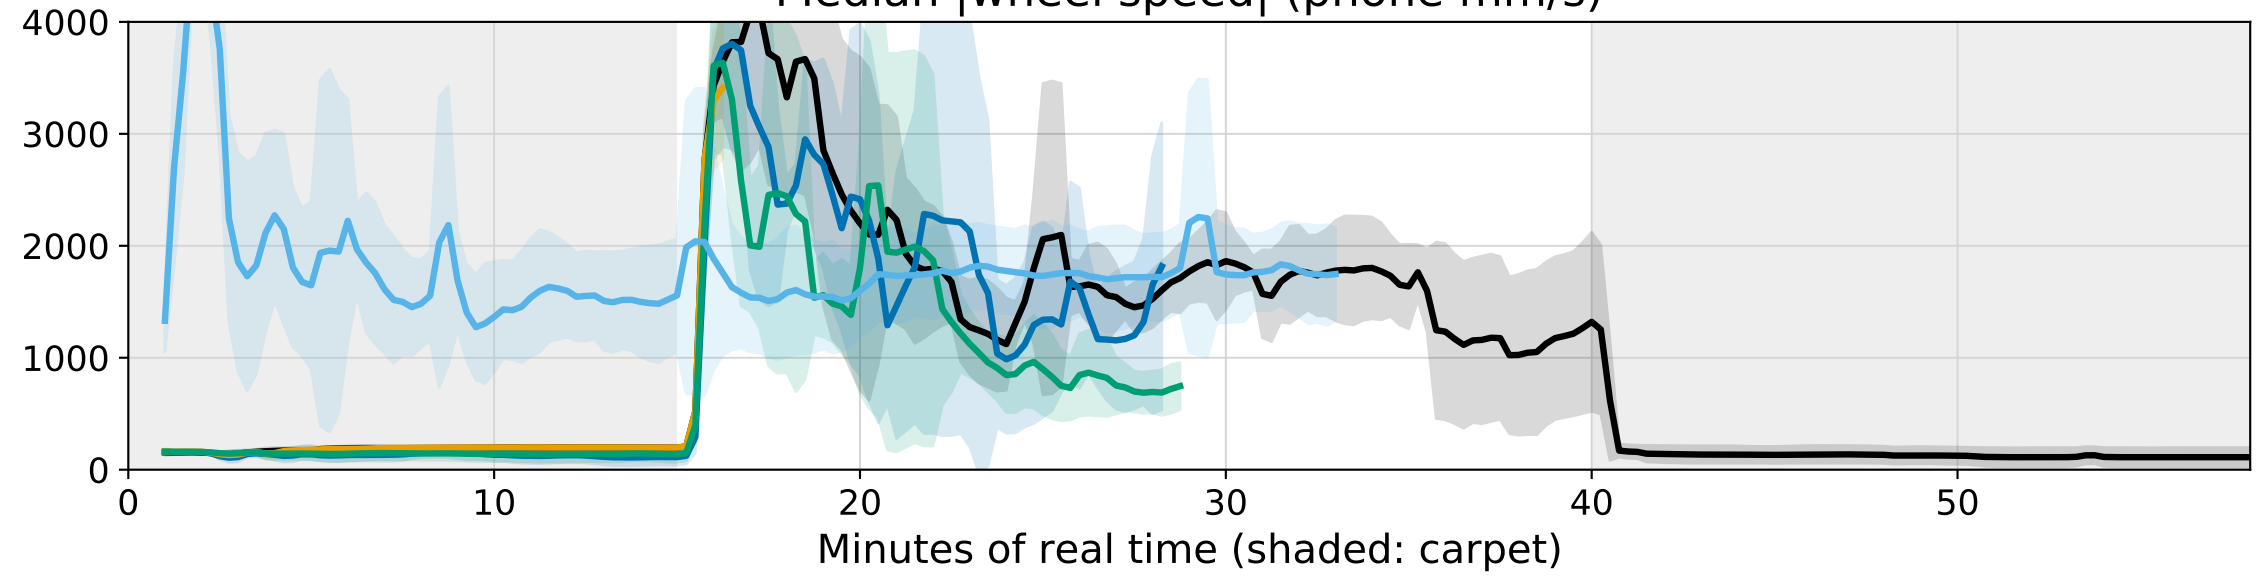

carpet_hold → table (n=6)
L2-init 3e-1 (n=5)
fresh table (n=7)
wd 1e-1 (n=5)
replay 1e6 (n=5)