



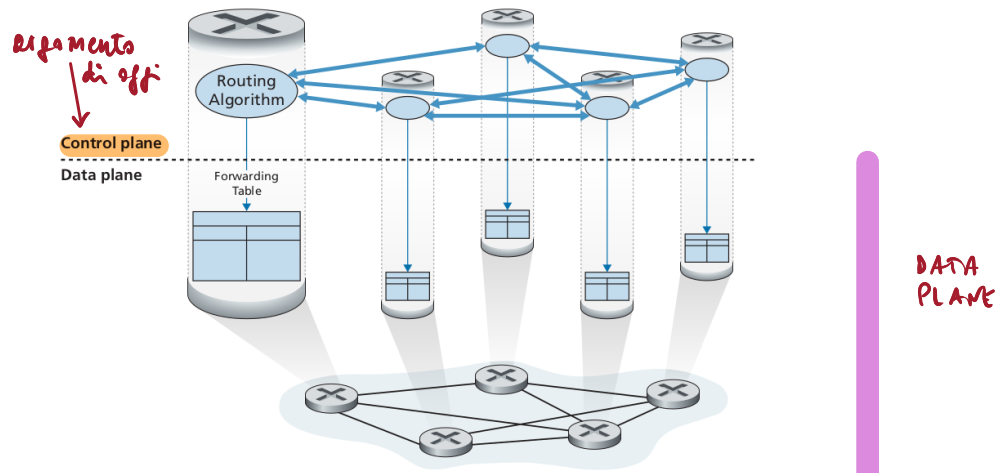


Figure 5.1 ♦ Per-router control: Individual routing algorithm components interact in the control plane

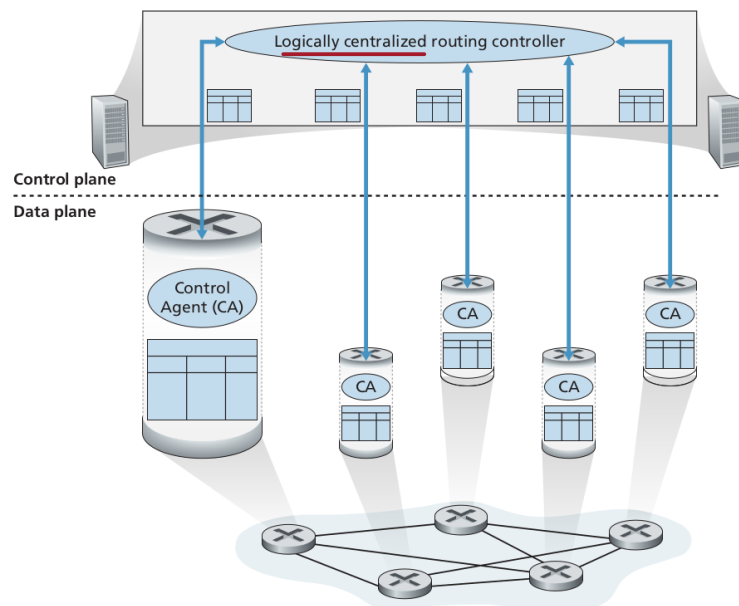

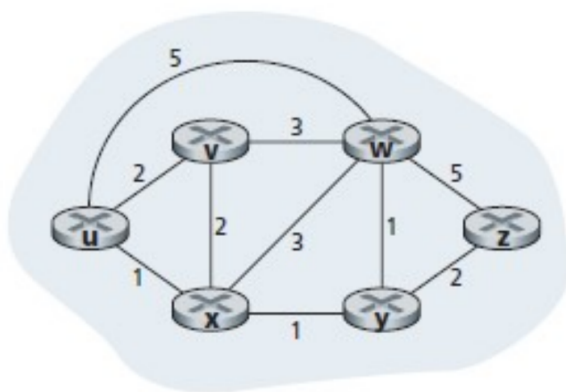

Grafo: (N, E)

E : relazione binaria

$$E \subseteq N \times N$$

SIMMETRICO $(x, y) \in E \Rightarrow (y, x) \in E$

ES. $c(x, w) = c(w, x) = 3$ COSTO

$$\pi = (u, x, w)$$

$$c(\pi) = c(u, x) + c(x, w)$$


in generale

$$\pi = (x_1, \dots, x_p)$$

$$c(\pi) = \sum_{i=1}^{p-1} c(x_i, x_{i+1})$$

DISTANCE VECTOR (DV)

Bellman-Ford

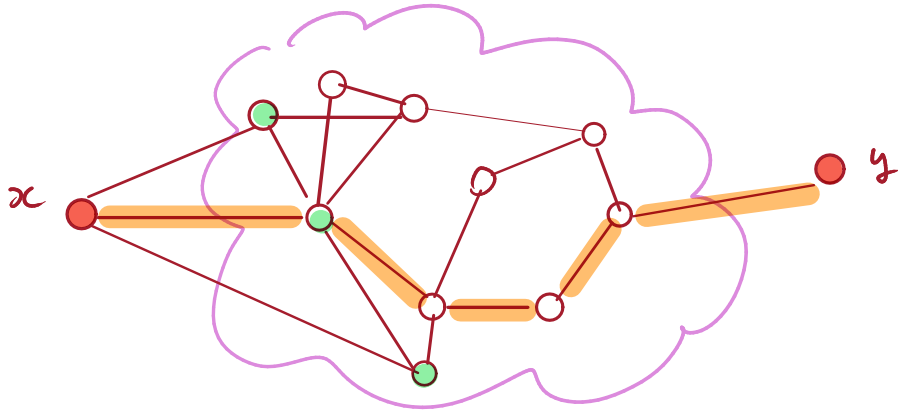


v : generico nodo adiacente a x

$$\min_v \{c(x, v) + d_v(y)\} = d_x(y)$$

$$v_1: \quad c(x, v_1) + d_{v_1}(y)$$

$$v_2: \quad c(x, v_2) + d_{v_2}(y)$$

$$v_3: \quad c(x, v_3) + d_{v_3}(y)$$

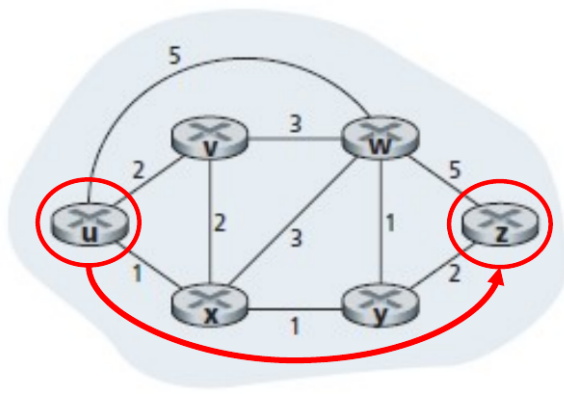

$$D_u$$

u	-
v	2
x	1
y	∞
w	5
z	∞

 D_y

u	∞
v	∞
x	1
y	-
w	1
z	2

 x
 D_x

u	1
v	2
x	-
y	1
w	3
z	∞



u	1
v	2
x	-
y	1
w	2
z	3

$$D_x(z) = c(x, y) + D_y(z)$$

 u

u	-
v	2
x	1
y	2
w	3
z	4

$$D_u(w) = c(u, x) + D_x(w)$$

$$D_u(z) = c(u, x) + D_x(z)$$