


## Router Initial Configuration: 1.Router modes, Interface ip configuration, console username and password configuration

```
Router>
Router>enable
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#exit
Router#
*Aug 17 19:21:00.471: %SYS-5-CONFIG_I: Configured from console by console
Router#show ip interface brief
Interface                IP-Address      OK? Method Status              Protocol
Ethernet0/0              unassigned      YES unset    administratively down down
Ethernet0/1              unassigned      YES unset    administratively down down
Ethernet0/2              unassigned      YES unset    administratively down down
Ethernet0/3              unassigned      YES unset    administratively down down
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface Ethernet 0/0
Router(config-if)#ip address 50.0.0.1 255.0.0.0
Router(config-if)#no shutdown
Router(config-if)#
*Aug 17 19:24:11.303: %LINK-3-UPDOWN: Interface Ethernet0/0, changed state to up
*Aug 17 19:24:12.303: %LINEPROTO-5-UPDOWN: Line protocol on Interface Ethernet0/0, changed state to up
Router(config-if)#exit
Router(config)#exit
Router#sh
*Aug 17 19:24:41.399: %SYS-5-CONFIG_I: Configured from console by console
Router#show ip interface brief
Interface                IP-Address      OK? Method Status              Protocol
Ethernet0/0              50.0.0.1        YES manual  up                  up
Ethernet0/1              unassigned      YES unset    administratively down down
Ethernet0/2              unassigned      YES unset    administratively down down
Ethernet0/3              unassigned      YES unset    administratively down down
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#username makeah password makeah
Router(config)#line console 0
Router(config-line)#login local
Router(config-line)#exit
Router(config)#exit
Router#
*Aug 17 19:28:17.070: %SYS-5-CONFIG_I: Configured from console by console
Router#exit
```

## 2.console login using username and password and disabling login local

```
Press RETURN to get started.  
  
User Access Verification  
Username: mukeesh  
Password:  
Router>enable  
Router#configure terminal  
Enter configuration commands, one per line. End with CNTL/Z.  
Router(config)#line console 0  
Router(config-line)#no login local  
Router(config-line)#exit  
Router(config)#exit  
Router#  
*Aug 17 19:29:17.961: %SYS-5-CONFIG_I: Configured from console by mukeesh on console  
Router#exit
```

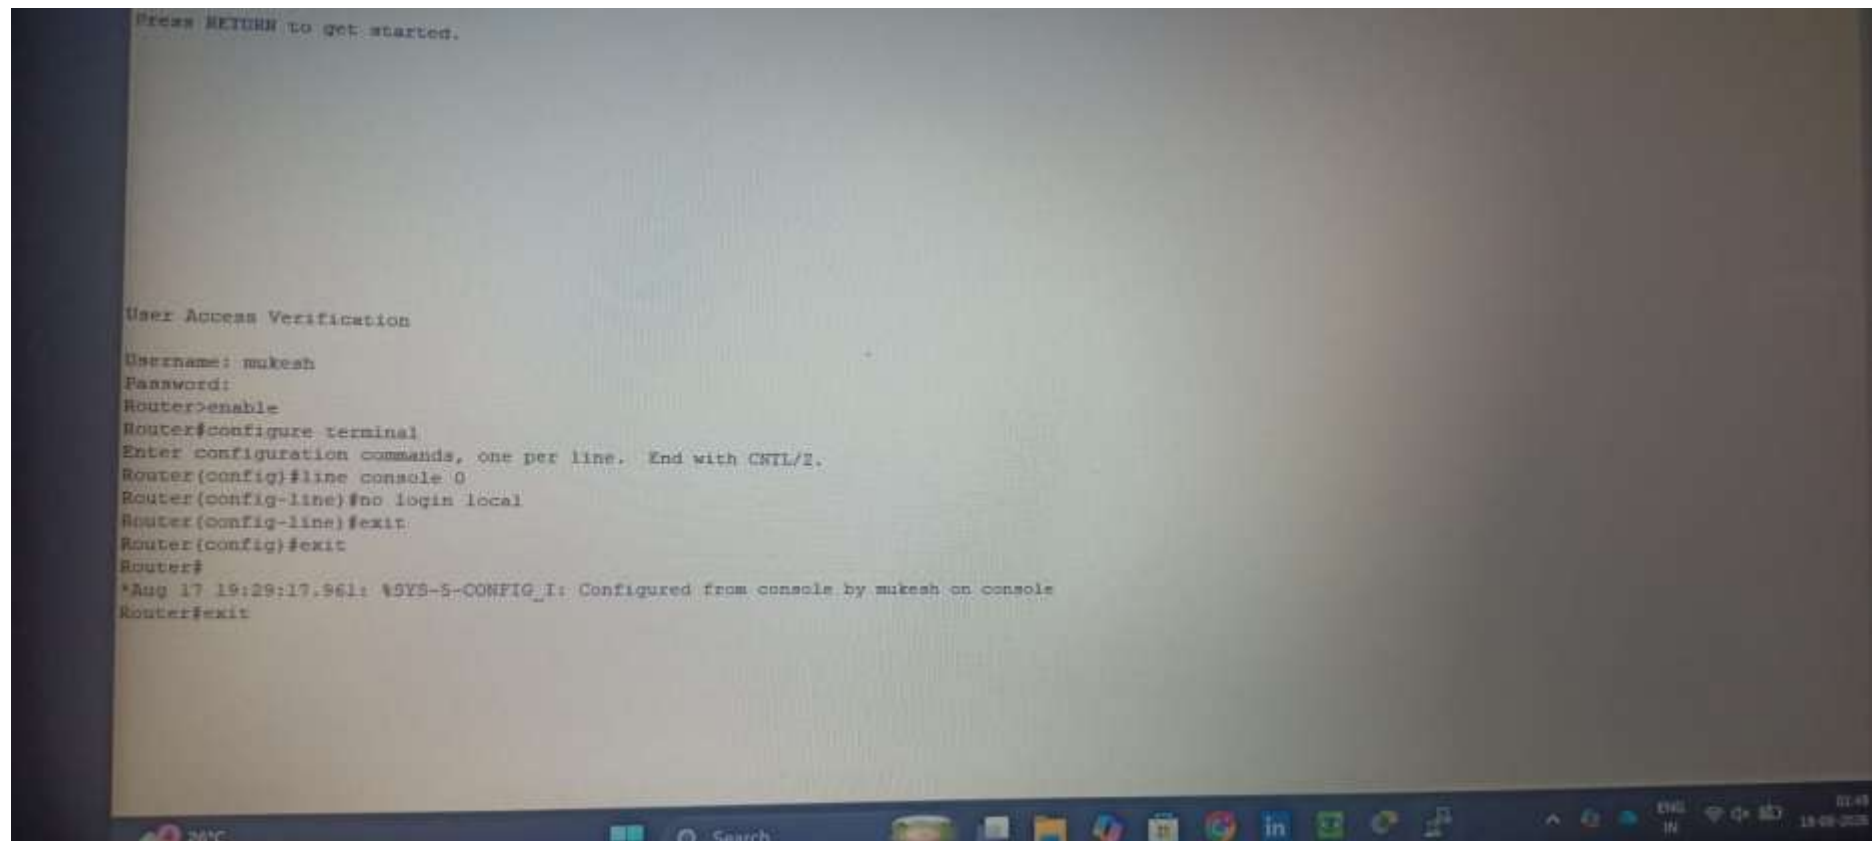

### 3.console password configuration

Press RETURN to get started.

```
Router>enable
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#line console 0
Router(config-line)#password anand
Router(config-line)#login
Router(config-line)#exit
Router(config)#exit
Router#
*Aug 17 19:30:39.820: %SYS-5-CONFIG_I: Configured from console by console
Router#exit
```

## 4.console password login and disabling login

Press RETURN to get started.

User Access Verification

Password:

Router>enable

Router#configure terminal

Enter configuration commands, one per line. End with CNTL/Z.

Router(config)#line console 0

Router(config-line)#no login

Router(config-line)#exit

Router(config)#exit

Router#exit

\*Aug 17 19:31:40.570: %SYS-5-CONFIG\_I: Configured from console by console


Router#exit

## 5.Privileged execution mode password configuration

```
Router>show is now available

Press RETURN to get started.


Router>enable
Router#configure terminal
Enter configuration commands, one per line. End with CTRL/Z.
Router(config)#enable secret dinesh
Router(config)#exit
Router#
*Aug 17 18:33:45.120: %SYS-5-CONFIG_I: Configured from console by console
Router#exit
```

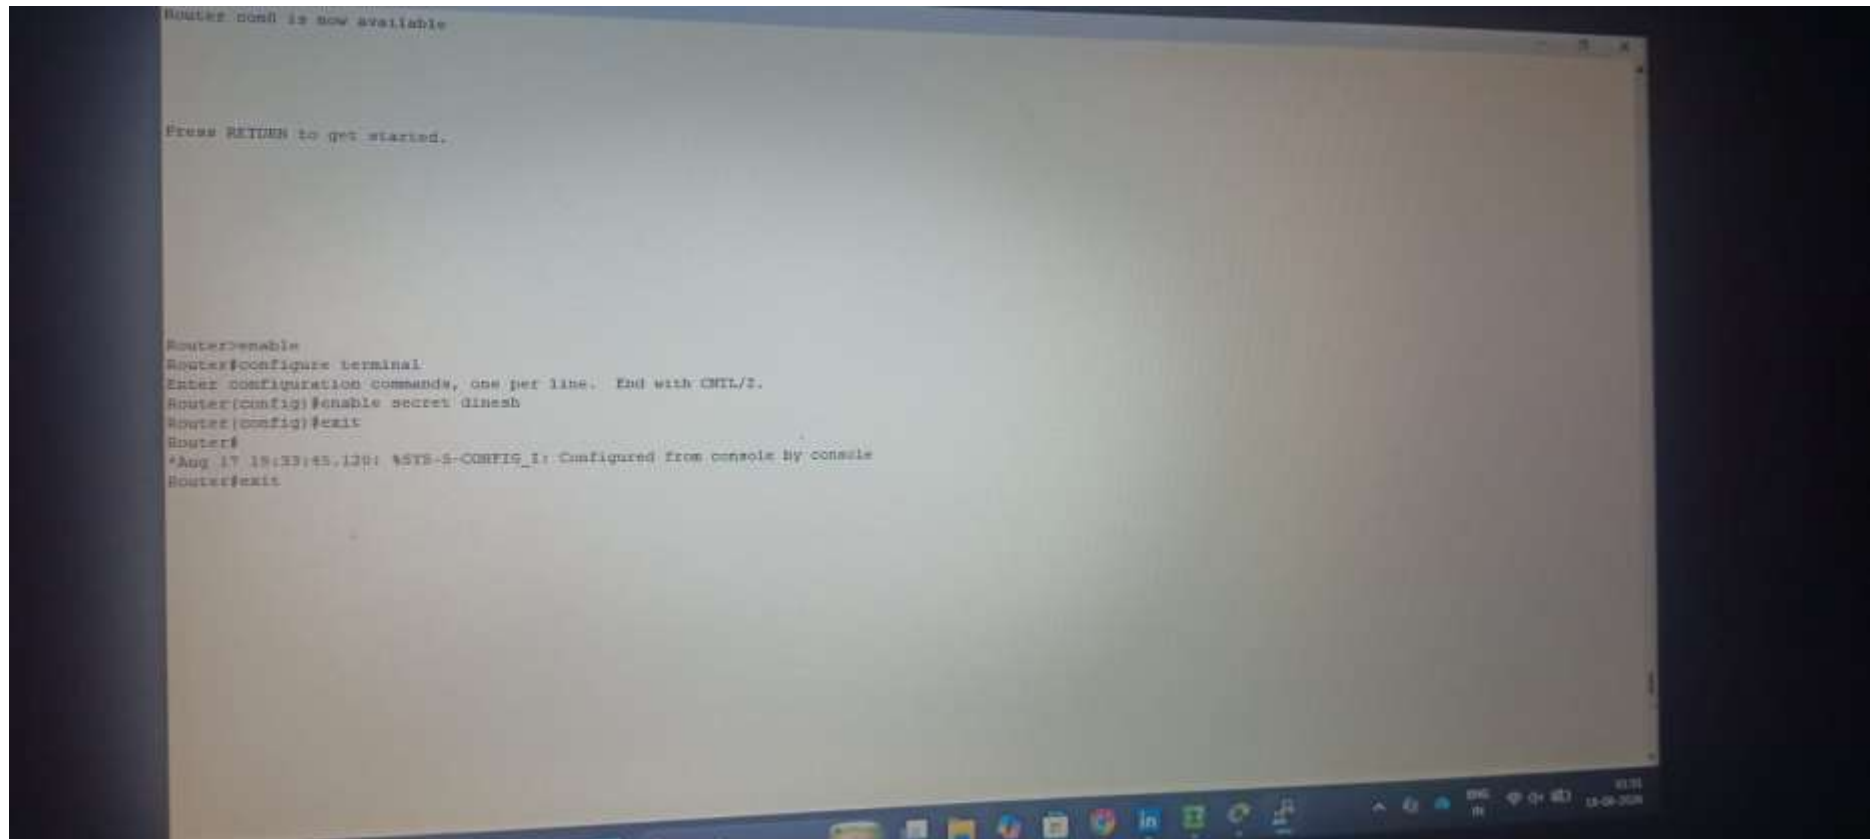A screenshot of a computer monitor displaying a Cisco IOS terminal session. The terminal window has a title bar with standard window controls. The text on the screen shows the user entering 'enable' to reach privileged EXEC mode, then 'configure terminal' to enter global configuration mode. The user then sets the enable password to 'dinesh' using the 'enable secret' command. After exiting configuration mode, a system message is displayed: '\*Aug 17 18:33:45.120: %SYS-5-CONFIG\_I: Configured from console by console'. Finally, the user exits the terminal session with the 'exit' command. The Windows taskbar is visible at the bottom of the screen, showing various application icons and the system clock.

## 6.Privileged Execution mode password login , Telnet enabling and password Setup for telnet

```
Router>enable
Password:
Router#show ip interface brief
Interface                IP-Address      OK? Method Status        Protocol
Ethernet0/0              50.0.0.1        YES manual up            up
Ethernet0/1              unassigned      YES unset  administratively down down
Ethernet0/2              unassigned      YES unset  administratively down down
Ethernet0/3              unassigned      YES unset  administratively down down
Router#
Router#
Router#
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#line vty 0 4
Router(config-line)#transport input telnet
Router(config-line)#password eashwar
Router(config-line)#exit
Router(config)#exit
Router#
*Aug 17 19:42:01.750: %SYS-5-CONFIG_I: Configured from console by console
Router#exit
```

## 7.taking router telnet from 50.0.0.10 pc using putty

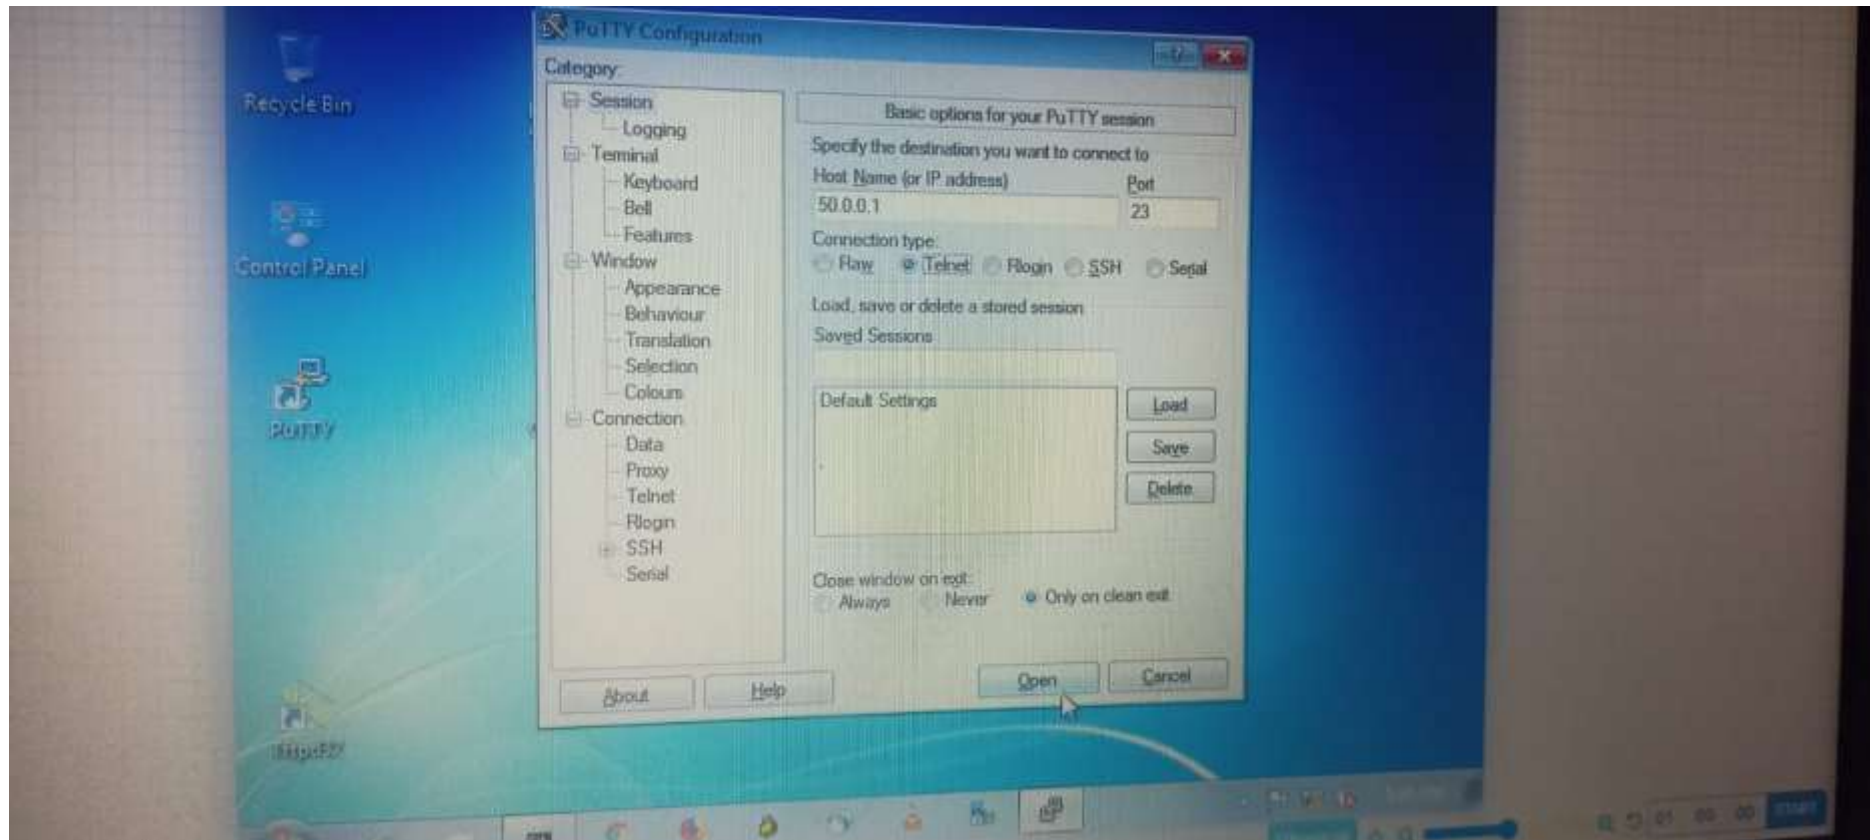

## 8.Telnet login and privileged mode authentication

