


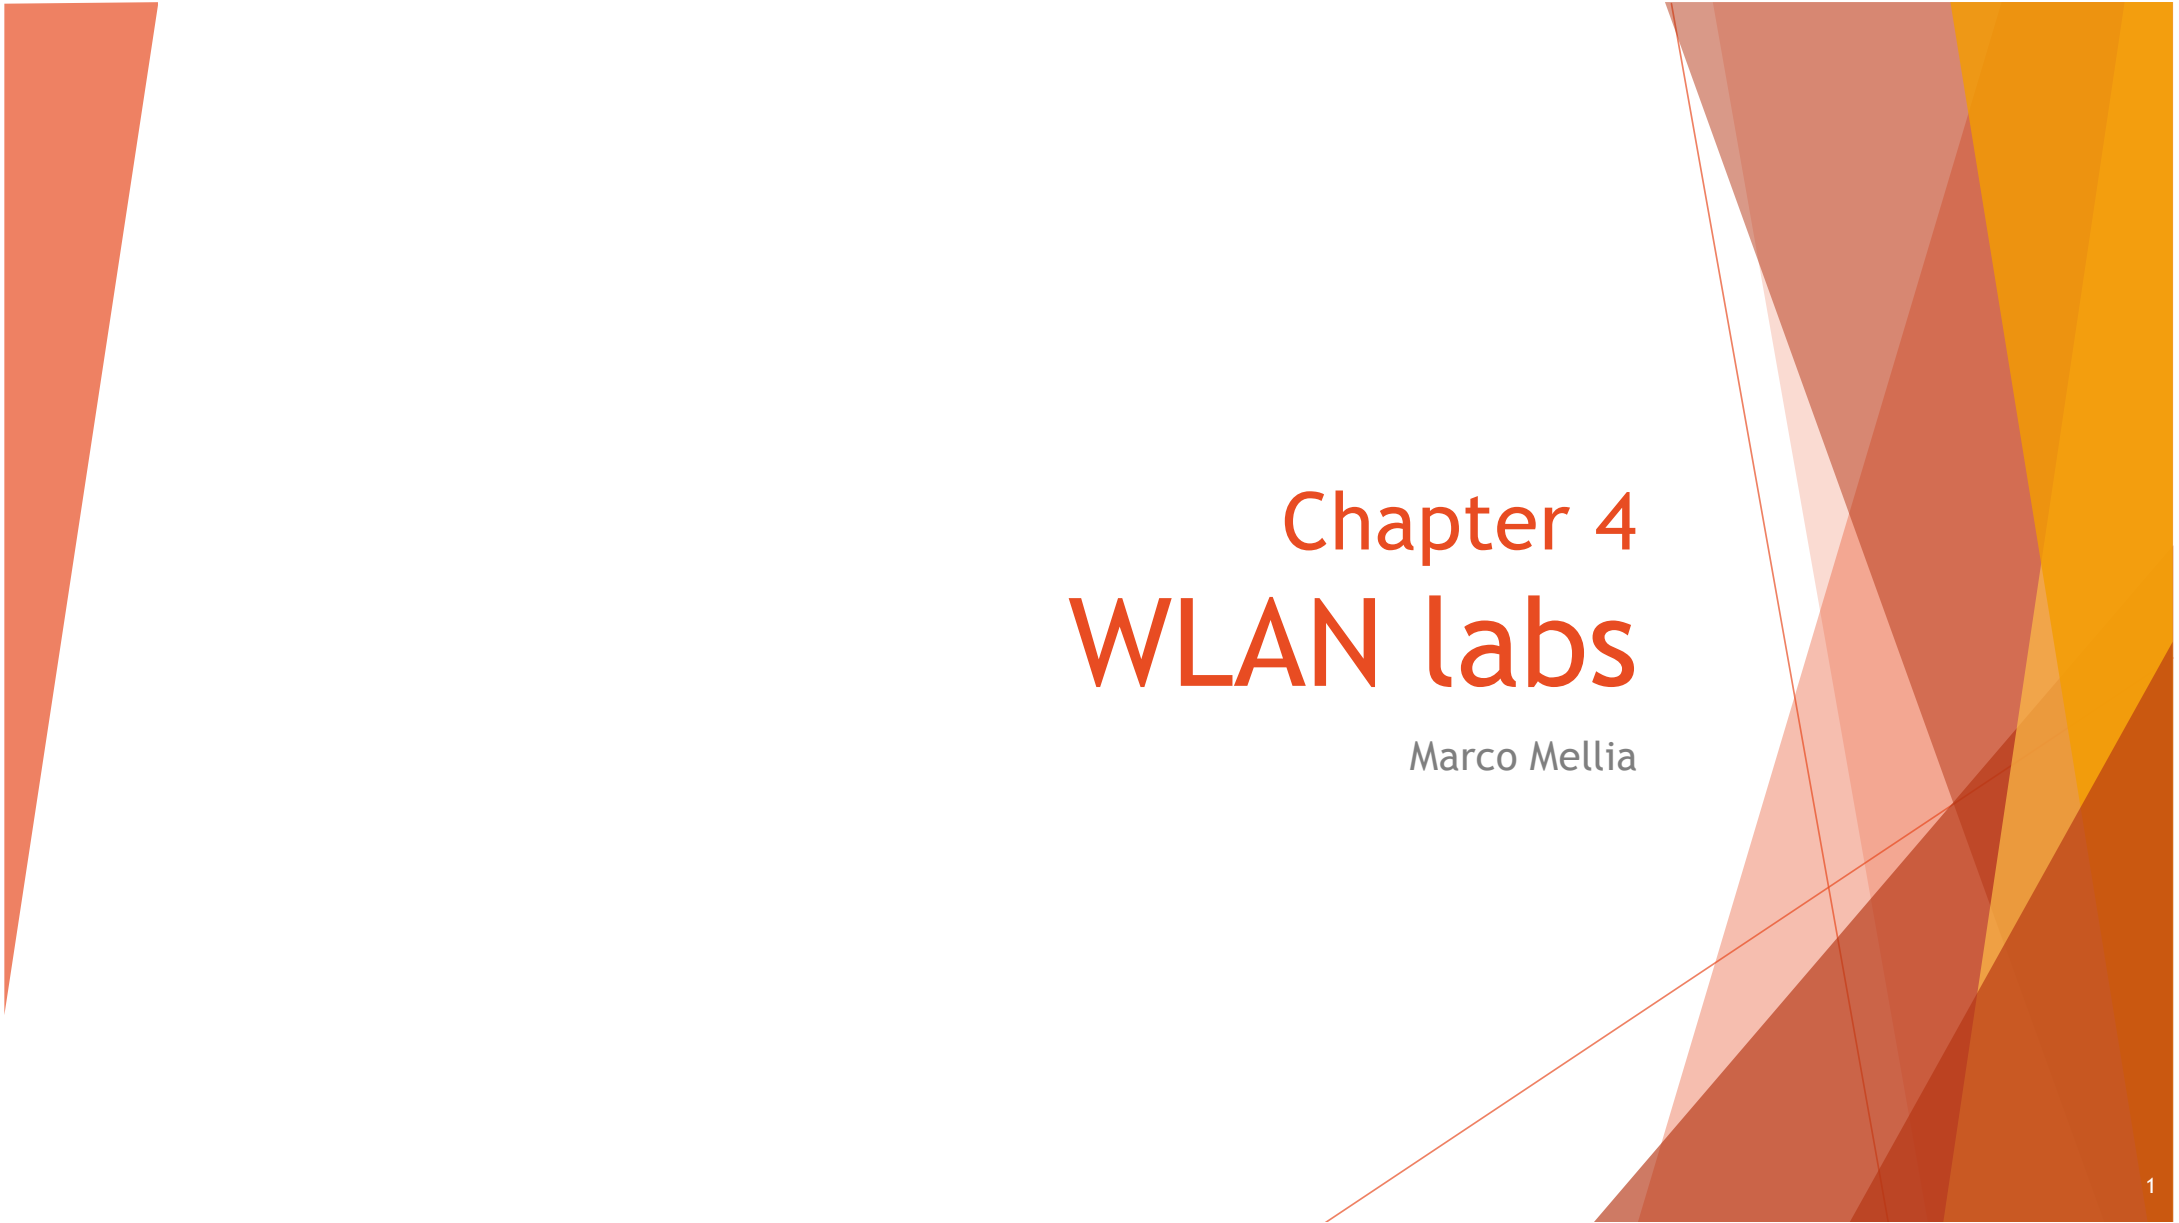

# Chapter 4

# WLAN labs

Marco Mellia

# Lab requirements

- ▶ Your laptop with WiFi card, your mobile phone, an open and/or a WPA-personal AP
- ▶ Linux OS
  - ▶ Kali Linux or any other distro, with installed the tools below
- ▶ MacOS
  - ▶ It may work also with the standard Apple Airport interface (WiFi)
  - ▶ Use homebrew to install tools - <https://brew.sh>
- ▶ Windows
  - ▶ You can try but don't ask
- ▶ Tools:
  - ▶ iperf and/or iperf3 - <https://sourceforge.net/projects/iperf2/> or <https://iperf.fr>
  - ▶ Wireshark to capture packets and filter packets - <https://www.wireshark.org>
    - ▶ tcpdump to force wifi in monitor mode - <https://www.tcpdump.org> - if WiFi driver is picky
  - ▶ aircrack-ng - to capture and inject packets in the network - <https://aircrack-ng.org>
    - ▶ Check <http://aircrack-ng.org/doku.php?id=aireplay-ng> for details
  - ▶ hashcat - to crack passwords - <https://hashcat.net/hashcat/>
  - ▶ zizzania - <https://github.com/cyrus-and/zizzania> [may not work]
  - ▶ Plenty of tools/tutorials



# Part 1 - WiFi performance test

VM is not reliable on clock, that is why on VM we have higher bitrate wrt the one measured in the terminal. Both have been exchanging datas for 10 s, but on VM we read 9 sec.

## Part 1 - WiFi performance test

- ▶ Setup a simple testbed where you have two hosts:

- ▶ Both hosts connected via Ethernet
- ▶ One host connected via Ethernet, one connected via WiFi
- ▶ Both hosts connected via WiFi



- ▶ Check the configuration of the hosts

- ▶ Ethernet speed

- ▶ Linux: `ethtool eth0`
- ▶ MacOS: `ifconfig -v -n en1` # -v => verbose mode; -m => list supported media
- ▶ Windows: `Get-NetAdapter` [from an admin powershell]

- ▶ WiFi speed

- ▶ Linux: `iw dev wlan0 link` or `iwconfig wlan0`
- ▶ MacOS: `sudo wdutil info` or option + click on WiFi icon
- ▶ Windows: `netsh wlan show interfaces` [from an admin powershell]

Always better measure on the receiver



# Expected Goodput

- ▶ Goodput:

$G = \text{Useful data at the Application Layer} / \text{Time to complete the transfer}$

- ▶ Maximum efficiency


- ▶ Using TCP, on Ethernet  $\mu_{\text{TCP}} = (1460) / (1460 + 20 + 20) + 38 = 0.949$
- ▶ Using UDP, on Ethernet  $\mu_{\text{udp}} = (1472) / (1472 + 8 + 20) + 38 = 0.957$
- ▶ Using TCP, on Half Duplex Ethernet link  $\mu_{\text{TCP-HD}} = (1460) / [(1460 + 20 + 20 + 38) + (20 + 20 + 6 + 38)] = 0.900$ 
  - ▶ Question: what about TCP options like Timestamp, SACK, MSS, Window Scaling?
  - ▶ Question: what if you use IPv6?
- ▶ On WiFi, depends on the configuration. Use the efficiency plot shown during classes
  - ▶  $\mu_{\text{TCP}} < 0.5$
  - ▶  $\mu_{\text{udp}} < 0.55$

- ▶ Given the capacity  $C$  of the *bottleneck* link, then

$$G < \mu C$$

# How to measure the goodput with iperf

► Run a server



```
iperf -s -i 1 or iperf3 -s
```



► Run a client




```
iperf -c <Server_IP> -i 1 or  
iperf3 -c <Server_IP>
```

Prepare a script to repeat the test 10 times  
and extract min, max, avg, std from the results

- u: perform a UDP test
- R: receive instead of sending
- l: length of the application buffer (1472 for UDP)
- b: set target bitrate to n bits/sec (default 1 Mbit/sec for UDP)

# TCP Example

► Run a server



```
iperf -s -i 1 or iperf3 -s
```



► Run a client



```
iperf -c <Server_IP> -i 1 or  
iperf3 -c <Server_IP>
```

```
pi@raspberrypi: ~  
pi@raspberrypi:~$ iperf -s -i 1  
-----  
Server listening on TCP port 5001  
TCP window size: 85.3 KByte (default)  
-----  
[ 4] local 192.168.1.155 port 5001 connected with 192.168.1.112 port 57220  
[ ID] Interval      Transfer    Bandwidth  
[ 4] 0.0- 1.0 sec  2.78 MBytes 23.3 Mbits/sec  
[ 4] 1.0- 2.0 sec  3.60 MBytes 30.2 Mbits/sec  
[ 4] 2.0- 3.0 sec  4.07 MBytes 34.2 Mbits/sec  
[ 4] 3.0- 4.0 sec  4.52 MBytes 37.9 Mbits/sec  
[ 4] 4.0- 5.0 sec  2.85 MBytes 23.9 Mbits/sec  
[ 4] 5.0- 6.0 sec  3.77 MBytes 31.6 Mbits/sec  
[ 4] 6.0- 7.0 sec  2.92 MBytes 24.5 Mbits/sec  
[ 4] 7.0- 8.0 sec  2.75 MBytes 23.0 Mbits/sec  
[ 4] 8.0- 9.0 sec  3.75 MBytes 31.5 Mbits/sec  
[ 4] 9.0-10.0 sec  3.09 MBytes 26.0 Mbits/sec  
[ 4] 0.0-10.3 sec 35.0 MBytes 28.5 Mbits/sec
```


ts

-u: pe  
-R: re  
-l: le  
UDP)  
-b: se  
Mbit/

```
-zsh  
-----  
Client connecting to raspberrypi.local, TCP port 5001  
TCP window size: 128 KByte (default)  
-----  
[ 1] local 192.168.1.112 port 57220 connected with 192.168.1.155 port 5001  
(icwnd/mss/irrt=11/1448/13000)  
[ ID] Interval      Transfer    Bandwidth  
[ 1] 0.00-1.00 sec  4.63 MBytes 38.8 Mbits/sec  
[ 1] 1.00-2.00 sec  3.62 MBytes 30.4 Mbits/sec  
[ 1] 2.00-3.00 sec  4.12 MBytes 34.6 Mbits/sec  
[ 1] 3.00-4.00 sec  4.50 MBytes 37.7 Mbits/sec  
[ 1] 4.00-5.00 sec  1.62 MBytes 13.6 Mbits/sec  
[ 1] 5.00-6.00 sec  5.00 MBytes 41.9 Mbits/sec  
[ 1] 6.00-7.00 sec  2.88 MBytes 24.1 Mbits/sec  
[ 1] 7.00-8.00 sec  1.25 MBytes 10.5 Mbits/sec  
[ 1] 8.00-9.00 sec  5.25 MBytes 44.0 Mbits/sec  
[ 1] 9.00-10.00 sec 2.00 MBytes 16.8 Mbits/sec  
[ 1] 10.00-10.34 sec 128 KBytes  3.07 Mbits/sec  
[ 1] 0.00-10.34 sec 35.0 MBytes 28.4 Mbits/sec  
(base) marcomellia@MacBook1diMarco ~ %
```

# TCP Example

► Run a server



```
iperf -s -i 1 or iperf3 -s
```



► Run a client



```
iperf -c <Server_IP> -i 1 or  
iperf3 -c <Server_IP>
```

```
pi@raspberrypi:~$ iperf3 -s
Server listening on 5201
Accepted connection from 192.168.1.112, port 57155
[ 5] local 192.168.1.155 port 5201 connected to 192.168.1.112 port 57156
[ ID] Interval      Transfer    Bandwidth
[ 5]  0.00-1.00  sec  2.57 MBytes  21.6 Mbits/sec
[ 5]  1.00-2.00  sec  2.46 MBytes  20.6 Mbits/sec
[ 5]  2.00-3.00  sec  3.19 MBytes  26.8 Mbits/sec
[ 5]  3.00-4.00  sec  2.22 MBytes  18.6 Mbits/sec
[ 5]  4.00-5.00  sec  2.10 MBytes  17.6 Mbits/sec
[ 5]  5.00-6.00  sec  2.70 MBytes  22.6 Mbits/sec
[ 5]  6.00-7.00  sec  2.88 MBytes  24.2 Mbits/sec
[ 5]  7.00-8.00  sec  2.53 MBytes  21.2 Mbits/sec
[ 5]  8.00-9.00  sec  2.56 MBytes  21.5 Mbits/sec
[ 5]  9.00-10.00 sec  3.74 MBytes  31.4 Mbits/sec
[ 5] 10.00-10.42 sec  1.52 MBytes  30.1 Mbits/sec
[ ID] Interval      Transfer    Bandwidth
[ 5]  0.00-10.42 sec  0.00 Bytes  0.00 bits/sec
[ 5]  0.00-10.42 sec  28.5 MBytes  22.9 Mbits/sec
Server listening on 5201
```

ts

-u: pe  
-R: re  
-l: le  
UDP)  
-b: se  
Mbit/

```
-zsh
Last login: Sun Apr 14 08:50:09 on ttys000
(base) marcomellia@MacBook1diMarco ~ % iperf3 -c raspberrypi.local
Connecting to host raspberrypi.local, port 5201
[ 8] local 192.168.1.112 port 57156 connected to 192.168.1.155 port 5201
[ ID] Interval      Transfer    Bitrate
[ 8]  0.00-1.01  sec  4.62 MBytes  38.6 Mbits/sec
[ 8]  1.01-2.01  sec  1.00 MBytes  8.33 Mbits/sec
[ 8]  2.01-3.01  sec  4.25 MBytes  35.9 Mbits/sec
[ 8]  3.01-4.00  sec  2.50 MBytes  21.1 Mbits/sec
[ 8]  4.00-5.01  sec  2.12 MBytes  17.7 Mbits/sec
[ 8]  5.01-6.01  sec  2.75 MBytes  23.1 Mbits/sec
[ 8]  6.01-7.00  sec  2.62 MBytes  22.1 Mbits/sec
[ 8]  7.00-8.02  sec  2.75 MBytes  22.7 Mbits/sec
[ 8]  8.02-9.01  sec  1.62 MBytes  13.8 Mbits/sec
[ 8]  9.01-10.01 sec  4.62 MBytes  38.5 Mbits/sec
[ ID] Interval      Transfer    Bitrate
[ 8]  0.00-10.01 sec  28.9 MBytes  24.2 Mbits/sec
[ 8]  0.00-10.01 sec  28.5 MBytes  23.8 Mbits/sec
iperf Done.
(base) marcomellia@MacBook1diMarco ~ %
```


sender  
receiver

# Questions

- ▶ Why are the results different?
- ▶ Why did the goodput change during the 10s of the experiment?
- ▶ Why are the receiver and the sender measurements different? Which is the correct goodput estimation?
- ▶ What changes if we invert the sender and the receiver role?

# UDP Example

► Run a server



► Run a client



`iperf -s -i 1` or `iperf3 -s`

`iperf -c <Server_IP> -i 1` or


`iperf3 -c <Server_IP>`

```
pi@raspberrypi: ~  
pi@raspberrypi:~$ iperf3 -s  
-----  
Server listening on 5201  
-----  
Accepted connection from 192.168.1.112, port 57247  
[ 5] local 192.168.1.155 port 5201 connected to 192.168.1.112 port 61831  
[ ID] Interval            Transfer       Bandwidth      Jitter    Lost/Total Datagrams  
[ 5]  0.00-1.00 sec      127 KBytes    1.04 Mbits/sec  342831107.035 ms  0/90 (0%)  
[ 5]  1.00-2.00 sec      127 KBytes    1.04 Mbits/sec  1029190.311 ms  0/90 (0%)  
[ 5]  2.00-3.00 sec      126 KBytes    1.03 Mbits/sec  3300.163 ms  0/89 (0%)  
[ 5]  3.00-4.00 sec      130 KBytes    1.07 Mbits/sec  10.825 ms  0/92 (0%)  
[ 5]  4.00-5.00 sec      129 KBytes    1.05 Mbits/sec  3.739 ms  0/91 (0%)  
[ 5]  5.00-6.00 sec      127 KBytes    1.04 Mbits/sec  2.476 ms  0/90 (0%)  
[ 5]  6.00-7.00 sec      129 KBytes    1.05 Mbits/sec  2.342 ms  0/91 (0%)  
[ 5]  7.00-8.00 sec      127 KBytes    1.04 Mbits/sec  4.157 ms  0/90 (0%)  
[ 5]  8.00-9.00 sec      129 KBytes    1.05 Mbits/sec  1.563 ms  0/91 (0%)  
[ 5]  9.00-10.00 sec     127 KBytes    1.04 Mbits/sec  2.131 ms  0/90 (0%)  
[ 5] 10.00-10.01 sec     2.83 KBytes    1.64 Mbits/sec  1.933 ms  0/2 (0%)  
-----  
[ ID] Interval            Transfer       Bandwidth      Jitter    Lost/Total Datagrams  
[ 5]  0.00-10.01 sec      0.00 Bytes    0.00 bits/sec  1.933 ms  0/906 (0%)  
-----  
Server listening on 5201  
-----
```

```
(base) marcomellia@MacBook1diMarco ~ % iperf3 -c raspberrypi.local -i 1 -u  
Connecting to host raspberrypi.local, port 5201  
[ 8] local 192.168.1.112 port 61831 connected to 192.168.1.155 port 5201  
[ ID] Interval            Transfer       Bitrate        Total Datagrams  
[ 8]  0.00-1.00 sec      129 KBytes    1.05 Mbits/sec  91  
[ 8]  1.00-2.00 sec      127 KBytes    1.04 Mbits/sec  90  
[ 8]  2.00-3.00 sec      129 KBytes    1.05 Mbits/sec  91  
[ 8]  3.00-4.00 sec      129 KBytes    1.05 Mbits/sec  91  
[ 8]  4.00-5.00 sec      127 KBytes    1.04 Mbits/sec  90  
[ 8]  5.00-6.00 sec      129 KBytes    1.05 Mbits/sec  91  
[ 8]  6.00-7.00 sec      127 KBytes    1.04 Mbits/sec  90  
[ 8]  7.00-8.00 sec      129 KBytes    1.05 Mbits/sec  91  
[ 8]  8.00-9.00 sec      127 KBytes    1.04 Mbits/sec  90  
[ 8]  9.00-10.00 sec     129 KBytes    1.05 Mbits/sec  91  
-----  
[ ID] Interval            Transfer       Bitrate        Jitter    Lost/Total Datagrams  
[ 8]  0.00-10.00 sec     1.25 MBytes    1.05 Mbits/sec  0.000 ms  0/906 (0%) sender  
[ 8]  0.00-10.00 sec     1.25 MBytes    1.05 Mbits/sec  1.933 ms  0/906 (0%) receiver  
-----  
iperf Done.  
(base) marcomellia@MacBook1diMarco ~ %
```

# UDP Example

► Run a server



► Run a client



`iperf -s -i 1` or `iperf3 -s`

`iperf -c <Server_IP> -i 1` or

`iperf3 -c <Server_IP>`


```
pi@raspberrypi: ~  
-----  
Accepted connection from 192.168.1.112, port 57249  
[ 5] local 192.168.1.155 port 5201 connected to 192.168.1.112 port 49192  
[ ID] Interval      Transfer    Bandwidth  Jitter    Lost/Total Datagrams  
[ 5]  0.00-1.00    sec  4.28 MBytes  35.9 Mbits/sec  0.421 ms  0/3096 (0%)  
[ 5]  1.00-2.00    sec  4.36 MBytes  36.6 Mbits/sec  0.477 ms  0/3157 (0%)  
[ 5]  2.00-3.00    sec  3.66 MBytes  30.7 Mbits/sec  0.409 ms  0/2654 (0%)  
[ 5]  3.00-4.00    sec  3.74 MBytes  31.4 Mbits/sec  0.500 ms  0/2707 (0%)  
[ 5]  4.00-5.00    sec  4.79 MBytes  40.2 Mbits/sec  0.383 ms  0/3469 (0%)  
[ 5]  5.00-6.00    sec  4.17 MBytes  35.0 Mbits/sec  0.445 ms  0/3022 (0%)  
[ 5]  6.00-7.00    sec  4.17 MBytes  35.0 Mbits/sec  0.442 ms  0/3018 (0%)  
[ 5]  7.00-8.00    sec  4.46 MBytes  37.4 Mbits/sec  0.472 ms  0/3232 (0%)  
[ 5]  8.00-9.00    sec  4.73 MBytes  39.7 Mbits/sec  0.459 ms  0/3423 (0%)  
[ 5]  9.00-10.00   sec  4.19 MBytes  35.1 Mbits/sec  0.345 ms  0/3034 (0%)  
[ 5] 10.00-11.00   sec  4.32 MBytes  36.3 Mbits/sec  0.816 ms  0/3131 (0%)  
[ 5] 11.00-12.00   sec  4.01 MBytes  33.6 Mbits/sec  0.406 ms  0/2902 (0%)  
[ 5] 12.00-13.00   sec  3.95 MBytes  33.1 Mbits/sec  0.441 ms  0/2858 (0%)  
[ 5] 13.00-13.80   sec  3.38 MBytes  35.5 Mbits/sec  0.411 ms 1005/3453 (29%)  
-----  
[ ID] Interval      Transfer    Bandwidth  Jitter    Lost/Total Datagrams  
[ 5]  0.00-13.80   sec  0.00 Bytes   0.00 bits/sec  0.411 ms 1005/43156 (2.3%)  
-----  
Server listening on 5201  
-----
```

```
-zsh  
[ 8]  0.00-10.00   sec  1.25 MBytes  1.05 Mbits/sec  0.000 ms 0/906 (0%) sender  
[ 8]  0.00-10.00   sec  1.25 MBytes  1.05 Mbits/sec  1.933 ms 0/906 (0%) receiver  
  
iperf Done.  
(base) marcomellia@MacBook1diMarco ~ % iperf3 -c raspberrypi.local -i 1 -u -b 50M  
Connecting to host raspberrypi.local, port 5201  
[ 8] local 192.168.1.112 port 49192 connected to 192.168.1.155 port 5201  
[ ID] Interval      Transfer    Bitrate      Total Datagrams  
[ 8]  0.00-1.00    sec  5.96 MBytes  50.0 Mbits/sec  4313  
[ 8]  1.00-2.00    sec  5.96 MBytes  50.0 Mbits/sec  4317  
[ 8]  2.00-3.00    sec  5.96 MBytes  50.0 Mbits/sec  4316  
[ 8]  3.00-4.00    sec  5.96 MBytes  50.0 Mbits/sec  4316  
[ 8]  4.00-5.00    sec  5.96 MBytes  50.0 Mbits/sec  4317  
[ 8]  5.00-6.00    sec  5.96 MBytes  50.0 Mbits/sec  4316  
[ 8]  6.00-7.00    sec  5.96 MBytes  50.0 Mbits/sec  4316  
[ 8]  7.00-8.00    sec  5.96 MBytes  50.0 Mbits/sec  4317  
[ 8]  8.00-9.00    sec  5.96 MBytes  50.0 Mbits/sec  4316  
[ 8]  9.00-10.00   sec  5.96 MBytes  50.0 Mbits/sec  4316  
-----  
[ ID] Interval      Transfer    Bitrate      Jitter    Lost/Total Datagrams  
[ 8]  0.00-10.00   sec  59.6 MBytes  50.0 Mbits/sec  0.000 ms 0/43160 (0%) sender  
[ 8]  0.00-10.00   sec  58.2 MBytes  48.8 Mbits/sec  0.411 ms 0/43156 (0%) receiver  
  
iperf Done.  
(base) marcomellia@MacBook1diMarco ~ %
```



# UDP Example

► Run a server



► Run a client

`iperf -s -i 1` or `iperf3 -s`

`iperf -c <Server>` or `iperf3 -c <Server>`


```
pi@raspberrypi: ~  
-----  
Accepted connection from 192.168.1.112, port 57249  
[ 5] local 192.168.1.155 port 5201 connected to 192.168.1.112 port 49192  
[ ID] Interval      Transfer    Bandwidth  Jitter    Lost/Totals  Datagrams  
[ 5]  0.00-1.00    sec  4.28 MBytes  35.9 Mbits/sec  0.421 ms  0/3096 (0%)  
[ 5]  1.00-2.00    sec  4.36 MBytes  36.6 Mbits/sec  0.477 ms  0/3157 (0%)  
[ 5]  2.00-3.00    sec  3.66 MBytes  30.7 Mbits/sec  0.409 ms  0/2654 (0%)  
[ 5]  3.00-4.00    sec  3.74 MBytes  31.4 Mbits/sec  0.500 ms  0/2707 (0%)  
[ 5]  4.00-5.00    sec  4.79 MBytes  40.2 Mbits/sec  0.383 ms  0/3469 (0%)  
[ 5]  5.00-6.00    sec  4.17 MBytes  35.0 Mbits/sec  0.445 ms  0/3022 (0%)  
[ 5]  6.00-7.00    sec  4.17 MBytes  35.0 Mbits/sec  0.442 ms  0/3018 (0%)  
[ 5]  7.00-8.00    sec  4.46 MBytes  37.4 Mbits/sec  0.472 ms  0/3232 (0%)  
[ 5]  8.00-9.00    sec  4.73 MBytes  39.7 Mbits/sec  0.459 ms  0/3423 (0%)  
[ 5]  9.00-10.00   sec  4.19 MBytes  35.1 Mbits/sec  0.345 ms  0/3034 (0%)  
[ 5] 10.00-11.00   sec  4.32 MBytes  36.3 Mbits/sec  0.816 ms  0/3131 (0%)  
[ 5] 11.00-12.00   sec  4.01 MBytes  33.6 Mbits/sec  0.406 ms  0/2902 (0%)  
[ 5] 12.00-13.00   sec  3.95 MBytes  33.1 Mbits/sec  0.441 ms  0/2858 (0%)  
[ 5] 13.00-13.80   sec  3.38 MBytes  35.5 Mbits/sec  0.411 ms 1005/3453 (29%)  
-----  
[ ID] Interval      Transfer    Bandwidth  Jitter    Lost/Totals  Datagrams  
[ 5]  0.00-13.80   sec  0.00 Bytes   0.00 bits/sec  0.411 ms 1005/43156 (2.3%)  
-----  
Server listening on 5201  
-----
```

```
(base) marcomellia@MacBook1diMarco ~ % ping -i 0.5 raspberrypi  
PING raspberrypi.lan (192.168.1.155): 56 data bytes  
64 bytes from 192.168.1.155: icmp_seq=0 ttl=64 time=8.839 ms  
64 bytes from 192.168.1.155: icmp_seq=1 ttl=64 time=23.628 ms  
64 bytes from 192.168.1.155: icmp_seq=2 ttl=64 time=20.094 ms  
64 bytes from 192.168.1.155: icmp_seq=3 ttl=64 time=37.050 ms  
64 bytes from 192.168.1.155: icmp_seq=4 ttl=64 time=14.000 ms  
64 bytes from 192.168.1.155: icmp_seq=5 ttl=64 time=19.183 ms  
64 bytes from 192.168.1.155: icmp_seq=6 ttl=64 time=14.199 ms  
64 bytes from 192.168.1.155: icmp_seq=7 ttl=64 time=10.905 ms  
64 bytes from 192.168.1.155: icmp_seq=8 ttl=64 time=24.885 ms  
64 bytes from 192.168.1.155: icmp_seq=9 ttl=64 time=83.806 ms  
64 bytes from 192.168.1.155: icmp_seq=10 ttl=64 time=209.323 ms  
Request timeout for icmp_seq 11  
64 bytes from 192.168.1.155: icmp_seq=11 ttl=64 time=525.101 ms  
64 bytes from 192.168.1.155: icmp_seq=12 ttl=64 time=570.726 ms  
64 bytes from 192.168.1.155: icmp_seq=13 ttl=64 time=736.485 ms  
64 bytes from 192.168.1.155: icmp_seq=14 ttl=64 time=961.899 ms  
Request timeout for icmp_seq 16  
64 bytes from 192.168.1.155: icmp_seq=15 ttl=64 time=1207.734 ms  
64 bytes from 192.168.1.155: icmp_seq=16 ttl=64 time=1488.189 ms  
Request timeout for icmp_seq 19  
64 bytes from 192.168.1.155: icmp_seq=17 ttl=64 time=1744.154 ms  
Request timeout for icmp_seq 21  
64 bytes from 192.168.1.155: icmp_seq=18 ttl=64 time=2104.530 ms  
64 bytes from 192.168.1.155: icmp_seq=19 ttl=64 time=2427.429 ms  
Request timeout for icmp_seq 24  
64 bytes from 192.168.1.155: icmp_seq=20 ttl=64 time=2694.272 ms  
64 bytes from 192.168.1.155: icmp_seq=21 ttl=64 time=2998.922 ms  
Request timeout for icmp_seq 27  
64 bytes from 192.168.1.155: icmp_seq=22 ttl=64 time=3295.730 ms  
64 bytes from 192.168.1.155: icmp_seq=23 ttl=64 time=3440.713 ms  
Request timeout for icmp_seq 30  
64 bytes from 192.168.1.155: icmp_seq=24 ttl=64 time=3529.455 ms  
64 bytes from 192.168.1.155: icmp_seq=25 ttl=64 time=3969.113 ms  
Request timeout for icmp_seq 33  
Request timeout for icmp_seq 34  
Request timeout for icmp_seq 35  
64 bytes from 192.168.1.155: icmp_seq=29 ttl=64 time=3580.658 ms  
64 bytes from 192.168.1.155: icmp_seq=30 ttl=64 time=3075.526 ms  
64 bytes from 192.168.1.155: icmp_seq=31 ttl=64 time=2570.451 ms  
64 bytes from 192.168.1.155: icmp_seq=32 ttl=64 time=2070.287 ms  
64 bytes from 192.168.1.155: icmp_seq=33 ttl=64 time=1569.305 ms  
64 bytes from 192.168.1.155: icmp_seq=34 ttl=64 time=1064.225 ms  
64 bytes from 192.168.1.155: icmp_seq=35 ttl=64 time=562.946 ms  
64 bytes from 192.168.1.155: icmp_seq=36 ttl=64 time=58.636 ms  
64 bytes from 192.168.1.155: icmp_seq=37 ttl=64 time=21.459 ms  
64 bytes from 192.168.1.155: icmp_seq=38 ttl=64 time=15.991 ms  
64 bytes from 192.168.1.155: icmp_seq=39 ttl=64 time=14.666 ms  
64 bytes from 192.168.1.155: icmp_seq=40 ttl=64 time=9.836 ms  
^C  
--- raspberrypi.lan ping statistics ---  
41 packets transmitted, 38 packets received, 7.3% packet loss  
round-trip min/avg/max/stddev = 8.839/1230.904/3969.113/1316.293 ms  
(base) marcomellia@MacBook1diMarco ~ %  
  
iperf Done.  
(base) marcomellia@MacBook1diMarco ~ %
```



# UDP Example

► Run a server



► Run a client



`iperf -s -i 1` or `iperf3 -s`

`iperf -c <Server_IP> -i 1` or

`iperf3 -c <Server_IP>`

```
pi@raspberrypi: ~  
[ 5] local 192.168.1.155 port 5201 connected to 192.168.1.112 port 60007  
[ ID] Interval      Transfer    Bandwidth   Jitter     Lost/Total Datagrams  
[ 5]  0.00-1.00    sec  4.58 MBytes 38.4 Mbits/sec 1.139 ms  0/586 (0%)  
[ 5]  1.00-2.00    sec  4.78 MBytes 40.1 Mbits/sec 0.881 ms  0/612 (0%)  
[ 5]  2.00-3.00    sec  4.50 MBytes 37.8 Mbits/sec 0.999 ms  0/576 (0%)  
[ 5]  3.00-4.00    sec  4.31 MBytes 36.2 Mbits/sec 1.269 ms  0/552 (0%)  
[ 5]  4.00-5.00    sec  4.80 MBytes 40.2 Mbits/sec 1.406 ms  0/614 (0%)  
[ 5]  5.00-6.00    sec  4.43 MBytes 37.2 Mbits/sec 1.783 ms 710/1277 (56%)  
[ 5]  6.00-7.00    sec  3.97 MBytes 33.3 Mbits/sec 2.642 ms 1026/1534 (67%)  
[ 5]  7.00-8.00    sec  4.41 MBytes 37.0 Mbits/sec 1.587 ms 1023/1587 (64%)  
[ 5]  8.00-9.00    sec  4.05 MBytes 34.0 Mbits/sec 1.335 ms 771/1290 (60%)  
[ 5]  9.00-10.00   sec  3.98 MBytes 33.4 Mbits/sec 2.207 ms 1050/1559 (67%)  
[ 5] 10.00-11.00   sec  4.48 MBytes 37.6 Mbits/sec 2.033 ms 1052/1625 (65%)  
[ 5] 11.00-12.00   sec  4.38 MBytes 36.8 Mbits/sec 1.921 ms 1095/1656 (66%)  
iperf3: OUT OF ORDER - incoming packet = 14146 and received packet = 0 AND SP = 14175  
[ 5] 12.00-13.00   sec  3.81 MBytes 32.0 Mbits/sec 1.710 ms 910/1397 (65%)  
[ 5] 13.00-13.14   sec  0.00 Bytes  0.00 bits/sec 1.710 ms  0/0 (0%)  
-----  
[ ID] Interval      Transfer    Bandwidth   Jitter     Lost/Total Datagrams  
[ 5]  0.00-13.14   sec  0.00 Bytes  0.00 bits/sec 1.710 ms 7637/14865 (51%)  
[SUM] 0.0-13.1 sec  1 datagrams received out-of-order  
-----  
Server listening on 5201  
-----
```

```
(base) marcomellia@MacBook1diMarco ~ % iperf3 -c raspberrypi.local -l 8192 -u -b 100M  
warning: UDP block size 8192 exceeds TCP MSS 1448, may result in fragmentation / drops  
Connecting to host raspberrypi.local, port 5201  
[ 8] local 192.168.1.112 port 60007 connected to 192.168.1.155 port 5201  
[ ID] Interval      Transfer    Bitrate      Total Datagrams  
[ 8]  0.00-1.00    sec  11.9 MBytes 99.9 Mbits/sec 1525  
[ 8]  1.00-2.00    sec  11.9 MBytes 100 Mbits/sec 1526  
[ 8]  2.00-3.00    sec  11.9 MBytes 100 Mbits/sec 1526  
[ 8]  3.00-4.00    sec  11.9 MBytes 100 Mbits/sec 1526  
[ 8]  4.00-5.00    sec  11.9 MBytes 100 Mbits/sec 1526  
[ 8]  5.00-6.00    sec  11.9 MBytes 100 Mbits/sec 1526  
[ 8]  6.00-7.00    sec  11.9 MBytes 99.9 Mbits/sec 1525  
[ 8]  7.00-8.00    sec  11.9 MBytes 100 Mbits/sec 1526  
[ 8]  8.00-9.00    sec  11.9 MBytes 100 Mbits/sec 1526  
[ 8]  9.00-10.00   sec  11.9 MBytes 100 Mbits/sec 1526  
-----  
[ ID] Interval      Transfer    Bitrate      Jitter     Lost/Total Datagrams  
[ 8]  0.00-10.00   sec  119 MBytes 100 Mbits/sec 0.000 ms  0/15258 (0%) sender  
[ 8]  0.00-10.00   sec  56.5 MBytes 47.4 Mbits/sec 1.710 ms  0/14865 (0%) receiver  
-----  
iperf Done.  
(base) marcomellia@MacBook1diMarco ~ %
```


# Questions

- ▶ Why are the results different?
- ▶ Why did the goodput change during the 10s of the experiment?
- ▶ Why are the receiver and the sender measurements different? Which is the correct goodput estimation?
- ▶ What changes if we invert the sender and the receiver role?
- ▶ How to properly choose the data generation rate with the  $-b$  parameter?

# Wireshark check conversations

From the Statistics menu -> Conversations

- Shows four interesting columns:
  - the start time of the conversation ("Rel Start") or ("Abs Start")
  - the duration of the conversation in seconds
  - the average bits (not bytes) per second in each direction. This is a measure of the throughput since it includes all bytes sent/received, including all headers, signalling packets, and eventually retransmitted packets

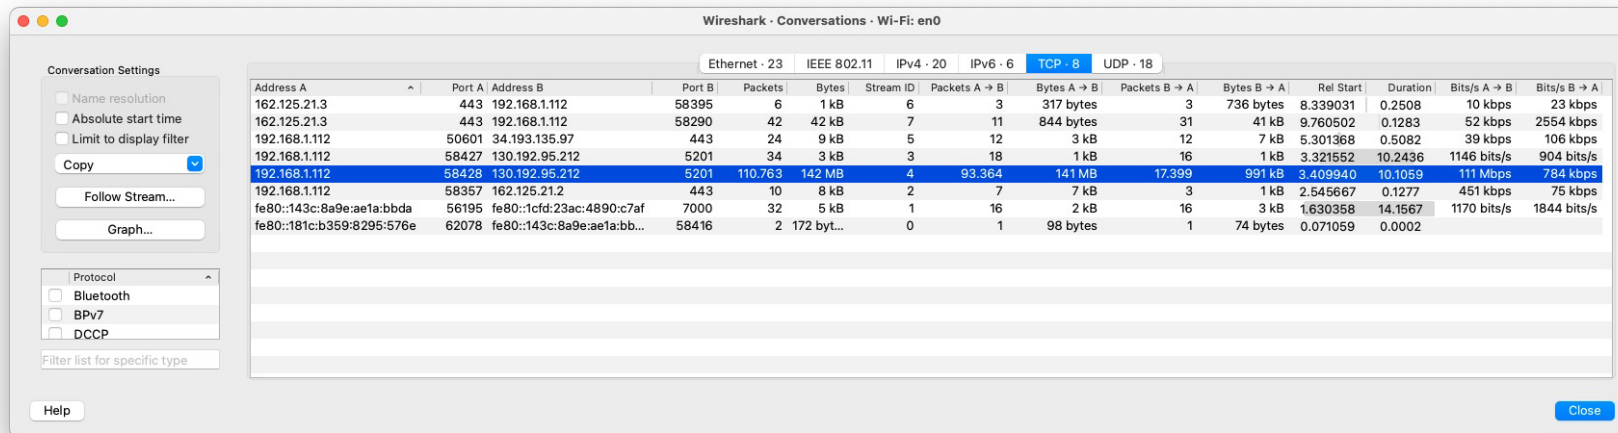

Wireshark - Conversations - Wi-Fi: en0

Conversation Settings

- ☐ Name resolution
- ☐ Absolute start time
- ☐ Limit to display filter
- Copy
- Follow Stream...
- Graph...

Protocol

- ☐ Bluetooth
- ☐ BPv7
- ☐ DCCP

Filter list for specific type

Help

| Address A                 | Port A | Address B                  | Port B | Packets | Bytes      | Stream ID | Packets A → B | Bytes A → B | Packets B → A | Bytes B → A | Rel Start | Duration | Bits/s A → B | Bits/s B → A |
|---------------------------|--------|----------------------------|--------|---------|------------|-----------|---------------|-------------|---------------|-------------|-----------|----------|--------------|--------------|
| 162.125.21.3              | 443    | 192.168.1.112              | 58395  | 6       | 1 kB       | 6         | 3             | 317 bytes   | 3             | 736 bytes   | 8.339031  | 0.2508   | 10 kbps      | 23 kbps      |
| 162.125.21.3              | 443    | 192.168.1.112              | 58290  | 42      | 42 kB      | 7         | 11            | 844 bytes   | 31            | 41 kB       | 9.760502  | 0.1283   | 52 kbps      | 2554 kbps    |
| 192.168.1.112             | 50601  | 34.193.135.97              | 443    | 24      | 9 kB       | 5         | 12            | 3 kB        | 12            | 7 kB        | 5.301368  | 0.5082   | 39 kbps      | 106 kbps     |
| 192.168.1.112             | 58427  | 130.192.95.212             | 5201   | 34      | 3 kB       | 3         | 18            | 1 kB        | 16            | 1 kB        | 3.321552  | 10.2436  | 1146 bits/s  | 904 bits/s   |
| 192.168.1.112             | 58428  | 130.192.95.212             | 5201   | 110.763 | 142 MB     | 4         | 93.364        | 141 MB      | 17.399        | 991 kB      | 3.409940  | 10.1059  | 111 Mbps     | 784 kbps     |
| 192.168.1.112             | 58357  | 162.125.21.2               | 443    | 10      | 8 kB       | 2         | 7             | 7 kB        | 3             | 1 kB        | 2.545667  | 0.1277   | 451 kbps     | 75 kbps      |
| fe80::143c:8a9e:ae1a:bbda | 56195  | fe80::1cfd:23ac:4890:c7af  | 7000   | 32      | 5 kB       | 1         | 16            | 2 kB        | 16            | 3 kB        | 1.630358  | 14.1567  | 1170 bits/s  | 1844 bits/s  |
| fe80::181c:b359:8295:576e | 62078  | fe80::143c:8a9e:ae1a:bb... | 58416  | 2       | 172 byt... | 0         | 1             | 98 bytes    | 1             | 74 bytes    | 0.071059  | 0.0002   |              |              |

Close

# Wireshark to check the results

From the Statistics -> I/O plot


- ▶ Shows the evolution over time of the desired quantity
- ▶ Use Filters to select what to plot
- ▶ Add as many lines as you like
- ▶ Use Y-Axis to choose the unit (bytes, bits, packets)
- ▶ User Y Axis Factor to ease the visualization



# TCP Stream graph to get

From the Statistics -> TCP Stream Graphs

- ▶ Stevens TCP Graph plot: plots the evolution of the sequence numbers over time
  - ▶ The slope is the throughput
- ▶ Throughput plot: plots the smoothed average throughput observed in a Moving Average Window
  - ▶ Shows also the Segment length
- ▶ Round Trip Time: plots the time elapsed since the observation of the TCP segment with a given sequence number and the reception of the corresponding Acknowledgement
  - ▶ It is an indication of possible congestion

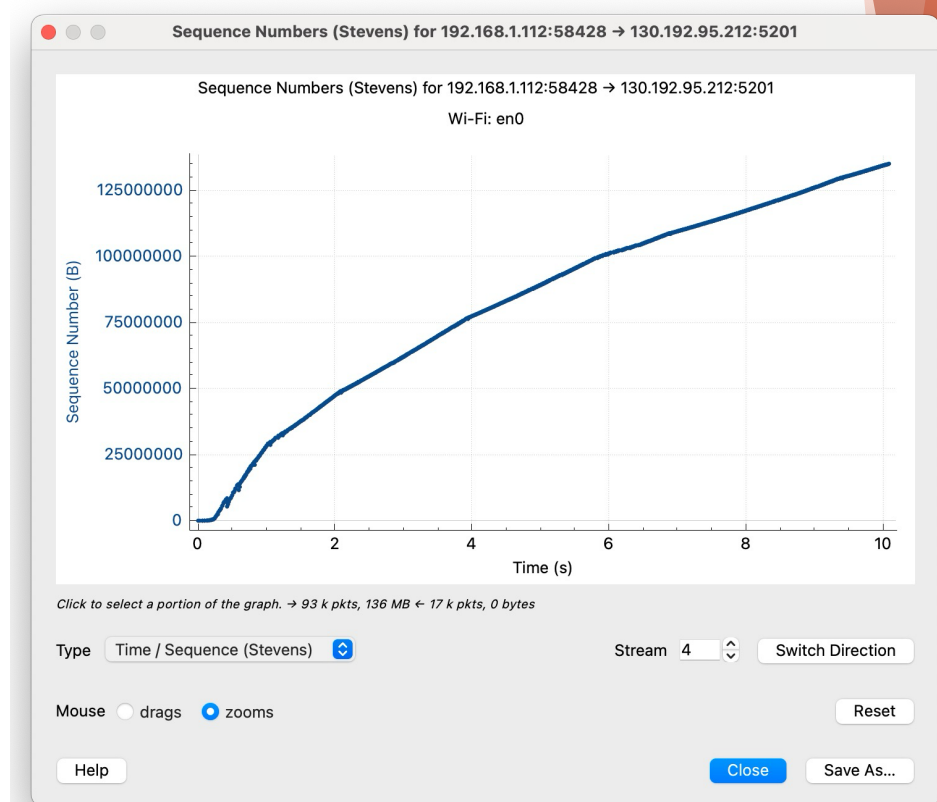

# Test to run


1. Predict the goodput  $G=G(L)$  as a function of the frame size in different setups
2. Perform the test for different values of  $L$ , repeating it at least 10 times. Summarize the results, reporting the average, minimum, maximum, and standard deviation of the observed goodput at the **receiver side**
3. Check for eventual **unexpected cases**. For instance, do you observe packet loss? Are those negligible?

# Scenarios to consider

- ▶ 1 - **Both Ethernet**: client and server are connected via Ethernet
- ▶ 2 - **Both WiFi**: client is WiFi and server is WiFi
- ▶ 3 - **Mixed mode**: Server is Ethernet, client is WiFi

Measure the actual goodput  $\hat{G} = \hat{G}(L)$  under different conditions:

- Isolated vs noisy environment
- Different data rates
- Different protocol versions
- TCP vs UDP

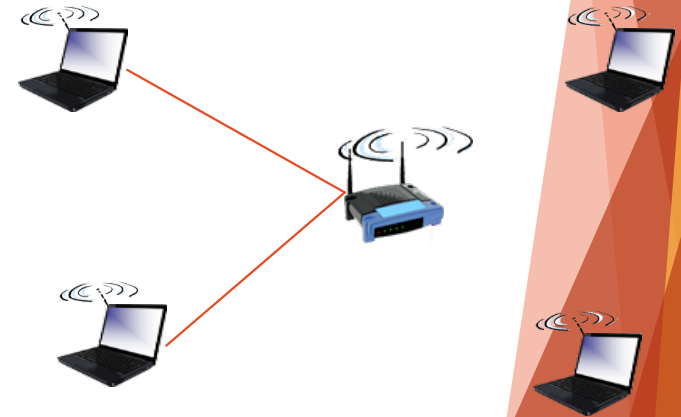

# Report preparation

- ▶ Use LaTeX and Overleaf with [ACM CCS template](#)
  - ▶ See course intro for some details
  - ▶ Use the “review” option: `\documentclass[sigconf, review]{acmart}`
  - ▶ Change authors, title, etc.
  - ▶ Remove the copyright part to save space:
    - ▶ `\setcopyright{none}` %remove the (c) section
    - ▶ `\acmConference{Wireless Security Report}{Torino}{2024}` % set a possibly significant conference name
    - ▶ `\acmPrice{}` % leave the rest empty. These will still appear.
    - ▶ `\acmISBN{}`
    - ▶ `\acmDOI{}`



# Report preparation

- ▶ Prepare a group report of 4 pages + appendix. Here is a possible organization
  - ▶ **Introduction** (less than one column): Briefly introduce the motivations and goals of the lab.
  - ▶ **Tools and theory** (~one column): summarise the expected goodput estimation and the iperf/iperf3 tool you use to run the experiments.
  - ▶ **Lab setup and scenarios** (~one column): describe the scenarios, the nominal link capacities, the IP setup (addresses, network, default gateway), and the operating system(s). You can add a figure to clarify the setup. Next, describe the scenarios that you will consider for your experiments.
  - ▶ **Results**: for each scenario, report the results by comparing your predictions with the actual results. Comment on each plot, do not just report them. Try to follow a red line, e.g., from simple setups to more complex setups.
  - ▶ **Conclusions**: briefly summarize the results
  - ▶ **Appendix**: [*mandatory*] insert here the scripts you created to make the experiment automatic and extract the results.

# Suggestion on how to write a report


- ▶ Try to be concise and avoid lengthy explanations. Go straight to the point
  - ▶ Write considering the reader should master the topic and know the technology
  - ▶ Defend your opinions, giving always the right justifications
- ▶ In the model, justify the formulas and how you arrive to that
  - ▶  $\eta_{\text{TCP}} = \text{MSS} / (\text{MSS} + 20 + 20)$  in case TCP header is 20B. It becomes  $\eta_{\text{TCP}} = \text{MSS} / (\text{MSS} + 38 + 20)$  in out setup due to optional TCP headers
  - ▶  $\eta_{\text{wifi}} = 0.5$  assuming 802.11g and about 1500B messages. This is due to ... In case of 802.11ax or higher, computing the efficiency is complicated. We can assume it to be ...
- ▶ In the scenario description, provide important parameters
  - ▶ OS being used, channel capacities, version of the wifi protocol, ...
- ▶ Always add a caption to the figures and tables
- ▶ Always refer to figures and tables in the text
- ▶ Put important figures and tables in the main part. Additional figures and results can go in the appendix
- ▶ Add the code for scripts in the appendix, formatting them in a readable manner
- ▶ Do not use passive tense “It has been done...”, “it can be noticed...”, “The capacity has been set to ...” -> “We did...”, “Notice that ...”, “We set the capacity to ...”
- ▶ Use AI consciously

# Quick and dirty test

- ▶ On home WiFi 802.11ax - 5GHz, Channel 36
  - ▶ Client: MacBook @192.168.1.112 as a WiFi client
  - ▶ bigdatadb.polito.it as a server
  - ▶ iperf3 tool


```
rm -f gput.dat
for l in `seq 16 100 1000`; do
    echo $l
    iperf3-darwin -c bigdatadb.polito.it -l $l -u --time 1 |
        grep receiver |
        tr -s ' ' |
        cut -d ' ' -f 7 >>gput.dat;
    sleep 1;
done

#cat gput.dat | awk `
# BEGIN{max=0;min=999999999}
# {x+=$0;y+=$0^2;if ($0<min){min=$0}; if ($0>max) {max=$0}}
# END{print "avg=", x/NR, "\nmin=", min, "\nmax=", max, "\nstd=", sqrt(y/NR-(x/NR)^2)}`
gnuplot <<
```

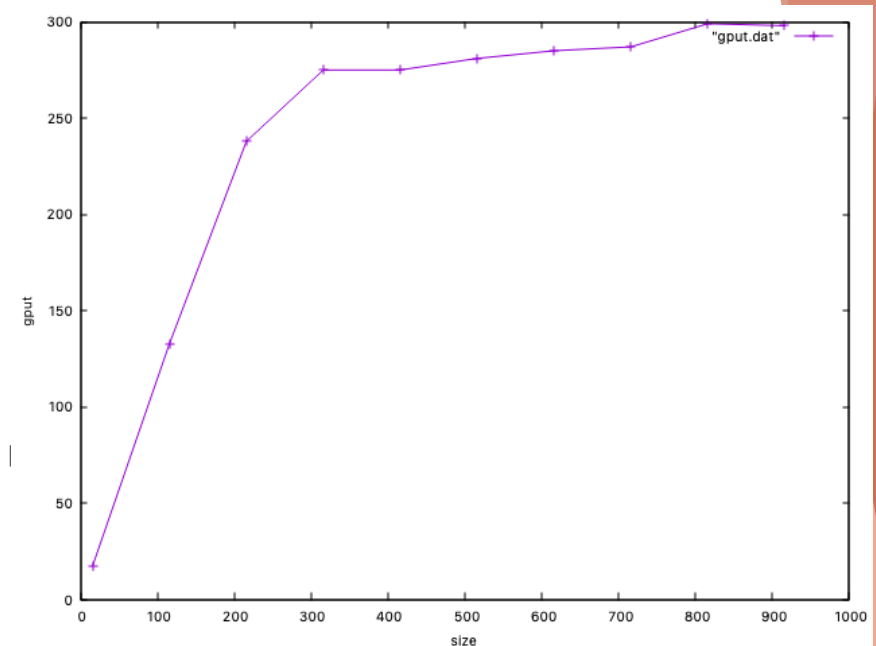

# Warnings

- ▶ What you set is the application payload -- the iperf3 block size
  - ▶ What TMT transmits is the payload frame -> you need to consider the L4 and L3 header on the x-axis
- ▶ With UDP, you need to set the application bitrate properly
  - ▶ Using the -b <bitrate> option
  - ▶ What happens if you set the bitrate smaller than the actual goodput?
- ▶ With TCP, the frame payload will be always MTU, no matter if you set the block size to L
  - ▶ Recall that TCP implements segmentation to the MSS
  - ▶ So you need to change the MTU of the interface

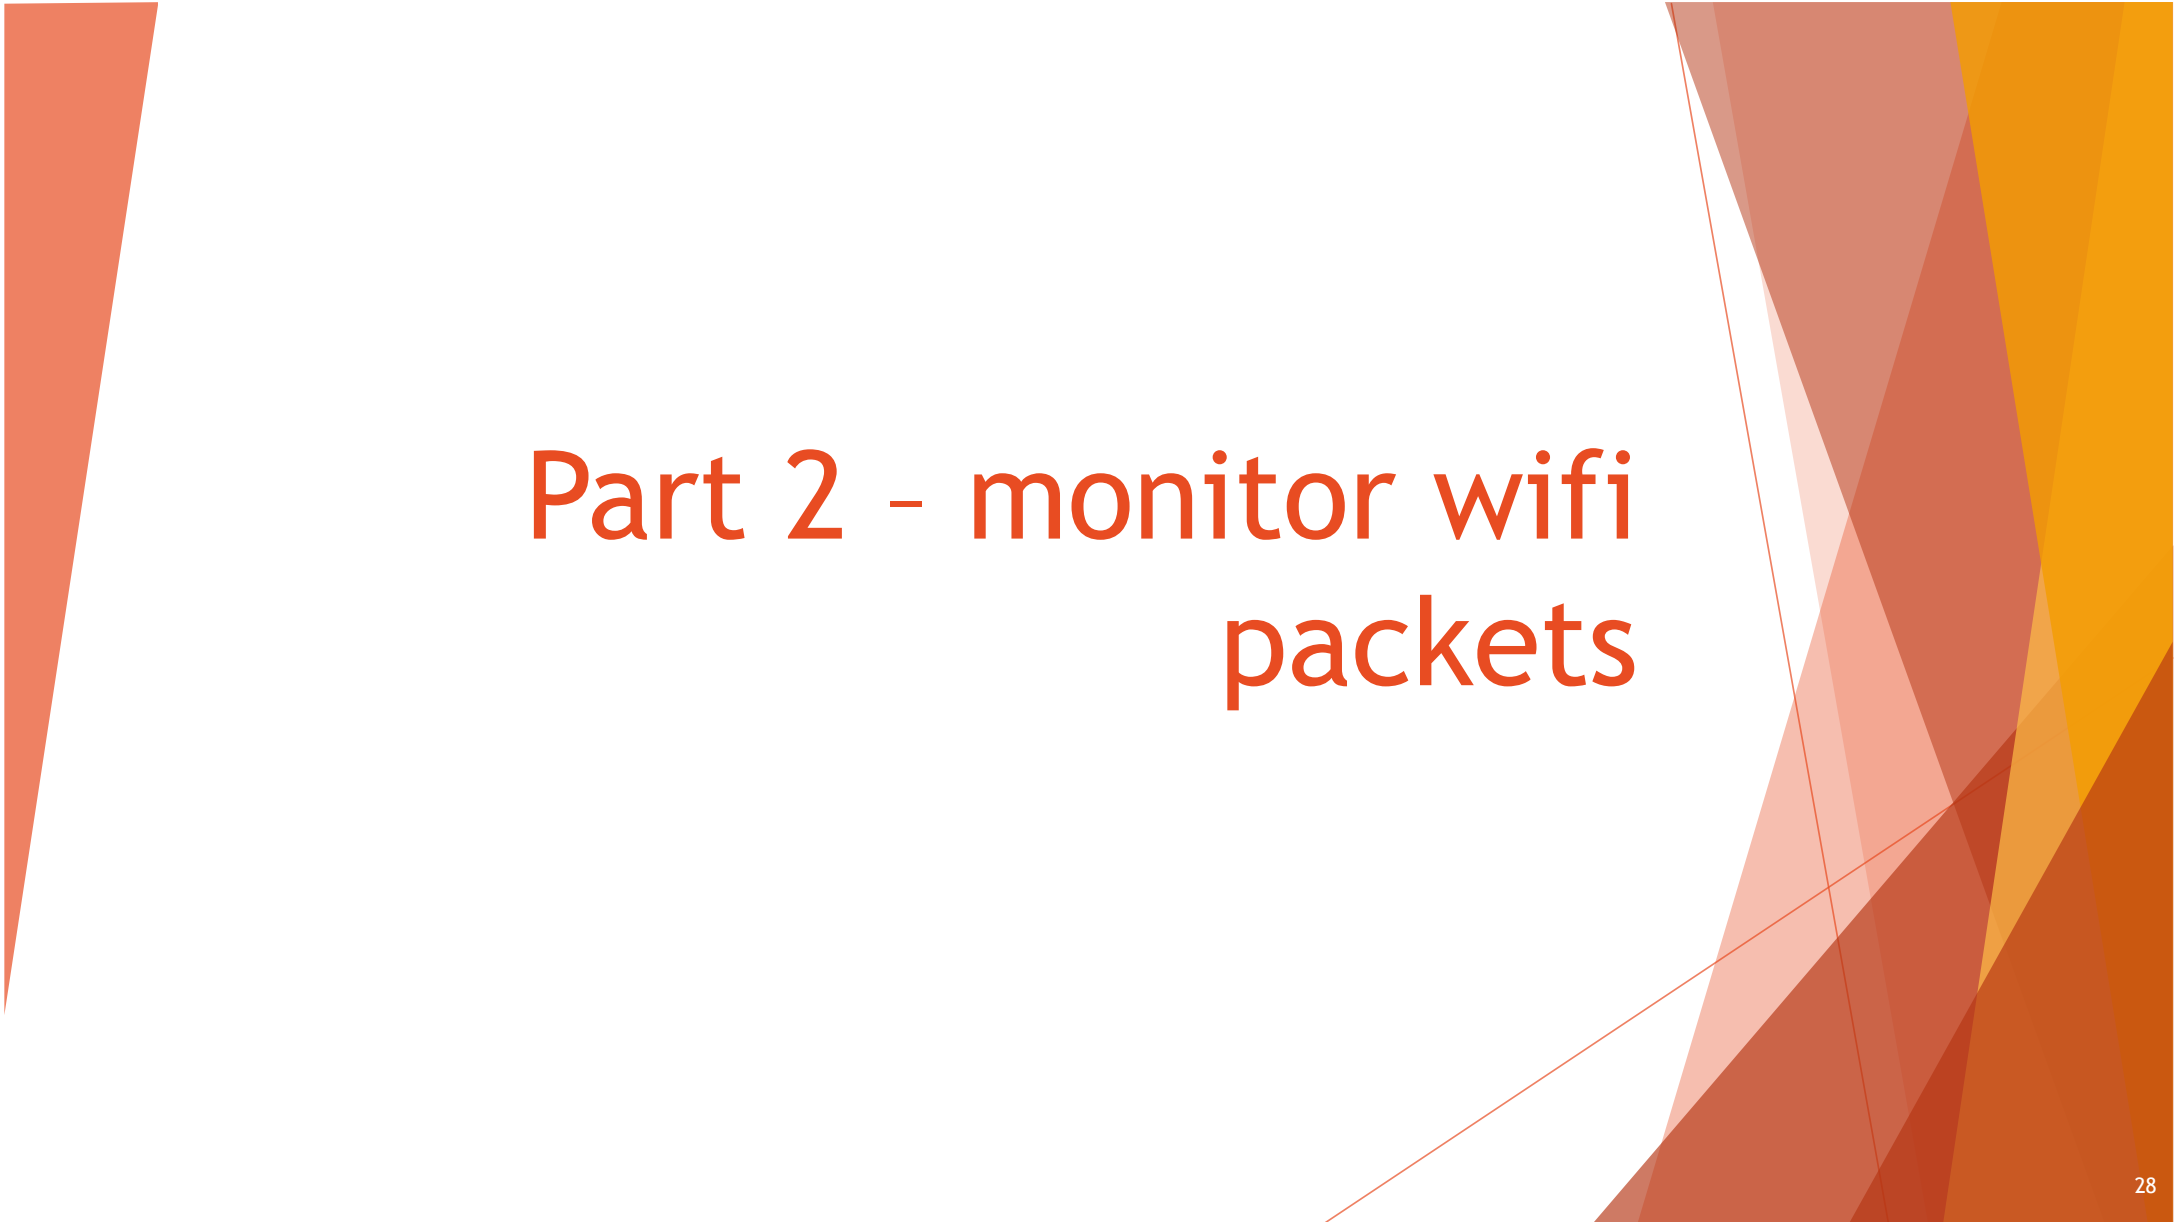

# Part 2 - monitor wifi packets

## Part 2 - monitor wifi packets

### ▶ On Linux

#### ▶ Scan for available networks

▶ `sudo iwlist wlan0 scan`

#### ▶ Choose the network channel to monitor

▶ `sudo iwconfig wlan0 mode monitor channel 1`

### ▶ On MacOS, use the airport utility [*pre macOS Sonoma 14.4*]

`ln -s /System/Library/PrivateFrameworks/Apple80211.framework/Versions/Current/Resources/airport /opt/homebrew/bin // link the airport cmd in a $PATH folder for convenience. Do this once!`

`sudo airport en0 -z -s //disconnect and scan for available networks`

`sudo airport en0 sniff 2g1/20 // sniff on channel 1 in the 2.4GHz band - 20MHz wide channel`


### ▶ Using Wireshark, monitor a wifi network

#### ▶ Put the interface in monitor mode and start capturing

▶ If this does not work, use tcpdump or iwconfig to force the card into monitor mode

`sudo tcpdump -i wlan0 -I`

`sudo ifconfig wlan0 down; sudo iwconfig wlan0 mode monitor; sudo ifconfig wlan0 up`

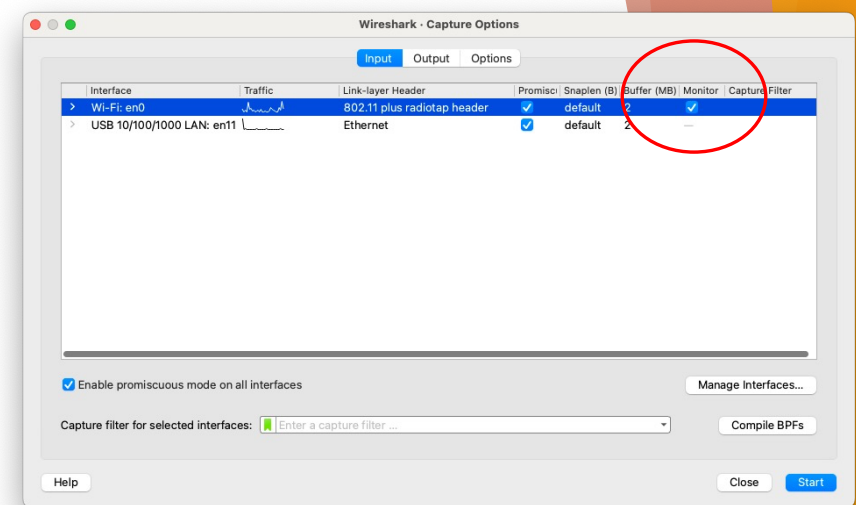

## Part 2 - monitor wifi packets

### ▶ On Linux:

#### ▶ Scan for available networks

▶ `sudo iwlist wlan0 scan`

#### ▶ Choose the network channel to monitor

▶ `sudo iwconfig wlan0 mode monitor channel 1`

### ▶ On MacOS, use the Wireless Diagnostic [all versions]

GUI: Option+Click on wireless icon -> open the "Open Wireless Diagnostics" tool

CLI: `/System/Library/CoreServices/Applications/Wireless Diagnostics.app/Contents/MacOS/Wireless Diagnostics`

In the menu, open **Windows -> Sniffer**

Choose channel and width


### ▶ Using wireshark, monitor a wifi network

#### ▶ Put the interface in monitor mode and start capturing

▶ If this does not work use tcpdump or iwconfig to force the card in monitor mode


`sudo tcpdump -i wlan0 -I`

`sudo ifconfig wlan0 down; sudo iwconfig wlan0 mode monitor; sudo ifconfig wlan0 up`

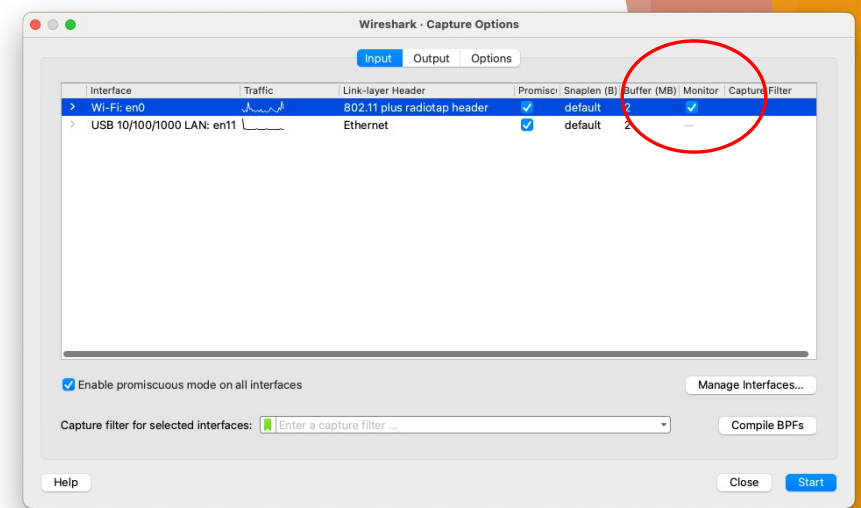

# Authentication & Association

- ▶ Capture and analyse packets identifying
  - ▶ Beacon frames sent by the AP(s)
  - ▶ A complete Probe + Authentication + Association request from your mobile phone
    - ▶ hint, you can use your mobile phone to generate request by turning off/on the wifi and joining the WLAN
  - ▶ Check the duration frame
    - ▶ Add a «column» to the quick view (right-click on the column header) to show the duration
- ▶ Define filters to select only packets that are interesting for you
  - ▶ Check [https://en.wikipedia.org/wiki/802.11\\_Frame\\_Types](https://en.wikipedia.org/wiki/802.11_Frame_Types) for control frame values

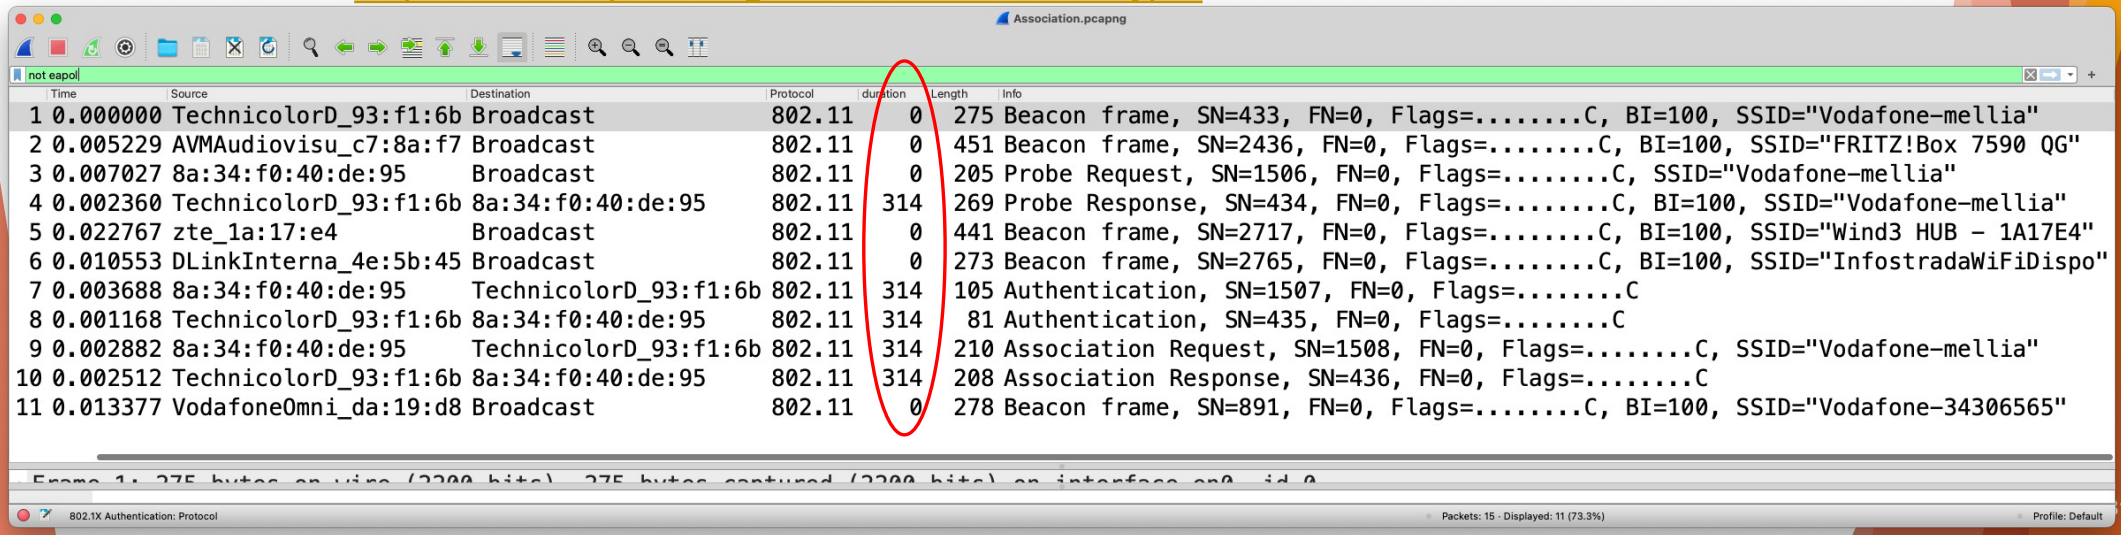

Association.pcapng

| Time        | Source                | Destination           | Protocol | duration | Length | Info                                                                           |
|-------------|-----------------------|-----------------------|----------|----------|--------|--------------------------------------------------------------------------------|
| 1 0.000000  | TechnicolorD_93:f1:6b | Broadcast             | 802.11   | 0        | 275    | Beacon frame, SN=433, FN=0, Flags=.....C, BI=100, SSID="Vodafone-mellia"       |
| 2 0.005229  | AVMAudiovisu_c7:8a:f7 | Broadcast             | 802.11   | 0        | 451    | Beacon frame, SN=2436, FN=0, Flags=.....C, BI=100, SSID="FRITZ!Box 7590 QG"    |
| 3 0.007027  | 8a:34:f0:40:de:95     | Broadcast             | 802.11   | 0        | 205    | Probe Request, SN=1506, FN=0, Flags=.....C, SSID="Vodafone-mellia"             |
| 4 0.002360  | TechnicolorD_93:f1:6b | 8a:34:f0:40:de:95     | 802.11   | 314      | 269    | Probe Response, SN=434, FN=0, Flags=.....C, BI=100, SSID="Vodafone-mellia"     |
| 5 0.022767  | zte_1a:17:e4          | Broadcast             | 802.11   | 0        | 441    | Beacon frame, SN=2717, FN=0, Flags=.....C, BI=100, SSID="Wind3 HUB - 1A17E4"   |
| 6 0.010553  | DLINKIntern_4e:5b:45  | Broadcast             | 802.11   | 0        | 273    | Beacon frame, SN=2765, FN=0, Flags=.....C, BI=100, SSID="InfostradaWi-FiDispo" |
| 7 0.003688  | 8a:34:f0:40:de:95     | TechnicolorD_93:f1:6b | 802.11   | 314      | 105    | Authentication, SN=1507, FN=0, Flags=.....C                                    |
| 8 0.001168  | TechnicolorD_93:f1:6b | 8a:34:f0:40:de:95     | 802.11   | 314      | 81     | Authentication, SN=435, FN=0, Flags=.....C                                     |
| 9 0.002882  | 8a:34:f0:40:de:95     | TechnicolorD_93:f1:6b | 802.11   | 314      | 210    | Association Request, SN=1508, FN=0, Flags=.....C, SSID="Vodafone-mellia"       |
| 10 0.002512 | TechnicolorD_93:f1:6b | 8a:34:f0:40:de:95     | 802.11   | 314      | 208    | Association Response, SN=436, FN=0, Flags=.....C                               |
| 11 0.013377 | VodafoneOmni_da:19:d8 | Broadcast             | 802.11   | 0        | 278    | Beacon frame, SN=891, FN=0, Flags=.....C, BI=100, SSID="Vodafone-34306565"     |

Frame 1: 275 bytes on wire (2200 bits) 275 bytes captured (2200 bits) on interface en0 id 0

802.11 Authentication: Protocol


Packets: 15 · Displayed: 11 (73.3%)

Profile: Default



# CSMA-CA in practice

- ▶ Check the CSMA-CD frames
  - ▶ Can you see the RTS/CTS?
  - ▶ Can you see the DATA/ACK packets?
- ▶ Define filters to select only packets that are interesting for you
  - ▶ Check [https://en.wikipedia.org/wiki/802.11\\_Frame\\_Types](https://en.wikipedia.org/wiki/802.11_Frame_Types) for control frame values
- ▶ Why some frames may be missing? Why there might be a lot more RTS than CTS?

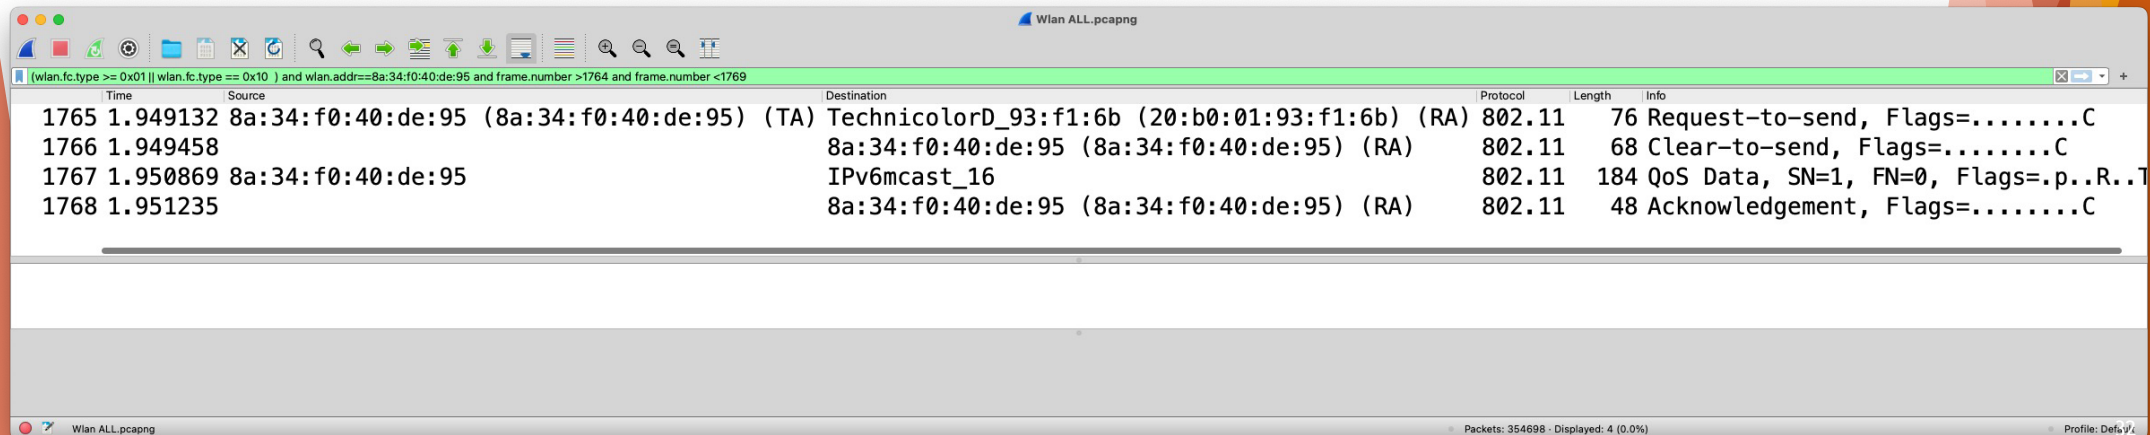

Wlan ALL.pcapng

(wlan.fc.type >= 0x01 || wlan.fc.type == 0x10) and wlan.addr==8a:34:f0:40:de:95 and frame.number >1764 and frame.number <1769

| Time          | Source                                     | Destination                                    | Protocol | Length | Info                                 |
|---------------|--------------------------------------------|------------------------------------------------|----------|--------|--------------------------------------|
| 1765 1.949132 | 8a:34:f0:40:de:95 (8a:34:f0:40:de:95) (TA) | TechnicolorD_93:f1:6b (20:b0:01:93:f1:6b) (RA) | 802.11   | 76     | Request-to-send, Flags=.....C        |
| 1766 1.949458 |                                            | 8a:34:f0:40:de:95 (8a:34:f0:40:de:95) (RA)     | 802.11   | 68     | Clear-to-send, Flags=.....C          |
| 1767 1.950869 | 8a:34:f0:40:de:95                          | IPv6mcast_16                                   | 802.11   | 184    | QoS Data, SN=1, FN=0, Flags=.p..R..T |
| 1768 1.951235 |                                            | 8a:34:f0:40:de:95 (8a:34:f0:40:de:95) (RA)     | 802.11   | 48     | Acknowledgement, Flags=.....C        |

Wlan ALL.pcapng

Packets: 354698 - Displayed: 4 (0.0%)


Profile: Default

# Possible statistics

- ▶ How many APs are present in the trace?
  - ▶ Hint: prepare a filter to show only beacon frames and then use the Statistics->Endpoint menu
- ▶ How many ESSID are present in the trace? Which channels do they use?
  - ▶ Hint: Check the “Wireless” menu entry
- ▶ How many STA are present in the trace?
  - ▶ Hint: prepare a filter to show the probe request and then use the Statistics->Endpoint menu
- ▶ Decrypt the packets
  - ▶ <https://wiki.wireshark.org/HowToDecrypt802.11>
- ▶ How many IP addresses are present?
- ▶ Pick one IP address and try to identify its OS
  - ▶ Hint: filter some DNS queries and check names
  - ▶ Hint: resolve MAC/IP address names (View->name resolution)

# Power Saving in 802.11

- ▶ Nodes “sleep” to conserve energy
- ▶ AP will buffer clients’ packets until requested with a poll message
- ▶ TIM (traffic indication map) is a periodic packet sent by AP to notify client of buffered data
- ▶ Relies on sync of packets so client is awake when the TIM is sent

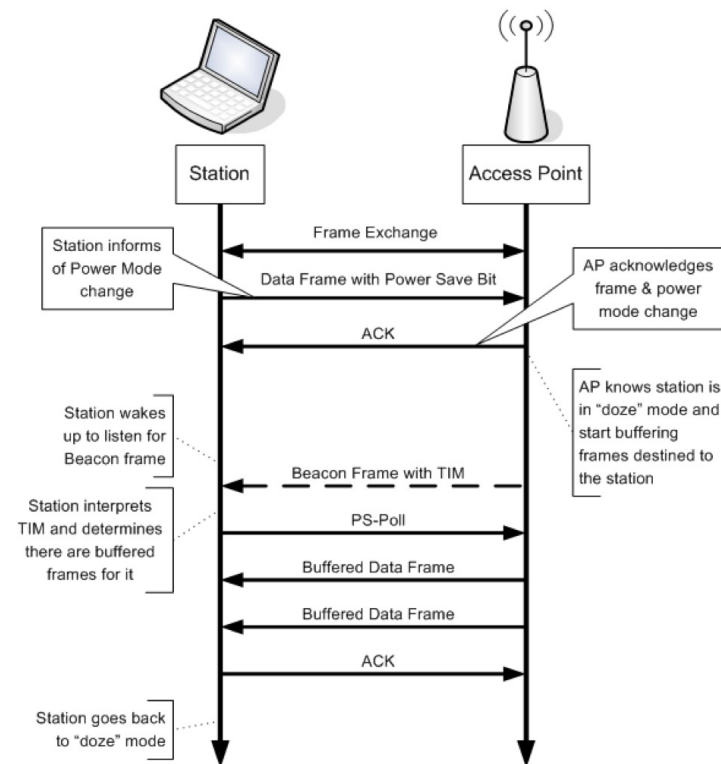

Picture from Meiners, L. F. (2009). *But... my station is awake! Power Save Denial of Service in 802.11 Networks*. Core Secur. Technol., Eden Prairie, MN, USA, Tech. Rep.

# Power management

- ▶ Filter packets that announce the STA is going to sleep
- ▶ Check when the STA is going to wake up
  - ▶ How does the STA tell the AP what is going to happen?
- ▶ From another device, send data to the STA and check if and when it goes to sleep
  - ▶ Can you see the TIM header in the beacon frames?

The image shows a Wireshark packet capture window titled "Wlan ALL.pcapng". The filter bar at the top shows the filter: "wlan.addr==8a:34:f0:40:de:95 and frame.number >=5027 and frame.number <=5042". The packet list shows three packets:

| No.  | Time     | Source            | Destination              | Protocol | Length | Info                                                    |
|------|----------|-------------------|--------------------------|----------|--------|---------------------------------------------------------|
| 5027 | 0.000000 | 8a:34:f0:40:de:95 | TechnicolorD_93:f1:6b    | 802.11   | 64     | Null function (No data), SN=1388, FN=0, Flags=...P...TC |
| 5028 | 0.000004 |                   | 8a:34:f0:40:de:95 (8a... | 802.11   | 48     | Acknowledgement, Flags=.....C                           |
| 5042 | 0.010677 | 8a:34:f0:40:de:95 | TechnicolorD_93:f1:6b    | 802.11   | 64     | Null function (No data), SN=1389, FN=0, Flags=.....TC   |

The details pane for the selected packet (5042) shows the following structure:

- IEEE 802.11 Null function (No data), Flags: ...P...TC
  - Type/Subtype: Null function (No data) (0x0024)
  - Frame Control Field: 0x4811
    - .... ..00 = Version: 0
    - .... 10.. = Type: Data frame (2)
    - 0100 .... = Subtype: 4
  - Flags: 0x11
    - .... ..01 = DS status: Frame from STA to DS via an AP (To DS: 1 From DS: 0) (0x1)
    - .... .0.. = More Fragments: This is the last fragment
    - .... 0... = Retry: Frame is not being retransmitted
    - ...1 .... = PWR MGT: STA will go to sleep
    - ..0. .... = More Data: No data buffered
    - .0.. .... = Protected flag: Data is not protected
    - 0... .... = +HTC/Order flag: Not strictly ordered

The packet bytes pane shows the raw data: 0020 02 00 00 00 48 11 58 01 20 b0 01 93 f1 6b 8a 34 ...H.X...k.4

At the bottom, a status bar indicates: "Power management status (wlan.fc.pwrmti): 1 byte" and "Packets: 354698 - Disposed: 3 (0.0%) Profile: Default".


## Part 2: testing some attacks

- ▶ In this second part of the lab, we will try to run some attacks:
- ▶ Power management attacks
  - ▶ Inject fake PM control frame to isolate a victim
- ▶ Deauthentication/Deassociation attack
  - ▶ Force a station offline so to observe an authentication phase
- ▶ On WP2-personal, mount a brute force attack

## Part-2: power management attack

- ▶ The attacker impersonates the victim station
  - ▶ Just need to know the AP and victim MAC address
- ▶ The attacker keeps injecting false Power Management frames with the bit set to 1
- ▶ The AP believes the victim is in sleep mode
  - ▶ Starts buffering packets
- ▶ Try using aircrack to mount this attack

[http://aircrack-ng.org/doku.php?id=interactive\\_packet\\_replay](http://aircrack-ng.org/doku.php?id=interactive_packet_replay)

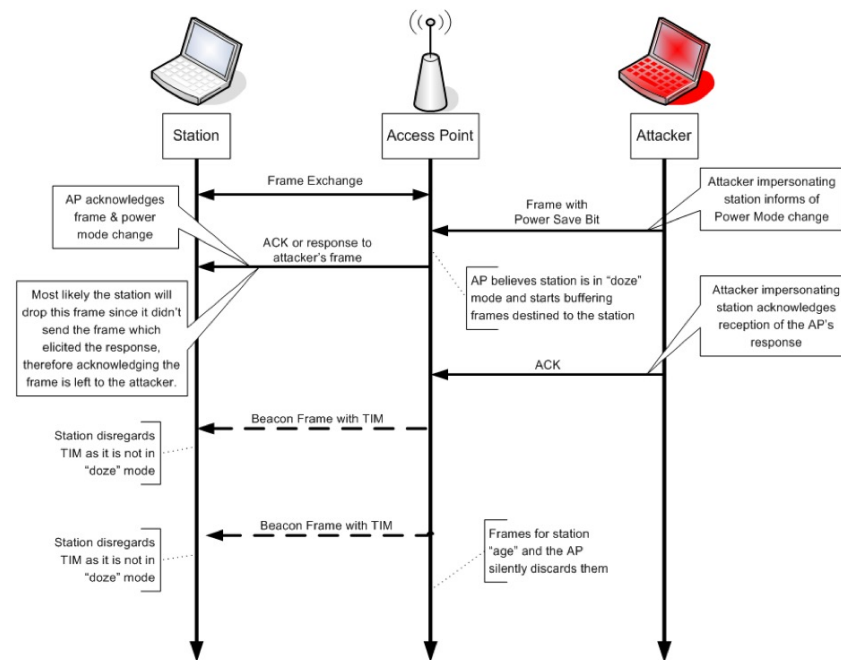


Picture from Meiners, L. F. (2009). *But... my station is awake! Power Save Denial of Service in 802.11 Networks*. Core Secur. Technol., Eden Prairie, MN, USA, Tech. Rep.

## Part-2: Disassociation or deauthentication attack

- A client can authenticate with multiple APs but associate with one to allow the correct AP to forward packets
  - E.g., politico WiFi has several AP. Your STA can authenticate with many, but associate with only one
- Association frames are **unauthenticated**
- 802.11 provides both a **disassociation** and **deauthentication** messages
- Vulnerability is a **spoofed message** causing the AP to **disassociate/deauthenticate** the client

## Part-2: Disassociation attack

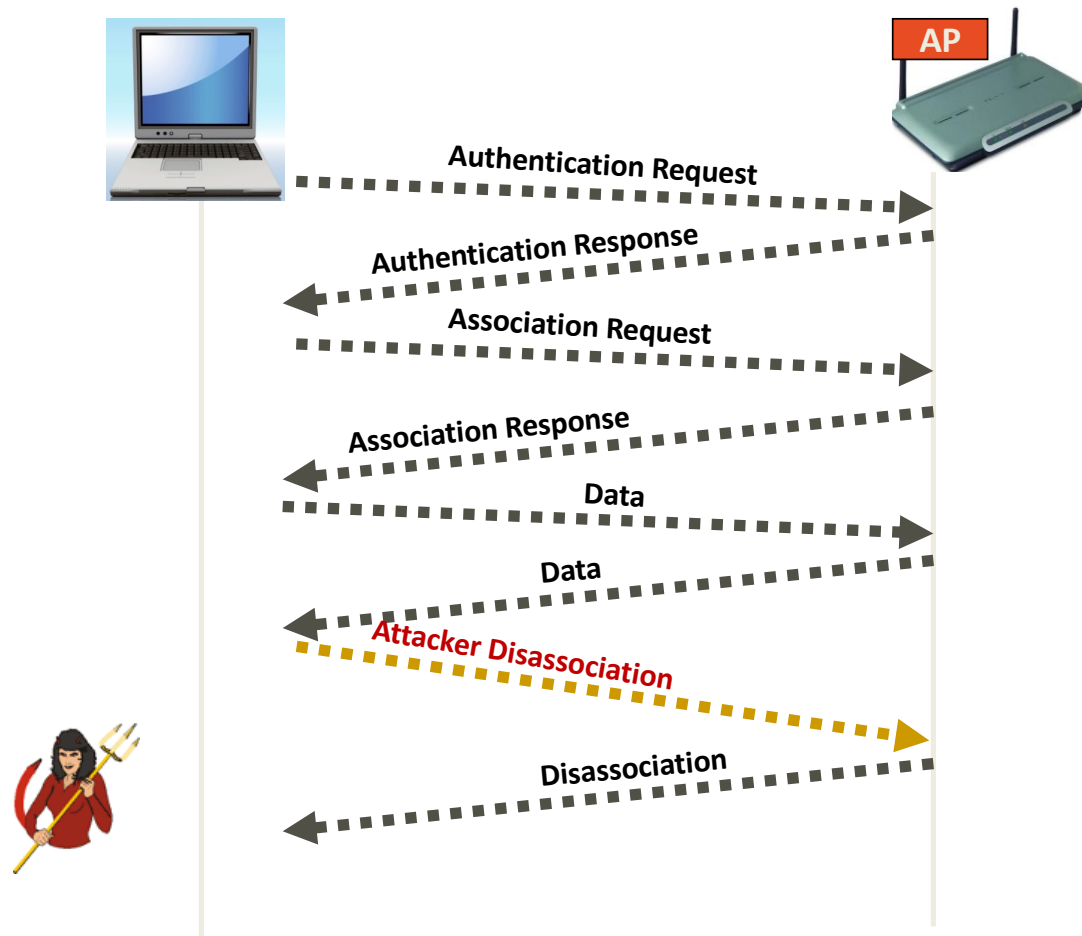



## Part-2: Deauthentication attack

- ▶ This attack sends deauthentication frame to one or more clients that are currently associated with a particular access point
- ▶ This allows:
  - ▶ Recovering a hidden ESSID. This is an ESSID which is not being broadcast. Another term for this is “cloaked”.
  - ▶ Capturing WPA/WPA2 handshakes by forcing clients to reauthenticate
  - ▶ Generate ARP requests (Windows clients sometimes flush their ARP cache when disconnected)
- ▶ You need two laptops and a third device (the victim)
  - ▶ Capture packets on Wireshark on one laptop
  - ▶ Identify the MAC address of your victim
  - ▶ Use the second laptop to run a deauthentication attack with aircrack-ng (note: your card must allow packet injection)

## Part-2: Deauthentication attack

```
aireplay-ng -0 1 -a 00:11:22:33:44:55 -c aa:bb:cc:dd:ee:ff wlan0
```

- ▶ Where:
  - ▶ -0 means deauthentication
  - ▶ 1 is the number of deauths to send (you can send multiple if you wish)
  - ▶ -a 00:11:22:33:44:55 is the MAC address of the access point
  - ▶ -c aa:bb:cc:dd:ee:ff is the MAC address of the client you are deauthing
  - ▶ wlan0 is the interface name
- ▶ Observe the trace on Wireshark and the network status on the victim
- ▶ Why does deauthentication not work?
  - ▶ You are physically too far away from the client(s). You need enough transmit power for the packets to reach and be heard by the clients. If you do a full packet capture, each packet sent to the client should result in an “ack” packet back. This means the client heard the packet. If there is no “ack” then likely it did not receive the packet.
  - ▶ Wireless cards work in particular modes such b, g, n and so on. If your card is in a different mode than the client card, there is a good chance that the client will not be able to correctly receive your transmission.
  - ▶ Some clients ignore broadcast deauthentications. If this is the case, you will need to send a deauthentication directed at the particular client.
  - ▶ Clients may reconnect too fast for you to see that they had been disconnected. If you do a full packet capture, you will be able to look for the reassociation packets in the capture to confirm deauthentication worked.

## Part-2: Brute force attack against WPA

- ▶ This is the most common attack against WPA/WPA2 networks
- ▶ Captures the 4-way handshake that allows the authentication key to be cracked offline
- ▶ During the 4-way handshake, several pieces of information are required
  - ▶ SSID
  - ▶ The key (not directly present in the exchanges)
  - ▶ The MAC address of the two parties
  - ▶ The nonce
- ▶ You will need to capture the challenge and the result
- ▶ Brute-force: Once the handshake has been captured, the attacker only must try all possible combinations offline to guess the key using a dictionary
- ▶ Enable monitor mode and capture packets as usual
- ▶ Identify and capture a 4-way handshake

```
airodump-ng -w wpafile -c X --bssid AA:BB:CC:DD:EE:FF wlan0
```
- ▶ Deauthenticate a device to force a reauthentication phase
  - ▶ or manually associate another device

```
aireplay-ng -0 0 -a 11:22:33:44:55:66 wlan0
```
- ▶ Password Cracking with Aircrack-ng

```
airodump-ng -a2 -w dictionary wpafile.cap
```
- ▶ Can use the GPU to speed up cracking
  - ▶ <https://hashcat.net/hashcat/>

## Part-2: Brute force attack against WPA

### Alternatives:

- ▶ Use zizzania to mount the attack
  - ▶ <https://github.com/cyrus-and/zizzania>
- ▶ Download some password dictionary
  - ▶ <https://github.com/Legoclones/password-cracking>
  - ▶ <https://github.com/zacheller/rockyou>
  - ▶ <https://github.com/berzerk0/Probable-Wordlists/tree/master/Real-Passwords/WPA-Length>
  - ▶ ...
- ▶ Use hashcat to speed up the crack
  - [https://hashcat.net/wiki/doku.php?id=cracking\\_wpawpa2](https://hashcat.net/wiki/doku.php?id=cracking_wpawpa2)
    - ▶ Convert pcap into hash file  
`hcxpcapngtool -o hash.hc22000 -E essids dump.pcapng`
    - ▶ Brute force the hash with a dictionary  
`hashcat -m 22000 hash.hc22000 wordlist.txt`
- ▶ **Mount the attack on your home WiFi and check that you can recover the pwd**

# Challenge instructions

- ▶ In the room there is a NEW WLAN network
  - ▶ On the ISM band - 2.4GHz range
  - ▶ Unknown channel and modulation
  - ▶ Unknown SSID
  - ▶ Protected by a WPA2 personal access
  - ▶ Password is present in the [01GYSUV\\_2024.csv](#) file
- ▶ There is one device connected to it
  - ▶ Unknown MAC address
  - ▶ Unknown modulation
- ▶ Goal: Crack the
  - ▶ Find the WLAN name
  - ▶ Find the MAC address of the connected device
  - ▶ Mount a deauthentication attack
  - ▶ Capture at least one complete Authentication exchange
  - ▶ Find the WPA2 password via a brute-force attack

# Proof of success

- ▶ Prepare and send an email address to [marco.mellia@polito.it](mailto:marco.mellia@polito.it)
  - ▶ Sender must be your **official email address**
- ▶ The email must contain
  - ▶ Your **Name, Lastname, student ID number** (matricola)
  - ▶ The successful **password** found message
  - ▶ The **pcap file** you use to crack the WPA password, named <s123456.pcap>
  - ▶ One or more **screenshots** and the **cut&paste** of the text of the shell in a .txt file named <s123456.txt>, which shows
    - ▶ The output of the **aircrack-ng** with the found password
    - ▶ The **tcpdump** output with the EAPOL messages that allow cracking the password. The last packets should be the EAPOL messages. Filter the original capture with Wireshark and export the filtered packets.
    - ▶ The **MD5** of the pcap file
    - ▶ The output of the **date** command